


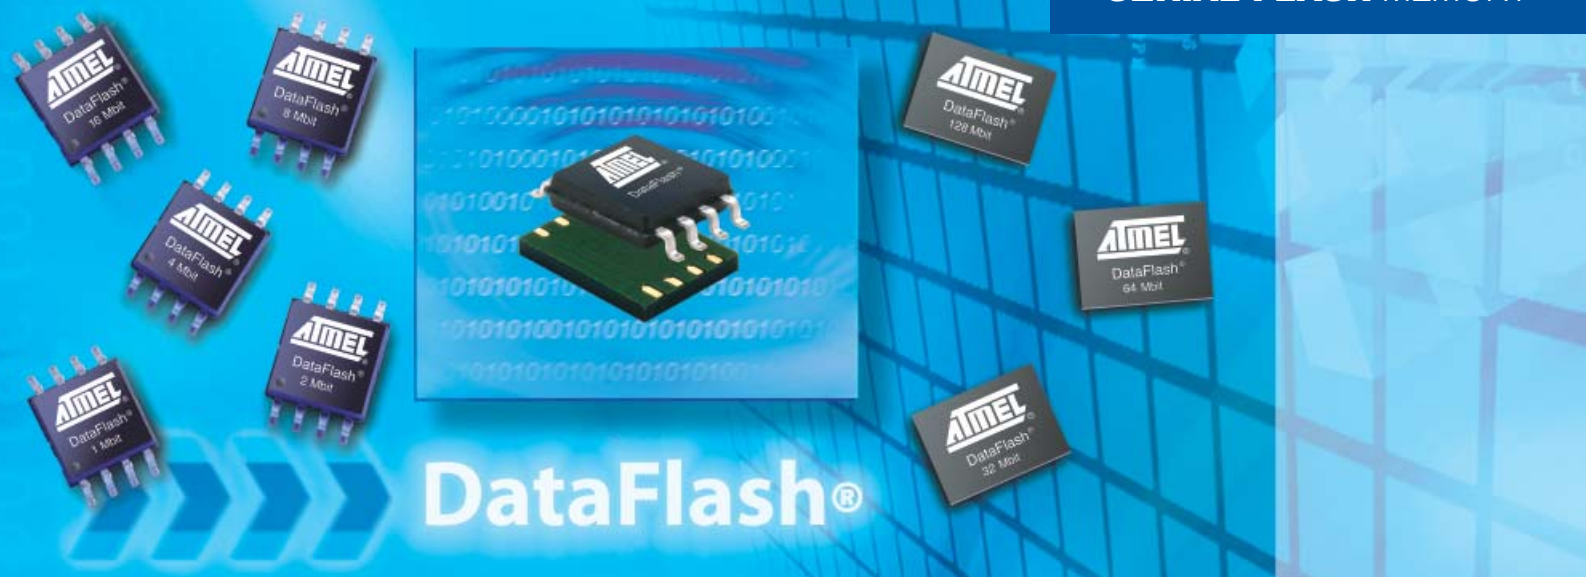

➤ DataFlash Binary Page Size Factory Configuration Option

Introduction

System designers continue to adopt Atmel® DataFlash® as the preferred nonvolatile memory device in their systems to store program code, user data, and parametric information. The DataFlash reduces total system cost and complexity through a feature-rich granular page-erase-based architecture, utilizing on-board SRAM buffers, and a comprehensive set of flexible command codes resulting in a reduced software footprint. The small pages and on-chip buffers facilitate easier changes to the memory contents and eliminate the large external RAM devices required to buffer the large data blocks during device reprogramming. The AT45 Series DataFlash devices feature a user configurable page size and in many data centric applications the default page size is optimal. However in code centric applications, the binary page size may be considered more efficient.


DataFlash Page Size Options

The page size and corresponding factory default configuration for each device are shown below. The mechanism to switch to the binary page size is detailed in each device datasheet available in the DataFlash products section on the Atmel web site. In order to simplify the customers production flow, Atmel has added an option for customers to order selected DataFlash devices pre-configured with a Binary page size.

Device	Density (Mbits)	Page Size (Bytes)	
		Binary	Default
AT45DB021D	2	256	264
AT45DB041D	4	256	264
AT45DB081D	8	256	264
AT45DB161D	16	512	528
AT45DB321D	32	512	528
AT45DB642D	64	1024	1056

How to Order DataFlash Devices with a Factory Configured Binary Page Size

The diagram below details the correct ordering codes required to specify products configured with the Binary Page size.

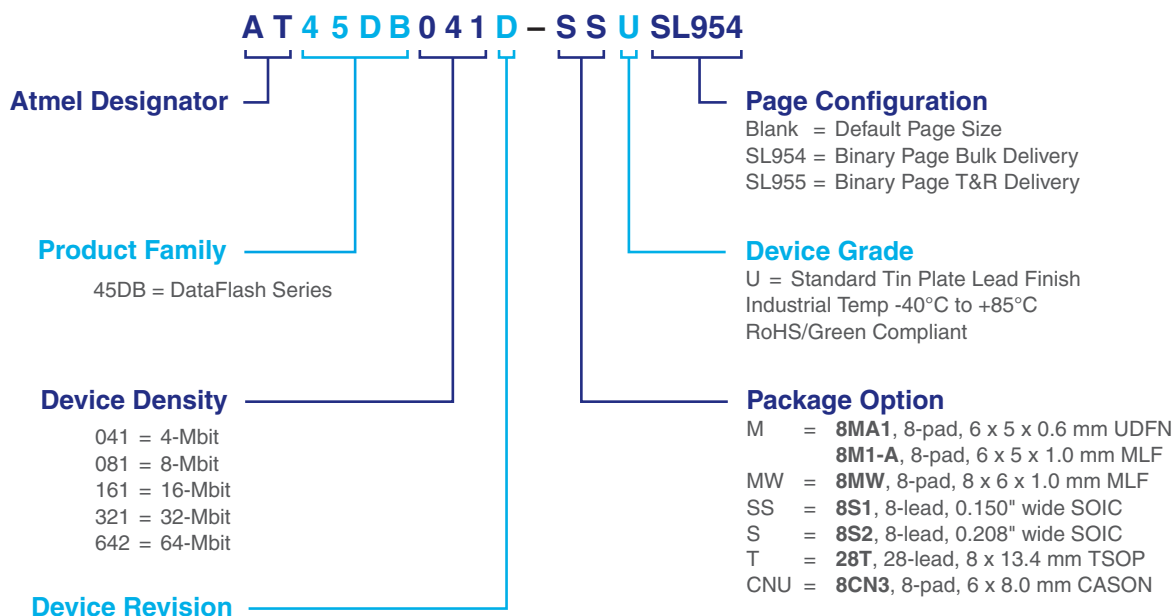

■ Notes

SL954 specifies the option of a Binary Page size with Bulk (Tube/Tray) delivery.
SL955 specifies the option of a Binary Page size with Tape and Reel (T&R) delivery.

■ Exceptions

The 1-Mbit DataFlash device is not available to order with the factory configured binary page size option. The user can still select the binary page option as detailed in the device specification.

■ Device Identification

SL954 will be marked on the topside of each device irrespective of shipping method to differentiate the factory configured binary page size devices from standard devices with the default page size.

■ Further Information

Specifications, applications notes and further information for Atmel DataFlash products can be found @ <http://www.atmel.com/products/DataFlash>

Headquarters

Atmel Corporation
2325 Orchard Parkway
San Jose, CA 95131
USA
Tel: (1) 408 441-0311
Fax: (1) 408 487-2600

International

Atmel Asia
Room 1219
Chinachem Golden Plaza
77 Mody Road, Tsimshatsui
East Kowloon
Hong Kong
Tel: (852) 2721-9778
Fax: (852) 2722-1369

Atmel Europe
Le Krebs
8, Rue Jean-Pierre Timbaud
BP 309
78054 St Quentin-en-
Yvelines Cedex
France
Tel: (33) 1-30-60-70-00
Fax: (33) 1-30-60-71-11

Atmel Japan
9F, Tonetsu Shinkawa Bldg.
1-24-8 Shinkawa
Chuo-ku, Tokyo 104-0033
Japan
Tel: (81) 3-3523-3551
Fax: (81) 3-3523-7581

Product Contact

Product Line
dataflash@atmel.com

Literature Requests
www.atmel.com/literature

Web Site
www.atmel.com

© 2008 Atmel Corporation.
All rights reserved.

Atmel®, logo and combinations thereof, DataFlash® and others are registered trademarks or trademarks of Atmel Corporation or its subsidiaries. Other terms and product names may be trademarks of others.

Rev.: 3688A-DLASH-04/08/0

