



Integrated Device Technology, Inc.
6024 Silver Creek Valley Road, San Jose, CA 95138

PRODUCT/PROCESS CHANGE NOTICE (PCN)

ATTACHMENT I - PCN #: TB0606-01

PCN Type: Packing

Data Sheet Change: None

Detail of Change: This notification is to advise our customer that IDT has qualified new shipping trays for VFQFP 64L products. The new trays provide better protection during product shipment.

Please note that there will be a change in number of units per tray from 260 to 207 units/tray. There is no change in the tray dimensions.

The new shipping trays have passed IDT's internal qualification requirements.


Description	Existing Shipping Tray	New Shipping Tray
Supplier	Daewon	Kostat
Part Number	14L-0909-B19	KS-87063
Tray Matrix	10x26	9x23
Qty per Tray	260 units	207 units
Pocket Size (WxL)	9.24x9.24 +/- 0.08mm	9.35x9.35 +/- 0.08mm




Integrated Device Technology, Inc.
6024 Silver Creek Valley Road, San Jose, CA 95138

PRODUCT/PROCESS CHANGE NOTICE (PCN)

ATTACHMENT I - PCN #: TB0606-01

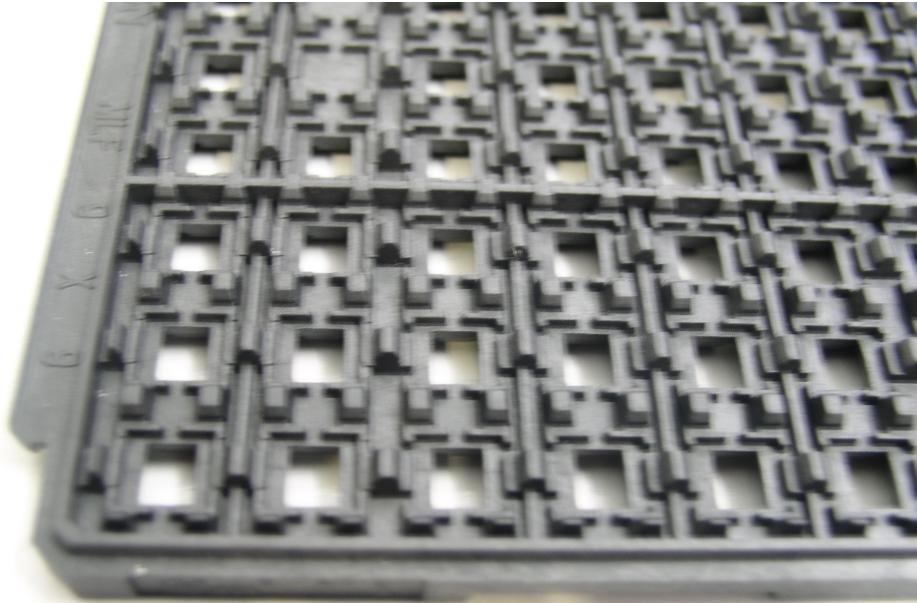

Existing Shipping Tray

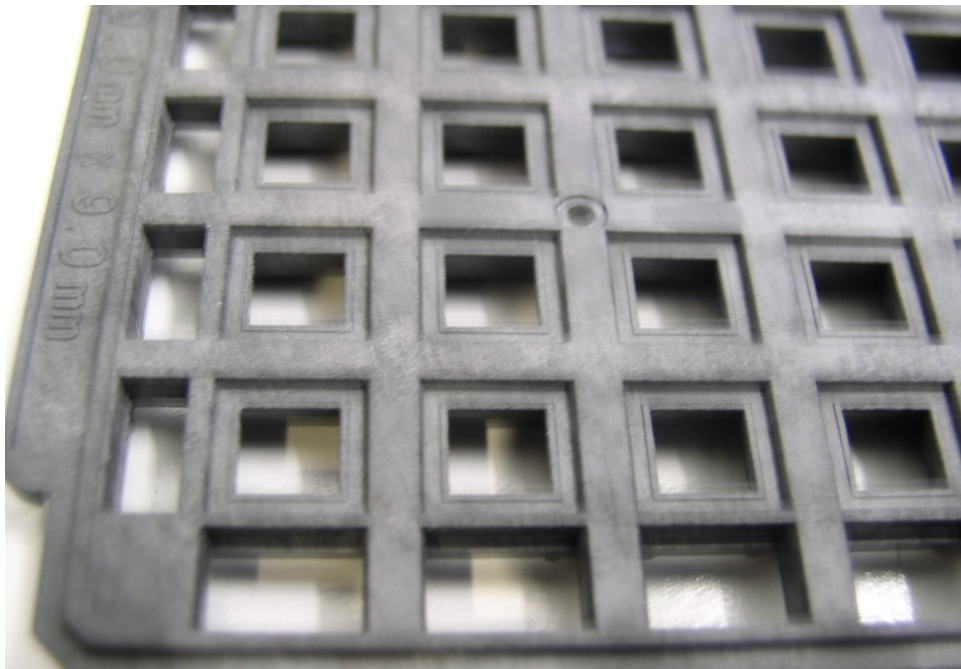

New Shipping Tray



Integrated Device Technology, Inc.
6024 Silver Creek Valley Road, San Jose, CA 95138

PRODUCT/PROCESS CHANGE NOTICE (PCN)

ATTACHMENT I - PCN #: TB0606-01

Qualification Plan #: BC06-05-03

Qualification Test Plan and Result:

Qualification Test and Conditions	Reject / Sample Size	Result
6 Feet Drop Test (6 drops, 1 drop per side @ standard packing)	0/4 trays (828 units)	Pass
Manufacturability (IC Fitting, Trim & Form Machine, Vision System, Test Handler)	0/5 trays	Pass
Visual/Mechanical (Chip, crack, pit, incomplete fill, contamination, burr on tray pocket)	0/5 trays	Pass
Static Electricity Test (100 volts max)	0/5 trays	Pass
Surface Resistivity Test (1×10^5 to 1×10^{11} ohms per sq)	0/5 trays	Pass
Dimensional (critical dimensions based on drawing)	0/5 trays	Pass
Bake Test (135°C@24 hours, bundled and singulated method)	0/8 trays	Pass



Integrated Device Technology, Inc.
6024 Silver Creek Valley Road, San Jose, CA 95138

PRODUCT/PROCESS CHANGE NOTICE (PCN)

ATTACHMENT II - PCN #: TB0606-01

Affected Part Number

IDT Part Number	IDT Part Number	IDT Part Number
IDTCV169NLG	IDTCV168NLG	IDTCV150NLG