

RX72M/RX72N Group, RX71M Group

Differences Between RX72M/RX72N Group and RX71M Group

Summary

This application note is a reference document that lists differences in peripheral modules, I/O registers, and pin functions between the RX72M/RX72N Group and the RX71M Group. This document also provides important information that needs to be taken into account when replacing the MCU.

Unless otherwise indicated the maximum MCU specifications of RX72M Group products with 224 pins, RX72N Group products with 224 pins, and RX71M Group products with 177 pins are described. Refer to the User's Manual: Hardware of each MCU for details of differences in electrical characteristics, usage notes, and setting procedures.

Target Devices

RX72M Group

RX72N Group

RX71M Group

Contents

1.	Comparison of Built-In Functions of RX72M/RX72N Group and RX71M Group	4
2.	Comparative Overview of Specifications	6
2.1	CPU.....	6
2.2	Operating Modes.....	8
2.3	Address Space.....	9
2.4	Option-Setting Memory	12
2.5	Clock Generation Circuit	14
2.6	Clock Frequency Accuracy Measurement Circuit.....	19
2.7	Low Power Consumption	21
2.8	Register Write Protection Function.....	27
2.9	Exception Handling	28
2.10	Interrupt Controller	29
2.11	Buses	33
2.12	Data Transfer Controller.....	36
2.13	Event Link Controller	39
2.14	I/O Ports	48
2.15	Multi-Function Pin Controller	53
2.16	Port Output Enable 3.....	107
2.17	General PWM Timer.....	111
2.18	PTP Module for the Ethernet Controller	122
2.19	Serial Communications Interface.....	124
2.20	I ² C Bus Interface	128
2.21	Serial Peripheral Interface.....	131
2.22	CRC Calculator	134
2.23	Serial Sound Interface (SSI)/Enhanced Serial Sound Interface (SSIE)	136
2.24	SD Host Interface	139
2.25	Boundary Scan.....	141
2.26	12-Bit A/D Converter	142
2.27	12-Bit D/A Converter	154
2.28	RAM	155
2.29	Standby RAM	157
2.30	Flash Memory.....	158
2.31	Packages	164
3.	Comparison of Pin Functions	165
3.1	176-Pin LFBGA Package	165
3.2	176-Pin LFQFP Package	177
3.3	145-Pin TFLGA Package	189
3.4	144-Pin LFQFP Package	196

3.5	100-Pin LFQFP Package	208
4.	Important Information when Migrating Between MCUs	216
4.1	Notes on Pin Design.....	216
4.1.1	Transitioning to Boot Mode (FINE Interface)	216
4.1.2	Inserting Decoupling Capacitors between AVCC and AVSS Pins	216
4.2	Notes on Functional Design	217
4.2.1	Running RAM Self-Diagnostics on Save Register Banks	217
4.2.2	User Boot Mode	217
4.2.3	Flash Access Window Setting Register (FAW).....	217
4.2.4	Clock Frequency Settings	217
4.2.5	Using a Low CL Crystal Oscillator	218
4.2.6	Note on Changing the ICLK Frequency.....	218
4.2.7	Ethernet Controller	218
4.2.8	Resetting the Ethernet Controller	218
4.2.9	Releasing PTP Controller for Ethernet Controller from Module Stop State	218
4.2.10	Transitioning ETHERC, EPTPC, and EDMAC Modules to Module Stop State	218
4.2.11	Note on ETHERC and EDMAC Software Reset.....	219
4.2.12	Eliminating I ² C Bus Interface Noise.....	219
4.2.13	A/D Conversion Start Bit	219
4.2.14	Compare Function Limitations.....	219
4.2.15	Initial Setting Procedure for Output Buffer Amplifier	219
4.2.16	ROM Cache.....	219
4.2.17	FCU Firmware Transfer.....	219
4.2.18	Initialization of the Port Direction Register (PDR).....	220
5.	Reference Documents.....	221
	Revision History	223

1. Comparison of Built-In Functions of RX72M/RX72N Group and RX71M Group

Table 1.1 is a comparative listing of the built-in functions of RX72M/RX72N Group and RX71M Group. For details of each function, refer to section 2, Comparative Overview of Specifications, as well as the documents listed in section 5, Reference Documents.

Table 1.1 Comparison of Built-In Functions of RX72M/RX72N Group and RX71M Group

Function	RX71M	RX72M	RX72N
CPU		●	
Operating modes		● / ■	
Address space		▲	
Resets	○		
Option-setting memory (OFSM)		● / ■	
Voltage detection circuit (LVDA)	○		
Clock generation circuit		● / ▲ / ■	
Clock frequency accuracy measurement circuit (CAC)	●		
Low power consumption	▲		
Battery backup function	○		
Register write protection function	●		
Exception handling	●		
Interrupt controller (ICUA): RX71M, (ICUD): RX72M/RX72N		● / ■	
Buses		● / ■	
Memory-protection unit (MPU)	○		
DMA controller (DMACAA)	○		
EXDMA controller (EXDMACa)	○		
Data transfer controller (DTCa): RX71M, (DTCb): RX72M/RX72N	●		
Event link controller (ELC)	●		
I/O ports	●		
Multi-function pin controller (MPC)		● / ▲ / ■	
Multi-function timer pulse unit 3 (MTU3a)	○		
Port output enable 3 (POE3a)		■	
General PWM timer (GPTA): RX71M, (GPTW): RX72M/RX72N	●		
GPTW port output enable (POEG)	✗	○	
16-bit timer pulse unit (TPUa)	○		
Programmable pulse generator (PPG)	○		
8-bit timer (TMR)	○		
Compare match timer (CMT)	○		
Compare match timer W (CMTW)	○		
Realtime clock (RTCd)	○		
Watchdog timer (WDTA)	○		
Independent watchdog timer (IWDTa)	○		
Ethernet controller (ETHERC)	○		
PTP module for the Ethernet controller (EPTPCa): RX71M, (EPTPCb): RX72M/RX72N	●		
DMA controller for the Ethernet controller (EDMACa)		○	
PHY management interface (PMGI)	✗	○	
EtherCAT slave controller (ESC)	✗	○	✗
USB 2.0 FS Host/Function module (USBb)		○	
USB 2.0 high-speed Host/Function module (USBAa)	○		✗

Function	RX71M	RX72M	RX72N
<u>Serial communications interface (SCIg, SCIf): RX71M, (SCIj, SCIi, SCIf): RX72M/RX72N</u>		●	
FIFO-embedded serial communications interface (SCIFA)	○		✗
<u>I²C bus interface (RIICa)</u>		●	
CAN module (CAN)		○	
<u>Serial peripheral interface (RSPIa): RX71M, (RSPIc): RX72M/RX72N</u>		●	
Quad serial peripheral interface (QSPI)		○	
<u>CRC calculator (CRC): RX71M, (CRCA): RX72M/RX72N</u>		●	
<u>Serial sound interface (SSI): RX71M, enhanced serial sound interface (SSIE): RX72M/RX72N</u>		●	
Sample rate converter (SRC)	○		✗
<u>SD host interface (SDHI)</u>		●	
MultiMediaCard interface (MMCIF)		○	
Parallel data capture unit (PDC)		○	
Graphic LCD controller (GLCDC)	✗	○	
2D drawing engine (DRW2D)	✗	○	
<u>Boundary scan</u>		▲	
Arithmetic unit for trigonometric functions (TFU)	✗	○	
Trusted Secure IP (TSIP)	✗	○	
AESa	○		✗
DES	○		✗
SHAa	○		✗
RNG	○		✗
Delta-sigma modulator interface (DSMIF)	✗	○	✗
<u>12-bit A/D converter (S12ADC): RX71M, (S12ADFa): RX72M/RX72N</u>		●/▲	
<u>12-bit D/A converter (R12DA): RX71M, (R12DAa): RX72M/RX72N</u>		●	
Temperature sensor (TEMPS)		○	
Data operation circuit (DOC)		○	
<u>RAM</u>		●	
<u>Standby RAM</u>		▲	
<u>Flash memory (FLASH)</u>		●/▲/■	
<u>Packages</u>		●/▲/■	

○: Available, ✗: Unavailable, ●: Differs due to added functionality,

▲: Differs due to change in functionality, ■: Differs due to removed functionality.

2. Comparative Overview of Specifications

This section presents a comparative overview of specifications, including registers.

In the comparative overview, **red text** indicates functions which are included only in one of the MCU groups and also functions for which the specifications differ between the two groups.

In the register comparison, **red text** indicates differences in specifications for registers that are included in both groups and **black text** indicates registers which are included only in one of the MCU groups. Differences in register specifications are not listed.

2.1 CPU

Table 2.1 is a comparative overview of CPUs, and Table 2.2 is a comparison of CPU registers.

Table 2.1 Comparative Overview of CPUs

Item	RX71M	RX72M/RX72N
CPU	<ul style="list-style-type: none"> • Maximum operating frequency: 240 MHz • 32-bit RX CPU (RXv2) • Minimum instruction execution time: One instruction per state (system clock cycle) • Address space: 4 GB, linear • Register set of the CPU <ul style="list-style-type: none"> — General purpose: Sixteen 32-bit registers — Control: Ten 32-bit registers — Accumulator: Two 72-bit register • Basic instructions: 75 • Floating-point instructions: 11 • DSP instructions: 23 • Addressing modes: 11 • Data arrangement <ul style="list-style-type: none"> — Instructions: Little endian — Data: Selectable between little endian or big endian • On-chip 32-bit multiplier: $32 \times 32 \rightarrow 64$ bits • On-chip divider: $32 / 32 \rightarrow 32$ bits • Barrel shifter: 32 bits 	<ul style="list-style-type: none"> • Maximum operating frequency: 240 MHz • 32-bit RX CPU (RXv3) • Minimum instruction execution time: One instruction per state (system clock cycle) • Address space: 4 GB, linear • Register set of the CPU <ul style="list-style-type: none"> — General purpose: Sixteen 32-bit registers — Control: Ten 32-bit registers — Accumulator: Two 72-bit registers • Basic instructions: 77 • Single-precision floating point instructions: 11 • DSP instructions: 23 • Instructions for register bank save function: 2 • Addressing modes: 11 • Data arrangement <ul style="list-style-type: none"> — Instructions: Little endian — Data: Selectable between little endian or big endian • On-chip 32-bit multiplier: $32 \times 32 \rightarrow 64$ bits • On-chip divider: $32 / 32 \rightarrow 32$ bits • Barrel shifter: 32 bits
FPU	<ul style="list-style-type: none"> • Single-precision floating point (32 bits) • Data types and floating-point exceptions conform to IEEE 754 standard 	<ul style="list-style-type: none"> • Single-precision floating-point (32 bits) • Data types and floating-point exceptions conform to IEEE 754 standard

Item	RX71M	RX72M/RX72N
Double-precision floating point coprocessor	—	<ul style="list-style-type: none"> • Double-precision floating-point register set <ul style="list-style-type: none"> — Double-precision floating-point data registers: 64-bit × 16 — Double-precision floating-point control registers: 32-bit × 4 • Double-precision floating-point processing instructions: 21 • Function for notifying the interrupt controller of double-precision floating-point exceptions
Register bank save function	—	<ul style="list-style-type: none"> • Fast collective saving and restoration of the values of CPU registers • 16 save register banks

Table 2.2 Comparison of CPU Registers

Register	Bit	RX71M	RX72M/RX72N
DR0 to DR15	—	—	Double-precision floating-point data registers
DPSW	—	—	Double-precision floating-point status word
DCMR	—	—	Double-precision floating-point comparison result register
DECNT	—	—	Double-precision floating-point exception handling control register
DEPC	—	—	Double-precision floating-point exception program counter

2.2 Operating Modes

Table 2.3 is a comparative overview of operating modes, and Table 2.4 is a comparison of operating mode registers.

Table 2.3 Comparative Overview of Operating Modes

Item	RX71M	RX72M/RX72N
Operating modes selected by mode-setting pins	Single-chip mode	Single-chip mode
	Boot mode (SCI interface)	Boot mode (SCI interface)
	Boot mode (USB interface)	Boot mode (USB interface)
	—	Boot mode (FINE interface)
	User boot mode	—
Operating modes selected by register settings	Single-chip mode	Single-chip mode
	User boot mode	—
	On-chip ROM disabled extended mode	On-chip ROM disabled extended mode
	On-chip ROM enabled extended mode	On-chip ROM enabled extended mode
Selection of endian order	MDE register	MDE register

Table 2.4 Comparison of Operating Mode Registers

Register	Bit	RX71M	RX72M/RX72N
MDSR	—	Mode status register	—

2.3 Address Space

Figure 2.1 is a comparative memory map of single-chip mode, Figure 2.2 is a comparative memory map of on-chip ROM enabled extended mode, and Figure 2.3 is a comparative memory map of on-chip ROM disabled extended mode.

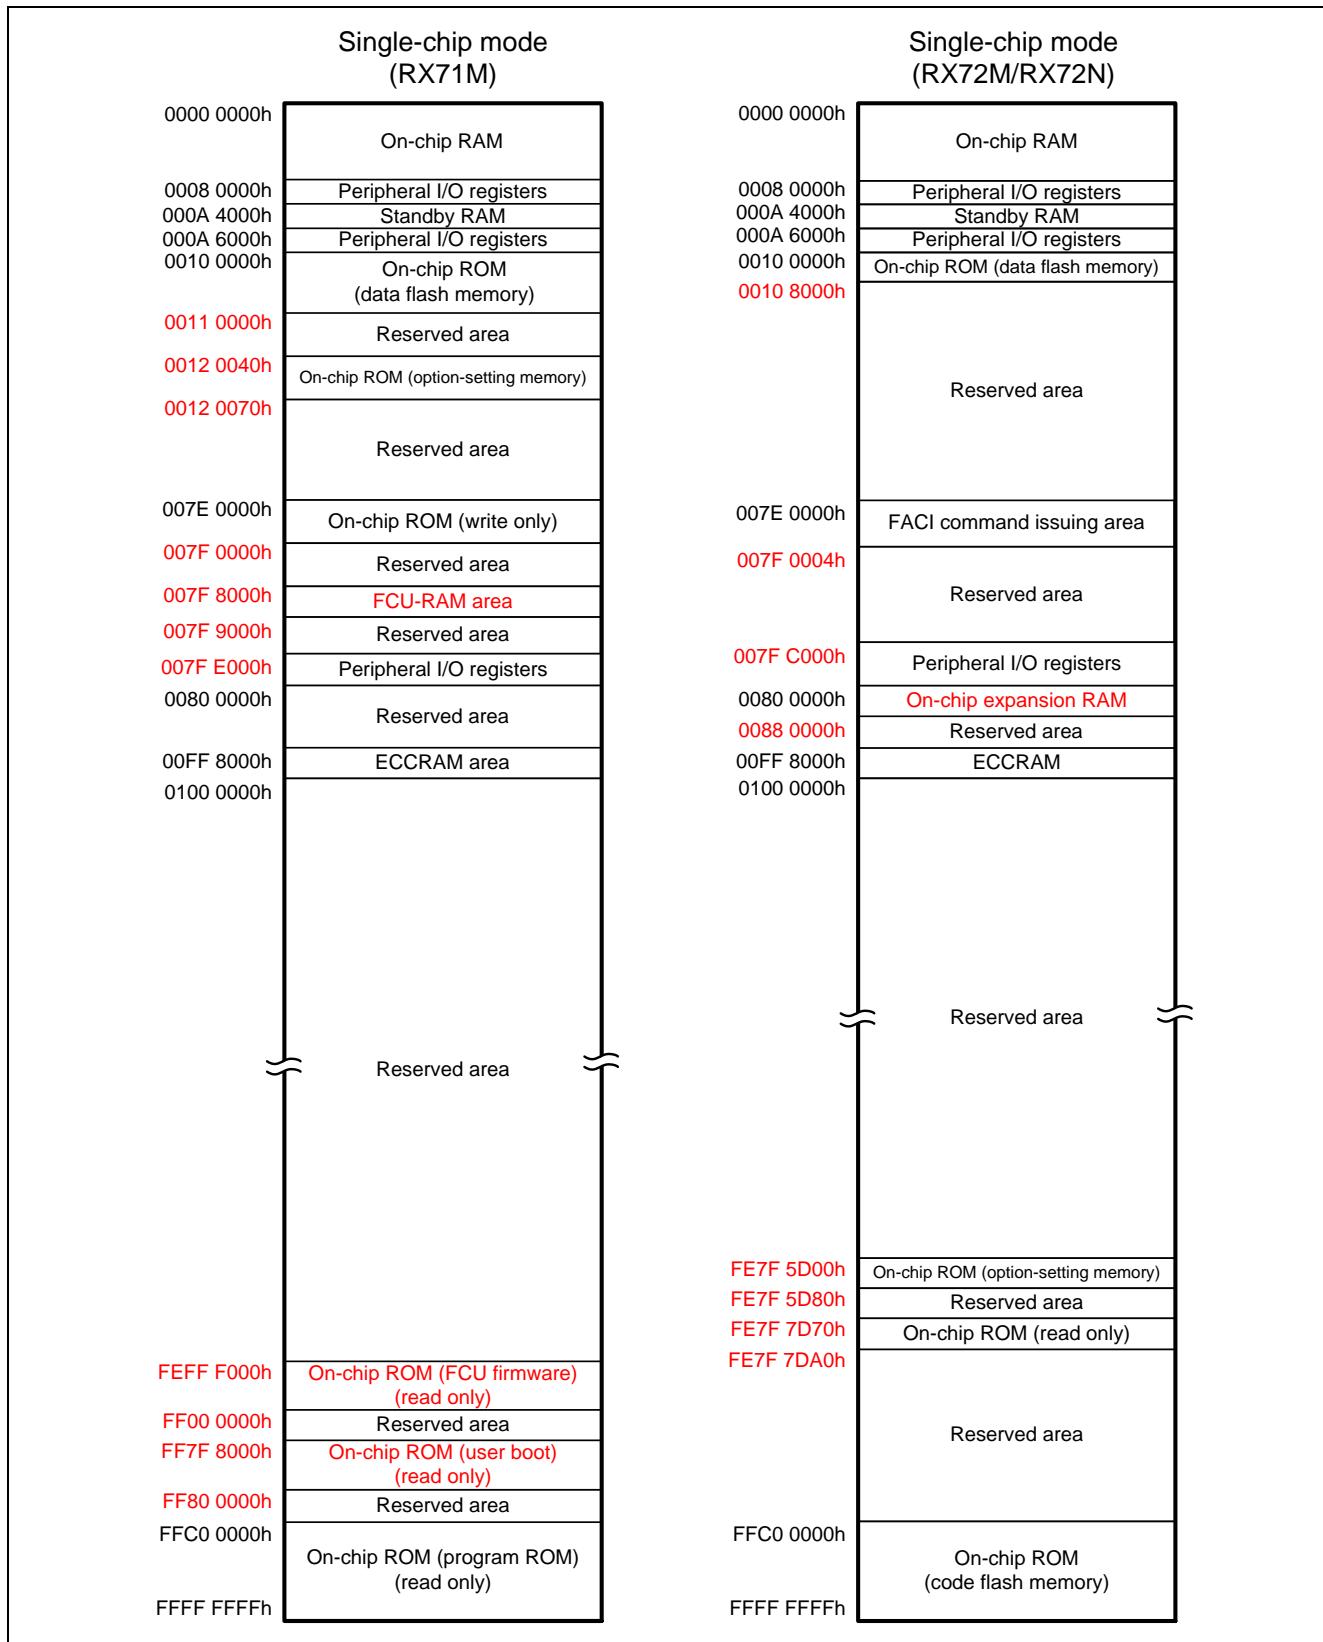


Figure 2.1 Comparative Memory Map of Single-Chip Mode

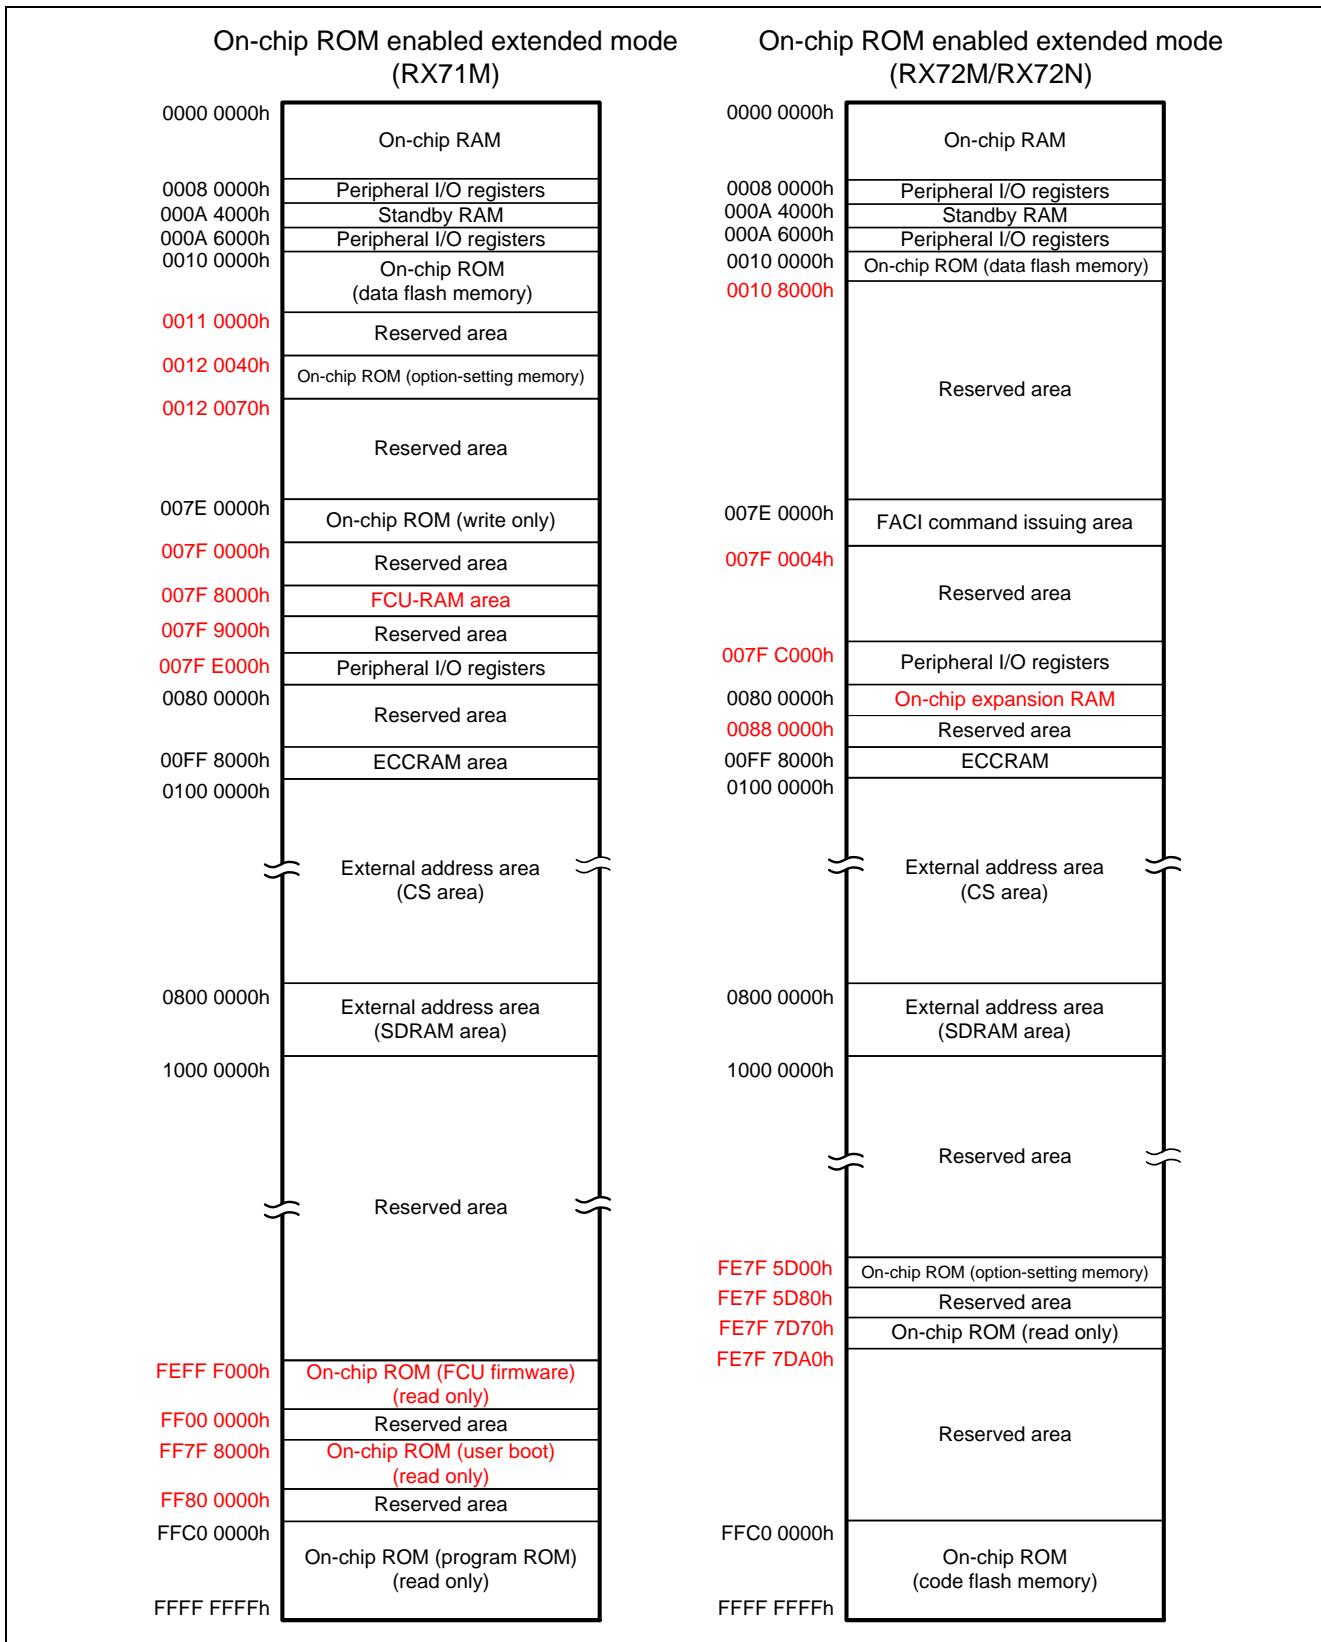


Figure 2.2 Comparative Memory Map of On-Chip ROM Enabled Extended Mode

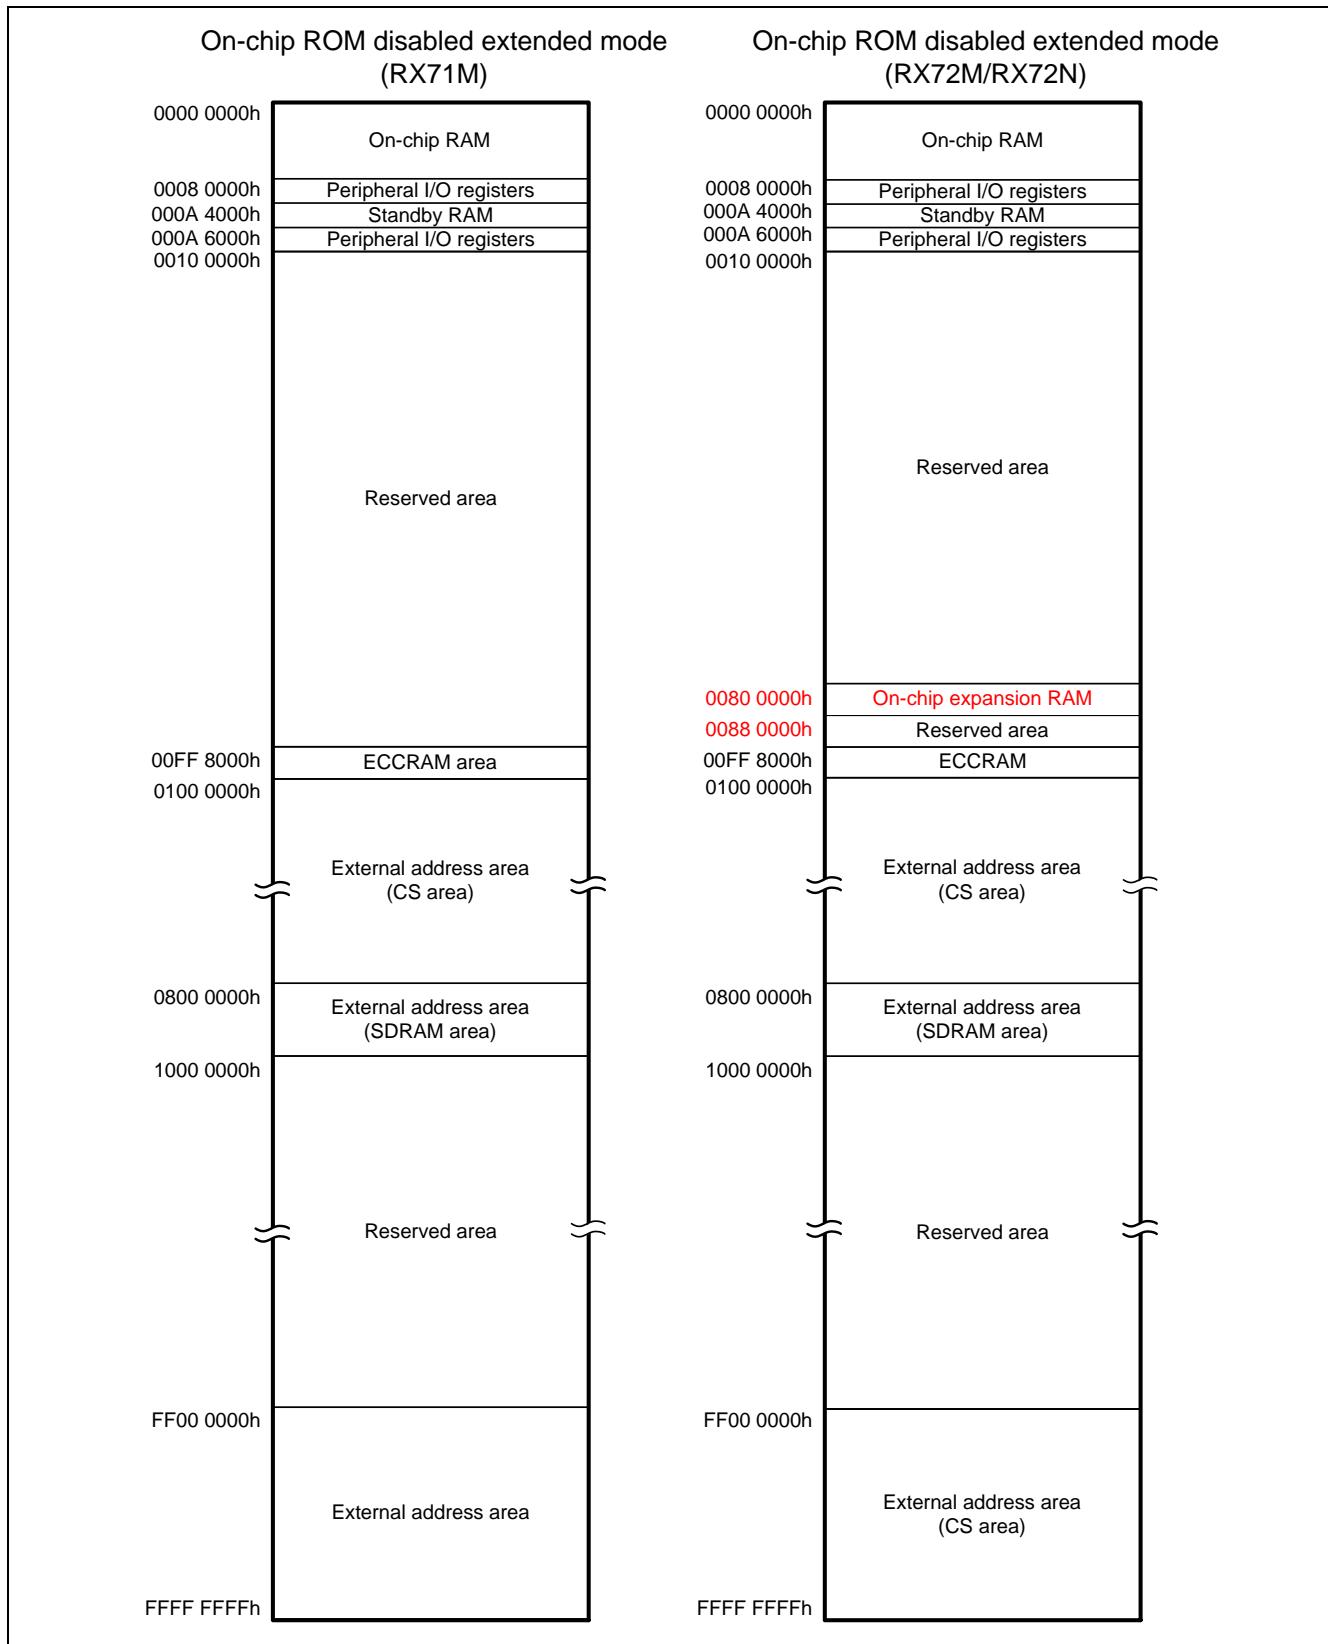


Figure 2.3 Comparative Memory Map of On-Chip ROM Disabled Extended Mode

2.4 Option-Setting Memory

Figure 2.4 is a comparison of option-setting memory areas, and Table 2.5 is a comparison of option-setting memory registers.

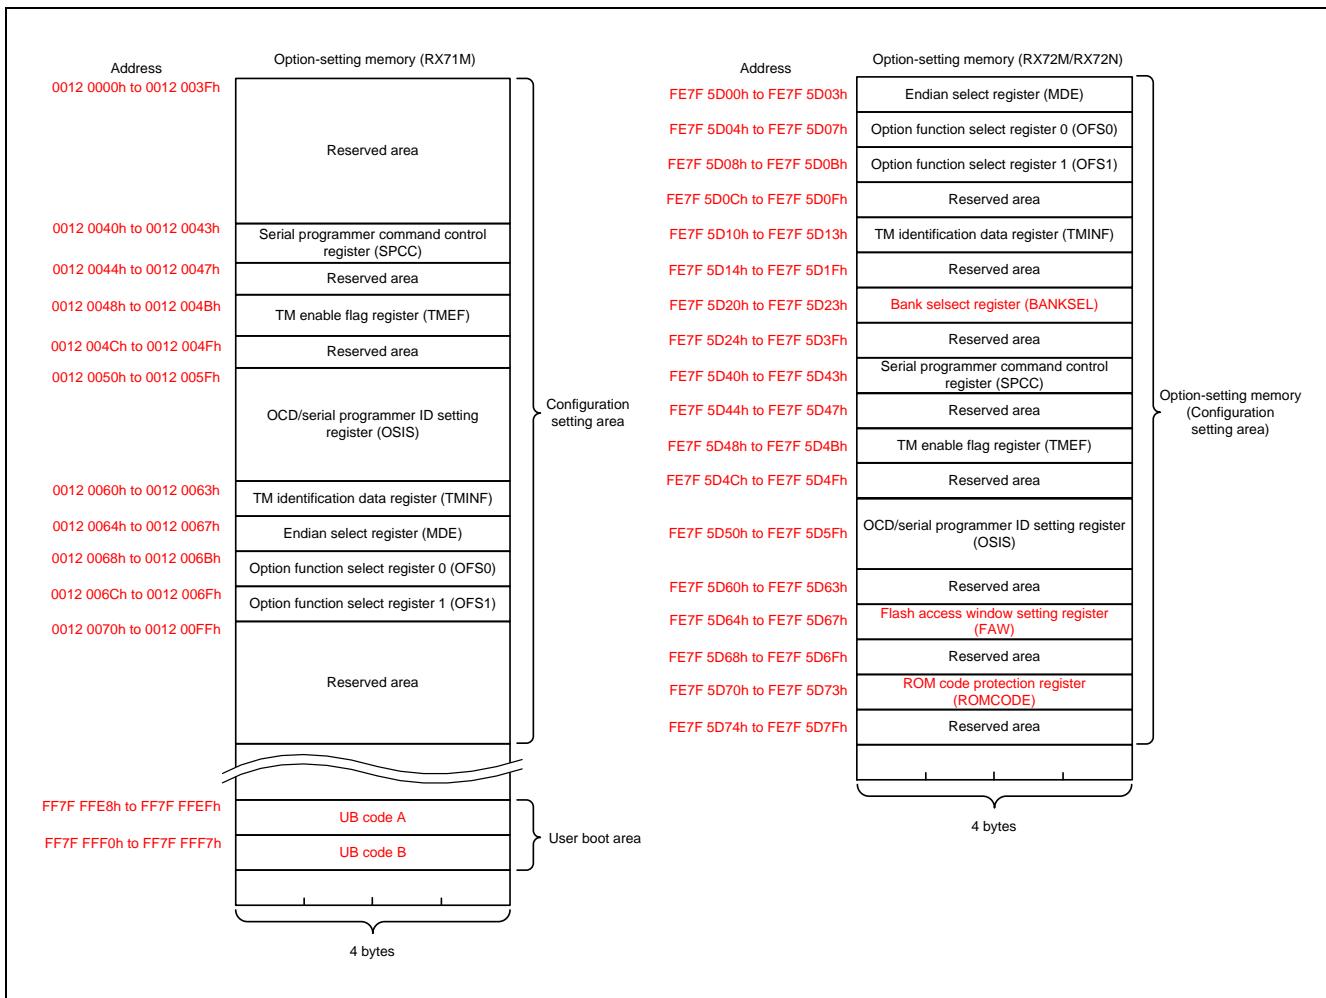


Figure 2.4 Comparison of Option-Setting Memory Areas

Table 2.5 comparison of Option-Setting Memory Registers

Register	Bit	RX71M (OFSM)	RX72M (OFSM)/RX72N (OFSM)
SPCC	IDE	ID code protection enable bit	—
	SEPR	Block erasure command protect bit	—
	WRPR	Programming command protect bit	—
	RDPR	Read command protect bit	—
OSIS	—	OCD/serial programmer ID setting register This register is used to store the ID code for ID code protection of the OCD/serial programmer. Refer to RX71M Group User's Manual: Hardware for details.	OCD/serial programmer ID setting register This register is used to store the control code or ID code for ID code protection of the OCD/serial programmer. Refer to RX72M Group User's Manual: Hardware for details.
MDE	BANKMD[2:0]	—	Bank mode select bits
TMEF	TMEFDB[2:0]	—	Dual-bank TM enable bits
BANKSEL	—	—	Bank select register
FAW	—	—	Flash access window setting register
ROMCODE	—	—	ROM code protection register

2.5 Clock Generation Circuit

Table 2.6 is a comparative overview of the clock generation circuits, and Table 2.7 is a comparison of clock generation circuit registers.

Table 2.6 Comparative Overview of Clock Generation Circuits

Item	RX71M	RX72M	RX72N
Use	<ul style="list-style-type: none"> Generates the system clock (ICLK) to be supplied to the CPU, DMAC, DTC, code flash memory, and RAM. Generates the peripheral module clock (PCLKA) to be supplied to the ETHERC, EDMAC, EPTPC, USBA, RSPI, SCIF, MTU3, GPT, and AES. Generates the peripheral module clock (PCLKB) to be supplied to the peripheral modules. Generates the peripheral module clocks (for analog conversion) (PCLKC: unit 0; PCLKD: unit 1) to be supplied to the S12ADC. Generates the flash-IF clock (FCLK) to be supplied to the flash interface. Generates the external bus clock (BCLK) to be supplied to the external bus. Generates the SDRAM clock (SDCLK) to be supplied to the SDRAM. Generates the USB clock (UCLK) to be supplied to the USBb and the PHY in the USBA. Generates the USBA clock (USBMCLK) to be supplied to the PHY in the USBA. 	<ul style="list-style-type: none"> Generates the system clock (ICLK) to be supplied to the CPU, DMAC, DTC, code flash memory, and RAM. Generates the peripheral module clock (PCLKA) to be supplied to the ETHERC, EDMAC, EPTPC, RSPI, SCLi, MTU, GLCDC, DRW2D, PMGI, GPTW, and ESC. Generates the peripheral module clock (PCLKB) to be supplied to the peripheral modules. Generates the peripheral module clocks (for analog conversion) (PCLKC: unit 0; PCLKD: unit 1) to be supplied to the S12ADFa. Generates the flash-IF clock (FCLK) to be supplied to the flash interface. Generates the external bus clock (BCLK) to be supplied to the external bus. Generates the SDRAM clock (SDCLK) to be supplied to the SDRAM. Generates the USB clock (UCLK) to be supplied to the USB. Generates the ESC clock (ESCCLK) to be supplied to the ESC. 	<ul style="list-style-type: none"> Generates the system clock (ICLK) to be supplied to the CPU, DMAC, DTC, code flash memory, and RAM. Generates the peripheral module clock (PCLKA) to be supplied to the ETHERC, EDMAC, EPTPC, RSPI, SCLi, MTU, GLCDC, DRW2D, PMGI, and GPTW. Generates the peripheral module clock (PCLKB) to be supplied to the peripheral modules. Generates the peripheral module clocks (for analog conversion) (PCLKC: unit 0; PCLKD: unit 1) to be supplied to the S12ADFa. Generates the flash-IF clock (FCLK) to be supplied to the flash interface. Generates the external bus clock (BCLK) to be supplied to the external bus. Generates the SDRAM clock (SDCLK) to be supplied to the SDRAM. Generates the USB clock (UCLK) to be supplied to the USB.

Item	RX71M	RX72M	RX72N
Use	<ul style="list-style-type: none"> Generates the CAC clock (CACCLK) to be supplied to the CAC. Generates the CAN clock (CANMCLK) to be supplied to the CAN. Generates the RTC sub-clock (RTCSCLK) to be supplied to the RTC. Generates the RTC main clock (RTCMCLK) to be supplied to the RTC. Generates the IWDT-dedicated clock (IWDTCLK) to be supplied to the IWDT. Generates the JTAG clock (JTAGTCK) to be supplied to the JTAG. 	<ul style="list-style-type: none"> Generates the CAC clock (CACCLK) to be supplied to the CAC. Generates the CAN clock (CANMCLK) to be supplied to the CAN. Generates the RTC sub-clock (RTCSCLK) to be supplied to the RTC. Generates the RTC main clock (RTCMCLK) to be supplied to the RTC. Generates the IWDT-dedicated clock (IWDTCLK) to be supplied to the IWDT. Generates the JTAG clock (JTAGTCK) to be supplied to the JTAG. 	<ul style="list-style-type: none"> Generates the CAC clock (CACCLK) to be supplied to the CAC. Generates the CAN clock (CANMCLK) to be supplied to the CAN. Generates the RTC sub-clock (RTCSCLK) to be supplied to the RTC. Generates the RTC main clock (RTCMCLK) to be supplied to the RTC. Generates the IWDT-dedicated clock (IWDTCLK) to be supplied to the IWDT. Generates the JTAG clock (JTAGTCK) to be supplied to the JTAG.
Operating frequency	<ul style="list-style-type: none"> ICLK: 240 MHz (max.) PCLKA: 120 MHz (max.) PCLKB: 60 MHz (max.) PCLKC: 60 MHz (max.) PCLKD: 60 MHz (max.) FCLK: <ul style="list-style-type: none"> — 4 MHz to 60 MHz (for programming and erasing the code flash memory and data flash memory) — 60 MHz (max.) (for reading from the data flash memory) BCLK: 120 MHz (max.) BCLK pin output: 60-MHz (max.) SDCLK pin output: 60-MHz (max.) UCLK: 48 MHz (max.) USBMCLK: 20 MHz, 24-MHz CACCLK: Same as the clocks from the respective oscillators. CANMCLK: 24 MHz (max.) 	<ul style="list-style-type: none"> ICLK: 240 MHz (max.) PCLKA: 120 MHz (max.) PCLKB: 60 MHz (max.) PCLKC: 60 MHz (max.) PCLKD: 60 MHz (max.) FCLK: <ul style="list-style-type: none"> — 4 MHz to 60 MHz (for programming and erasing the code flash memory and data flash memory) — 60 MHz (max.) (for reading from the data flash memory) BCLK: 120 MHz (max.) BCLK pin output: 80-MHz (max.) SDCLK pin output: 80-MHz (max.) UCLK: 48 MHz (max.) ESCCLK: 100 MHz (max.) CLKOUT25M pin output: 25 MHz (max.) CLKOUT pin output: 40 MHz (max.) CACCLK: Same as the clocks from the respective oscillators. CANMCLK: 24 MHz (max.) 	<ul style="list-style-type: none"> ICLK: 240 MHz (max.) PCLKA: 120 MHz (max.) PCLKB: 60 MHz (max.) PCLKC: 60 MHz (max.) PCLKD: 60 MHz (max.) FCLK: <ul style="list-style-type: none"> — 4 MHz to 60 MHz (for programming and erasing the code flash memory and data flash memory) — 60 MHz (max.) (for reading from the data flash memory) BCLK: 120 MHz (max.) BCLK pin output: 80-MHz (max.) SDCLK pin output: 80-MHz (max.) UCLK: 48 MHz (max.) CLKOUT25M pin output: 25 MHz (max.) CLKOUT pin output: 40 MHz (max.) CACCLK: Same as the clocks from the respective oscillators. CANMCLK: 24 MHz (max.)

Item	RX71M	RX72M	RX72N
Operating frequency	<ul style="list-style-type: none"> RTCSCLK: 32.768 kHz RTCMCLK: 8 MHz to 24 MHz IWDTCLOCK: 120 kHz JTAGTCK: 10 MHz (max.) 	<ul style="list-style-type: none"> RTCSCLK: 32.768 kHz RTCMCLK: 8 MHz to 16 MHz IWDTCLOCK: 120 kHz JTAGTCK: 10 MHz (max.) 	<ul style="list-style-type: none"> RTCSCLK: 32.768 kHz RTCMCLK: 8 MHz to 16 MHz IWDTCLOCK: 120 kHz JTAGTCK: 10 MHz (max.)
Main clock oscillator	<ul style="list-style-type: none"> Resonator frequency: 8 MHz to 24 MHz External clock input frequency: 24 MHz (max.) Connectable resonator or additional circuit: ceramic resonator, crystal resonator Connection pins: EXTAL, XTAL Oscillation stop detection function: When oscillation stop is detected on the main clock, the system clock source is switched to LOCO, and the MTU3 and GPT pins can be forcedly driven high-impedance. 	<ul style="list-style-type: none"> Resonator frequency: 8 MHz to 24 MHz External clock input frequency: 30 MHz (max.) Connectable resonator or additional circuit: ceramic resonator, crystal resonator Connection pins: EXTAL, XTAL Oscillation stop detection function: When oscillation stop is detected on the main clock, the system clock source is switched to LOCO, and the MTU and GPTW pins can be forcedly driven high-impedance. 	<ul style="list-style-type: none"> Resonator frequency: 8 MHz to 24 MHz External clock input frequency: 30 MHz (max.) Connectable resonator or additional circuit: ceramic resonator, crystal resonator Connection pins: EXTAL, XTAL Oscillation stop detection function: When oscillation stop is detected on the main clock, the system clock source is switched to LOCO, and the MTU and GPTW pins can be forcedly driven high-impedance.
Sub-clock oscillator	<ul style="list-style-type: none"> Resonator frequency: 32.768 kHz Connectable resonator or additional circuit: crystal resonator Connection pins: XCIN, XCOUT 	<ul style="list-style-type: none"> Resonator frequency: 32.768 kHz Connectable resonator or additional circuit: crystal resonator Connection pins: XCIN, XCOUT 	<ul style="list-style-type: none"> Resonator frequency: 32.768 kHz Connectable resonator or additional circuit: crystal resonator Connection pins: XCIN, XCOUT
PLL frequency synthesizer	<ul style="list-style-type: none"> Input clock sources: Main clock, HOCO Input pulse frequency division ratio: Selectable from $\times 1/1$, $\times 1/2$, and $\times 1/3$ Input frequency: 8 MHz to 24 MHz Frequency multiplication factor: Selectable from 10 to 30 Output clock frequency of PLL frequency synthesizer: 120 MHz to 240 MHz 	<ul style="list-style-type: none"> Input clock sources: Main clock, HOCO Input pulse frequency division ratio: Selectable from $\times 1/1$, $\times 1/2$, and $\times 1/3$ Input frequency: 8 MHz to 24 MHz Frequency multiplication factor: Selectable from 10 to 30 Output clock frequency of PLL frequency synthesizer: 120 MHz to 240 MHz 	<ul style="list-style-type: none"> Input clock sources: Main clock, HOCO Input pulse frequency division ratio: Selectable from $\times 1/1$, $\times 1/2$, and $\times 1/3$ Input frequency: 8 MHz to 24 MHz Frequency multiplication factor: Selectable from 10 to 30 Output clock frequency of PLL frequency synthesizer: 120 MHz to 240 MHz

Item	RX71M	RX72M	RX72N
PLL frequency synthesizer for specific purposes (PPLL)	—	<ul style="list-style-type: none"> • Input clock sources: Main clock, HOCO • Input pulse frequency division ratio: Selectable from $\times 1/1$, $\times 1/2$, and $\times 1/3$ • Input frequency: 8 MHz to 24 MHz • Frequency multiplication factor: Selectable from 10 to 30 • Output clock frequency of PLL frequency synthesizer: 120 MHz to 240 MHz 	<ul style="list-style-type: none"> • Input clock sources: Main clock, HOCO • Input pulse frequency division ratio: Selectable from $\times 1/1$, $\times 1/2$, and $\times 1/3$ • Input frequency: 8 MHz to 24 MHz • Frequency multiplication factor: Selectable from 10 to 30 • Output clock frequency of PLL frequency synthesizer: 120 MHz to 240 MHz
High-speed on-chip oscillator (HOCO)	<ul style="list-style-type: none"> • Oscillation frequency: Selectable among 16 MHz, 18 MHz, and 20 MHz • HOCO power supply control 	<ul style="list-style-type: none"> • Oscillation frequency: Selectable among 16 MHz, 18 MHz, and 20 MHz • HOCO power supply control 	<ul style="list-style-type: none"> • Oscillation frequency: Selectable among 16 MHz, 18 MHz, and 20 MHz • HOCO power supply control
Low-speed on-chip oscillator (LOCO)	Oscillation frequency: 240 kHz	Oscillation frequency: 240 kHz	Oscillation frequency: 240 kHz
IWDT-dedicated on-chip oscillator	Oscillation frequency: 120 kHz	Oscillation frequency: 120 kHz	Oscillation frequency: 120 kHz
JTAG external clock input (TCK)	Input clock frequency: 10 MHz (max.)	Input clock frequency: 10 MHz (max.)	Input clock frequency: 10 MHz (max.)
Control of output on BCLK pin	<ul style="list-style-type: none"> • Selectable between BCLK clock output and high output • Selectable between BCLK and BCLK $\times 1/2$ 	<ul style="list-style-type: none"> • Selectable between BCLK clock output and high output • Selectable between BCLK and BCLK $\times 1/2$ 	<ul style="list-style-type: none"> • Selectable between BCLK clock output and high output • Selectable between BCLK and BCLK $\times 1/2$
Control of output on SDCLK pin	Selectable between SDCLK clock output and high output SDCLK	Selectable between SDCLK clock output and high output SDCLK	Selectable between SDCLK clock output and high output SDCLK
Event link function (output)	Detection of stopping of the main clock oscillator	Detection of stopping of the main clock oscillator	Detection of stopping of the main clock oscillator
Event link function (input)	Switching of the clock source to the low-speed on-chip oscillator	Switching of the clock source to the low-speed on-chip oscillator	Switching of the clock source to the low-speed on-chip oscillator

Table 2.7 Comparison of Clock Generation Circuit Registers

Register	Bit	RX71M	RX72M	RX72N
SCKCR	BCK [3:0]	External bus clock (BCLK) select bits b19 b16 0 0 0 0: 1/1 0 0 0 1: 1/2 0 0 1 0: 1/4 0 0 1 1: 1/8 0 1 0 0: 1/16 0 1 0 1: 1/32 0 1 1 0: 1/64 Settings other than the above are prohibited.	External bus clock (BCLK) select bits b19 b16 0 0 0 0: 1/1 0 0 0 1: 1/2 0 0 1 0: 1/4 0 0 1 1: 1/8 0 1 0 0: 1/16 0 1 0 1: 1/32 0 1 1 0: 1/64 1 0 0 1: 1/3 Settings other than the above are prohibited.	External bus clock (BCLK) select bits b19 b16 0 0 0 0: 1/1 0 0 0 1: 1/2 0 0 1 0: 1/4 0 0 1 1: 1/8 0 1 0 0: 1/16 0 1 0 1: 1/32 0 1 1 0: 1/64 1 0 0 1: 1/3 Settings other than the above are prohibited.
MEMWAIT	—	Memory wait cycle setting register MEMWAIT is a 32-bit register.	Memory wait cycle setting register MEMWAIT is an 8-bit register.	Memory wait cycle setting register MEMWAIT is an 8-bit register.
OSCOVFSR	PPLOVF	—	PPLL clock oscillation stabilization flag	PPLL clock oscillation stabilization flag
CKOCR	—	—	CLKOUT output control register	CLKOUT output control register
PACKCR	—	—	Specific-use clock control register	Specific-use clock control register
	EPLLSEL	—	ESC clock (ESCLK) source select bit	—
PPLLCR	—	—	PPLL control register	PPLL control register
PPLLCR2	—	—	PPLL control register 2	PPLL control register 2
PPLLCR3	—	—	PPLL control register 3	PPLL control register 3

2.6 Clock Frequency Accuracy Measurement Circuit

Table 2.8 is a comparative overview of clock frequency accuracy measurement circuits, and Table 2.9 is a comparison of clock frequency accuracy measurement circuit registers.

Table 2.8 Comparative Overview of Clock Frequency Accuracy Measurement Circuits

Item	RX71M (CAC)	RX72M (CAC)/RX72N (CAC)
Measurement target clocks	The frequencies of the following clocks can be measured: <ul style="list-style-type: none"> • Main clock • Sub-clock • HOCO clock • LOCO clock • IWDTCLK clock • Peripheral module clock B (PCLKB) 	The frequencies of the following clocks can be measured: <ul style="list-style-type: none"> • Main clock • Sub-clock • HOCO clock • LOCO clock • IWDT-dedicated clock (IWDTCLK) • Peripheral module clock B (PCLKB) • USB clock (UCLK) • External clock for the Ethernet-PHY (CLKOUT25M)
Measurement reference clocks	<ul style="list-style-type: none"> • External clock input on CACREF pin • Main clock • Sub-clock • HOCO clock • LOCO clock • IWDTCLK clock • Peripheral module clock B (PCLKB) 	<ul style="list-style-type: none"> • External clock input on CACREF pin • Main clock • Sub-clock • HOCO clock • LOCO clock • IWDT-dedicated clock (IWDTCLK) • Peripheral module clock B (PCLKB) • USB clock (UCLK) • External clock for the Ethernet-PHY (CLKOUT25M)
Selectable function	Digital filter function	Digital filter function
Interrupt sources	<ul style="list-style-type: none"> • Measurement end interrupt • Frequency error interrupt • Overflow interrupt 	<ul style="list-style-type: none"> • Measurement end interrupt • Frequency error interrupt • Overflow interrupt
Low power consumption function	Ability to specify module stop state	Ability to transition to module stop state

Table 2.9 Comparison of Clock Frequency Accuracy Measurement Circuit Registers

Register	Bit	RX71M (CAC)	RX72M (CAC)/RX72N (CAC)
CACR1	FMCS[2:0]	<p>Measurement target clock select bits</p> <p>b3 b1</p> <p>0 0 0: Main clock 0 0 1: Sub-clock 0 1 0: HOCO clock 0 1 1: LOCO clock 1 0 0: IWDTCLK clock</p> <p>1 0 1: Peripheral module clock B (PCLKB)</p> <p>Settings other than the above are prohibited.</p>	<p>Measurement target clock select bits</p> <p>b3 b1</p> <p>0 0 0: Main clock 0 0 1: Sub-clock 0 1 0: HOCO clock 0 1 1: LOCO clock 1 0 0: IWDT-dedicated clock (IWDTCLK) 1 0 1: Peripheral module clock B (PCLKB)</p> <p>1 1 0: USB clock (UCLK) 1 1 1: External clock for the Ethernet-PHY (CLKOUT25M)</p> <p>Settings other than the above are prohibited.</p>
CACR2	RSCS[2:0]	<p>Measurement reference clock select bits</p> <p>b3 b1</p> <p>0 0 0: Main clock 0 0 1: Sub-clock 0 1 0: HOCO clock 0 1 1: LOCO clock 1 0 0: IWDTCLK clock</p> <p>1 0 1: Peripheral module clock B (PCLKB)</p> <p>Settings other than the above are prohibited.</p>	<p>Measurement reference clock select bits</p> <p>b3 b1</p> <p>0 0 0: Main clock 0 0 1: Sub-clock 0 1 0: HOCO clock 0 1 1: LOCO clock 1 0 0: IWDT-dedicated clock (IWDTCLK) 1 0 1: Peripheral module clock B (PCLKB)</p> <p>1 1 0: USB clock (UCLK) 1 1 1: External clock for the Ethernet-PHY (CLKOUT25M)</p> <p>Settings other than the above are prohibited.</p>

2.7 Low Power Consumption

Table 2.10 is a comparative overview of the low power consumption functions, Table 2.11 is a comparison of procedures for entering and exiting low power consumption modes and operating states in each mode, and Table 2.12 is a comparison of low power consumption registers.

Table 2.10 Comparative Overview of Low Power Consumption Functions

Item	RX71M	RX72M/RX72N
Reduced power consumption by switching clocks	The frequency division ratio is settable independently for the system clock (ICLK), peripheral module clocks (PCLKA, PCLKB, PCLKC, and PCLKD), external bus clock (BCLK), and flash interface clock (FCLK).	The frequency division ratio is settable independently for the system clock (ICLK), peripheral module clocks (PCLKA, PCLKB, PCLKC, and PCLKD), external bus clock (BCLK), and flash interface clock (FCLK).
BCLK output control function	It is possible to select between BCLK output and high output.	It is possible to select between BCLK output and high output.
SDCLK output control function	It is possible to select between SDCLK output and high output.	It is possible to select between SDCLK output and high output.
Module stop function	Functions can be stopped independently for each peripheral module.	Functions can be stopped independently for each peripheral module.
Function for transition to low power consumption mode	It is possible to transition to low power consumption modes that stop the CPU, peripheral modules, and oscillator.	It is possible to transition to low power consumption modes that stop the CPU, peripheral modules, and oscillator.
Low power consumption function	<ul style="list-style-type: none"> • Sleep mode • All-module clock stop mode • Software standby mode • Deep software standby mode 	<ul style="list-style-type: none"> • Sleep mode • All-module clock stop mode • Software standby mode • Deep software standby mode
Function for lower operating power consumption	<ul style="list-style-type: none"> • Power consumption can be reduced in normal operation, sleep mode, and all-module clock stop mode by selecting an appropriate operating power consumption control mode according to the operating frequency and operating voltage range. • Operating power control modes: 3 <ul style="list-style-type: none"> — High-speed operating mode — Low-speed operating mode 1 — Low-speed operating mode 2 	<ul style="list-style-type: none"> • Power consumption can be reduced in normal operation, sleep mode, and all-module clock stop mode by selecting an appropriate operating power consumption control mode according to the operating frequency and operating voltage range. • Operating power control modes: 3 <ul style="list-style-type: none"> — High-speed operating mode — Low-speed operating mode 1 — Low-speed operating mode 2 <p style="color: red; margin-left: 20px;">There is no difference in power consumption when the same conditions (frequency and voltage) are set in low-speed operating modes 1 and 2.</p>

Table 2.11 Comparison of Procedures for Entering and Exiting Low Power Consumption Modes and Operating States in Each Mode

Mode	Entering and Exiting Low Power Consumption Modes and Operating States	RX71M	RX72M/RX72N
Sleep mode	Transition method	Control register + instruction	Control register + instruction
	Method of cancellation other than reset	Interrupt	Interrupt
	State after cancellation	Program execution state (interrupt processing)	Program execution state (interrupt processing)
	Main clock oscillator	Operation possible	Operation possible
	Sub-clock oscillator	Operation possible	Operation possible
	High-speed on-chip oscillator	Operation possible	Operation possible
	Low-speed on-chip oscillator	Operation possible	Operation possible
	IWDT-dedicated on-chip oscillator	Operation possible	Operation possible
	PLL	Operation possible	Operation possible
	PPLL	—	Operation possible
	CPU	Stopped (retained)	Stopped (retained)
	RAM and ECCRAM: RX71M RAM, expansion RAM, and ECCRAM: RX72M/RX72N	Operation possible (retained)	Operation possible (retained)
	Standby RAM	Operation possible (retained)	Operation possible (retained)
	Flash memory	Operation	Operation
	USBFS Host/Function module (USBb)	Operation possible	Operation possible
	USBHS Host/Function module (USBA)	Operation possible	—
	Watchdog timer (WDT)	Stopped (retained)	Stopped (retained)
	Independent watchdog timer (IWDT)	Operation possible	Operation possible
	Realtime clock (RTC)	Operation possible	Operation possible
	8-bit timer (unit 0, unit 1) (TMR)	Operation possible	Operation possible
All-module clock stop mode	Port output enable (POE)	—	Operation possible
	Voltage detection circuit (LVD)	Operation possible	Operation possible
	Power-on reset circuit	Operation	Operation
	Peripheral modules	Operation possible	Operation possible
	I/O ports	Operation	Operation
	Transition method	Control register + instruction	Control register + instruction
	Method of cancellation other than reset	Interrupt	Interrupt
	State after cancellation	Program execution state (interrupt processing)	Program execution state (interrupt processing)
	Main clock oscillator	Operation possible	Operation possible
	Sub-clock oscillator	Operation possible	Operation possible

Mode	Entering and Exiting Low Power Consumption Modes and Operating States	RX71M	RX72M/RX72N
All-module clock stop mode	RAM, ECCRAM: RX71M RAM, expansion RAM, ECCRAM: RX72M/RX72N	Stopped (retained)	Stopped (retained)
	Standby RAM	Stopped (retained)	Stopped (retained)
	Flash memory	Stopped (retained)	Stopped (retained)
	USBFS Host/Function module (USBb)	Stopped	Stopped
	USBHS Host/Function module (USBA)	Stopped	—
	Watchdog timer (WDT)	Stopped (retained)	Stopped (retained)
	Independent watchdog timer (IWDT)	Operation possible	Operation possible
	Realtime clock (RTC)	Operation possible	Operation possible
	8-bit timer (unit 0, unit 1) (TMR)	Operation possible	Operation possible
	Port output enable (POE)	—	Operation possible* ¹
	Voltage detection circuit (LVD)	Operation possible	Operation possible
	Power-on reset circuit	Operation	Operation
	Peripheral modules	Stopped (retained)	Stopped (retained)
	I/O ports	Retained	Retained
Software standby mode	Transition method	Control register + instruction	Control register + instruction
	Method of cancellation other than reset	Interrupt	Interrupt
	State after cancellation	Program execution state (interrupt processing)	Program execution state (interrupt processing)
	Main clock oscillator	Operation possible	Operation possible
	Sub-clock oscillator	Operation possible	Operation possible
	High-speed on-chip oscillator	Stopped	Stopped
	Low-speed on-chip oscillator	Stopped	Stopped
	IWDT-dedicated on-chip oscillator	Operation possible	Operation possible
	PLL	Stopped	Stopped
	PPLL	—	Stopped
	CPU	Stopped (retained)	Stopped (retained)
	RAM, ECCRAM: RX71M RAM, expansion RAM, ECCRAM: RX72M/RX72N	Stopped (retained)	Stopped (retained)
	Standby RAM	Stopped (retained)	Stopped (retained)
	Flash memory	Stopped (retained)	Stopped (retained)
	USBFS Host/Function module (USBb)	Stopped	Stopped
	USBHS Host/Function module (USBA)	Stopped	—
	Watchdog timer (WDT)	Stopped (retained)	Stopped (retained)
	Independent watchdog timer (IWDT)	Operation possible	Operation possible
	Realtime clock (RTC)	Operation possible	Operation possible
	8-bit timer (unit 0, unit 1) (TMR)	Stopped (retained)	Stopped (retained)
	Port output enable (POE)	—	Stopped (retained)
	Voltage detection circuit (LVD)	Operation possible	Operation possible
	Power-on reset circuit	Operation	Operation
	Peripheral modules	Stopped (retained)	Stopped (retained)
	I/O ports	Retained	Retained

Mode	Entering and Exiting Low Power Consumption Modes and Operating States	RX71M	RX72M/RX72N
Deep software standby mode	Transition method	Control register + instruction	Control register + instruction
	Method of cancellation other than reset	Interrupt	Interrupt
	State after cancellation	Program execution state (reset processing)	Program execution state (reset processing)
	Main clock oscillator	Operation possible	Operation possible
	Sub-clock oscillator	Operation possible	Operation possible
	High-speed on-chip oscillator	Stopped	Stopped
	Low-speed on-chip oscillator	Stopped	Stopped
	IWDT-dedicated on-chip oscillator	Stopped (undefined)	Stopped (undefined)
	PLL	Stopped	Stopped
	PPLL	—	Stopped
	CPU	Stopped (undefined)	Stopped (undefined)
	RAM, ECCRAM: RX71M RAM, expansion RAM, ECCRAM: RX72M/RX72N	Stopped (undefined)	Stopped (undefined)
	Standby RAM	Stopped (retained/undefined)	Stopped (retained/undefined)
	Flash memory	Stopped (retained)	Stopped (retained)
	USBFS Host/Function module (USBb)	Stopped (retained/undefined)	Stopped (retained/undefined)
	USBHS Host/Function module (USBA)	Stopped (retained/undefined)	—
	Watchdog timer (WDT)	Stopped (undefined)	Stopped (undefined)
	Independent watchdog timer (IWDT)	Stopped (undefined)	Stopped (undefined)
	Realtime clock (RTC)	Operation possible	Operation possible
	8-bit timer (unit 0, unit 1) (TMR)	Stopped (undefined)	Stopped (undefined)
	Port output enable (POE)	—	Stopped (undefined)
	Voltage detection circuit (LVD)	Operation possible	Operation possible
	Power-on reset circuit	Operation	Operation
	Peripheral modules	Stopped (undefined)	Stopped (undefined)
	I/O ports	Retained	Retained

Notes: "Operation possible" means that whether the state is operating or stopped is controlled by the control register setting.

"Stopped (retained)" means that internal register values are retained and internal operations are suspended.

"Stopped (undefined)" means that internal register values are undefined and power is not supplied to the internal circuit.

1. If POE interrupts are enabled and a POE interrupt source occurs while the chip is in all-module clock stop mode, return from all-module clock stop mode does not occur but the state of the interrupt source flag is retained. If a different source initiates return from all-module clock stop mode in this state, the POE interrupt is generated after the return.

Table 2.12 Comparison of Low Power Consumption Registers

Register	Bit	RX71M	RX72M	RX72N
MSTPCRA	MSTPA7	General PWM timer bit	General PWM timer/ GPTW dedicated port output enable module stop bit	General PWM timer/ GPTW dedicated port output enable module stop bit
MSTPCRB	MSTPB11	—	Δ-Σ interface module stop bit	—
	MSTPB12	Universal serial bus 2.0 HS interface module stop bit	—	—
	MSTPB13	—	Ethernet-controller PTP controller and Ethernet-controller DMA controller module stop setting bit	Ethernet-controller PTP controller and Ethernet-controller DMA controller module stop setting bit
	MSTPB14	Ethernet Controller and Ethernet controller DMA controller (channel 1) modules stop bit	Ethernet controller, Ethernet controller DMA controller, and PHY management interface (channel 1) modules stop bit	Ethernet controller, Ethernet controller DMA controller, and PHY management interface (channel 1) modules stop bit
	MSTPB15	Ethernet Controller and Ethernet controller DMA controller (channel 0) modules stop bit	Ethernet controller, Ethernet controller DMA controller, and PHY management interface (channel 0) modules stop bit	Ethernet controller, Ethernet controller DMA controller, and PHY management interface (channel 0) modules stop bit
	MSTPB20	—	I ² C bus interface 1 module stop bit	I ² C bus interface 1 module stop bit
MSTPCRC	MSTPC2	—	Expansion RAM module stop bit	Expansion RAM module stop bit
	MSTPC22	—	Serial peripheral interface 2 module stop bit	Serial peripheral interface 2 module stop bit
	MSTPC24	FIFO on-chip serial communications interface 11 module stop bit	Serial communication interface 11 module stop bit	Serial communication interface 11 module stop bit
	MSTPC25	FIFO on-chip serial communications interface 10 module stop bit	Serial communication interface 10 module stop bit	Serial communication interface 10 module stop bit
	MSTPC26	FIFO on-chip serial communications interface 9 module stop bit	Serial communication interface 9 module stop bit	Serial communication interface 9 module stop bit
	MSTPC27	FIFO on-chip serial communications interface 8 module stop bit	Serial communication interface 8 module stop bit	Serial communication interface 8 module stop bit
	MSTPC28	—	2D drawing engine module stop bit	2D drawing engine module stop bit
	MSTPC29	—	Graphic-LCD controller module stop bit	Graphic-LCD controller module stop bit

Register	Bit	RX71M	RX72M	RX72N
MSTPCRD	MSTPD11	—	EtherCAT slave controller module stop bit	—
	MSTPD14	Serial sound interface 1 module stop bit	Extended serial sound interface 1 module stop bit* ¹	Extended serial sound interface 1 module stop bit
	MSTPD15	Serial sound interface 0 module stop bit	Extended serial sound interface 0 module stop bit	Extended serial sound interface 0 module stop bit
	MSTPD23	Sampling rate converter module stop bit	—	—
	MSTPD27	—	Trusted Secure IP module stop bit	Trusted Secure IP module stop bit

Note: 1. When transitioning to software standby mode after changing the value of the MSTPD11 bit, execute the WAIT instruction after two cycles of the ESC clock (ESCCLK) have elapsed after writing to the MSTPD11 bit.

2.8 Register Write Protection Function

Table 2.13 is a comparative overview of the register write protection functions.

Table 2.13 Comparative Overview of Register Write Protection Functions

Item	RX71M	RX72M/RX72N
PRC0 bit	Registers related to the clock generation circuit: SCKCR, SCKCR2, SCKCR3, PLLCR, PLLCR2, BCKCR, MOSCCR, SOSCCR, LOCOCR, ILOCOCR, HOCOCR, HOCOCR2, OSTDCR, OSTDSR	Registers related to the clock generation circuit: SCKCR, SCKCR2, SCKCR3, PACKCR , PLLCR, PLLCR2, PULLCR , PULLCR2 , BCKCR, MOSCCR, SOSCCR, LOCOCR, ILOCOCR, HOCOCR, HOCOCR2, OSTDCR, OSTDSR, CKOCR
PRC1 bit	<ul style="list-style-type: none"> Registers related to the operating modes: SYSCR0, SYSCR1 Registers related to the low power consumption functions: SBYCR, MSTPCRA, MSTPCRB, MSTPCRC, MSTPCRD, OPCCR, RSTCKCR, DPSBYCR, DPSIER0 to DPSIER3, DPSIFR0 to DPSIFR3, DPSIEGR0 to DPSIEGR3 Registers related to the clock generation circuit: MOSCWTCR, SOSCWTCR, MOFCR, HOCOPCR Software reset register: SWRR 	<ul style="list-style-type: none"> Registers related to the operating modes: SYSCR0, SYSCR1 Registers related to the low power consumption functions: SBYCR, MSTPCRA, MSTPCRB, MSTPCRC, MSTPCRD, OPCCR, RSTCKCR, DPSBYCR, DPSIER0 to DPSIER3, DPSIFR0 to DPSIFR3, DPSIEGR0 to DPSIEGR3 Registers related to the clock generation circuit: MOSCWTCR, SOSCWTCR, MOFCR, HOCOPCR Software reset register: SWRR
PRC3 bit	Registers related to LVD: LVCMPCR, LVDLVLR, LVD1CR0, LVD1CR1, LVD1SR, LVD2CR0, LVD2CR1, LVD2SR	Registers related to LVD: LVCMPCR, LVDLVLR, LVD1CR0, LVD1CR1, LVD1SR, LVD2CR0, LVD2CR1, LVD2SR

2.9 Exception Handling

Table 2.14 is a comparative overview of exception handling, Table 2.15 is a comparison of vectors, and Table 2.16 is a comparison of instructions for returning from exception handling routines.

Table 2.14 Comparative Overview of Exception Handling

Item	RX71M	RX72M/RX72N
Exception events	<ul style="list-style-type: none"> • Undefined instruction exception • Privileged instruction exception • Access exception • Floating-point exception • Reset • Non-maskable interrupt • Interrupt • Unconditional trap 	<ul style="list-style-type: none"> • Undefined instruction exception • Privileged instruction exception • Access exception • Address exception • Single-precision floating-point exception • Reset • Non-maskable interrupt • Interrupt • Unconditional trap

Table 2.15 Comparison of Vectors

Item	RX71M	RX72M/RX72N								
Undefined instruction exception	Exception vector table (EXTB)	Exception vector table (EXTB)								
Privileged instruction exception	Exception vector table (EXTB)	Exception vector table (EXTB)								
Access exception	Exception vector table (EXTB)	Exception vector table (EXTB)								
Address exception	—	Exception vector table (EXTB)								
Floating-point exception (RX71M)/ single-precision floating-point exception (RX72M/RX72N)	Exception vector table (EXTB)	Exception vector table (EXTB)								
Reset	Exception vector table (EXTB)	Exception vector table (EXTB)								
Non-maskable interrupt	Exception vector table (EXTB)	Exception vector table (EXTB)								
Interrupt	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 10%;">Fast interrupt</td> <td style="width: 90%;">FINTV</td> </tr> <tr> <td>Other than fast interrupt</td> <td>Relocatable vector table (INTB)</td> </tr> </table>	Fast interrupt	FINTV	Other than fast interrupt	Relocatable vector table (INTB)	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 10%;">Fast interrupt</td> <td style="width: 90%;">FINTV</td> </tr> <tr> <td>Other than fast interrupt</td> <td>Interrupt vector table (INTB)</td> </tr> </table>	Fast interrupt	FINTV	Other than fast interrupt	Interrupt vector table (INTB)
Fast interrupt	FINTV									
Other than fast interrupt	Relocatable vector table (INTB)									
Fast interrupt	FINTV									
Other than fast interrupt	Interrupt vector table (INTB)									
Unconditional trap	Relocatable vector table (INTB)	Interrupt vector table (INTB)								

Table 2.16 Comparison of Instructions for Returning from Exception Handling Routines

Item	RX71M	RX72M/RX72N								
Undefined instruction exception	RTE	RTE								
Privileged instruction exception	RTE	RTE								
Access exception	RTE	RTE								
Address exception	—	RTE								
Floating-point exception (RX71M)/ single-precision floating-point exception (RX72M/RX72N)	RTE	RTE								
Reset	Return not possible	Return not possible								
Non-maskable interrupt	Prohibited	Prohibited								
Interrupt	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 10%;">Fast interrupt</td> <td style="width: 90%;">RTFI</td> </tr> <tr> <td>Other than fast interrupt</td> <td>RTE</td> </tr> </table>	Fast interrupt	RTFI	Other than fast interrupt	RTE	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 10%;">Fast interrupt</td> <td style="width: 90%;">RTFI</td> </tr> <tr> <td>Other than fast interrupt</td> <td>RTE</td> </tr> </table>	Fast interrupt	RTFI	Other than fast interrupt	RTE
Fast interrupt	RTFI									
Other than fast interrupt	RTE									
Fast interrupt	RTFI									
Other than fast interrupt	RTE									
Unconditional trap	RTE	RTE								

2.10 Interrupt Controller

Table 2.17 is a comparative overview of the interrupt controllers, and Table 2.18 is a comparison of interrupt controller registers.

Table 2.17 Comparative Overview of Interrupt Controllers

Item	RX71M (ICUA)	RX72M (ICUD)/RX72N (ICUD)
Interrupts	Peripheral function interrupts	<p>Interrupts from peripheral modules</p> <ul style="list-style-type: none"> • Interrupt detection method: Edge detection/level detection (fixed for each interrupt source) • Group interrupts: Multiple interrupt sources are grouped together and treated as a single interrupt source. <p>— Group BE0 interrupt: Interrupt sources of peripheral modules that use PCLKB as the operating clock (edge detection)</p> <p>— Group BL0/BL1 interrupts: Interrupt sources of peripheral modules that use PCLKB as the operating clock (level detection)</p> <p>— Group AL0/AL1 interrupt: Interrupt sources of peripheral modules that use PCLKA as the operating clock (level detection)</p> <ul style="list-style-type: none"> • Software configurable interrupt B: Any of the interrupt sources for peripheral modules that use PCLKB as the operating clock can be assigned to interrupt vector numbers 128 to 207. • Software configurable interrupt A: Any of the interrupt sources for peripheral modules that use PCLKA as the operating clock can be assigned to interrupt vector numbers 208 to 255.

Item		RX71M (ICUA)	RX72M (ICUD)/RX72N (ICUD)
Interrupts	External pin interrupts	<p>Interrupts by input signals on IRQ<i>i</i> pins (<i>i</i> = 0 to 15)</p> <ul style="list-style-type: none"> • Interrupt detection: Ability to set as source detection of low level, falling edge, rising edge, or rising and falling edges • A digital filter can be used to remove noise. 	<p>Interrupts by input signals on IRQ<i>i</i> pins (<i>i</i> = 0 to 15)</p> <ul style="list-style-type: none"> • Interrupt detection: Ability to set as source detection of low level, falling edge, rising edge, or rising and falling edges • A digital filter can be used to remove noise.
	Software interrupts	<ul style="list-style-type: none"> • An interrupt request can be generated by writing to a register. • Number of sources: 2 	<ul style="list-style-type: none"> • An interrupt request can be generated by writing to a register. • Number of sources: 2
	Interrupt priority	The priority level is set by writing to interrupt source priority register <i>r</i> (IPR <i>r</i>) (<i>r</i> = 000 to 255).	The priority level is set by writing to interrupt source priority register <i>r</i> (IPR <i>r</i>) (<i>r</i> = 000 to 255).
	Fast interrupt function	The CPU's interrupt response time can be reduced. This setting can be used for one interrupt source only.	The CPU's interrupt response time can be reduced. This setting can be used for one interrupt source only.
	DTC/DMAC control	Interrupt sources can be used to start the DTC and DMAC.	Interrupt sources can be used to start the DTC and DMAC.
Non-maskable interrupts	EXDMAC control	<ul style="list-style-type: none"> • An interrupt selected by software configurable interrupt B source select register 144 or software configurable interrupt A source select register 208 can be used to start EXDMAC0. • An interrupt selected by software configurable interrupt B source select register 145 or software configurable interrupt A source select register 209 can be used to start EXDMAC1. 	<ul style="list-style-type: none"> • An interrupt selected by software configurable interrupt B source select register 144 or software configurable interrupt A source select register 208 can be used to start EXDMAC0. • An interrupt selected by software configurable interrupt B source select register 145 or software configurable interrupt A source select register 209 can be used to start EXDMAC1.
	NMI pin interrupt	<p>Interrupt by the input signal on the NMI pin</p> <ul style="list-style-type: none"> • Interrupt detection: Falling edge or rising edge • Digital filter can be used to remove noise. 	<p>Interrupt by the input signal on the NMI pin</p> <ul style="list-style-type: none"> • Interrupt detection: Falling edge or rising edge • Digital filter can be used to remove noise.
	Oscillation stop detection interrupt	Interrupt occurs at detection of main clock oscillation having stopped.	Interrupt occurs at detection of main clock oscillation having stopped.
	WDT underflow/refresh error interrupt	Interrupt occurs when the watchdog timer underflows or a refresh error occurs.	Interrupt occurs when the watchdog timer underflows or a refresh error occurs.
IWDT underflow/refresh error interrupt	IWDT underflow/refresh error interrupt	Interrupt occurs when the independent watchdog timer underflows or a refresh error occurs.	Interrupt occurs when the independent watchdog timer underflows or a refresh error occurs.

Item		RX71M (ICUA)	RX72M (ICUD)/RX72N (ICUD)
Non-maskable interrupts	Voltage monitoring 1 interrupt	Interrupt from voltage detection circuit 1 (LVD1)	Interrupt from voltage detection circuit 1 (LVD1)
	Voltage monitoring 2 interrupt	Interrupt from voltage detection circuit 2 (LVD2)	Interrupt from voltage detection circuit 2 (LVD2)
	RAM error interrupt	Interrupt occurs when a parity check error is detected in the RAM or an ECC error is detected in the ECCRAM.	Interrupt occurs when a parity check error is detected in the RAM (including the expansion RAM) or an ECC error is detected in the ECCRAM.
	Double-precision floating-point exceptions	—	Exceptions from double-precision floating-point coprocessor
Return from low power consumption state	Sleep mode	Exit sleep mode by any interrupt source.	Exit sleep mode by any interrupt source.
	All-module clock stop mode	Exit all-module clock stop mode by NMI pin interrupt, external pin interrupt, or peripheral interrupt (voltage monitoring 1, voltage monitoring 2, oscillation stop detection interrupt, USB resume, RTC alarm, RTC period, USBA resume , IWDT, software configurable interrupt 146 to 157).	Exit all-module clock stop mode by NMI pin interrupt, external pin interrupt, or peripheral interrupt (voltage monitoring 1, voltage monitoring 2, oscillation stop detection interrupt, USB resume, RTC alarm, RTC period, IWDT, software configurable interrupt 146 to 157).
	Software standby mode	Exit software standby mode by NMI pin interrupt, external pin interrupt, or peripheral interrupt (voltage monitoring 1, voltage monitoring 2, USB resume, RTC alarm, RTC period, USBA resume , IWDT).	Exit software standby mode by NMI pin interrupt, external pin interrupt, or peripheral interrupt (voltage monitoring 1, voltage monitoring 2, USB resume, RTC alarm, RTC period, IWDT).
	Deep software standby mode	Exit deep software standby mode by NMI pin interrupt, any among a subset of external pin interrupts, or peripheral interrupt (voltage monitoring 1, voltage monitoring 2, USB resume, RTC alarm, RTC period, USBA resume).	Exit deep software standby mode by NMI pin interrupt, any among a subset of external pin interrupts, or peripheral interrupt (voltage monitoring 1, voltage monitoring 2, USB resume, RTC alarm, RTC period).

Table 2.18 Comparison of Interrupt Controller Registers

Register	Bit	RX71M (ICUA)	RX72M (ICUD)	RX72N (ICUD)
NMISR	ECCRAMST	RAM error interrupt status flag	—	—
	EXNMIST	—	Expanded non-maskable interrupt status flag	Expanded non-maskable interrupt status flag
NMIER	ECCRAMEN	RAM error interrupt enable bit	—	—
	EXNMIEN	—	Expanded non-maskable interrupt enable bit	Expanded non-maskable interrupt enable bit
EXNMISR	—	—	Expanded non-maskable interrupt status register	Expanded non-maskable interrupt status register
EXNMIER	—	—	Expanded non-maskable interrupt enable register	Expanded non-maskable interrupt enable register
EXNMICLR	—	—	Expanded non-maskable interrupt status clear register	Expanded non-maskable interrupt status clear register
GRPIE0	—	—	Group IE0 interrupt request register	Group IE0 interrupt request register
GRPBL2	—	—	Group BL2 interrupt request register	Group BL2 interrupt request register
GENIE0	—	—	Group IE0 interrupt request enable register	Group IE0 interrupt request enable register
GENBL2	—	—	Group BL2 interrupt request enable register	Group BL2 interrupt request enable register
GCRIE0	—	—	Group IE0 interrupt clear register	Group IE0 interrupt clear register
PIBRK	—	Software configurable interrupt B request register k (k = 0h to Ah)	Software configurable interrupt B request register k (k = 0h to Bh)	Software configurable interrupt B request register k (k = 0h to Bh)
PIARK	—	Software configurable interrupt A request register k (k = 0h to Bh)	Software configurable interrupt A request register k (k = 0h to Ch)	Software configurable interrupt A request register k (k = 0h to Ah, Ch)

2.11 Buses

Table 2.19 is a comparative overview of the buses, and Table 2.20 is a comparison of bus registers.

Table 2.19 Comparative Overview of Buses

Item		RX71M	RX72M	RX72N
CPU buses	Instruction bus	<ul style="list-style-type: none"> Connected to the CPU (for instructions) Connected to on-chip memory (RAM, code flash memory via the AFU) Operates in synchronization with the system clock (ICLK) 	<ul style="list-style-type: none"> Connected to the CPU (for instructions) Connected to on-chip memory (RAM, expansion RAM, ECCRAM, code flash memory) Operates in synchronization with the system clock (ICLK) 	<ul style="list-style-type: none"> Connected to the CPU (for instructions) Connected to on-chip memory (RAM, expansion RAM, ECCRAM, code flash memory) Operates in synchronization with the system clock (ICLK)
	Operand bus	<ul style="list-style-type: none"> Connected to the CPU (for instructions) Connected to on-chip memory (RAM, code flash memory via the AFU) Operates in synchronization with the system clock (ICLK) 	<ul style="list-style-type: none"> Connected to the CPU (for instructions) Connected to on-chip memory (RAM, expansion RAM, ECCRAM, code flash memory) Operates in synchronization with the system clock (ICLK) 	<ul style="list-style-type: none"> Connected to the CPU (for instructions) Connected to on-chip memory (RAM, expansion RAM, ECCRAM, code flash memory) Operates in synchronization with the system clock (ICLK)
Memory buses	Memory bus 1	Connected to RAM	Connected to RAM	Connected to RAM
	Memory bus 2	Connected to code flash memory	Connected to code flash memory	Connected to code flash memory
	Memory bus 3	Connected to ECCRAM	Connected to expansion RAM and ECCRAM	Connected to expansion RAM and ECCRAM
Internal main buses	Internal main bus 1	<ul style="list-style-type: none"> Connected to the CPU Operates in synchronization with the system clock (ICLK) 	<ul style="list-style-type: none"> Connected to the CPU Operates in synchronization with the system clock (ICLK) 	<ul style="list-style-type: none"> Connected to the CPU Operates in synchronization with the system clock (ICLK)
	Internal main bus 2	<ul style="list-style-type: none"> Connected to the DMAC, DTC, and EDMAC Connected to on-chip memory (RAM, code flash memory) Operates in synchronization with the system clock (ICLK) 	<ul style="list-style-type: none"> Connected to the DMAC, DTC, and extended bus master Connected to on-chip memory (RAM, expansion RAM, ECCRAM, code flash memory) Operates in synchronization with the system clock (ICLK) 	<ul style="list-style-type: none"> Connected to the DMAC, DTC, and extended bus master Connected to on-chip memory (RAM, expansion RAM, ECCRAM, code flash memory) Operates in synchronization with the system clock (ICLK)

Item	RX71M	RX72M	RX72N
Internal peripheral buses	Internal peripheral bus 1	<ul style="list-style-type: none"> Connected to peripheral modules (DTC, DMAC, EXDMAC, interrupt controller, and bus error monitoring section) Operates in synchronization with the system clock (ICLK) (EXDMAC operates in synchronization with the BCLK) 	<ul style="list-style-type: none"> Connected to peripheral modules (DTC, DMAC, EXDMAC, interrupt controller, and bus error monitoring section) Operates in synchronization with the system clock (ICLK) (EXDMAC operates in synchronization with the BCLK)
	Internal peripheral bus 2	<ul style="list-style-type: none"> Connected to peripheral modules (peripheral functions other than those connected to internal peripheral buses 1, 3, 4, and 5) Operates in synchronization with the peripheral module clock (PCLKB) 	<ul style="list-style-type: none"> Connected to peripheral modules (peripheral functions other than those connected to internal peripheral buses 1 and 3 to 5) Operates in synchronization with the peripheral module clock (PCLKB)
	Internal peripheral bus 3	<ul style="list-style-type: none"> Connected to peripheral modules (USBb, PDC, and standby RAM) Operates in synchronization with the peripheral module clock (PCLKB) 	<ul style="list-style-type: none"> Connected to peripheral modules (USB, DSMIF, PDC, and standby RAM) Operates in synchronization with the peripheral module clock (PCLKB)
	Internal peripheral bus 4	<ul style="list-style-type: none"> Connected to peripheral modules (EDMAC, ETHERC, EPTPC, MTU3, GPT, SCIF, RSPI, USBA, and AES) Operates in synchronization with the peripheral module clock (PCLKA) 	<ul style="list-style-type: none"> Connected to peripheral modules (EDMAC, ETHERC, PMGI, EPTPC, GPTW, MTU, SCII, and RSPI) Operates in synchronization with the peripheral module clock (PCLKA)
	Internal peripheral bus 5	Reserved area	<ul style="list-style-type: none"> Connected to peripheral modules (GLCDC, DRW2D, and ESC) Operates in synchronization with the peripheral module clock (PCLKA)

Item		RX71M	RX72M	RX72N
Internal peripheral buses	Internal peripheral bus 6	<ul style="list-style-type: none"> Connected to code flash (in P/E) and data flash memory Operates in synchronization with the FlashIF clock (FCLK) 	<ul style="list-style-type: none"> Connected to code flash (in P/E) and data flash memory Operates in synchronization with the FlashIF clock (FCLK) 	<ul style="list-style-type: none"> Connected to code flash (in P/E) and data flash memory Operates in synchronization with the FlashIF clock (FCLK)
External bus	CS area	<ul style="list-style-type: none"> Connected to external devices Operates in synchronization with the external-bus clock (BCLK) 	<ul style="list-style-type: none"> Connected to external devices Operates in synchronization with the external-bus clock (BCLK) 	<ul style="list-style-type: none"> Connected to external devices Operates in synchronization with the external-bus clock (BCLK)
	SDRAM area	<ul style="list-style-type: none"> Connected to SDRAM Operates in synchronization with the SDRAM clock (SDCLK) 	<ul style="list-style-type: none"> Connected to SDRAM Operates in synchronization with the SDRAM clock (SDCLK) 	<ul style="list-style-type: none"> Connected to SDRAM Operates in synchronization with the SDRAM clock (SDCLK)

Table 2.20 Comparison of Bus Registers

Register	Bit	RX71M	RX72M/RX72N
BERSR1	MST[2:0]	Bus master code bits b6 b4 0 0 0: CPU 0 0 1: Reserved 0 1 0: Reserved 0 1 1: DTC/DMAC 1 0 0: Reserved 1 0 1: Reserved 1 1 0: EDMAC 1 1 1: EXDMAC	Bus master code bits b6 b4 0 0 0: CPU 0 0 1: Reserved 0 1 0: Reserved 0 1 1: DTC/DMAC 1 0 0: Reserved 1 0 1: Reserved 1 1 0: Extended bus master 1 1 1: EXDMAC
BUSPRI	BPRA[1:0]	Memory bus 1 and 3 (RAM/ECCRAM) priority control bits	Memory bus 1 and 3 (RAM/expansion RAM/ECCRAM) priority control bits
EBMAPCR	—	—	Extended bus master priority control register

2.12 Data Transfer Controller

Table 2.21 is a comparative overview of the data transfer controllers, and Table 2.22 is a comparison of data transfer controller registers.

Table 2.21 Comparative Overview of Data Transfer Controllers

Item	RX71M (DTCa)	RX72M (DTCb)/RX72N (DTCb)
Number of transfer channels	Equal to number of all interrupt sources that can start a DTC transfer.	Equal to number of all interrupt sources that can start a DTC transfer.
Transfer modes	<ul style="list-style-type: none"> • Normal transfer mode <ul style="list-style-type: none"> — A single activation leads to a single data transfer. • Repeat transfer mode <ul style="list-style-type: none"> — A single activation leads to a single data transfer. — The transfer address returns to the transfer start address when the number of data transfers equals the repeat size. — The maximum number of repeat transfers is 256, and the maximum data transfer size is 256×32 bits, or 1,024 bytes. • Block transfer mode <ul style="list-style-type: none"> — A single activation leads to the transfer of a single block of data. — The maximum block size is 256×32 bits = 1,024 bytes. 	<ul style="list-style-type: none"> • Normal transfer mode <ul style="list-style-type: none"> — A single activation leads to a single data transfer. • Repeat transfer mode <ul style="list-style-type: none"> — A single activation leads to a single data transfer. — The transfer address returns to the transfer start address when the number of data transfers equals the repeat size. — The maximum number of repeat transfers is 256, and the maximum data transfer size is 256×32 bits, or 1,024 bytes. • Block transfer mode <ul style="list-style-type: none"> — A single activation leads to the transfer of a single block of data. — The maximum block size is 256×32 bits = 1,024 bytes.
Chain transfer function	<ul style="list-style-type: none"> • Multiple data transfer types can be executed sequentially in response to a single transfer request. • Either “performed only when the transfer counter reaches 0” or “every time” can be selected. 	<ul style="list-style-type: none"> • Multiple data transfer types can be executed sequentially in response to a single transfer request. • Either “performed only when the transfer counter reaches 0” or “every time” can be selected.
Sequence transfer	—	<p>A complex series of transfers can be registered as a sequence. Any sequence can be selected by the transfer data and executed.</p> <ul style="list-style-type: none"> • Only one sequence transfer trigger source can be selected at a time. • Up to 256 sequences can correspond to a single trigger source. • The data that is initially transferred in response to a transfer request determines the sequence. • The entire sequence can be executed on a single request, or the sequence can be suspended in the middle and resumed on the next transfer request (sequence division).

Item	RX71M (DTCa)	RX72M (DTCb)/RX72N (DTCb)
Transfer space	<ul style="list-style-type: none"> 16 MB in short-address mode (within 0000 0000h to 007F FFFFh or FF80 0000h to FFFF FFFFh, excluding reserved areas) 4 GB in full-address mode (within 0000 0000h to FFFF FFFFh, excluding reserved areas) 	<ul style="list-style-type: none"> 16 MB in short-address mode (within 0000 0000h to 007F FFFFh or FF80 0000h to FFFF FFFFh, excluding reserved areas) 4 GB in full-address mode (within 0000 0000h to FFFF FFFFh, excluding reserved areas)
Data transfer units	<ul style="list-style-type: none"> Single data unit: 1 byte (8 bits), 1 word (16 bits), or 1 longword (32 bits) Single block size: 1 to 256 data units 	<ul style="list-style-type: none"> Single data unit: 1 byte (8 bits), 1 word (16 bits), or 1 longword (32 bits) Single block size: 1 to 256 data units
CPU interrupt sources	<ul style="list-style-type: none"> An interrupt request to the CPU can be generated by a DTC activation interrupt. An interrupt request to the CPU can be generated after a single data transfer. An interrupt request to the CPU can be generated after transfer of the specified number of data units. 	<ul style="list-style-type: none"> An interrupt request to the CPU can be generated by a DTC activation interrupt. An interrupt request to the CPU can be generated after a single data transfer. An interrupt request to the CPU can be generated after transfer of the specified number of data units.
Event link function	An event link request is generated after each data transfer (for block transfer, after each block is transferred).	An event link request is generated after each data transfer (for block transfer, after each block is transferred).
Read skip	Reading of the transfer information can be skipped when the same transfer is repeated.	Reading of the transfer information can be skipped when the same transfer is repeated.
Write-back skip	Write-back of transferred data that is not updated can be skipped when the address of the transfer source or destination is fixed.	Write-back of transferred data that is not updated can be skipped when the address of the transfer source or destination is fixed.
Write-back disable	—	Ability to disable write-back of transfer information
Displacement addition	—	Ability to add displacement to the transfer source address (selectable by each transfer information)
Low power consumption function	Ability to transition to module stop state	Ability to transition to module stop state

Table 2.22 Comparison of Data Transfer Controller Registers

Register	Bit	RX71M (DTCa)	RX72M (DTCb)/RX72N (DTCb)
MRA	WBDIS	—	Write-back disable bit
MRB	SQEND	—	Sequence transfer end bit
	INDX	—	Index table reference bit
MRC	—	—	DTC mode register C
DTCCR	RRS	DTC transfer information read skip enable bit 0: Transfer information read is not skipped. 1: Transfer information read is skipped when vector numbers match.	DTC transfer information read skip enable bit 0: Transfer information read is not skipped. 1: Transfer information read is skipped when vector numbers match. Set this bit to 0 when using sequence transfer.
DTCADMOD	SHORT	Short-address mode set bit 0: Full-address mode 1: Short-address mode	Short-address mode set bit 0: Full-address mode 1: Short-address mode Set this bit to 0 (full-address mode) when using sequence transfer.
DTCSTS	ACT	DTC active flag [Condition for setting to 1] <ul style="list-style-type: none">• When the DTC is activated by a transfer request. [Condition for clearing to 0] <ul style="list-style-type: none">• When data transfer has completed in response to a single transfer request	DTC active flag [Condition for setting to 1] <ul style="list-style-type: none">• When the DTC is activated by a transfer request.• When a sequence transfer is resumed. [Condition for clearing to 0] <ul style="list-style-type: none">• When data transfer has completed in response to a single transfer request• When a sequence transfer is suspended
DTCIBR	—	—	DTC index table base register
DTCOR	—	—	DTC operation register
DTCSQE	—	—	DTC sequence transfer enable register
DTCDISP	—	—	DTC address displacement register

2.13 Event Link Controller

Table 2.23 is a comparative overview of the event link controllers, Table 2.24 is a comparison of event link controller registers, Table 2.25 lists correspondences between ELSRn registers and peripheral modules, and Table 2.27 shows correspondences between values set in ELSRn.ELS[7:0] and event signal names and numbers.

Table 2.23 Comparative Overview of Event Link Controllers

Item	RX71M (ELC)	RX72M (ELC)	RX72N (ELC)
Event link function	<ul style="list-style-type: none"> • 119 event signals can be directly interconnected to modules. • Operation of timer modules while inputting an event signal can be selected. • Event linkage operation is possible on ports B and E. <ul style="list-style-type: none"> — Single port^{*1}: Event link operation can be specified on a single port. — Port group^{*1}: Event linkage operation can be specified by grouping multiple designated ports among up to eight ports. 	<ul style="list-style-type: none"> • 137 event signals can be directly interconnected to modules. • Operation of timer modules while inputting an event signal can be selected. • Event linkage operation is possible on ports B and E. <ul style="list-style-type: none"> — Single port^{*1}: Event link operation can be specified on a single port. — Port group^{*1}: Event linkage operation can be specified by grouping multiple designated ports among up to eight ports. 	<ul style="list-style-type: none"> • 135 event signals can be directly interconnected to modules. • Operation of timer modules while inputting an event signal can be selected. • Event linkage operation is possible on ports B and E. <ul style="list-style-type: none"> — Single port^{*1}: Event link operation can be specified on a single port. — Port group^{*1}: Event linkage operation can be specified by grouping multiple designated ports among up to eight ports.
Low power consumption function	Ability to transition to module stop state	Ability to transition to module stop state	Ability to transition to module stop state

Note: 1. An event is generated when the corresponding input signal on a single port or port group set to input changes.

Table 2.24 Comparison of Event Link Controller Registers

Register	Bit	RX71M (ELC)	RX72M (ELC)	RX72N (ELC)
ELSRn	—	Event link setting register n (n = 0, 3, 4, 7, 10 to 13, 15, 16, 18 to 28, 33, 35 to 38, and 41 to 45)	Event link setting register n (n = 0, 3, 4, 7, 10 to 13, 15, 16, 18 to 28, 33, 35 to 38, and 41 to 45, 48 to 57)	Event link setting register n (n = 0, 3, 4, 7, 10 to 13, 15, 16, 18 to 28, 33, 35 to 38, 45, and 48 to 57)
	ELS[7:0]	Event link select bits 00h: Event signal output to the corresponding peripheral module is disabled. 01h to BDh: Specifies the number of the event signal to be linked. Settings other than the above are prohibited.	Event link select bits 00h: Event signal output to the corresponding peripheral module is disabled. 01h to CFh: Specifies the number of the event signal to be linked. Settings other than the above are prohibited.	Event link select bits 00h: Event signal output to the corresponding peripheral module is disabled. 01h to CDh: Specifies the number of the event signal to be linked. Settings other than the above are prohibited.
ELOPI	—	Event link option setting register I	—	—
ELOPJ	—	Event link option setting register J	—	—

Table 2.25 Correspondence between ELSRn Registers and Peripheral Modules

Register	RX71M (ELC)	RX72M (ELC)	RX72N (ELC)
ELSR0	MTU0	MTU0	MTU0
ELSR3	MTU3	MTU3	MTU3
ELSR4	MTU4	MTU4	MTU4
ELSR7	CMT1	CMT1	CMT1
ELSR10	TMR0	TMR0	TMR0
ELSR11	TMR1	TMR1	TMR1
ELSR12	TMR2	TMR2	TMR2
ELSR13	TMR3	TMR3	TMR3
ELSR15	S12AD (ELCTRG0)	S12AD (ELCTRG00N)	S12AD (ELCTRG00N)
ELSR16	DA0	DA0	DA0
ELSR18	ICU (interrupt 1)	ICU (interrupt 1)	ICU (interrupt 1)
ELSR19	ICU (interrupt 2)	ICU (interrupt 2)	ICU (interrupt 2)
ELSR20	Output port group 1	Output port group 1	Output port group 1
ELSR21	Output port group 2	Output port group 2	Output port group 2
ELSR22	Input port group 1	Input port group 1	Input port group 1
ELSR23	Input port group 2	Input port group 2	Input port group 2
ELSR24	Single port 0	Single port 0	Single port 0
ELSR25	Single port 1	Single port 1	Single port 1
ELSR26	Single port 2	Single port 2	Single port 2
ELSR27	Single port 3	Single port 3	Single port 3
ELSR28	Clock source switching to LOCO	Clock source switching to LOCO	Clock source switching to LOCO
ELSR33	CMTW0	CMTW0	CMTW0
ELSR35	TPU0	TPU0	TPU0
ELSR36	TPU1	TPU1	TPU1
ELSR37	TPU2	TPU2	TPU2
ELSR38	TPU3	TPU3	TPU3
ELSR41	GPT0	DSMIF0 trigger 0	—
ELSR42	GPT1	DSMIF0 trigger 1	—
ELSR43	GPT2	DSMIF1 trigger 0	—
ELSR44	GPT3	DSMIF1 trigger 1	—
ELSR45	S12AD1 (ELCTRG1)	S12AD1 (ELCTRG10N)	S12AD1 (ELCTRG10N)
ELSR48	—	GPTW event source A (common to all channels)	GPTW event source A (common to all channels)
ELSR49	—	GPTW event source B (common to all channels)	GPTW event source B (common to all channels)
ELSR50	—	GPTW event source C (common to all channels)	GPTW event source C (common to all channels)
ELSR51	—	GPTW event source D (common to all channels)	GPTW event source D (common to all channels)
ELSR52	—	GPTW event source E (common to all channels)	GPTW event source E (common to all channels)
ELSR53	—	GPTW event source F (common to all channels)	GPTW event source F (common to all channels)
ELSR54	—	GPTW event source G (common to all channels)	GPTW event source G (common to all channels)
ELSR55	—	GPTW event source H (common to all channels)	GPTW event source H (common to all channels)
ELSR56	—	S12AD (ELCTRG01N)	S12AD (ELCTRG01N)
ELSR57	—	S12AD1 (ELCTRG11N)	S12AD1 (ELCTRG11N)

Table 2.26 Correspondence between Values Set in ELSRn.ELS[7:0] Bits and Event Signal Names and Numbers

Value of ELS[7:0] Bits	Peripheral Module	RX71M (ELC)	RX72M (ELC)	RX72N (ELC)
01h	Multifunction timer pulse unit 3	MTU0 compare match 0A	MTU0 compare match 0A	MTU0 compare match 0A
02h		MTU0 compare match 0B	MTU0 compare match 0B	MTU0 compare match 0B
03h		MTU0 compare match 0C	MTU0 compare match 0C	MTU0 compare match 0C
04h		MTU0 compare match 0D	MTU0 compare match 0D	MTU0 compare match 0D
05h		MTU0 compare match 0E	MTU0 compare match 0E	MTU0 compare match 0E
06h		MTU0 compare match 0F	MTU0 compare match 0F	MTU0 compare match 0F
07h		MTU0 overflow	MTU0 overflow	MTU0 overflow
10h		MTU3 compare match 3A	MTU3 compare match 3A	MTU3 compare match 3A
11h		MTU3 compare match 3B	MTU3 compare match 3B	MTU3 compare match 3B
12h		MTU3 compare match 3C	MTU3 compare match 3C	MTU3 compare match 3C
13h		MTU3 compare match 3D	MTU3 compare match 3D	MTU3 compare match 3D
14h		MTU3 overflow	MTU3 overflow	MTU3 overflow
15h		MTU4 compare match 4A	MTU4 compare match 4A	MTU4 compare match 4A
16h		MTU4 compare match 4B	MTU4 compare match 4B	MTU4 compare match 4B
17h		MTU4 compare match 4C	MTU4 compare match 4C	MTU4 compare match 4C
18h		MTU4 compare match 4D	MTU4 compare match 4D	MTU4 compare match 4D
19h		MTU4 overflow	MTU4 overflow	MTU4 overflow
1Ah		MTU4 underflow	MTU4 underflow	MTU4 underflow
1Fh	Compare match timer	CMT1 compare match 1	CMT1 compare match 1	CMT1 compare match 1
22h	8-bit timer	TMR0 compare match A0	TMR0 compare match A0	TMR0 compare match A0
23h		TMR0 compare match B0	TMR0 compare match B0	TMR0 compare match B0
24h		TMR0 overflow	TMR0 overflow	TMR0 overflow
25h		TMR1 compare match A1	TMR1 compare match A1	TMR1 compare match A1
26h		TMR1 compare match B1	TMR1 compare match B1	TMR1 compare match B1
27h		TMR1 overflow	TMR1 overflow	TMR1 overflow
28h		TMR2 compare match A2	TMR2 compare match A2	TMR2 compare match A2
29h		TMR2 compare match B2	TMR2 compare match B2	TMR2 compare match B2
2Ah		TMR2 overflow	TMR2 overflow	TMR2 overflow

Value of ELS[7:0] Bits	Peripheral Module	RX71M (ELC)	RX72M (ELC)	RX72N (ELC)
2Bh	8-bit timer	TMR3 compare match A3	TMR3 compare match A3	TMR3 compare match A3
2Ch		TMR3 compare match B3	TMR3 compare match B3	TMR3 compare match B3
2Dh		TMR3 overflow	TMR3 overflow	TMR3 overflow
2Eh	Realtime clock	RTC periodic event (select 1/256, 1/128, 1/64, 1/32, 1/16, 1/8, 1/4, 1/2, 1, or 2 seconds)	RTC periodic event (select 1/256, 1/128, 1/64, 1/32, 1/16, 1/8, 1/4, 1/2, 1, or 2 seconds)	RTC periodic event (select 1/256, 1/128, 1/64, 1/32, 1/16, 1/8, 1/4, 1/2, 1, or 2 seconds)
31h	Independent watchdog timer	IWDT underflow or refresh error	IWDT underflow or refresh error	IWDT underflow or refresh error
3Ah	Serial communications interface	SCI5 error (receive error or error signal detection)	SCI5 error (receive error or error signal detection)	SCI5 error (receive error or error signal detection)
3Bh		SCI5 receive data full	SCI5 receive data full	SCI5 receive data full
3Ch		SCI5 transmit data empty	SCI5 transmit data empty	SCI5 transmit data empty
3Dh		SCI5 transmit end	SCI5 transmit end	SCI5 transmit end
4Eh	I ² C bus interface	RIIC0 communication error or event generation	RIIC0 communication error or event generation	RIIC0 communication error or event generation
4Fh		RIIC0 receive data full	RIIC0 receive data full	RIIC0 receive data full
50h		RIIC0 transmit data empty	RIIC0 transmit data empty	RIIC0 transmit data empty
51h		RIIC0 transmit end	RIIC0 transmit end	RIIC0 transmit end
52h	Serial peripheral interface	RSPI0 error (mode fault, overrun, or parity error)	RSPI0 error (mode fault, overrun, underrun , or parity error)	RSPI0 error (mode fault, overrun, underrun , or parity error)
53h		RSPI0 idle	RSPI0 idle	RSPI0 idle
54h		RSPI0 receive data full	RSPI0 receive data full	RSPI0 receive data full
55h		RSPI0 transmit data empty	RSPI0 transmit data empty	RSPI0 transmit data empty
56h		RSPI0 transmit end	RSPI0 transmit end	RSPI0 transmit end
58h	12-bit A/D converter	S12AD A/D conversion end	S12AD A/D conversion end	S12AD A/D conversion end
5Bh	Voltage detection circuit	LVD1 voltage detection	LVD1 voltage detection	LVD1 voltage detection
5Ch		LVD2 voltage detection	LVD2 voltage detection	LVD2 voltage detection
5Dh	DMA controller	DMAC0 transfer end	DMAC0 transfer end	DMAC0 transfer end
5Eh		DMAC1 transfer end	DMAC1 transfer end	DMAC1 transfer end
5Fh		DMAC2 transfer end	DMAC2 transfer end	DMAC2 transfer end
60h		DMAC3 transfer end	DMAC3 transfer end	DMAC3 transfer end
61h	Data transfer controller	DTC transfer end	DTC transfer end	DTC transfer end
62h	Clock generation circuit	Oscillation stop detection of clock generation circuit	Oscillation stop detection of clock generation circuit	Oscillation stop detection of clock generation circuit

Value of ELS[7:0] Bits	Peripheral Module	RX71M (ELC)	RX72M (ELC)	RX72N (ELC)
63h	I/O ports	Input edge detection of input port group 1	Input edge detection of input port group 1	Input edge detection of input port group 1
64h		Input edge detection of input port group 2	Input edge detection of input port group 2	Input edge detection of input port group 2
65h		Input edge detection of single input port 0	Input edge detection of single input port 0	Input edge detection of single input port 0
66h		Input edge detection of single input port 1	Input edge detection of single input port 1	Input edge detection of single input port 1
67h		Input edge detection of single input port 2	Input edge detection of single input port 2	Input edge detection of single input port 2
68h		Input edge detection of single input port 3	Input edge detection of single input port 3	Input edge detection of single input port 3
69h	Event link controller	Software event	Software event	Software event
6Ah	Data operation circuit	DOC data operation condition met	DOC data operation condition met	DOC data operation condition met
6Ch	12-bit A/D converter	S12AD1 A/D conversion end	S12AD1 A/D conversion end	S12AD1 A/D conversion end
7Eh	Compare match timer W	CMTW channel 0 compare match	CMTW channel 0 compare match	CMTW channel 0 compare match
80h	General PWM timer	GPT0 compare match A	GPTW0 compare match A	GPTW0 compare match A
81h		GPT0 compare match B	GPTW0 compare match B	GPTW0 compare match B
82h		GPT0 compare match C	GPTW0 compare match C	GPTW0 compare match C
83h		GPT0 compare match D	GPTW0 compare match D	GPTW0 compare match D
84h		—	GPTW0 compare match E	GPTW0 compare match E
85h		—	GPTW0 compare match F	GPTW0 compare match F
86h		GPT0 overflow	GPTW0 overflow	GPTW0 overflow
87h		GPT0 underflow	GPTW0 underflow	GPTW0 underflow
88h		GPT1 compare match A	GPTW1 compare match A	GPTW1 compare match A
89h		GPT1 compare match B	GPTW1 compare match B	GPTW1 compare match B
8Ah		GPT1 compare match C	GPTW1 compare match C	GPTW1 compare match C
8Bh		GPT1 compare match D	GPTW1 compare match D	GPTW1 compare match D
8Ah		—	GPTW1 compare match E	GPTW1 compare match E
8Bh		—	GPTW1 compare match F	GPTW1 compare match F
8Eh		GPT1 overflow	GPTW1 overflow	GPTW1 overflow
8Fh		GPT1 underflow	GPTW1 underflow	GPTW1 underflow
90h		GPT2 compare match A	GPTW2 compare match A	GPTW2 compare match A

Value of ELS[7:0] Bits	Peripheral Module	RX71M (ELC)	RX72M (ELC)	RX72N (ELC)
91h	General PWM timer	GPT2 compare match B	GPTW2 compare match B	GPTW2 compare match B
92h		GPT2 compare match C	GPTW2 compare match C	GPTW2 compare match C
93h		GPT2 compare match D	GPTW2 compare match D	GPTW2 compare match D
94h		—	GPTW2 compare match E	GPTW2 compare match E
95h		—	GPTW2 compare match F	GPTW2 compare match F
96h		GPT2 overflow	GPTW2 overflow	GPTW2 overflow
97h		GPT2 underflow	GPTW2 underflow	GPTW2 underflow
98h		GPT3 compare match A	GPTW3 compare match A	GPTW3 compare match A
99h		GPT3 compare match B	GPTW3 compare match B	GPTW3 compare match B
9Ah		GPT3 compare match C	GPTW3 compare match C	GPTW3 compare match C
9Bh		GPT3 compare match D	GPTW3 compare match D	GPTW3 compare match D
9Ah		—	GPTW3 compare match E	GPTW3 compare match E
9Bh		—	GPTW3 compare match F	GPTW3 compare match F
9Eh		GPT3 overflow	GPTW3 overflow	GPTW3 overflow
9Fh		GPT3 underflow	GPTW3 underflow	GPTW3 underflow
A0h	Ethernet controller	EPTPC STCA timer 0 rising edge detection	EPTPC STCA timer 0 rising edge detection	EPTPC STCA timer 0 rising edge detection
A1h		EPTPC STCA timer 1 rising edge detection	EPTPC STCA timer 1 rising edge detection	EPTPC STCA timer 1 rising edge detection
A2h		EPTPC STCA timer 2 rising edge detection	EPTPC STCA timer 2 rising edge detection	EPTPC STCA timer 2 rising edge detection
A3h		EPTPC STCA timer 3 rising edge detection	EPTPC STCA timer 3 rising edge detection	EPTPC STCA timer 3 rising edge detection
A4h		EPTPC STCA timer 4 rising edge detection	EPTPC STCA timer 4 rising edge detection	EPTPC STCA timer 4 rising edge detection
A5h		EPTPC STCA timer 5 rising edge detection	EPTPC STCA timer 5 rising edge detection	EPTPC STCA timer 5 rising edge detection
A6h		EPTPC STCA timer 0 falling edge detection	EPTPC STCA timer 0 falling edge detection	EPTPC STCA timer 0 falling edge detection
A7h		EPTPC STCA timer 1 falling edge detection	EPTPC STCA timer 1 falling edge detection	EPTPC STCA timer 1 falling edge detection
A8h		EPTPC STCA timer 2 falling edge detection	EPTPC STCA timer 2 falling edge detection	EPTPC STCA timer 2 falling edge detection
A9h		EPTPC STCA timer 3 falling edge detection	EPTPC STCA timer 3 falling edge detection	EPTPC STCA timer 3 falling edge detection
AAh		EPTPC STCA timer 4 falling edge detection	EPTPC STCA timer 4 falling edge detection	EPTPC STCA timer 4 falling edge detection
ABh		EPTPC STCA timer 5 falling edge detection	EPTPC STCA timer 5 falling edge detection	EPTPC STCA timer 5 falling edge detection

Value of ELS[7:0] Bits	Peripheral Module	RX71M (ELC)	RX72M (ELC)	RX72N (ELC)
ACh	16-bit timer pulse unit	TPU0 compare match A	TPU0 compare match A	TPU0 compare match A
ADh		TPU0 compare match B	TPU0 compare match B	TPU0 compare match B
AEh		TPU0 compare match C	TPU0 compare match C	TPU0 compare match C
AFh		TPU0 compare match D	TPU0 compare match D	TPU0 compare match D
B0h		TPU0 overflow	TPU0 overflow	TPU0 overflow
B1h		TPU1 compare match A	TPU1 compare match A	TPU1 compare match A
B2h		TPU1 compare match B	TPU1 compare match B	TPU1 compare match B
B3h		TPU1 overflow	TPU1 overflow	TPU1 overflow
B4h		TPU1 underflow	TPU1 underflow	TPU1 underflow
B5h		TPU2 compare match A	TPU2 compare match A	TPU2 compare match A
B6h		TPU2 compare match B	TPU2 compare match B	TPU2 compare match B
B7h		TPU2 overflow	TPU2 overflow	TPU2 overflow
B8h		TPU2 underflow	TPU2 underflow	TPU2 underflow
B9h		TPU3 compare match A	TPU3 compare match A	TPU3 compare match A
BAh		TPU3 compare match B	TPU3 compare match B	TPU3 compare match B
BBh		TPU3 compare match C	TPU3 compare match C	TPU3 compare match C
BCh		TPU3 compare match D	TPU3 compare match D	TPU3 compare match D
BDh		TPU3 overflow	TPU3 overflow	TPU3 overflow
C6h	General PWM timer	—	GPTW0 A/D converter start request A	GPTW0 A/D converter start request A
C7h		—	GPTW0 A/D converter start request B	GPTW0 A/D converter start request B
C8h		—	GPTW1 A/D converter start request A	GPTW1 A/D converter start request A
C9h		—	GPTW1 A/D converter start request B	GPTW1 A/D converter start request B
CAh		—	GPTW2 A/D converter start request A	GPTW2 A/D converter start request A
CBh		—	GPTW2 A/D converter start request B	GPTW2 A/D converter start request B
CCh		—	GPTW3 A/D converter start request A	GPTW3 A/D converter start request A

Value of ELS[7:0] Bits	Peripheral Module	RX71M (ELC)	RX72M (ELC)	RX72N (ELC)
CDh	General PWM timer	—	GPTW3 A/D converter start request B	GPTW3 A/D converter start request B
CEh	EtherCAT slave controller	—	ESC SYNC0	—
CFh		—	ESC SYNC1	—

2.14 I/O Ports

Table 2.27 is a comparative overview of the I/O ports of 176-pin products, Table 2.28 is a comparative overview of the I/O ports of 145- and 144-pin products, Table 2.29 is a comparative overview of the I/O ports of 100-pin products, and Table 2.30 is a comparison of I/O port functions, and Table 2.31 is a comparison of I/O port registers.

Table 2.27 Comparative Overview of I/O Ports of 176-Pin Products

Item	RX71M (176-Pin)	RX72M (176-Pin)/RX72N (176-Pin)
PORT0	P00 to P03, P05, P07	P00 to P03, P05, P07
PORT1	P10 to P17	P10 to P17
PORT2	P20 to P27	P20 to P27
PORT3	P30 to P37	P30 to P37
PORT4	P40 to P47	P40 to P47
PORT5	P50 to P53	P50 to P57
PORT6	P60 to P67	P60 to P67
PORT7	P70 to P77	P70 to P77
PORT8	P80 to P83, P86, P87	P80 to P87
PORT9	P90 to P97	P90 to P97
PORTA	PA0 to PA7	PA0 to PA7
PORTB	PB0 to PB7	PB0 to PB7
PORTC	PC0 to PC7	PC0 to PC7
PORTD	PD0 to PD7	PD0 to PD7
PORTE	PE0 to PE7	PE0 to PE7
PORTF	PF0 to PF5	PF0 to PF5
PORTG	PG0 to PG7	PG0 to PG7
PORTJ	PJ3, PJ5	PJ0 to PJ3, PJ5

Table 2.28 Comparative Overview of I/O Ports of 145- and 144-Pin Products

Item	RX71M (145- and 144-Pin)	RX72M (144-Pin)	RX72N (145- and 144-Pin)
PORT0	P00 to P03, P05, P07	P00 to P03, P05	P00 to P03, P05, P07
PORT1	P12 to P17	P12 to P17	P12 to P17
PORT2	P20 to P27	P20 to P27	P20 to P27
PORT3	P30 to P37	P30 to P37	P30 to P37
PORT4	P40 to P47	P40 to P44	P40 to P47
PORT5	P50 to P56	P50 to P56	P50 to P56
PORT6	P60 to P67	P60 to P67	P60 to P67
PORT7	P70 to P77	P73 to P77	P70 to P77
PORT8	P80 to P83, P86, P87	P80 to P83, P86, P87	P80 to P83, P86, P87
PORT9	P90 to P93	P90 to P93, P96, P97	P90 to P93
PORTA	PA0 to PA7	PA0 to PA7	PA0 to PA7
PORTB	PB0 to PB7	PB0 to PB7	PB0 to PB7
PORTC	PC0 to PC7	PC0 to PC7	PC0 to PC7
PORTD	PD0 to PD7	PD0 to PD7	PD0 to PD7
PORTE	PE0 to PE7	PE0 to PE7	PE0 to PE7
PORTF	PF5	—	PF5
PORTG	—	PG0 to PG2, PG5 to PG7	—
PORTJ	PJ3, PJ5	PJ2, PJ3	PJ3, PJ5

Table 2.29 Comparative Overview of I/O Ports of 100-Pin Products

Item	RX71M (100-Pin)	RX72M (100-Pin)	RX72N (100-Pin)
PORT0	P05, P07	P00	P05, P07
PORT1	P12 to P17	P14 to P17	P12 to P17
PORT2	P20 to P27	P20, P21, P23 to P27	P20 to P27
PORT3	P30 to P37	P30 to P37	P30 to P37
PORT4	P40 to P47	P40 to P42	P40 to P47
PORT5	P50 to P55	P50 to P52, P56	P50 to P55
PORT6	—	P60 to P64, P66, P67	—
PORT8	—	P80 to P82, P86, P87	—
PORT9	—	P90 to P93, P96, P97	—
PORTA	PA0 to PA7	PA0 to PA4, PA6	PA0 to PA7
PORTB	PB0 to PB7	PB0, PB1, PB3 to PB7	PB0 to PB7
PORTC	PC0 to PC7	PC2, PC4 to PC7	PC0 to PC7
PORTD	PD0 to PD7	PD1, PD2, PD6, PD7	PD0 to PD7
PORTE	PE0 to PE7	PE3 to PE5	PE0 to PE7
PORTJ	PJ3	—	PJ3
PORTG	—	PG2, PG5, PG6	—

Table 2.30 Comparison of I/O Port Functions

Item	Port Symbol	RX71M	RX72M/RX72N
Input pull-up	PORT0	P00 to P03, P05, P07	P00 to P03, P05, P07
	PORT1	P10 to P17	P10 to P17
	PORT2	P20 to P27	P20 to P27
	PORT3	P30 to P34, P36, P37	P30 to P34, P36, P37
	PORT4	P40 to P47	P40 to P47
	PORT5	P50 to P56	P50 to P57
	PORT6	P60 to P67	P60 to P67
	PORT7	P70 to P77	P70 to P77
	PORT8	P80 to P83, P86, P87	P80 to P87
	PORT9	P90 to P97	P90 to P97
	PORTA	PA0 to PA7	PA0 to PA7
	PORTB	PB0 to PB7	PB0 to PB7
	PORTC	PC0 to PC7	PC0 to PC7
	PORTD	PD0 to PD7	PD0 to PD7
	PORTE	PE0 to PE7	PE0 to PE7
	PORTF	PF0 to PF5	PF0 to PF5
	PORTG	PG0 to PG7	PG0 to PG7
	PORTH	—	PH0 to PH7
	PORTJ	PJ3, PJ5	PJ0 to PJ3, PJ5
	PORTK	—	PK0 to PK7
	PORTL	—	PL0 to PL7
	PORTM	—	PM0 to PM7
	PORTN	—	PN0 to PN5
	PORTQ	—	PQ0 to PQ7
Open-drain output	PORT0	P00 to P03, P05, P07	P00 to P03, P05, P07
	PORT1	P10 to P17	P10 to P17
	PORT2	P20 to P27	P20 to P27
	PORT3	P30 to P34, P36, P37	P30 to P34, P36, P37
	PORT4	P40 to P47	P40 to P47
	PORT5	P50 to P56	P50 to P57
	PORT6	P60 to P67	P60 to P67
	PORT7	P70 to P77	P70 to P77
	PORT8	P80 to P83, P86, P87	P80 to P87
Open-drain output	PORT9	P90 to P97	P90 to P97
	PORTA	PA0 to PA7	PA0 to PA7
	PORTB	PB0 to PB7	PB0 to PB7
	PORTC	PC0 to PC7	PC0 to PC7
	PORTD	PD0 to PD7	PD0 to PD7
	PORTE	PE0 to PE7	PE0 to PE7
	PORTF	PF0 to PF5	PF0 to PF5
	PORTG	PG0 to PG7	PG0 to PG7
	PORTH	—	PH0 to PH7
	PORTJ	PJ3, PJ5	PJ0 to PJ3, PJ5
	PORTK	—	PK0 to PK7
	PORTL	—	PL0 to PL7
	PORTM	—	PM0 to PM7
	PORTN	—	PN0 to PN5
	PORTQ	—	PQ0 to PQ7

Item	Port Symbol	RX71M	RX72M/RX72N
Driving ability switching	PORT0	P00 to P03, P05, P07	P00 to P03, P05, P07
	PORT1	P10 to P17	P10 to P17
	PORT2	P20 to P27	P20 to P27
	PORT3	P30 to P34, P36, P37	P30 to P34, P36, P37
	PORT4	P40 to P47	P40 to P47
	PORT5	P50 to P56	P50 to P57
	PORT6	P60 to P67	P60 to P67
	PORT7	P70 to P77	P70 to P77
	PORT8	P80 to P83, P86, P87	P80 to P87
	PORT9	P90 to P97	P90 to P97
	PORTA	PA0 to PA7	PA0 to PA7
	PORTB	PB0 to PB7	PB0 to PB7
	PORTC	PC0 to PC7	PC0 to PC7
	PORTD	PD0 to PD7	PD0 to PD7
	PORTE	PE0 to PE7	PE0 to PE7
	PORTF	PF0 to PF5	PF0 to PF5
	PORTG	PG0 to PG7	PG0 to PG7
	PORTH	—	PH0 to PH7
	PORTJ	PJ3, PJ5	PJ0 to PJ3, PJ5
	PORTK	—	PK0 to PK7
	PORTL	—	PL0 to PL7
	PORTM	—	PM0 to PM7
	PORTN	—	PN0 to PN5
	PORTQ	—	PQ0 to PQ7
5 V tolerant	PORT0	P07	P07
	PORT1	P11 to P17	P11 to P17
	PORT2	P20, P21	P20, P21
	PORT3	P30 to P33	P30 to P33
	PORT6	P67	P67
	PORTC	PC0 to PC3	PC0 to PC3

Table 2.31 Comparison of I/O Port Registers

Register	Bit	RX71M	RX72M/RX72N
PDR	B0 to B7	Pm0 to Pm7 I/O select bits (m = 0 to 9, A to G, and J)	Pm0 to Pm7 I/O select bits (m = 0 to 9, A to H, J to N, and Q)
PODR	B0 to B7	Pm0 to Pm7 output data store bits (m = 0 to 9, A to G, and J)	Pm0 to Pm7 output data store bits (m = 0 to 9, A to H, J to N, and Q)
PIDR	B0 to B7	Pm0 to Pm7 bits (m = 0 to 9, A to G, and J)	Pm0 to Pm7 bits (m = 0 to 9, A to H, J to N, and Q)
PMR	B0 to B7	Pm0 to Pm7 pin mode control bits (m = 0 to 9, A to G, and J)	Pm0 to Pm7 pin mode control bits (m = 0 to 9, A to H, J to N, and Q)
ODR0	B0	Pm0 output type select bit (m = 0 to 9, A to G, and J)	Pm0 output type select bit (m = 0 to 9, A to H, J to N, and Q)
	B2	Pm1 output type select bit (m = 0 to 9, A to G, and J)	Pm1 output type select bit (m = 0 to 9, A to H, J to N, and Q)
	B3	PE1 output type select bit (m = 0 to 9, A to G, and J)	PE1 output type select bit (m = 0 to 9, A to H, J to N, and Q)
	B4	Pm2 output type select bit (m = 0 to 9, A to G, and J)	Pm2 output type select bit (m = 0 to 9, A to H, J to N, and Q)
	B6	Pm3 output type select bit (m = 0 to 9, A to G, and J)	Pm3 output type select bit (m = 0 to 9, A to H, J to N, and Q)
ODR1	B0	Pm4 output type select bit (m = 0 to 9, A to G, and J)	Pm4 output type select bit (m = 0 to 9, A to H, J to N, and Q)
	B2	Pm5 output type select bit (m = 0 to 9, A to G, and J)	Pm5 output type select bit (m = 0 to 9, A to H, J to N, and Q)
	B4	Pm6 output type select bit (m = 0 to 9, A to G, and J)	Pm6 output type select bit (m = 0 to 9, A to H, J to N, and Q)
	B6	Pm7 output type select bit (m = 0 to 9, A to G, and J)	Pm7 output type select bit (m = 0 to 9, A to H, J to N, and Q)
PCR	B0 to B7	Pm0 to Pm7 input pull-up resistor control bits (m = 0 to 9, A to G, and J)	Pm0 to Pm7 input pull-up resistor control bits (m = 0 to 9, A to H, J to N, and Q)
DSCR	B0 to B7	Pm0 to Pm7 drive capacity control bits (m = 0, 2, 5, 9, A to E, and G)	Pm0 to Pm7 drive capacity control bits (m = 0 to 2, 5, 7 to 9, A to E, G, H, J to N, and Q)
DSCR2	—	—	Drive capacity control register 2

2.15 Multi-Function Pin Controller

Table 2.32 is comparison of the assignments of multiplexed pins, and Table 2.33 to Table 2.56 are comparisons of multi-function pin controller registers.

In the following comparison of the assignments of multiplexed pins, **light blue text** designates pins that exist on the RX72M and RX72N Groups only, **orange text** pins that exist on the RX71M Group only, and **light green text** pins that exist on the RX72M Group only. A circle (○) indicates that a function is assigned, a cross (✗) that the pin does not exist or that no function is assigned, and grayed out items mean that the function is not implemented. A solid circle (●) indicates that all pins exist in the case of pin functions for which the pins that are present or absent differ between the RX72M/RX72N Group and RX71M Group.

Table 2.32 Comparison of Multiplexed Pin Assignments

Module/ Function	Pin Function	Port Allocation	RX71M			RX72M			RX72N		
			177-/ 176- Pin	145-/ 144- Pin	100- Pin	176- Pin	144- Pin	100- Pin	176- Pin	145-/ 144- Pin	100- Pin
Interrupt	NMI (input)	P35	○	○	○	○	○	○	○	○	○
EXDMA controller	EDREQ0 (input)	P22	○	○	○	○	○	✗	○	○	○
		P55	✗	○	○	○	○	✗	○	○	○
		P80	○	○	✗	○	○	✗	○	○	✗
	EDACK0 (output)	P23	○	○	○	○	○	✗	○	○	○
		P54	✗	○	○	○	○	✗	○	○	○
		P81	○	○	✗	○	○	✗	○	○	✗
	EDREQ1 (input)	P24	○	○	○	○	○	✗	○	○	○
		P33	○	○	○	○	○	✗	○	○	○
		P82	○	○	✗	○	○	✗	○	○	✗
	EDACK1 (output)	P25	○	○	○	○	○	✗	○	○	○
		P56	✗	○	✗	○	○	✗	○	○	✗
		P83	○	○	✗	○	○	✗	○	○	✗
		PJ3	○	○	○	○	○	✗	○	○	○
Interrupt	IRQ0-DS (input)	P30	○	○	○	○	○	○	○	○	○
	IRQ0 (input)	P10	○	✗	✗	○	✗	✗	○	✗	✗
	PD0	○	○	○	○	○	○	✗	○	○	○
	IRQ1-DS (input)	P31	○	○	○	○	○	○	○	○	○
	IRQ1 (input)	P11	○	✗	✗	○	✗	✗	○	✗	✗
		PD1	○	○	○	○	○	○	○	○	○
	IRQ2-DS (input)	P32	○	○	○	○	○	○	○	○	○
	IRQ2 (input)	P12	○	○	○	○	○	✗	○	○	○
		PD2	○	○	○	○	○	○	○	○	○
	IRQ3-DS (input)	P33	○	○	○	○	○	○	○	○	○
	IRQ3 (input)	P13	○	○	○	○	○	✗	○	○	○
		PD3	○	○	○	○	○	✗	○	○	○
	IRQ4-DS (input)	PB1	○	○	○	○	○	○	○	○	○
	IRQ4 (input)	P14	○	○	○	○	○	○	○	○	○
		P34	○	○	○	○	○	○	○	○	○
		PD4	○	○	○	○	○	✗	○	○	○
		PF5	○	○	✗	○	✗	✗	○	○	✗
	IRQ5-DS (input)	PA4	○	○	○	○	○	○	○	○	○
	IRQ5 (input)	P15	○	○	○	○	○	○	○	○	○
		PD5	○	○	○	○	○	✗	○	○	○
		PE5	○	○	○	○	○	○	○	○	○

Module/ Function	Pin Function	Port Allocation	RX71M			RX72M			RX72N		
			177-/ 176-Pin	145-/ 144-Pin	100-Pin	176-Pin	144-Pin	100-Pin	176-Pin	145-/ 144-Pin	100-Pin
Interrupt	IRQ6-DS (input)	PA3	○	○	○	○	○	○	○	○	○
	IRQ6 (input)	P16	○	○	○	○	○	○	○	○	○
		PD6	○	○	○	○	○	○	○	○	○
		PE6	○	○	○	○	○	×	○	○	○
	IRQ7-DS (input)	PE2	○	○	○	○	○	×	○	○	○
	IRQ7 (input)	P17	○	○	○	○	○	○	○	○	○
		PD7	○	○	○	○	○	○	○	○	○
		PE7	○	○	○	○	○	×	○	○	○
	IRQ8-DS (input)	P40	○	○	○	○	○	○	○	○	○
	IRQ8 (input)	P00	○	○	×	○	○	○	○	○	×
		P20	○	○	○	○	○	○	○	○	○
	IRQ9-DS (input)	P41	○	○	○	○	○	○	○	○	○
	IRQ9 (input)	P01	○	○	×	○	○	×	○	○	×
		P21	○	○	○	○	○	○	○	○	○
	IRQ10-DS (input)	P42	○	○	○	○	○	○	○	○	○
	IRQ10 (input)	P02	○	○	×	○	○	×	○	○	×
		P55	×	○	○	○	○	×	○	○	○
	IRQ11-DS (input)	P43	○	○	○	○	○	×	○	○	○
	IRQ11 (input)	P03	○	○	×	○	○	×	○	○	×
		PA1	○	○	○	○	○	○	○	○	○
	IRQ12-DS (input)	P44	○	○	○	○	○	×	○	○	○
	IRQ12 (input)	PB0	○	○	○	○	○	○	○	○	○
		PC1	○	○	○	○	○	×	○	○	○
	IRQ13-DS (input)	P45	○	○	○	○	×	×	○	○	○
	IRQ13 (input)	P05	○	○	○	○	○	×	○	○	○
		PC6	○	○	○	○	○	○	○	○	○
	IRQ14-DS (input)	P46	○	○	○	○	×	×	○	○	○
	IRQ14 (input)	PC0	○	○	○	○	○	×	○	○	○
		PC7	○	○	○	○	○	○	○	○	○
	IRQ15-DS (input)	P47	○	○	○	○	×	×	○	○	○
	IRQ15 (input)	P07	○	○	○	○	×	×	○	○	○
		P67	○	○	×	○	○	○	○	○	×
Multi-function timer unit 3	MTIOC0A (input/output)	P34	○	○	○	○	○	○	○	○	○
		PB3	○	○	○	○	○	○	○	○	○
	MTIOC0B (input/output)	P13	○	○	○	○	○	×	○	○	○
		P15	○	○	○	○	○	○	○	○	○
	MTIOC0C (input/output)	PA1	○	○	○	○	○	○	○	○	○
		P32	○	○	○	○	○	○	○	○	○
	MTIOC0D (input/output)	PB1	○	○	○	○	○	○	○	○	○
		P33	○	○	○	○	○	○	○	○	○
	MTIOC1A (input/output)	PA3	○	○	○	○	○	○	○	○	○
		P20	○	○	○	○	○	○	○	○	○
	MTIOC1B (input/output)	PE4	○	○	○	○	○	○	○	○	○
		P21	○	○	○	○	○	○	○	○	○
	MTIOC2A (input/output)	PB5	○	○	○	○	○	○	○	○	○
		P26	○	○	○	○	○	○	○	○	○
	MTIOC2B (input/output)	PB5	○	○	○	○	○	○	○	○	○

Module/ Function	Pin Function	Port Allocation	RX71M			RX72M			RX72N		
			177-/ 176- Pin	145-/ 144- Pin	100- Pin	176- Pin	144- Pin	100- Pin	176- Pin	145-/ 144- Pin	100- Pin
Multi-function timer unit 3	MTIOC2B (input/output)	P27	○	○	○	○	○	○	○	○	○
		PE5	○	○	○	○	○	○	○	○	○
	MTIOC3A (input/output)	P14	○	○	○	○	○	○	○	○	○
		P17	○	○	○	○	○	○	○	○	○
		PC1	○	○	○	○	○	×	○	○	○
		PC7	○	○	○	○	○	○	○	○	○
	MTIOC3B (input/output)	P17	○	○	○	○	○	○	○	○	○
		P22	○	○	○	○	○	×	○	○	○
		P80	○	○	×	○	○	○	○	○	×
		PB7	○	○	○	○	○	○	○	○	○
		PC5	○	○	○	○	○	○	○	○	○
		PE1	○	○	○	○	○	×	○	○	○
	MTIOC3C (input/output)	P16	○	○	○	○	○	○	○	○	○
		P56	×	○	×	○	○	○	○	○	×
		PC0	○	○	○	○	○	×	○	○	○
		PC6	○	○	○	○	○	○	○	○	○
		PJ3	○	○	○	○	○	×	○	○	○
	MTIOC3D (input/output)	P16	○	○	○	○	○	○	○	○	○
		P23	○	○	○	○	○	○	○	○	○
		P81	○	○	×	○	○	○	○	○	×
		PB6	○	○	○	○	○	○	○	○	○
		PC4	○	○	○	○	○	○	○	○	○
		PE0	○	○	○	○	○	×	○	○	○
	MTIOC4A (input/output)	P21	○	○	○	○	○	○	○	○	○
		P24	○	○	○	○	○	○	○	○	○
		P82	○	○	×	○	○	○	○	○	×
		PA0	○	○	○	○	○	○	○	○	○
		PB3	○	○	○	○	○	○	○	○	○
		PE2	○	○	○	○	○	×	○	○	○
	MTIOC4B (input/output)	P17	○	○	○	○	○	○	○	○	○
		P30	○	○	○	○	○	○	○	○	○
		P54	×	○	○	○	○	×	○	○	○
		PC2	○	○	○	○	○	○	○	○	○
		PD1	○	○	○	○	○	○	○	○	○
		PE3	○	○	○	○	○	○	○	○	○
	MTIOC4C (input/output)	P25	○	○	○	○	○	○	○	○	○
		P83	○	○	×	○	○	×	○	○	×
		P87	○	○	×	○	○	○	○	○	×
		PB1	○	○	○	○	○	○	○	○	○
		PE1	○	○	○	○	○	×	○	○	○
		PE5	○	○	○	○	○	○	○	○	○
	MTIOC4D (input/output)	P31	○	○	○	○	○	○	○	○	○
		P55	×	○	○	○	○	×	○	○	○
		P86	○	○	×	○	○	○	○	○	×
		PC3	○	○	○	○	○	×	○	○	○
		PD2	○	○	○	○	○	○	○	○	○
		PE4	○	○	○	○	○	○	○	○	○

Module/ Function	Pin Function	Port Allocation	RX71M			RX72M			RX72N		
			177-/ 176- Pin	145-/ 144- Pin	100- Pin	176- Pin	144- Pin	100- Pin	176- Pin	145-/ 144- Pin	100- Pin
Multi-function timer unit 3	MTIC5U (input)	P12	○	×	×	○	×	×	○	×	×
		PA4	○	○	○	○	○	○	○	○	○
		PD7	○	○	○	○	○	○	○	○	○
	MTIC5V (input)	P11	○	×	×	○	×	×	○	×	×
		PA6	○	○	○	○	○	○	○	○	○
		PD6	○	○	○	○	○	○	○	○	○
	MTIC5W (input)	P10	○	×	×	○	×	×	○	×	×
		PB0	○	○	○	○	○	○	○	○	○
		PD5	○	○	○	○	○	×	○	○	○
	MTIOC6A (input/output)	PE7	○	○	○	○	○	×	○	○	○
		PJ1	×	×	×	○	×	×	○	×	×
	MTIOC6B (input/output)	PA5	○	○	○	○	○	×	○	○	○
		PJ0	×	×	×	○	×	×	○	×	×
	MTIOC6C (input/output)	PE6	○	○	○	○	○	×	○	○	○
		P85	×	×	×	○	×	×	○	×	×
	MTIOC6D (input/output)	PA0	○	○	○	○	○	○	○	○	○
		P84	×	×	×	○	×	×	○	×	×
	MTIOC7A (input/output)	PA2	○	○	○	○	○	○	○	○	○
	MTIOC7B (input/output)	PA1	○	○	○	○	○	○	○	○	○
	MTIOC7C (input/output)	P67	○	○	×	○	○	○	○	○	×
	MTIOC7D (input/output)	P66	○	○	×	○	○	○	○	○	×
	MTIOC8A (input/output)	PD6	○	○	○	○	○	○	○	○	○
	MTIOC8B (input/output)	PD4	○	○	○	○	○	×	○	○	○
	MTIOC8C (input/output)	PD5	○	○	○	○	○	×	○	○	○
	MTIOC8D (input/output)	PD3	○	○	○	○	○	×	○	○	○
	MTCLKA (input)	P14	○	○	○	○	○	○	○	○	○
		P24	○	○	○	○	○	○	○	○	○
		PA4	○	○	○	○	○	○	○	○	○
		PC6	○	○	○	○	○	○	○	○	○
		PD5	×	×	×	○	○	×	○	○	○
	MTCLKB (input)	P15	○	○	○	○	○	○	○	○	○
		P25	○	○	○	○	○	○	○	○	○
		PA6	○	○	○	○	○	○	○	○	○
		PC7	○	○	○	○	○	○	○	○	○
	MTCLKC (input)	P22	○	○	○	○	○	×	○	○	○
		PA1	○	○	○	○	○	○	○	○	○
		PC4	○	○	○	○	○	○	○	○	○
	MTCLKD (input)	P23	○	○	○	○	○	○	○	○	○
		PA3	○	○	○	○	○	○	○	○	○
		PC5	○	○	○	○	○	○	○	○	○

Module/ Function	Pin Function	Port Allocation	RX71M			RX72M			RX72N		
			177-/ 176- Pin	145-/ 144- Pin	100- Pin	176- Pin	144- Pin	100- Pin	176- Pin	145-/ 144- Pin	100- Pin
Port output enable 3	POE0# (input)	P32	○	○	○	○	○	○	○	○	○
		P93	○	○	×	○	○	○	○	○	×
		PC4	○	○	○	○	○	○	○	○	○
		PD1	○	○	○	○	○	○	○	○	○
		PD7	○	○	○	○	○	○	○	○	○
	POE4# (input)	P33	○	○	○	○	○	○	○	○	○
		P92	○	○	×	○	○	○	○	○	×
		PB5	○	○	○	○	○	○	○	○	○
		PD0	○	○	○	○	○	×	○	○	○
		PD6	○	○	○	○	○	○	○	○	○
	POE8# (input)	P17	○	○	○	○	○	○	○	○	○
		P30	○	○	○	○	○	○	○	○	○
		PD3	○	○	○	○	○	×	○	○	○
		PE3	○	○	○	○	○	○	○	○	○
		PJ5	○	○	×	○	×	×	○	○	×
	POE10# (input)	P32	○	○	○	○	○	○	○	○	○
		P34	○	○	○	○	○	○	○	○	○
		PA6	○	○	○	○	○	○	○	○	○
		PD5	○	○	○	○	○	×	○	○	○
	POE11# (input)	P33	○	○	○	○	○	○	○	○	○
		PB3	○	○	○	○	○	○	○	○	○
		PD4	○	○	○	○	○	×	○	○	○
General PWM timer/General PWM timer W	GTIOC0A (input/output)	P23	○	○	○	○	○	○	○	○	○
		P83	○	○	×	○	○	×	○	○	×
		PA5	○	○	○	○	○	×	○	○	○
		PD3	○	○	○	○	○	×	○	○	○
		PE5	○	○	○	○	○	○	○	○	○
	GTIOC0B (input/output)	P17	○	○	○	○	○	○	○	○	○
		P81	○	○	×	○	○	○	○	○	×
		PA0	○	○	○	○	○	○	○	○	○
		PD2	○	○	○	○	○	○	○	○	○
		PE2	○	○	○	○	○	×	○	○	○
	GTIOC1A (input/output)	P22	○	○	○	○	○	×	○	○	○
		PA2	○	○	○	○	○	○	○	○	○
		PC5	○	○	○	○	○	○	○	○	○
		PD1	○	○	○	○	○	○	○	○	○
		PE4	○	○	○	○	○	○	○	○	○
	GTIOC1B (input/output)	P67	○	○	×	○	○	○	○	○	×
		P87	○	○	×	○	○	○	○	○	×
		PC3	○	○	○	○	○	×	○	○	○
		PD0	○	○	○	○	○	×	○	○	○
		PE1	○	○	○	○	○	×	○	○	○
	GTIOC2A (input/output)	P21	○	○	○	○	○	○	○	○	○
		P82	○	○	×	○	○	○	○	○	×
		PA1	○	○	○	○	○	○	○	○	○
		PE3	○	○	○	○	○	○	○	○	○

Module/ Function	Pin Function	Port Allocation	RX71M			RX72M			RX72N		
			177-/ 176-Pin	145-/ 144-Pin	100-Pin	176-Pin	144-Pin	100-Pin	176-Pin	145-/ 144-Pin	100-Pin
General PWM timer/General PWM timer W	GTIOC2B (input/output)	P66	○	○	×	○	○	○	○	○	×
		P86	○	○	×	○	○	○	○	○	×
		PC2	○	○	○	○	○	○	○	○	○
		PE0	○	○	○	○	○	×	○	○	○
	GTIOC3A (input/output)	PC7	○	○	○	○	○	○	○	○	○
		PE7	○	○	○	○	○	×	○	○	○
	GTIOC3B (input/output)	PC6	○	○	○	○	○	○	○	○	○
		PE6	○	○	○	○	○	×	○	○	○
	GTETRG (input)	P15	○	○	○						
		PA6	○	○	○						
		PC4	○	○	○						
	GTADSM0 (output)	P12				○	○	×	○	○	○
	GTADSM1 (output)	P13				○	○	×	○	○	○
	GTETRGA (input)	P15				○	○	○	○	○	○
	GTETRGB (input)	PA6				○	○	○	○	○	○
	GTETRGC (input)	PC4				○	○	○	○	○	○
	GTETRGD (input)	P14				○	○	○	○	○	○
16-bit timer pulse unit	TIOCA0 (input/output)	P86	○	○	×	○	○	○	○	○	×
		PA0	○	○	○	○	○	○	○	○	○
	TIOCB0 (input/output)	P17	○	○	○	○	○	○	○	○	○
		PA1	○	○	○	○	○	○	○	○	○
	TIOCC0 (input/output)	P32	○	○	○	○	○	○	○	○	○
		P85	×	×	×	○	×	×	○	×	×
	TIOCD0 (input/output)	P33	○	○	○	○	○	○	○	○	○
		PA3	○	○	○	○	○	○	○	○	○
	TIOCA1 (input/output)	P56	×	○	×	○	○	○	○	○	×
		PA4	○	○	○	○	○	○	○	○	○
	TIOCB1 (input/output)	P16	○	○	○	○	○	○	○	○	○
		PA5	○	○	○	○	○	×	○	○	○
	TIOCA2 (input/output)	P87	○	○	×	○	○	○	○	○	×
		PA6	○	○	○	○	○	○	○	○	○
	TIOCB2 (input/output)	P15	○	○	○	○	○	○	○	○	○
		PA7	○	○	○	○	○	×	○	○	○
	TIOCA3 (input/output)	P21	○	○	○	○	○	○	○	○	○
		PB0	○	○	○	○	○	○	○	○	○
	TIOCB3 (input/output)	P20	○	○	○	○	○	○	○	○	○
		PB1	○	○	○	○	○	○	○	○	○
	TIOCC3 (input/output)	P22	○	○	○	○	○	×	○	○	○
		PB2	○	○	○	○	○	×	○	○	○
	TIOCD3 (input/output)	P23	○	○	○	○	○	○	○	○	○
		PB3	○	○	○	○	○	○	○	○	○
	TIOCA4 (input/output)	P25	○	○	○	○	○	○	○	○	○
		PB4	○	○	○	○	○	○	○	○	○
	TIOCB4 (input/output)	P24	○	○	○	○	○	○	○	○	○
		PB5	○	○	○	○	○	○	○	○	○
	TIOCA5 (input/output)	P13	○	○	○	○	○	×	○	○	○
		PB6	○	○	○	○	○	○	○	○	○

Module/ Function	Pin Function	Port Allocation	RX71M			RX72M			RX72N		
			177-/ 176- Pin	145-/ 144- Pin	100- Pin	176- Pin	144- Pin	100- Pin	176- Pin	145-/ 144- Pin	100- Pin
16-bit timer pulse unit	TIOCB5 (input/output)	P14	○	○	○	○	○	○	○	○	○
		PB7	○	○	○	○	○	○	○	○	○
	TCLKA (input)	P14	○	○	○	○	○	○	○	○	○
		PC2	○	○	○	○	○	○	○	○	○
	TCLKB (input)	P15	○	○	○	○	○	○	○	○	○
		PA3	○	○	○	○	○	○	○	○	○
		PC3	○	○	○	○	○	×	○	○	○
	TCLKC (input)	P16	○	○	○	○	○	○	○	○	○
		PB2	○	○	○	○	○	×	○	○	○
		PC0	○	○	○	○	○	×	○	○	○
	TCLKD (input)	P17	○	○	○	○	○	○	○	○	○
		PB3	○	○	○	○	○	○	○	○	○
		PC1	○	○	○	○	○	×	○	○	○
Programmable pulse generator	PO0 (output)	P20	○	○	○	○	○	○	○	○	○
	PO1 (output)	P21	○	○	○	○	○	○	○	○	○
	PO2 (output)	P22	○	○	○	○	○	×	○	○	○
	PO3 (output)	P23	○	○	○	○	○	○	○	○	○
	PO4 (output)	P24	○	○	○	○	○	○	○	○	○
	PO5 (output)	P25	○	○	○	○	○	○	○	○	○
	PO6 (output)	P26	○	○	○	○	○	○	○	○	○
	PO7 (output)	P27	○	○	○	○	○	○	○	○	○
	PO8 (output)	P30	○	○	○	○	○	○	○	○	○
	PO9 (output)	P31	○	○	○	○	○	○	○	○	○
	PO10 (output)	P32	○	○	○	○	○	○	○	○	○
	PO11 (output)	P33	○	○	○	○	○	○	○	○	○
	PO12 (output)	P34	○	○	○	○	○	○	○	○	○
	PO13 (output)	P13	○	○	○	○	○	×	○	○	○
		P15	○	○	○	○	○	○	○	○	○
	PO14 (output)	P16	○	○	○	○	○	○	○	○	○
	PO15 (output)	P14	○	○	○	○	○	○	○	○	○
		P17	○	○	○	○	○	○	○	○	○
	PO16 (output)	P73	○	○	×	○	○	×	○	○	×
		PA0	○	○	○	○	○	○	○	○	○
	PO17 (output)	PA1	○	○	○	○	○	○	○	○	○
		PC0	○	○	○	○	○	×	○	○	○
	PO18 (output)	PA2	○	○	○	○	○	○	○	○	○
		PC1	○	○	○	○	○	×	○	○	○
		PE1	○	○	○	○	○	×	○	○	○
	PO19 (output)	P74	○	○	×	○	○	×	○	○	×
		PA3	○	○	○	○	○	○	○	○	○
	PO20 (output)	P75	○	○	×	○	○	×	○	○	×
		PA4	○	○	○	○	○	○	○	○	○
	PO21 (output)	PA5	○	○	○	○	○	×	○	○	○
		PC2	○	○	○	○	○	○	○	○	○
	PO22 (output)	P76	○	○	×	○	○	×	○	○	×
		PA6	○	○	○	○	○	○	○	○	○

Module/ Function	Pin Function	Port Allocation	RX71M			RX72M			RX72N		
			177-/ 176-Pin	145-/ 144-Pin	100-Pin	176-Pin	144-Pin	100-Pin	176-Pin	145-/ 144-Pin	100-Pin
Programmable pulse generator	PO23 (output)	P77	○	○	×	○	○	×	○	○	×
		PA7	○	○	○	○	○	×	○	○	○
		PE2	○	○	○	○	○	×	○	○	○
	PO24 (output)	PB0	○	○	○	○	○	○	○	○	○
		PC3	○	○	○	○	○	×	○	○	○
	PO25 (output)	PB1	○	○	○	○	○	○	○	○	○
		PC4	○	○	○	○	○	○	○	○	○
	PO26 (output)	P80	○	○	×	○	○	○	○	○	×
		PB2	○	○	○	○	○	×	○	○	○
		PE3	○	○	○	○	○	○	○	○	○
	PO27 (output)	P81	○	○	×	○	○	○	○	○	×
		PB3	○	○	○	○	○	○	○	○	○
	PO28 (output)	P82	○	○	×	○	○	○	○	○	×
		PB4	○	○	○	○	○	○	○	○	○
		PE4	○	○	○	○	○	○	○	○	○
	PO29 (output)	PB5	○	○	○	○	○	○	○	○	○
		PC5	○	○	○	○	○	○	○	○	○
	PO30 (output)	PB6	○	○	○	○	○	○	○	○	○
		PC6	○	○	○	○	○	○	○	○	○
	PO31 (output)	PB7	○	○	○	○	○	○	○	○	○
		PC7	○	○	○	○	○	○	○	○	○
8-bit timer	TMO0 (output)	P22	○	○	○	○	○	×	○	○	○
		PB3	○	○	○	○	○	○	○	○	○
	TMCI0 (input)	P01	○	○	×	○	○	×	○	○	×
		P21	○	○	○	○	○	○	○	○	○
		PB1	○	○	○	○	○	○	○	○	○
	TMRI0 (input)	P00	○	○	×	○	○	○	○	○	×
		P20	○	○	○	○	○	○	○	○	○
		PA4	○	○	○	○	○	○	○	○	○
	TMO1 (output)	P17	○	○	○	○	○	○	○	○	○
		P26	○	○	○	○	○	○	○	○	○
	TMCI1 (input)	P02	○	○	×	○	○	×	○	○	×
		P12	○	○	○	○	○	×	○	○	○
		P54	×	○	○	○	○	×	○	○	○
		PC4	○	○	○	○	○	○	○	○	○
	TMRI1 (input)	P24	○	○	○	○	○	○	○	○	○
		PB5	○	○	○	○	○	○	○	○	○
	TMO2 (output)	P16	○	○	○	○	○	○	○	○	○
		PC7	○	○	○	○	○	○	○	○	○
	TMCI2 (input)	P15	○	○	○	○	○	○	○	○	○
		P31	○	○	○	○	○	○	○	○	○
		PC6	○	○	○	○	○	○	○	○	○
	TMRI2 (input)	P14	○	○	○	○	○	○	○	○	○
		PC5	○	○	○	○	○	○	○	○	○
	TMO3 (output)	P13	○	○	○	○	○	×	○	○	○
		P32	○	○	○	○	○	○	○	○	○
		P55	×	○	○	○	○	×	○	○	○

Module/ Function	Pin Function	Port Allocation	RX71M			RX72M			RX72N			
			177-/ 176-Pin	145-/ 144-Pin	100-Pin	176-Pin	144-Pin	100-Pin	176-Pin	145-/ 144-Pin	100-Pin	
8-bit timer	TMCI3 (input)	P11	○	×	×	○	×	×	○	×	×	
		P27	○	○	○	○	○	○	○	○	○	
		P34	○	○	○	○	○	○	○	○	○	
		PA6	○	○	○	○	○	○	○	○	○	
	TMR13 (input)	P10	○	×	×	○	×	×	○	×	×	
		P30	○	○	○	○	○	○	○	○	○	
		P33	○	○	○	○	○	○	○	○	○	
Compare match timer W	TOC0 (output)	PC7	○	○	○	○	○	×	○	○	○	
	TIC0 (input)	PC6	○	○	○	○	○	×	○	○	○	
	TOC1 (output)	PE7	○	○	○	○	○	×	○	○	○	
	TIC1 (input)	PE6	○	○	○	○	○	×	○	○	○	
	TOC2 (output)	PD3	○	○	○	○	○	×	○	○	○	
	TIC2 (input)	PD2	○	○	○	○	○	×	○	○	○	
	TOC3 (output)	PE3	○	○	○	○	○	×	○	○	○	
	TIC3 (input)	PE2	○	○	○	○	○	×	○	○	○	
Ethernet controller	REF50CK0 (input)	P76	○	○	×	○	○	×	○	○	×	
		PB2	○	○	○	○	○	×	○	○	○	
		PE5	○	○	○	○	○	○	○	○	○	
	RMII0_CRS_DV (input)	P83	○	○	×	○	○	×	○	○	×	
		PB7	○	○	○	○	○	○	○	○	○	
	RMII0_TXD0 (output)	P81	○	○	×	○	○	○	○	○	×	
		PB5	○	○	○	○	○	○	○	○	○	
	RMII0_RXD1 (output)	P82	○	○	×	○	○	○	○	○	×	
		PB6	○	○	○	○	○	○	○	○	○	
	RMII0_RXD0 (input)	P75	○	○	×	○	○	×	○	○	×	
		PB1	○	○	○	○	○	○	○	○	○	
	RMII0_RXD1 (input)	P74	○	○	×	○	○	×	○	○	×	
		PB0	○	○	○	○	○	○	○	○	○	
	RMII0_RXD0 (output)	P80	○	○	×	○	○	○	○	○	×	
		PA0	○	○	○	○	○	○	○	○	○	
		PB4	○	○	○	○	○	○	○	○	○	
	RMII0_RX_ER (input)	P77	○	○	×	○	○	×	○	○	×	
		PB3	○	○	○	○	○	○	○	○	○	
	ET0_CRS (input)	P83	○	○	×	○	○	×	○	○	×	
		PB7	○	○	○	○	○	○	○	○	○	
	ET0_RX_DV (input)	PC2	○	○	○	○	○	○	○	○	○	
		P55	×	○	○	○	○	×	○	○	○	
ET0_EXOUT (output)		PA6	○	○	○	○	○	○	○	○	○	
		PJ3	○	○	○	○	○	×	○	○	○	
ET0_LINKSTA (input)	P34	○	○	○	○	○	○	○	○	○		
	P54	×	○	○	○	○	×	○	○	○		
	PA5	○	○	○	○	○	×	○	○	○		
ET0_ETXD0 (output)	P81	○	○	×	○	○	○	○	○	×		
	PB5	○	○	○	○	○	○	○	○	○		
ET0_ETXD1 (output)	P82	○	○	×	○	○	○	○	○	×		
	PB6	○	○	○	○	○	○	○	○	○		
ET0_ETXD2 (output)	PC5	○	○	○	○	○	○	○	○	○		
	PC6	○	○	○	○	○	○	○	○	○		
ET0_ETXD3 (output)												

Module/ Function	Pin Function	Port Allocation	RX71M			RX72M			RX72N		
			177-/ 176-Pin	145-/ 144-Pin	100-Pin	176-Pin	144-Pin	100-Pin	176-Pin	145-/ 144-Pin	100-Pin
Ethernet controller	ET0_ERXD0 (input)	P75	○	○	×	○	○	×	○	○	×
		PB1	○	○	○	○	○	○	○	○	○
	ET0_ERXD1 (input)	P74	○	○	×	○	○	×	○	○	×
		PB0	○	○	○	○	○	○	○	○	○
	ET0_ERXD2 (input)	PC1	○	○	○	○	○	×	○	○	○
		PE4	○	○	○	○	○	○	○	○	○
	ET0_ERXD3 (input)	PC0	○	○	○	○	○	×	○	○	○
		PE3	○	○	○	○	○	○	○	○	○
	ET0_TX_EN (output)	P80	○	○	×	○	○	○	○	○	×
		PA0	○	○	○	○	○	○	○	○	○
		PB4	○	○	○	○	○	○	○	○	○
	ET0_TX_ER (output)	PC3	○	○	○	○	○	×	○	○	○
	ET0_RX_ER (input)	P77	○	○	×	○	○	×	○	○	×
		PB3	○	○	○	○	○	○	○	○	○
	ET0_TX_CLK (input)	PC4	○	○	○	○	○	○	○	○	○
	ET0_RX_CLK (input)	P76	○	○	×	○	○	×	○	○	×
		PB2	○	○	○	○	○	×	○	○	○
		PE5	○	○	○	○	○	○	○	○	○
	ET0_COL (input)	PC7	○	○	○	○	○	○	○	○	○
	ET0_WOL (output)	P73	○	○	×	○	○	×	○	○	×
		PA1	○	○	○	○	○	○	○	○	○
		PA7	○	○	○	○	○	×	○	○	○
	ET0_MDC (output)	P72	○	○	×	○	×	×	○	○	×
		PA4	○	○	○	○	○	○	○	○	○
	ET0_MDIO (input/output)	P71	○	○	×	○	×	×	○	○	×
		PA3	○	○	○	○	○	○	○	○	○
	REF50CK1 (input)	PG0	○	×	×	○	○	×	○	×	×
		PD6	×	×	×	○	○	○	○	○	×
	RMII1_CRS_DV (input)	P92	○	×	×	○	○	○	○	○	×
	RMII1_TXD0 (output)	PG3	○	×	×	○	×	×	○	×	×
		P64	×	×	×	○	○	○	○	○	×
	RMII1_TXD1 (output)	PG4	○	×	×	○	×	×	○	×	×
		P63	×	×	×	○	○	○	○	○	×
	RMII1_RXD0 (input)	P94	○	×	×	○	×	×	○	×	×
		P62	×	×	×	○	○	○	○	○	×
	RMII1_RXD1 (input)	P95	○	×	×	○	×	×	○	×	×
		P61	×	×	×	○	○	○	○	○	×
	RMII1_TXD_EN (output)	P60	○	×	×	○	○	○	○	○	×
	RMII1_RX_ER (input)	PG1	○	×	×	○	○	×	○	×	×
		PD7	×	×	×	○	○	○	○	○	×
	ET1_CRS (input)	P92	○	×	×	○	○	○	○	×	×
	ET1_RX_DV (input)	P90	○	×	×	○	○	○	○	×	×
	ET1_EXOUT (output)	P26	○	×	×	○	○	○	○	×	×
		PD2	×	×	×	○	○	○	○	×	×
	ET1_LINKSTA (input)	P93	○	×	×	○	○	○	○	×	×
		P84	×	×	×	○	×	×	○	×	×

Module/ Function	Pin Function	Port Allocation	RX71M			RX72M			RX72N		
			177-/ 176-Pin	145-/ 144-Pin	100-Pin	176-Pin	144-Pin	100-Pin	176-Pin	145-/ 144-Pin	100-Pin
Ethernet controller	ET1_ETXD0 (output)	PG3	○	×	×	○	×	×	○	×	×
		P64	×	×	×	○	○	○	○	×	×
	ET1_ETXD1 (output)	PG4	○	×	×	○	×	×	○	×	×
		P63	×	×	×	○	○	○	○	×	×
	ET1_ETXD2 (output)	PG5	○	×	×	○	○	○	○	×	×
	ET1_ETXD3 (output)	PG6	○	×	×	○	○	○	○	×	×
	ET1_ERXD0 (input)	P94	○	×	×	○	×	×	○	×	×
		P62	×	×	×	○	○	○	○	×	×
	ET1_ERXD1 (input)	P95	○	×	×	○	×	×	○	×	×
		P61	×	×	×	○	○	○	○	×	×
	ET1_ERXD2 (input)	P96	○	×	×	○	○	○	○	×	×
	ET1_ERXD3 (input)	P97	○	×	×	○	○	○	○	×	×
	ET1_TX_EN (output)	P60	○	×	×	○	○	○	○	×	×
	ET1_TX_ER (output)	PG7	○	×	×	○	○	×	○	×	×
	ET1_RX_ER (input)	PG1	○	×	×	○	○	×	○	×	×
		PD7	×	×	×	○	○	○	○	×	×
	ET1_TX_CLK (input)	PG2	○	×	×	○	○	○	○	×	×
	ET1_RX_CLK (input)	PG0	○	×	×	○	○	×	○	×	×
		PD6	×	×	×	○	○	○	○	×	×
	ET1_COL (input)	P91	○	×	×	○	○	○	○	×	×
	ET1_WOL (output)	P27	○	×	×	○	○	○	○	×	×
		PD3	×	×	×	○	○	×	○	×	×
	ET1_MDC (output)	P31	○	×	×	○	○	○	○	×	×
		PD5	×	×	×	○	○	×	○	×	×
	ET1_MDIO (input/output)	P30	○	×	×	○	○	○	○	×	×
		PD4	×	×	×	○	○	×	○	×	×
Serial communications interface	RXD0 (input) / SMISO0 (input/output) / SSCL0 (input/output)	P21	○	○	○	○	○	○	○	○	○
		P33	○	○	○	○	○	○	○	○	○
	TXD0 (output) / SMOSI0 (input/output) / SSDA0 (input/output)	P20	○	○	○	○	○	○	○	○	○
		P32	○	○	○	○	○	○	○	○	○
	SCK0 (input/output)	P22	○	○	○	○	○	×	○	○	○
		P34	○	○	○	○	○	○	○	○	○
	CTS0# (input) / RTS0# (output) / SS0# (input)	P23	○	○	○	○	○	○	○	○	○
		PJ3	○	○	○	○	○	×	○	○	○
	RXD1 (input) / SMISO1 (input/output) / SSCL1 (input/output)	P15	○	○	○	○	○	○	○	○	○
		P30	○	○	○	○	○	○	○	○	○
	TXD1 (output) / SMOSI1 (input/output) / SSDA1 (input/output)	PF2	○	×	×	○	×	×	○	×	×
		P16	○	○	○	○	○	○	○	○	○
		P26	○	○	○	○	○	○	○	○	○
		PF0	○	×	×	○	×	×	○	×	×
	SCK1 (input/output)	P17	○	○	○	○	○	○	○	○	○
		P27	○	○	○	○	○	○	○	○	○
		PF1	○	×	×	○	×	×	○	×	×

Module/ Function	Pin Function	Port Allocation	RX71M			RX72M			RX72N		
			177-/ 176-Pin	145-/ 144-Pin	100-Pin	176-Pin	144-Pin	100-Pin	176-Pin	145-/ 144-Pin	100-Pin
Serial communications interface	CTS1# (input) / RTS1# (output) / SS1# (input)	P14	○	○	○	○	○	○	○	○	○
		P31	○	○	○	○	○	○	○	○	○
	RXD2 (input) / SMISO2 (input/output) / SSCL2 (input/output)	P12	○	○	○	○	○	×	○	○	○
		P52	○	○	○	○	○	○	○	○	○
	TXD2 (output) / SMOSI2 (input/output) / SSDA2 (input/output)	P13	○	○	○	○	○	×	○	○	○
		P50	○	○	○	○	○	○	○	○	○
	SCK2 (input/output)	P11	○	×	×	○	×	×	○	×	×
		P51	○	○	○	○	○	○	○	○	○
	CTS2# (input) / RTS2# (output) / SS2# (input)	P54	×	○	○	○	○	×	○	○	○
		PJ5	○	○	×	○	×	×	○	○	×
	RXD3 (input) / SMISO3 (input/output) / SSCL3 (input/output)	P16	○	○	○	○	○	○	○	○	○
		P25	○	○	○	○	○	○	○	○	○
	TXD3 (output) / SMOSI3 (input/output) / SSDA3 (input/output)	P17	○	○	○	○	○	○	○	○	○
		P23	○	○	○	○	○	○	○	○	○
	SCK3 (input/output)	P15	○	○	○	○	○	○	○	○	○
		P24	○	○	○	○	○	○	○	○	○
	CTS3# (input) / RTS3# (output) / SS3# (input)	P26	○	○	○	○	○	○	○	○	○
	RXD4 (input) / SMISO4 (input/output) / SSCL4 (input/output)	PB0	○	○	×	○	○	○	○	○	×
		PB1	○	○	×	○	○	○	○	○	×
	SCK4 (input/output)	PB3	○	○	×	○	○	○	○	○	×
	CTS4# (input) / RTS4# (output) / SS4# (input)	PB2	○	○	×	○	○	×	○	○	×
RXD5 (input) / SMISO5 (input/output) / SSCL5 (input/output)	PA2	○	○	○	○	○	○	○	○	○	○
	PA3	○	○	○	○	○	○	○	○	○	○
	PC2	○	○	○	○	○	○	○	○	○	○
	PA4	○	○	○	○	○	○	○	○	○	○
	PC3	○	○	○	○	○	×	○	○	○	○
	SCK5 (input/output)	PA1	○	○	○	○	○	○	○	○	○
		PC1	○	○	○	○	○	×	○	○	○
		PC4	○	○	○	○	○	○	○	○	○

Module/ Function	Pin Function	Port Allocation	RX71M			RX72M			RX72N		
			177-/ 176-Pin	145-/ 144-Pin	100-Pin	176-Pin	144-Pin	100-Pin	176-Pin	145-/ 144-Pin	100-Pin
Serial communications interface	CTS5# (input) / RTS5# (output) / SS5# (input)	PA6	○	○	○	○	○	○	○	○	○
		PC0	○	○	○	○	○	×	○	○	○
	RXD6 (input) / SMISO6 (input/output) / SSCL6 (input/output)	P01	○	○	×	○	○	×	○	○	×
		P33	○	○	○	○	○	○	○	○	○
		PB0	○	○	○	○	○	○	○	○	○
	TXD6 (output) / SMOSI6 (input/output) / SSDA6 (input/output)	P00	○	○	×	○	○	○	○	○	×
		P32	○	○	○	○	○	○	○	○	○
		PB1	○	○	○	○	○	○	○	○	○
	SCK6 (input/output)	P02	○	○	×	○	○	×	○	○	×
		P34	○	○	○	○	○	○	○	○	○
		PB3	○	○	○	○	○	○	○	○	○
	CTS6# (input) / RTS6# (output) / SS6# (input)	PB2	○	○	○	○	○	×	○	○	○
		PJ3	○	○	○	○	○	×	○	○	○
	RXD7 (input) / SMISO7 (input/output) / SSCL7 (input/output)	P92	○	○	×	○	○	○	○	○	×
		P57	×	×	×	○	×	×	○	×	×
	TXD7 (output) / SMOSI7 (input/output) / SSDA7 (input/output)	P90	○	○	×	○	○	○	○	○	×
		P55	×	×	×	○	○	×	○	○	×
		SCK7 (input/output)	○	○	×	○	○	○	○	○	×
	P56	P91	○	○	×	○	○	○	○	○	×
		P56	×	×	×	○	○	○	○	○	×
	CTS7# (input) / RTS7# (output) / SS7# (input)	P93	○	○	×	○	○	○	○	○	×
RXD8 (input) / SMISO8 (input/output) / SSCL8 (input/output)	PC6	○	○	○	●	●	●	●	●	●	●
	PJ1	×	×	×	●	×	×	●	×	×	×
	PC7	○	○	○	●	●	●	●	●	●	●
	PJ2	×	×	×	●	●	×	●	×	×	×
SCK8 (input/output) / RTS8# (output)	PC5	○	○	○	○	○	○	○	○	○	○
CTS8# (input) / SS8# (input)	PC4	○	○	○	●	●	●	●	●	●	●
SCK8 (input/output)	PJ0				○	×	×	○	×	×	×
RXD9 (input) / SMISO9 (input/output) / SSCL9 (input/output)	PB6	○	○	○	●	●	●	●	●	●	●
TXD9 (output) / SMOSI9 (input/output) / SSDA9 (input/output)	PB7	○	○	○	●	●	●	●	●	●	●

Module/ Function	Pin Function	Port Allocation	RX71M			RX72M			RX72N		
			177-/ 176-Pin	145-/ 144-Pin	100-Pin	176-Pin	144-Pin	100-Pin	176-Pin	145-/ 144-Pin	100-Pin
Serial communications interface	SCK9 (input/output) / RTS9# (output)	PB5	○	○	○	○	○	○	○	○	○
	CTS9# (input) / SS9# (input)	PB4	○	○	○	●	●	●	●	●	●
	RXD10 (input) / SMISO10 (input/output) / SSCL10 (input/output)	P81	○	○	×	●	●	●	●	●	×
		P86	○	○	×	●	●	●	●	●	×
		PC6	×	×	×	●	●	●	●	●	●
	TXD10 (output) / SMOSI10 (input/output) / SSDA10 (input/output)	P82	○	○	×	●	●	●	●	●	×
		P87	○	○	×	●	●	●	●	●	×
		PC7	×	×	×	●	●	●	●	●	●
	SCK10 (input/output)	P80	○	○	×	×	×	×	×	×	×
		P83	○	○	×	×	×	×	×	×	×
		PC5	×	×	×	○	○	○	○	○	○
	RTS10# (output) / SCK10 (input/output)	P80	○	○	×	●	●	●	●	●	×
	CTS10# (input) / SCK10 (input/output) / SS10# (input)	P83	○	○	×	●	●	×	●	●	×
	CTS10# (input) / RTS10# (output) / SS10# (input)	PC4				○	○	○	○	○	○
	RXD11 (input) / SMISO11 (input/output) / SSCL11 (input/output)	P76	○	○	×	●	●	×	●	●	×
		PB6	×	×	×	●	●	●	●	●	●
	TXD11 (output) / SMOSI11 (input/output) / SSDA11 (input/output)	P77	○	○	×	●	●	×	●	●	×
		PB7	×	×	×	●	●	●	●	●	●
Serial communications interface	SCK11 (input/output) / RTS11# (output)	P75	○	○	×	○	○	×	○	○	×
	SCK11 (input/output)	PB5				○	○	○	○	○	○
	CTS11# (input) / SS11# (input)	P74	○	○	×	●	●	×	●	●	×
	CTS11# (input) / RTS11# (output) / SS11# (input)	PB4				○	○	○	○	○	○
	RXD12 (input) / SMISO12 (input/output) / SSCL12 (input/output) / RXDX12 (input)	PE2	○	○	○	○	○	×	○	○	○

Module/ Function	Pin Function	Port Allocation	RX71M			RX72M			RX72N		
			177-/ 176-Pin	145-/ 144-Pin	100-Pin	176-Pin	144-Pin	100-Pin	176-Pin	145-/ 144-Pin	100-Pin
Serial communications interface	TXD12 (output) / SMOSI12 (input/output) / SSDA12 (input/output) / TDX12 (output) / SIOX12 (input/output)	PE1	○	○	○	○	○	×	○	○	○
	SCK12 (input/output)	PE0	○	○	○	○	○	×	○	○	○
	CTS12# (input) / RTS12# (output) / SS12# (input)	PE3	○	○	○	○	○	×	○	○	○
I ² C bus interface	SCL0[FM+] (input/output)	P12	○	○	○	○	○	×	○	○	○
	SDA0[FM+] (input/output)	P13	○	○	○	○	○	×	○	○	○
	SCL2-DS (input/output)	P16	○	○	○	○	○	○	○	○	○
	SDA2-DS (input/output)	P17	○	○	○	○	○	○	○	○	○
	SCL1 (input/output)	P21				○	○	○	○	○	○
	SDA1 (input/output)	P20				○	○	○	○	○	○
USB 2.0 FS Host/Function module	USB0_VBUS (input)	P16	○	○	○	○	○	○	○	○	○
	USB0_EXICEN (output)	P21	○	○	○	○	○	○	○	○	○
	USB0_VBUSEN (output)	P16	○	○	○	○	○	○	○	○	○
		P24	○	○	○	○	○	○	○	○	○
		P32	○	○	○	○	○	○	○	○	○
	USB0_OVRCURA (input)	P14	○	○	○	○	○	○	○	○	○
	USB0_OVRCURB (input)	P16	○	○	○	○	○	○	○	○	○
USB 2.0 HS Host/Function module	USB0_OVRCURB (input)	P22	○	○	○	○	○	×	○	○	○
	USB0_ID (input)	P20	○	○	○	○	○	○	○	○	○
	USBA_VBUS (input)	P11	○	×	×						
	USBA_EXICEN (output)	P21	○	×	×						
	USBA_VBUSEN (output)	P11	○	×	×						
		P15	○	×	×						
CAN module	USBA_OVRCURA (input)	P10	○	×	×						
	USBA_OVRCURB (input)	P22	○	×	×						
	USBA_ID (input)	P20	○	×	×						
	CRX0 (input)	P33	○	○	○	○	○	○	○	○	○
	PD2	○	○	○	○	○	○	○	○	○	○
CTX0 (output)	CTX0 (output)	P32	○	○	○	○	○	○	○	○	○
		PD1	○	○	○	○	○	○	○	○	○
	CRX1-DS (input)	P15	○	○	○	○	○	○	○	○	○
CRX1 (input)	CRX1 (input)	P55	×	○	○	○	○	×	○	○	○

Module/ Function	Pin Function	Port Allocation	RX71M			RX72M			RX72N		
			177-/ 176-Pin	145-/ 144-Pin	100-Pin	176-Pin	144-Pin	100-Pin	176-Pin	145-/ 144-Pin	100-Pin
CAN module	CTX1 (output)	P14	○	○	○	○	○	○	○	○	○
		P54	×	○	○	○	○	×	○	○	○
		P23	×	×	×	○	○	○	○	○	○
	CRX2 (input)	P67	○	○	×	○	○	○	○	○	×
Serial peripheral interface	RSPCKA (input/output)	PA5	○	○	○	○	○	×	○	○	○
		PC5	○	○	○	○	○	×	○	○	○
	MOSIA (input/output)	PA6	○	○	○	○	○	×	○	○	○
		PC6	○	○	○	○	○	×	○	○	○
	MISOA (input/output)	PA7	○	○	○	○	○	×	○	○	○
		PC7	○	○	○	○	○	×	○	○	○
	SSLA0 (input/output)	PA4	○	○	○	○	○	×	○	○	○
		PC4	○	○	○	○	○	×	○	○	○
	SSLA1 (output)	PA0	○	○	○	○	○	×	○	○	○
		PC0	○	○	○	○	○	×	○	○	○
	SSLA2 (output)	PA1	○	○	○	○	○	×	○	○	○
		PC1	○	○	○	○	○	×	○	○	○
	SSLA3 (output)	PA2	○	○	○	○	○	×	○	○	○
		PC2	○	○	○	○	○	×	○	○	○
	RSPCKB (input/output)	P27	○	○	○	○	○	○	○	○	○
		PE5	○	○	○	○	○	○	○	○	○
	MOSIB (input/output)	P26	○	○	○	○	○	○	○	○	○
		PE6	○	○	○	○	○	×	○	○	○
	MISOB (input/output)	P30	○	○	○	○	○	○	○	○	○
		PE7	○	○	○	○	○	×	○	○	○
	SSLB0 (input/output)	P31	○	○	○	○	○	○	○	○	○
		PE4	○	○	○	○	○	○	○	○	○
	SSLB1 (output)	P50	○	○	○	○	○	○	○	○	○
		PE0	○	○	○	○	○	×	○	○	○
	SSLB2 (output)	P51	○	○	○	○	○	○	○	○	○
		PE1	○	○	○	○	○	×	○	○	○
	SSLB3 (output)	P52	○	○	○	○	○	○	○	○	○
		PE2	○	○	○	○	○	×	○	○	○
	RSPCKC (input/output)	P56				○	×	×	○	×	×
		PD3				○	○	×	○	○	○
	MOSIC (input/output)	P54				○	×	×	○	×	×
		PD1				○	○	×	○	○	○
	MISOC (input/output)	P55				○	×	×	○	×	×
		PD2				○	○	×	○	○	○
	SSLC0 (input/output)	P57				○	×	×	○	×	×
		PD4				○	○	×	○	○	○
	SSLC1 (output)	PD5				○	○	×	○	○	○
		PJ0				○	×	×	○	×	×
	SSLC2 (output)	PD6				○	○	×	○	○	○
		PJ1				○	×	×	○	×	×
	SSLC3 (output)	PD7				○	○	×	○	○	○
		PJ2				○	×	×	○	×	×

Module/ Function	Pin Function	Port Allocation	RX71M			RX72M			RX72N		
			177-/ 176- Pin	145-/ 144- Pin	100- Pin	176- Pin	144- Pin	100- Pin	176- Pin	145-/ 144- Pin	100- Pin
Realtime clock	RTCOUT (output)	P16	○	○	○	○	○	○	○	○	○
		P32	○	○	○	○	○	○	○	○	○
	RTCIC0 (input)* ¹	P30	○	○	○	○	○	○	○	○	○
	RTCIC1 (input)* ¹	P31	○	○	○	○	○	○	○	○	○
	RTCIC2 (input)* ¹	P32	○	○	○	○	○	○	○	○	○
12-bit A/D converter	AN000 (input)* ¹	P40	○	○	○	○	○	○	○	○	○
	AN001 (input)* ¹	P41	○	○	○	○	○	○	○	○	○
	AN002 (input)* ¹	P42	○	○	○	○	○	○	○	○	○
	AN003 (input)* ¹	P43	○	○	○	○	○	×	○	○	○
	AN004 (input)* ¹	P44	○	○	○	○	○	×	○	○	○
	AN005 (input)* ¹	P45	○	○	○	○	×	×	○	○	○
	AN006 (input)* ¹	P46	○	○	○	○	×	×	○	○	○
	AN007 (input)* ¹	P47	○	○	○	○	×	×	○	○	○
	ADTRG0# (input)	P07	○	○	○	○	×	×	○	○	○
		P16	○	○	○	○	○	○	○	○	○
		P25	○	○	○	○	○	○	○	○	○
	AN100 (input)* ¹	PE2	○	○	○	○	○	×	○	○	○
	AN101 (input)* ¹	PE3	○	○	○	○	○	○	○	○	○
	AN102 (input)* ¹	PE4	○	○	○	○	○	○	○	○	○
	AN103 (input)* ¹	PE5	○	○	○	○	○	○	○	○	○
	AN104 (input)* ¹	PE6	○	○	○	○	○	×	○	○	○
	AN105 (input)* ¹	PE7	○	○	○	○	○	×	○	○	○
	AN106 (input)* ¹	PD6	○	○	○	○	○	○	○	○	○
	AN107 (input)* ¹	PD7	○	○	○	○	○	○	○	○	○
	AN108 (input)* ¹	PD0	○	○	○	○	○	×	○	○	○
	AN109 (input)* ¹	PD1	○	○	○	○	○	○	○	○	○
	AN110 (input)* ¹	PD2	○	○	○	○	○	○	○	○	○
	AN111 (input)* ¹	PD3	○	○	○	○	○	×	○	○	○
	AN112 (input)* ¹	PD4	○	○	○	○	○	×	○	○	○
	AN113 (input)* ¹	PD5	○	○	○	○	○	×	○	○	○
	AN114 (input)* ¹	P90	○	○	×	○	○	○	○	○	×
	AN115 (input)* ¹	P91	○	○	×	○	○	○	○	○	×
	AN116 (input)* ¹	P92	○	○	×	○	○	○	○	○	×
	AN117 (input)* ¹	P93	○	○	×	○	○	○	○	○	×
	AN118 (input)* ¹	P00	○	○	×	○	○	○	○	○	×
	AN119 (input)* ¹	P01	○	○	×	○	○	×	○	○	×
	AN120 (input)* ¹	P02	○	○	×	○	○	×	○	○	×
	ANEX0 (output)* ¹	PE0	○	○	○	○	○	×	○	○	○
	ANEX1 (input)* ¹	PE1	○	○	○	○	○	×	○	○	○
	ADTRG1# (input)	P13	○	○	○	○	○	×	○	○	○
		P17	○	○	○	○	○	○	○	○	○
12-bit D/A converter	DA0 (output)* ¹	P03	○	○	×	○	○	×	○	○	×
	DA1 (output)* ¹	P05	○	○	○	○	○	×	○	○	○
Parallel data capture unit	PIXCLK (input)	P24	○	○	×	○	○	×	○	○	×
	VSYNC (input)	P32	○	○	×	○	○	×	○	○	×
	HSYNC (input)	P25	○	○	×	○	○	×	○	○	×
	PIXD0 (input)	P15	○	○	×	○	○	×	○	○	×
	PIXD1 (input)	P86	○	○	×	○	○	×	○	○	×

Module/ Function	Pin Function	Port Allocation	RX71M			RX72M			RX72N		
			177-/ 176-Pin	145-/ 144-Pin	100-Pin	176-Pin	144-Pin	100-Pin	176-Pin	145-/ 144-Pin	100-Pin
Parallel data capture unit	PIXD2 (input)	P87	○	○	×	○	○	×	○	○	×
	PIXD3 (input)	P17	○	○	×	○	○	×	○	○	×
	PIXD4 (input)	P20	○	○	×	○	○	×	○	○	×
	PIXD5 (input)	P21	○	○	×	○	○	×	○	○	×
	PIXD6 (input)	P22	○	○	×	○	○	×	○	○	×
	PIXD7 (input)	P23	○	○	×	○	○	×	○	○	×
	PCKO (output)	P33	○	○	×	○	○	×	○	○	×
Serial sound interface/ expansion serial sound interface	SSISCK0 (input/output) / SSIBCK0 (input/output)	P23	○	○	○	○	○	○	○	○	○
		P01	×	×	×	○	○	×	○	○	×
	SSIWS0 (input/output) / SSILRCK0 (input/output)	P21	○	○	○	○	○	○	○	○	○
		PF5	×	×	×	○	×	×	○	○	×
	SSIRXD0 (input)	P20	○	○	○	○	○	○	○	○	○
		PJ5	×	×	×	○	×	×	○	○	×
	SSITXD0 (output)	P17	○	○	○	○	○	○	○	○	○
		PJ3	×	×	×	○	○	×	○	○	○
	SSISCK1 (input/output) / SSIBCK1 (input/output)	P24	○	○	○	○	○	○	○	○	○
		P02	×	×	×	○	○	×	○	○	×
	SSIWS1 (input/output) / SSILRCK1 (input/output)	P15	○	○	○	○	○	○	○	○	○
		P05	×	×	×	○	○	×	○	○	○
	SSIDATA1 (input/output)	P25	○	○	○	○	○	○	○	○	○
		P03	×	×	×	○	○	×	○	○	×
	AUDIO_MCLK (input) / AUDIO_CLK (input)	P22	○	○	○	○	○	×	○	○	○
		P00	×	×	×	○	○	○	○	○	×
MMC host interface	MMC_RES# (output)	P75	○	○	×	○	○	×	○	○	×
		PE7	○	○	○	○	○	×	○	○	○
	MMC_CLK (output)	P77	○	○	×	○	○	×	○	○	×
		PD5	○	○	○	○	○	×	○	○	○
	MMC_CD (input)	PC2	○	○	×	○	○	×	○	○	×
		PE6	○	○	○	○	○	×	○	○	○
	MMC_CMD (input/output)	P76	○	○	×	○	○	×	○	○	×
		PD4	○	○	○	○	○	×	○	○	○
	MMC_D0 (input/output)	PC3	○	○	×	○	○	×	○	○	×
		PD6	○	○	○	○	○	×	○	○	○
	MMC_D1 (input/output)	PC4	○	○	×	○	○	×	○	○	×
		PD7	○	○	○	○	○	×	○	○	○
	MMC_D2 (input/output)	P80	○	○	×	○	○	×	○	○	×
		PD2	○	○	○	○	○	×	○	○	○
	MMC_D3 (input/output)	P81	○	○	×	○	○	×	○	○	×
		PD3	○	○	○	○	○	×	○	○	○
	MMC_D4 (input/output)	P82	○	○	×	○	○	×	○	○	×
		PE0	○	○	○	○	○	×	○	○	○

Module/ Function	Pin Function	Port Allocation	RX71M			RX72M			RX72N		
			177-/ 176-Pin	145-/ 144-Pin	100-Pin	176-Pin	144-Pin	100-Pin	176-Pin	145-/ 144-Pin	100-Pin
MMC host interface	MMC_D5 (input/output)	PC5	○	○	×	○	○	×	○	○	×
		PE1	○	○	○	○	○	×	○	○	○
	MMC_D6 (input/output)	PC6	○	○	×	○	○	×	○	○	×
		PE2	○	○	○	○	○	×	○	○	○
	MMC_D7 (input/output)	PC7	○	○	×	○	○	×	○	○	×
		PE3	○	○	○	○	○	×	○	○	○
SD host interface	SDHI_CLK (output)	P77	○	○	×	○	○	×	○	○	×
		PD5	○	○	○	○	○	×	○	○	○
		P21	×	×	×	○	○	×	○	○	×
	SDHI_CMD (input/output)	P76	○	○	×	○	○	×	○	○	×
		PD4	○	○	○	○	○	×	○	○	○
		P20	×	×	×	○	○	×	○	○	×
	SDHI_CD (input)	P81	○	○	×	○	○	×	○	○	×
		PE6	○	○	○	○	○	×	○	○	○
		P25	×	×	×	○	○	×	○	○	×
	SDHI_WP (input)	P80	○	○	×	○	○	×	○	○	×
		PE7	○	○	○	○	○	×	○	○	○
		P24	×	×	×	○	○	×	○	○	×
	SDHI_D0 (input/output)	PC3	○	○	×	○	○	×	○	○	×
		PD6	○	○	○	○	○	×	○	○	○
		P22	×	×	×	○	○	×	○	○	×
	SDHI_D1 (input/output)	PC4	○	○	×	○	○	×	○	○	×
		PD7	○	○	○	○	○	×	○	○	○
		P23	×	×	×	○	○	×	○	○	×
	SDHI_D2 (input/output)	P75	○	○	×	○	○	×	○	○	×
		PD2	○	○	○	○	○	×	○	○	○
		P87	×	×	×	○	○	×	○	○	×
	SDHI_D3 (input/output)	PC2	○	○	×	○	○	×	○	○	×
		PD3	○	○	○	○	○	×	○	○	○
		P17	×	×	×	○	○	×	○	○	×
Clock frequency accuracy measurement circuit	CACREF (input)	PA0	○	○	○	○	○	○	○	○	○
		PC7	○	○	○	○	○	○	○	○	○
Quad serial peripheral interface	QSPCLK (input/output)	P77	○	○	×	○	○	×	○	○	×
		PD5	○	○	○	○	○	×	○	○	○
	QSSL (input/output)	P76	○	○	×	○	○	×	○	○	×
		PD4	○	○	○	○	○	×	○	○	○
	QMO /QIO0 (input/output)	PC3	○	○	×	○	○	×	○	○	×
		PD6	○	○	○	○	○	×	○	○	○
	QMI /QIO1 (input/output)	PC4	○	○	×	○	○	×	○	○	×
		PD7	○	○	○	○	○	×	○	○	○
	QIO2 (input/output)	P80	○	○	×	○	○	×	○	○	×
		PD2	○	○	○	○	○	×	○	○	○
	QIO3 (input/output)	P81	○	○	×	○	○	×	○	○	×
		PD3	○	○	○	○	○	×	○	○	○

Module/ Function	Pin Function	Port Allocation	RX71M			RX72M			RX72N		
			177-/ 176-Pin	145-/ 144-Pin	100-Pin	176-Pin	144-Pin	100-Pin	176-Pin	145-/ 144-Pin	100-Pin
PTP controller for Ethernet controller	EPLSOUT0 (output)	P17				○	○	○	○	○	○
		PJ0				○	✗	✗	○	✗	✗
		PJ5				○	✗	✗	○	○	✗
	EPLSOUT1 (output)	P11				○	✗	✗	○	✗	✗
		P67				○	○	○	○	○	✗
		P87				○	○	○	○	○	✗
		PJ1				○	✗	✗	○	✗	✗
Ethernet PHY management interface	PMGI0_MDC (output)	P72				○	✗	✗	○	○	✗
		PA4				○	○	○	○	○	○
	PMGI0_MDIO (input/output)	P71				○	✗	✗	○	○	✗
		PA3				○	○	○	○	○	○
	PMGI1_MDC (output)	P31				○	○	○	○	○	✗
		PD5				○	○	✗	○	○	✗
	PMGI1_MDIO (input/output)	P30				○	○	○	○	○	✗
		PD4				○	○	✗	○	○	✗
EtherCAT slave controller	CAT0_LINKSTA (input)	P34				○	○	○			
		P54				○	○	✗			
		PA5				○	○	✗			
	CAT0_RX_CLK (input)	P76				○	○	✗			
		PB2				○	○	✗			
		PE5				○	○	○			
	CAT0_RX_DV (input)	P83				○	○	✗			
		PB7				○	○	✗			
		PC2				○	○	○			
	CAT0_ERXD0 (input)	P75				○	○	○			
		PB1				○	○	○			
	CAT0_ERXD1 (input)	P74				○	○	✗			
		PB0				○	○	○			
	CAT0_ERXD2 (input)	PC1				○	○	✗			
		PE4				○	○	○			
	CAT0_ERXD3 (input)	PC0				○	○	✗			
		PE3				○	○	○			
	CAT0_RX_ER (input)	P77				○	○	✗			
		PB3				○	○	○			
	CAT0_TX_CLK (input)	PC4				○	○	○			
	CAT0_TX_EN (output)	P80				○	○	○			
		PA0				○	○	○			
		PB4				○	○	○			
	CAT0_ETXD0 (output)	P81				○	○	○			
		PB5				○	○	○			
	CAT0_ETXD1 (output)	P82				○	○	○			
		PB6				○	○	○			
	CAT0_ETXD2 (output)	PC5				○	○	○			
	CAT0_ETXD3 (output)	PC6				○	○	○			

Module/ Function	Pin Function	Port Allocation	RX71M			RX72M			RX72N		
			177-/ 176-Pin	145-/ 144-Pin	100-Pin	176-Pin	144-Pin	100-Pin	176-Pin	145-/ 144-Pin	100-Pin
EtherCAT slave controller	CAT0_MDC (output)	P72				○	✗	✗			
		PA4				○	○	○			
	CAT0_MDIO (input/output)	P71				○	✗	✗			
		PA3				○	○	○			
	CAT1_LINKSTA (input)	P84				○	✗	✗			
		P93				○	○	○			
	CAT1_RX_CLK (input)	PD6				○	○	○			
		PG0				○	○	✗			
	CAT1_RX_DV (input)	P90				○	○	○			
		P92				○	○	○			
	CAT1_ERXD0 (input)	P62				○	○	○			
		P94				○	✗	✗			
	CAT1_ERXD1 (input)	P61				○	○	○			
		P95				○	✗	✗			
	CAT1_ERXD2 (input)	P96				○	○	○			
	CAT1_ERXD3 (input)	P97				○	○	○			
	CAT1_RX_ER (input)	PD7				○	○	○			
		PG1				○	○	✗			
	CAT1_TX_CLK (input)	PG2				○	○	○			
	CAT1_TX_EN (output)	P60				○	○	○			
	CAT1_ETXD0 (output)	P64				○	○	○			
		PG3				○	✗	✗			
	CAT1_ETXD1 (output)	P63				○	○	○			
		PG4				○	✗	✗			
	CAT1_ETXD2 (output)	PG5				○	○	○			
	CAT1_ETXD3 (output)	PG6				○	○	○			
	CATRESTOUT (output)	PA6				○	○	○			
		PJ3				○	○	✗			
	CATLEDRUN (output)	P15				○	○	○			
		PA0				○	○	○			
	CATIRQ (output)	P27				○	○	○			
		PA4				○	○	○			
	CATLEDSTER (output)	P02				○	○	✗			
		P52				○	○	○			
	CATLEDERR (output)	P01				○	○	✗			
		P50				○	○	○			
	CATLINKACT0 (output)	P70				○	✗	✗			
		P86				○	○	○			
	CATLINKACT1 (output)	P26				○	○	○			
		PA2				○	○	○			

Module/ Function	Pin Function	Port Allocation	RX71M			RX72M			RX72N		
			177-/176-Pin	145-/144-Pin	100-Pin	176-Pin	144-Pin	100-Pin	176-Pin	145-/144-Pin	100-Pin
EtherCAT slave controller	CATSYNC0 (output)	P17				○	○	○			
		PC4				○	○	○			
		PJ0				○	✗	✗			
		PJ5				○	✗	✗			
	CATSYNC1 (output)	P11				○	✗	✗			
		P67				○	○	○			
		P87				○	○	○			
		PJ1				○	✗	✗			
	CATLATCH0 (input)	P80				○	○	○			
		PF5				○	✗	✗			
	CATLATCH1 (input)	P00				○	○	○			
		PC6				○	○	○			
	CATI2CCLK (output)	P81				○	○	○			
		PF2				○	✗	✗			
	CATI2CDATA (input/output)	P82				○	○	○			
		PF0				○	✗	✗			
Delta-sigma modulator interface	DSMCLK0 (input/output)	P33				○	○	✗			
	DSMDAT0 (input)	P34				○	○	✗			
	DSMCLK1 (input/output)	P83				○	○	✗			
	DSMDAT1 (input)	P56				○	○	✗			
	DSMCLK2 (input/output)	P74				○	○	✗			
	DSMDAT2 (input)	P75				○	○	✗			
	DSMCLK3 (input/output)	P71				○	✗	✗			
	DSMDAT3 (input)	P72				○	✗	✗			
	DSMCLK4 (input/output)	P92				○	✗	✗			
	DSMDAT4 (input)	P93				○	✗	✗			
	DSMCLK5 (input/output)	P90				○	✗	✗			
	DSMDAT5 (input)	P91				○	✗	✗			
Clock generation circuit	CLKOUT (output)	P25				○	○	○	○	○	○
	CLKOUT25M (output)	P56				○	○	○	○	○	✗
		PJ2				○	○	✗	○	✗	✗
Graphic-LCD controller	LCD_EXTCLK (input)	P73				○	✗	✗	○	✗	✗
		PD0				○	○	✗	○	○	○
	LCD_CLK (output)	P14				○	✗	✗	○	✗	✗
		PB5				○	○	✗	○	○	○
	LCD_TCON0 (output)	P13				○	✗	✗	○	✗	✗
		PB4				○	○	✗	○	○	○
	LCD_TCON1 (output)	PB3				○	○	✗	○	○	○
		P12				○	✗	✗	○	✗	✗
	LCD_TCON2 (output)	PB2				○	○	✗	○	○	○
		PJ2				○	✗	✗	○	✗	✗
	LCD_TCON3 (output)	PB1				○	○	✗	○	○	○
		PJ1				○	✗	✗	○	✗	✗

Module/ Function	Pin Function	Port Allocation	RX71M			RX72M			RX72N		
			177-/ 176-Pin	145-/ 144-Pin	100-Pin	176-Pin	144-Pin	100-Pin	176-Pin	145-/ 144-Pin	100-Pin
Graphic-LCD controller	LCD_DATA0 (output)	PB0				○	○	×	○	○	○
		PJ0				○	×	×	○	×	×
	LCD_DATA1 (output)	P85				○	×	×	○	×	×
		PA7				○	○	×	○	○	○
	LCD_DATA2 (output)	P84				○	×	×	○	×	×
		PA6				○	○	×	○	○	○
	LCD_DATA3 (output)	P57				○	×	×	○	×	×
		PA5				○	○	×	○	○	○
	LCD_DATA4 (output)	P56				○	×	×	○	×	×
		PA4				○	○	×	○	○	○
	LCD_DATA5 (output)	P55				○	×	×	○	×	×
		PA3				○	○	×	○	○	○
	LCD_DATA6 (output)	P54				○	×	×	○	×	×
		PA2				○	○	×	○	○	○
	LCD_DATA7 (output)	P11				○	×	×	○	×	×
		PA1				○	○	×	○	○	○
	LCD_DATA8 (output)	P83				○	×	×	○	×	×
		PA0				○	○	×	○	○	○
	LCD_DATA9 (output)	PC7				○	×	×	○	×	×
		PE7				○	○	×	○	○	○
	LCD_DATA10 (output)	PC6				○	×	×	○	×	×
		PE6				○	○	×	○	○	○
	LCD_DATA11 (output)	PC5				○	×	×	○	×	×
		PE5				○	○	×	○	○	○
	LCD_DATA12 (output)	P82				○	×	×	○	×	×
		PE4				○	○	×	○	○	○
	LCD_DATA13 (output)	P81				○	×	×	○	×	×
		PE3				○	○	×	○	○	○
	LCD_DATA14 (output)	P80				○	×	×	○	×	×
		PE2				○	○	×	○	○	○
	LCD_DATA15 (output)	PC4				○	×	×	○	×	×
		PE1				○	○	×	○	○	○
	LCD_DATA16 (output)	PC3				○	×	×	○	×	×
		PE0				○	○	×	○	○	○
	LCD_DATA17 (output)	P77				○	×	×	○	×	×
		PD7				○	○	×	○	○	○
	LCD_DATA18 (output)	P76				○	×	×	○	×	×
		PD6				○	○	×	○	○	○
	LCD_DATA19 (output)	PC2				○	×	×	○	×	×
		PD5				○	○	×	○	○	○
	LCD_DATA20 (output)	P75				○	×	×	○	×	×
		PD4				○	○	×	○	○	○
	LCD_DATA21 (output)	P74				○	×	×	○	×	×
		PD3				○	○	×	○	○	○
	LCD_DATA22 (output)	PC1				○	×	×	○	×	×
		PD2				○	○	×	○	○	○

Module/ Function	Pin Function	Port Allocation	RX71M			RX72M			RX72N		
			177-/ 176- Pin	145-/ 144- Pin	100- Pin	176- Pin	144- Pin	100- Pin	176- Pin	145-/ 144- Pin	100- Pin
Graphic-LCD controller	LCD_DATA23 (output)	P72				○	✗	✗	○	✗	✗
		PD1				○	○	✗	○	○	○

Note: 1. To use this pin, set the corresponding port to general I/O. (Clear the PORTm.PDR.Bn and PORTm.PMR.Bn bits to 0.)

Table 2.33 Comparison of P0n Pin Function Control Register (P0nPFS)

Register	Bit	RX71M (n = 0 to 3, 5, 7)	RX72M (n = 0 to 3, 5, 7)	RX72N (n = 0 to 3, 5, 7)
P00PFS	PSEL[5:0]	Pin function select bits 000000b: Hi-Z 000101b: TMRI0 001010b: TXD6/SMOSI6/ SSDA6	Pin function select bits 000000b: Hi-Z 000101b: TMRI0 001010b: TXD6/SMOSI6/ SSDA6 010111b: AUDIO_CLK 011011b: QIO2-C 100111b: CATLATCH1	Pin function select bits 000000b: Hi-Z 000101b: MRI0 001010b: TXD6/SMOSI6/ SSDA6 010111b: AUDIO_CLK 011011b: QIO2-C
P01PFS	PSEL[5:0]	Pin function select bits 000000b: Hi-Z 000101b: TMCI0 001010b: RXD6/SMISO6/ SSCL6	Pin function select bits 000000b: Hi-Z 000101b: TMCI0 001010b: RXD6/SMISO6/ SSCL6 010111b: SSIBCK0 011011b: QIO3-C 100111b: CATLEDERR	Pin function select bits 000000b: Hi-Z 000101b: TMCI0 001010b: RXD6/SMISO6/ SSCL6 010111b: SSIBCK0 011011b: QIO3-C
P02PFS	PSEL[5:0]	Pin function select bits 000000b: Hi-Z 000101b: TMCI1 001010b: SCK6	Pin function select bits 000000b: Hi-Z 000101b: TMCI1 001010b: SCK6 010111b: SSIBCK1 100111b: CATLEDSTER	Pin function select bits 000000b: Hi-Z 000101b: TMCI1 001010b: SCK6 010111b: SSIBCK1
P03PFS	PSEL[5:0]	—	Pin function select bits	Pin function select bits
P05PFS	PSEL[5:0]	—	Pin function select bits	Pin function select bits

Table 2.34 Comparison of P1n Pin Function Control Register (P1nPFS)

Register	Bit	RX71M (n = 0 to 7)	RX72M (n = 0 to 7)	RX72N (n = 0 to 7)
P10PFS	PSEL[5:0]	Pin function select bits 000000b: Hi-Z 000001b: MTIC5W 000101b: TMRI3 010101b: USBA_OVRCURA	Pin function select bits 000000b: Hi-Z 000001b: MTIC5W 000101b: TMRI3	Pin function select bits 000000b: Hi-Z 000001b: MTIC5W 000101b: TMRI3
P11PFS	PSEL[5:0]	Pin function select bits 000000b: Hi-Z 000001b: MTIC5V 000101b: TMCI3 001010b: SCK2 010100b: USBA_VBUS 010101b: USBA_VBUSEN	Pin function select bits 000000b: Hi-Z 000001b: MTIC5V 000101b: TMCI3 001010b: SCK2 010001b: EPLSOUT1 100101b: LCD_DATA7-A 100111b: CATSYNC1	Pin function select bits 000000b: Hi-Z 000001b: MTIC5V 000101b: TMCI3 001010b: SCK2 010001b: EPLSOUT1 100101b: LCD_DATA7-A
P12PFS	PSEL[5:0]	Pin function select bits 000000b: Hi-Z 000001b: MTIC5U 000101b: TMCI1 001010b: RXD2/SMISO2/ SSCL2 001111b: SCL0[FM+]	Pin function select bits 000000b: Hi-Z 000001b: MTIC5U 000101b: TMCI1 001010b: RXD2/SMISO2/ SSCL2 001111b: SCL0[FM+] 011110b: GTADSM0 100101b: LCD_TCON1-A	Pin function select bits 000000b: Hi-Z 000001b: MTIC5U 000101b: TMCI1 001010b: RXD2/SMISO2/ SSCL2 001111b: SCL0[FM+] 011110b: GTADSM0 100101b: LCD_TCON1-A
P13PFS	PSEL[5:0]	Pin function select bits 000000b: Hi-Z 000001b: MTIOC0B 000011b: TIOCA5 000101b: TMO3 000110b: PO13 001001b: ADTRG1# 001010b: TXD2/SMOSI2/ SSDA2 001111b: SDA0[FM+]	Pin function select bits 000000b: Hi-Z 000001b: MTIOC0B 000011b: TIOCA5 000101b: TMO3 000110b: PO13 001001b: ADTRG1# 001010b: TXD2/SMOSI2/ SSDA2 001111b: SDA0[FM+] 011110b: GTADSM1 100101b: LCD_TCON0-A	Pin function select bits 000000b: Hi-Z 000001b: MTIOC0B 000011b: TIOCA5 000101b: TMO3 000110b: PO13 001001b: ADTRG1# 001010b: TXD2/SMOSI2/ SSDA2 001111b: SDA0[FM+] 011110b: GTADSM1 100101b: LCD_TCON0-A

Register	Bit	RX71M (n = 0 to 7)	RX72M (n = 0 to 7)	RX72N (n = 0 to 7)
P14PFS	PSEL[5:0]	Pin function select bits 000000b: Hi-Z 000001b: MTIOC3A 000010b: MTCLKA 000011b: TIOCB5 000100b: TCLKA 000101b: TMRI2 000110b: PO15 001011b: CTS1#/RTS1#/SS1# 010000b: CTX1 010010b: USB0_OVRCURA	Pin function select bits 000000b: Hi-Z 000001b: MTIOC3A 000010b: MTCLKA 000011b: TIOCB5 000100b: TCLKA 000101b: TMRI2 000110b: PO15 001011b: CTS1#/RTS1#/SS1# 010000b: CTX1 010010b: USB0_OVRCURA 011110b: GTETRGD 100101b: LCD_CLK-A	Pin function select bits 000000b: Hi-Z 000001b: MTIOC3A 000010b: MTCLKA 000011b: TIOCB5 000100b: TCLKA 000101b: TMRI2 000110b: PO15 001011b: CTS1#/RTS1#/SS1# 010000b: CTX1 010010b: USB0_OVRCURA A-DS 011110b: GTETRGD 100101b: LCD_CLK-A
P15PFS	PSEL[5:0]	Pin function select bits 000000b: Hi-Z 000001b: MTIOC0B 000010b: MTCLKB 000011b: TIOCB2 000100b: TCLKB 000101b: TMCI2 000110b: PO13 001010b: RXD1/SMISO1/SSCL1 001011b: SCK3 010000b: CRX1-DS 010101b: USBA_VBUSEN 010111b: SSIWS1 011100b: PIXD0 011110b: GTETRG	Pin function select bits 000000b: Hi-Z 000001b: MTIOC0B 000010b: MTCLKB 000011b: TIOCB2 000100b: TCLKB 000101b: TMCI2 000110b: PO13 001010b: RXD1/SMISO1/SSCL1 001011b: SCK3 010000b: CRX1-DS 010111b: SSILRCK1 011100b: PIXD0 011110b: GTETRGA 100111b: CATLEDRUN	Pin function select bits 000000b: Hi-Z 000001b: MTIOC0B 000010b: MTCLKB 000011b: TIOCB2 000100b: TCLKB 000101b: TMCI2 000110b: PO13 001010b: RXD1/SMISO1/SSCL1 001011b: SCK3 010000b: CRX1-DS 010111b: SSILRCK1 011100b: PIXD0 011110b: GTETRGA

Register	Bit	RX71M (n = 0 to 7)	RX72M (n = 0 to 7)	RX72N (n = 0 to 7)
P17PFS	PSEL[5:0]	Pin function select bits 000000b: Hi-Z 000001b: MTIOC3A 000010b: MTIOC3B 000011b: TIOCB0 000100b: TCLKD 000101b: TMO1 000110b: PO15 000111b: POE8# 001000b: MTIOC4B 001001b: ADTRG1# 001010b: SCK1 001011b: TXD3/SMOSI3/ SSDA3 001111b: SDA2-DS 010111b: SSITXD0 011100b: PIXD3 011110b: GTIOC0B	Pin function select bits 000000b: Hi-Z 000001b: MTIOC3A 000010b: MTIOC3B 000011b: TIOCB0 000100b: TCLKD 000101b: TMO1 000110b: PO15 000111b: POE8# 001000b: MTIOC4B 001001b: ADTRG1# 001010b: SCK1 001011b: TXD3/SMOSI3/ SSDA3 001111b: SDA2-DS 010001b: EPLSOUT0 010111b: SSITXD0 011010b: SDHI_D3-C 011100b: PIXD3 011110b: GTIOC0B 100111b: CATSYNC0	Pin function select bits 000000b: Hi-Z 000001b: MTIOC3A 000010b: MTIOC3B 000011b: TIOCB0 000100b: TCLKD 000101b: TMO1 000110b: PO15 000111b: POE8# 001000b: MTIOC4B 001001b: ADTRG1# 001010b: SCK1 001011b: TXD3/SMOSI3/ SSDA3 001111b: SDA2-DS 010001b: EPLSOUT0 010111b: SSITXD0 011010b: SDHI_D3-C 011100b: PIXD3 011110b: GTIOC0B

Table 2.35 Comparison of P2n Pin Function Control Register (P2nPFS)

Register	Bit	RX71M (n = 0 to 7)	RX72M (n = 0 to 7)	RX72N (n = 0 to 7)
P20PFS	PSEL[5:0]	Pin function select bits 000000b: Hi-Z 000001b: MTIOC1A 000011b: TIOCB3 000101b: TMRI0 000110b: PO0 001010b: TXD0/SMOSI0/ SSDA0 010011b: USB0_ID 010110b: USBA_ID 010111b: SSIRXD0 011100b: PIXD4	Pin function select bits 000000b: Hi-Z 000001b: MTIOC1A 000011b: TIOCB3 000101b: TMRI0 000110b: PO0 001010b: TXD0/SMOSI0/ SSDA0 001111b: SDA1 010011b: USB0_ID 010111b: SSIRXD0 011010b: SDHI_CMD-C 011100b: PIXD4	Pin function select bits 000000b: Hi-Z 000001b: MTIOC1A 000011b: TIOCB3 000101b: TMRI0 000110b: PO0 001010b: TXD0/SMOSI0/ SSDA0 001111b: SDA1 010011b: USB0_ID 010111b: SSIRXD0 011010b: SDHI_CMD-C 011100b: PIXD4

Register	Bit	RX71M (n = 0 to 7)	RX72M (n = 0 to 7)	RX72N (n = 0 to 7)
P21PFS	PSEL[5:0]	Pin function select bits 000000b: Hi-Z 000001b: MTIOC1B 000011b: TIOCA3 000101b: TMCI0 000110b: PO1 001000b: MTIOC4A 001010b: RXD0/SMISO0/ SSCL0 010011b: USB0_EXICEN 010110b: USBA_EXICEN 010111b: SSIWS0 011100b: PIXD5 011110b: GTIOC2A	Pin function select bits 000000b: Hi-Z 000001b: MTIOC1B 000011b: TIOCA3 000101b: TMCI0 000110b: PO1 001000b: MTIOC4A 001010b: RXD0/SMISO0/ SSCL0 001111b: SCL1 010011b: USB0_EXICEN 010111b: SSILRCK0 011010b: SDHI_CLK-C 011100b: PIXD5 011110b: GTIOC2A	Pin function select bits 000000b: Hi-Z 000001b: MTIOC1B 000011b: TIOCA3 000101b: TMCI0 000110b: PO1 001000b: MTIOC4A 001010b: RXD0/SMISO0/ SSCL0 001111b: SCL1 010011b: USB0_EXICEN 010111b: SSILRCK0 011010b: SDHI_CLK-C 011100b: PIXD5 011110b: GTIOC2A
P22PFS	PSEL[5:0]	Pin function select bits 000000b: Hi-Z 000001b: MTIOC3B 000010b: MTCLKC 000011b: TIOCC3 000101b: TMO0 000110b: PO2 001010b: SCK0 010011b: USB0_OVRCURB 010110b: USBA_OVRCURB 010111b: AUDIO_MCLK 011000b: EDREQ0 011100b: PIXD6 011110b: GTIOC1A	Pin function select bits 000000b: Hi-Z 000001b: MTIOC3B 000010b: MTCLKC 000011b: TIOCC3 000101b: TMO0 000110b: PO2 001010b: SCK0 010011b: USB0_OVRCURB 010111b: AUDIO_CLK 011000b: EDREQ0 011010b: SDHI_D0-C 011100b: PIXD6 011110b: GTIOC1A	Pin function select bits 000000b: Hi-Z 000001b: MTIOC3B 000010b: MTCLKC 000011b: TIOCC3 000101b: TMO0 000110b: PO2 001010b: SCK0 010011b: USB0_OVRCURB 010111b: AUDIO_CLK 011000b: EDREQ0 011010b: SDHI_D0-C 011100b: PIXD6 011110b: GTIOC1A
P23PFS	PSEL[5:0]	Pin function select bits 000000b: Hi-Z 000001b: MTIOC3D 000010b: MTCLKD 000011b: TIOCD3 000110b: PO3 001010b: TXD3/SMOSI3/ SSDA3 001011b: CTS0#/RTS0#/ SS0# 010111b: SSISCK0 011000b: EDACK0 011100b: PIXD7 011110b: GTIOC0A	Pin function select bits 000000b: Hi-Z 000001b: MTIOC3D 000010b: MTCLKD 000011b: TIOCD3 000110b: PO3 001010b: TXD3/SMOSI3/ SSDA3 001011b: CTS0#/RTS0#/ SS0# 010000b: CTX1 010111b: SSIBCK0 011000b: EDACK0 011010b: SDHI_D1-C 011100b: PIXD7 011110b: GTIOC0A	Pin function select bits 000000b: Hi-Z 000001b: MTIOC3D 000010b: MTCLKD 000011b: TIOCD3 000110b: PO3 001010b: TXD3/SMOSI3/ SSDA3 001011b: CTS0#/RTS0#/ SS0# 010000b: CTX1 010111b: SSIBCK0 011000b: EDACK0 011010b: SDHI_D1-C 011100b: PIXD7 011110b: GTIOC0A

Register	Bit	RX71M (n = 0 to 7)	RX72M (n = 0 to 7)	RX72N (n = 0 to 7)
P24PFS	PSEL[5:0]	Pin function select bits 000000b: Hi-Z 000001b: MTIOC4A 000010b: MTCLKA 000011b: TIOCB4 000101b: TMRI1 000110b: PO4 001010b: SCK3 010011b: USB0_VBUSEN 010111b: SSISCK1 011000b: EDREQ1 011100b: PIXCLK	Pin function select bits 000000b: Hi-Z 000001b: MTIOC4A 000010b: MTCLKA 000011b: TIOCB4 000101b: TMRI1 000110b: PO4 001010b: SCK3 010011b: USB0_VBUSEN 010111b: SSIBCK1 011000b: EDREQ1 011010b: SDHI_WP 011100b: PIXCLK	Pin function select bits 000000b: Hi-Z 000001b: MTIOC4A 000010b: MTCLKA 000011b: TIOCB4 000101b: TMRI1 000110b: PO4 001010b: SCK3 010011b: USB0_VBUSEN 010111b: SSIBCK1 011000b: EDREQ1 011010b: SDHI_WP-C 011100b: PIXCLK
P25PFS	PSEL[5:0]	Pin function select bits 000000b: Hi-Z 000001b: MTIOC4C 000010b: MTCLKB 000011b: TIOCA4 000110b: PO5 001001b: ADTRG0# 001010b: RXD3/SMISO3/ SSCL3 010111b: SSIDATA1 011000b: EDACK1 011100b: HSYNC	Pin function select bits 000000b: Hi-Z 000001b: MTIOC4C 000010b: MTCLKB 000011b: TIOCA4 000110b: PO5 001001b: ADTRG0# 001010b: RXD3/SMISO3/ SSCL3 010111b: SSIDATA1 011000b: EDACK1 011010b: SDHI_CD 011100b: HSYNC 101010b: CLKOUT	Pin function select bits 000000b: Hi-Z 000001b: MTIOC4C 000010b: MTCLKB 000011b: TIOCA4 000110b: PO5 001001b: ADTRG0# 001010b: RXD3/SMISO3/ SSCL3 010111b: SSIDATA1 011000b: EDACK1 011010b: SDHI_CD-C 011100b: HSYNC 101010b: CLKOUT
P26PFS	PSEL[5:0]	Pin function select bits 000000b: Hi-Z 000001b: MTIOC2A 000101b: TMO1 000110b: PO6 001010b: TXD1/SMOSI1/ SSDA1 001011b: CTS3#/RTS3#/ SS3# 001101b: MOSIB 010100b: ET1_EXOUT	Pin function select bits 000000b: Hi-Z 000001b: MTIOC2A 000101b: TMO1 000110b: PO6 001010b: TXD1/SMOSI1/ SSDA1 001011b: CTS3#/RTS3#/ SS3# 001101b: MOSIB-A 010100b: ET1_EXOUT 100111b: CATLINKACT1	Pin function select bits 000000b: Hi-Z 000001b: MTIOC2A 000101b: TMO1 000110b: PO6 001010b: TXD1/SMOSI1/ SSDA1 001011b: CTS3#/RTS3#/ SS3# 001101b: MOSIB-A 010100b: ET1_EXOUT
P27PFS	PSEL[5:0]	Pin function select bits 000000b: Hi-Z 000001b: MTIOC2B 000101b: TMCI3 000110b: PO7 001010b: SCK1 001101b: RSPCKB 010100b: ET1_WOL	Pin function select bits 000000b: Hi-Z 000001b: MTIOC2B 000101b: TMCI3 000110b: PO7 001010b: SCK1 001101b: RSPCKB-A 010100b: ET1_WOL 100111b: CATIRQ	Pin function select bits 000000b: Hi-Z 000001b: MTIOC2B 000101b: TMCI3 000110b: PO7 001010b: SCK1 001101b: RSPCKB-A 010100b: ET1_WOL

Table 2.36 Comparison of P3n Pin Function Control Register (P3nPFS)

Register	Bit	RX71M (n = 0 to 4)	RX72M (n = 0 to 4)	RX72N (n = 0 to 4)
P30PFS	PSEL[5:0]	Pin function select bits 000000b: Hi-Z 000001b: MTIOC4B 000101b: TMRI3 000110b: PO8 000111b: POE8# 001010b: RXD1/SMISO1/ SSCL1 001101b: MISOB 010100b: ET1_MDIO	Pin function select bits 000000b: Hi-Z 000001b: MTIOC4B 000101b: TMRI3 000110b: PO8 000111b: POE8# 001010b: RXD1/SMISO1/ SSCL1 001101b: MISOB-A 010100b: ET1_MDIO 101000b: PMGI1_MDIO	Pin function select bits 000000b: Hi-Z 000001b: MTIOC4B 000101b: TMRI3 000110b: PO8 000111b: POE8# 001010b: RXD1/SMISO1/ SSCL1 001101b: MISOB-A 010100b: ET1_MDIO 101000b: PMGI1_MDIO
P31PFS	PSEL[5:0]	Pin function select bits 000000b: Hi-Z 000001b: MTIOC4D 000101b: TMCI2 000110b: PO9 001011b: CTS1#/RTS1#/ SS1# 001101b: SSLB0 010100b: ET1_MDC	Pin function select bits 000000b: Hi-Z 000001b: MTIOC4D 000101b: TMCI2 000110b: PO9 001011b: CTS1#/RTS1#/ SS1# 001101b: SSLB0-A 010100b: ET1_MDC 101000b: PMGI1_MDC	Pin function select bits 000000b: Hi-Z 000001b: MTIOC4D 000101b: TMCI2 000110b: PO9 001011b: CTS1#/RTS1#/ SS1# 001101b: SSLB0-A 010100b: ET1_MDC 101000b: PMGI1_MDC
P33PFS	PSEL[5:0]	Pin function select bits 000000b: Hi-Z 000001b: MTIOC0D 000011b: TIOCD0 000101b: TMRI3 000110b: PO11 001000b: POE4# 001010b: RXD6/SMISO6/ SSCL6 001011b: RXD0/SMISO0/ SSCL0 010000b: CRX0 011000b: EDREQ1 011100b: PCKO 100001b: POE11#	Pin function select bits 000000b: Hi-Z 000001b: MTIOC0D 000011b: TIOCD0 000101b: TMRI3 000110b: PO11 001000b: POE4# 001010b: RXD6/SMISO6/ SSCL6 001011b: RXD0/SMISO0/ SSCL0 010000b: CRX0 011000b: EDREQ1 011100b: PCKO 100001b: POE11# 101001b: DSMCLK0	Pin function select bits 000000b: Hi-Z 000001b: MTIOC0D 000011b: TIOCD0 000101b: TMRI3 000110b: PO11 001000b: POE4# 001010b: RXD6/SMISO6/ SSCL6 001011b: RXD0/SMISO0/ SSCL0 010000b: CRX0 011000b: EDREQ1 011100b: PCKO 100001b: POE11# 101001b: DSMCLK0

Register	Bit	RX71M (n = 0 to 4)	RX72M (n = 0 to 4)	RX72N (n = 0 to 4)
P34PFS	PSEL[5:0]	Pin function select bits 000000b: Hi-Z 000001b: MTIOC0A 000101b: TMCI3 000110b: PO12 000111b: POE10# 001010b: SCK6 001011b: SCK0 010001b: ET0_LINKSTA	Pin function select bits 000000b: Hi-Z 000001b: MTIOC0A 000101b: TMCI3 000110b: PO12 000111b: POE10# 001010b: SCK6 001011b: SCK0 010001b: ET0_LINKSTA 100110b: CAT0_LINKSTA 101001b: DSMDATO	Pin function select bits 000000b: Hi-Z 000001b: MTIOC0A 000101b: TMCI3 000110b: PO12 000111b: POE10# 001010b: SCK6 001011b: SCK0 010001b: ET0_LINKSTA

Table 2.37 Comparison of P5n Pin Function Control Register (P5nPFS)

Register	Bit	RX71M (n = 0 to 2, 4 to 6)	RX72M (n = 0 to 2, 4 to 7)	RX72N (n = 0 to 2, 4 to 7)
P50PFS	PSEL[5:0]	Pin function select bits 000000b: Hi-Z 001010b: TXD2/SMOSI2/ SSDA2 001101b: SSLB1	Pin function select bits 000000b: Hi-Z 001010b: TXD2/SMOSI2/ SSDA2 001101b: SSLB1-A 100111b: CATLEDERR	Pin function select bits 000000b: Hi-Z 001010b: TXD2/SMOSI2/ SSDA2 001101b: SSLB1-A
P52PFS	PSEL[5:0]	Pin function select bits 000000b: Hi-Z 001010b: RXD2/SMISO2/ SSCL2 001101b: SSLB3	Pin function select bits 000000b: Hi-Z 001010b: RXD2/SMISO2/ SSCL2 001101b: SSLB3-A 100111b: CATLEDSTER	Pin function select bits 000000b: Hi-Z 001010b: RXD2/SMISO2/ SSCL2 001101b: SSLB3-A
P54PFS	PSEL[5:0]	Pin function select bits 000000b: Hi-Z 000001b: MTIOC4B 000101b: TMCI1 001011b: CTS2#/RTS2#/ SS2# 010000b: CTX1 010001b: ET0_LINKSTA 011000b: EDACK0	Pin function select bits 000000b: Hi-Z 000001b: MTIOC4B 000101b: TMCI1 001011b: CTS2#/RTS2#/ SS2# 001101b: MOSIC-B 010000b: CTX1 010001b: ET0_LINKSTA 011000b: EDACK0 100101b: LCD_DATA6-A 100110b: CAT0_LINKSTA	Pin function select bits 000000b: Hi-Z 000001b: MTIOC4B 000101b: TMCI1 001011b: CTS2#/RTS2#/ SS2# 001101b: MOSIC-B 010000b: CTX1 010001b: ET0_LINKSTA 011000b: EDACK0 100101b: LCD_DATA6-A

Register	Bit	RX71M ($n = 0$ to $2, 4$ to 6)	RX72M ($n = 0$ to $2, 4$ to 7)	RX72N ($n = 0$ to $2, 4$ to 7)
P55PFS	PSEL[5:0]	Pin function select bits 000000b: Hi-Z 000001b: MTIOC4D 000101b: TMO3 010000b: CRX1 010001b: ET0_EXOUT 011000b: EDREQ0	Pin function select bits 000000b: Hi-Z 000001b: MTIOC4D 000101b: TMO3 001010b: TXD7/SMOSI7/ SSDA7 001101b: MISOC-B 010000b: CRX1 010001b: ET0_EXOUT 011000b: EDREQ0 100101b: LCD_DATA5-A	Pin function select bits 000000b: Hi-Z 000001b: MTIOC4D 000101b: TMO3 001010b: TXD7/SMOSI7/ SSDA7 001101b: MISOC-B 010000b: CRX1 010001b: ET0_EXOUT 011000b: EDREQ0 100101b: LCD_DATA5-A
P56PFS	PSEL[5:0]	Pin function select bits 000000b: Hi-Z 000001b: MTIOC3C 000011b: TIOCA1 011000b: EDACK1	Pin function select bits 000000b: Hi-Z 000001b: MTIOC3C 000011b: TIOCA1 001010b: SCK7 001101b: RSPCKC-B 011000b: EDACK1 100101b: LCD_DATA4-A 101001b: DSMDAT1 101010b: CLKOUT25M	Pin function select bits 000000b: Hi-Z 000001b: MTIOC3C 000011b: TIOCA1 001010b: SCK7 001101b: RSPCKC-B 011000b: EDACK1 100101b: LCD_DATA4-A 101010b: CLKOUT25M
P57PFS	—	—	P57 pin function control register	P57 pin function control register

Table 2.38 Comparison of P6n Pin Function Control Register (P6nPFS)

Register	Bit	RX71M ($n = 0, 6, 7$)	RX72M ($n = 0$ to $4, 6, 7$)	RX72N ($n = 0$ to $4, 6, 7$)
P60PFS	PSEL[5:0]	Pin function select bits 000000b: Hi-Z 010100b: ET1_TX_EN 010101b: RMII1_TXD_EN	Pin function select bits 000000b: Hi-Z 010100b: ET1_TX_EN 010101b: RMII1_TXD_EN 100110b: CAT1_TX_EN	Pin function select bits 000000b: Hi-Z 010100b: ET1_TX_EN 010101b: RMII1_TXD_EN
P61PFS	—	—	P61 pin function control register	P61 pin function control register
P62PFS	—	—	P62 pin function control register	P62 pin function control register
P63PFS	—	—	P63 pin function control register	P63 pin function control register
P64PFS	—	—	P64 pin function control register	P64 pin function control register
P67PFS	PSEL[5:0]	Pin function select bits 000000b: Hi-Z 001000b: MTIOC7C 010000b: CRX2 011110b: GTIOC1B	Pin function select bits 000000b: Hi-Z 001000b: MTIOC7C 010000b: CRX2 010001b: EPLSOUT1 011110b: GTIOC1B 100111b: CATSYNC1	Pin function select bits 000000b: Hi-Z 001000b: MTIOC7C 010000b: CRX2 010001b: EPLSOUT1 011110b: GTIOC1B

Table 2.39 Comparison of P7n Pin Function Control Register (P7nPFS)

Register	Bit	RX71M (n = 1 to 7)	RX72M (n = 0 to 7)	RX72N (n = 1 to 7)
P70PFS	—	—	P70 pin function control register	—
P71PFS	PSEL[5:0]	Pin function select bits 000000b: Hi-Z 010001b: ET0_MDIO	Pin function select bits 000000b: Hi-Z 010001b: ET0_MDIO 100110b: CAT0_MDIO 101000b: PMGI0_MDIO 101001b: DSMCLK3	Pin function select bits 000000b: Hi-Z 010001b: ET0_MDIO 101000b: PMGI0_MDIO
P72PFS	PSEL[5:0]	Pin function select bits 000000b: Hi-Z 010001b: ET0_MDC	Pin function select bits 000000b: Hi-Z 010001b: ET0_MDC 100101b: LCD_DATA23-A 100110b: CAT0_MDC 101000b: PMGI0_MDC 101001b: DSMDAT3	Pin function select bits 000000b: Hi-Z 010001b: ET0_MDC 100101b: LCD_DATA23-A 101000b: PMGI0_MDC
P73PFS	PSEL[5:0]	Pin function select bits 000000b: Hi-Z 000110b: PO16 010001b: ET0_WOL	Pin function select bits 000000b: Hi-Z 000110b: PO16 010001b: ET0_WOL 100101b: LCD_EXTCLK-A	Pin function select bits 000000b: Hi-Z 000110b: PO16 010001b: ET0_WOL 100101b: LCD_EXTCLK-A
P74PFS	PSEL[5:0]	Pin function select bits 000000b: Hi-Z 000110b: PO19 001011b: CTS11# 010001b: ET0_ERXD1 010010b: RMII0_RXD1	Pin function select bits 000000b: Hi-Z 000110b: PO19 001011b: SS11#/CTS11# 010001b: ET0_ERXD1 010010b: RMII0_RXD1 100101b: LCD_DATA21-A 100110b: CAT0_ERXD1 101001b: DSMCLK2	Pin function select bits 000000b: Hi-Z 000110b: PO19 001011b: SS11#/CTS11# 010001b: ET0_ERXD1 010010b: RMII0_RXD1 100101b: LCD_DATA21-A
P75PFS	PSEL[5:0]	Pin function select bits 000000b: Hi-Z 000110b: PO20 001010b: SCK11 001011b: RTS11# 010001b: ET0_ERXD0 010010b: RMII0_RXD0 011001b: MMC_RES# 011010b: SDHI_D2	Pin function select bits 000000b: Hi-Z 000110b: PO20 001010b: SCK11 001011b: RTS11# 010001b: ET0_ERXD0 010010b: RMII0_RXD0 011001b: MMC_RES#-A 011010b: SDHI_D2-A 100101b: LCD_DATA20-A 100110b: CAT0_ERXD0 101001b: DSMDAT2	Pin function select bits 000000b: Hi-Z 000110b: PO20 001010b: SCK11 001011b: RTS11# 010001b: ET0_ERXD0 010010b: RMII0_RXD0 011001b: MMC_RES#-A 011010b: SDHI_D2-A 100101b: LCD_DATA20-A

Register	Bit	RX71M (n = 1 to 7)	RX72M (n = 0 to 7)	RX72N (n = 1 to 7)
P76PFS	PSEL[5:0]	Pin function select bits 000000b: Hi-Z 000110b: PO22 001010b: RXD11 010001b: ET0_RX_CLK 010010b: REF50CK0 011001b: MMC_CMD 011010b: SDHI_CMD 011011b: QSSL	Pin function select bits 000000b: Hi-Z 000110b: PO22 001010b: SMISO11/ SSCL11/RXD11 010001b: ET0_RX_CLK 010010b: REF50CK0 011001b: MMC_CMD-A 011010b: SDHI_CMD-A 011011b: QSSL-A 100101b: LCD_DATA18-A 100110b: CAT0_RX_CLK	Pin function select bits 000000b: Hi-Z 000110b: PO22 001010b: SMISO11/ SSCL11/RXD11 010001b: ET0_RX_CLK 010010b: REF50CK0 011001b: MMC_CMD-A 011010b: SDHI_CMD-A 011011b: QSSL-A 100101b: LCD_DATA18-A
P77PFS	PSEL[5:0]	Pin function select bits 000000b: Hi-Z 000110b: PO23 001010b: TXD11 010001b: ET0_RX_ER 010010b: RMII0_RX_ER 011001b: MMC_CLK 011010b: SDHI_CLK 011011b: QSPCLK	Pin function select bits 000000b: Hi-Z 000110b: PO23 001010b: SMOSI11/ SSDA11/TXD11 010001b: ET0_RX_ER 010010b: RMII0_RX_ER 011001b: MMC_CLK-A 011010b: SDHI_CLK-A 011011b: QSPCLK-A 100101b: LCD_DATA17-A 100110b: CAT0_RX_ER	Pin function select bits 000000b: Hi-Z 000110b: PO23 001010b: SMOSI11/ SSDA11/TXD11 010001b: ET0_RX_ER 010010b: RMII0_RX_ER 011001b: MMC_CLK-A 011010b: SDHI_CLK-A 011011b: QSPCLK-A 100101b: LCD_DATA17-A

Table 2.40 Comparison of P8n Pin Function Control Register (P8nPFS)

Register	Bit	RX71M (n = 0 to 3, 6, 7)	RX72M (n = 0 to 7)	RX72N (n = 0 to 7)
P80PFS	PSEL[5:0]	Pin function select bits 000000b: Hi-Z 000001b: MTIOC3B 000110b: PO26 001010b: SCK10 001011b: RTS10# 010001b: ET0_TX_EN 010010b: RMII0_TXD_EN 011000b: EDREQ0 011001b: MMC_D2 011010b: SDHI_WP 011011b: QIO2	Pin function select bits 000000b: Hi-Z 000001b: MTIOC3B 000110b: PO26 001010b: SCK10 001011b: RTS10# 010001b: ET0_TX_EN 010010b: RMII0_TXD_EN 011000b: EDREQ0 011001b: MMC_D2-A 011010b: SDHI_WP 011011b: QIO2-A 100101b: LCD_DATA14-A 100110b: CAT0_TX_EN 100111b: CATLATC0	Pin function select bits 000000b: Hi-Z 000001b: MTIOC3B 000110b: PO26 001010b: SCK10 001011b: RTS10# 010001b: ET0_TX_EN 010010b: RMII0_TXD_EN 011000b: EDREQ0 011001b: MMC_D2-A 011010b: SDHI_WP-A 011011b: QIO2-A 100101b: LCD_DATA14-A
P81PFS	PSEL[5:0]	Pin function select bits 000000b: Hi-Z 000001b: MTIOC3D 000110b: PO27 001010b: RXD10 010001b: ET0_ETXD0 010010b: RMII0_TXD0 011000b: EDACK0 011001b: MMC_D3 011010b: SDHI_CD 011011b: QIO3 011110b: GTIOC0B	Pin function select bits 000000b: Hi-Z 000001b: MTIOC3D 000110b: PO27 001010b: SMISO10/SSCL10/RXD10 010001b: ET0_ETXD0 010010b: RMII0_TXD0 011000b: EDACK0 011001b: MMC_D3-A 011010b: SDHI_CD 011011b: QIO3-A 011110b: GTIOC0B 100101b: LCD_DATA13-A 100110b: CAT0_ETXD0 100111b: CATI2CCLK	Pin function select bits 000000b: Hi-Z 000001b: MTIOC3D 000110b: PO27 001010b: SMISO10/SSCL10/RXD10 010001b: ET0_ETXD0 010010b: RMII0_TXD0 011000b: EDACK0 011001b: MMC_D3-A 011010b: SDHI_CD-A 011011b: QIO3-A 011110b: GTIOC0B 100101b: LCD_DATA13-A
P82PFS	PSEL[5:0]	Pin function select bits 000000b: Hi-Z 000001b: MTIOC4A 000110b: PO28 001010b: TXD10 010001b: ET0_ETXD1 010010b: RMII0_TXD1 011000b: EDREQ1 011001b: MMC_D4 011110b: GTIOC2A	Pin function select bits 000000b: Hi-Z 000001b: MTIOC4A 000110b: PO28 001010b: SMOSI10/SSDA10/TXD10 010001b: ET0_ETXD1 010010b: RMII0_TXD1 011000b: EDREQ1 011001b: MMC_D4-A 011110b: GTIOC2A 100101b: LCD_DATA12-A 100110b: CAT0_ETXD1 100111b: CATI2CDATA	Pin function select bits 000000b: Hi-Z 000001b: MTIOC4A 000110b: PO28 001010b: SMOSI10/SSDA10/TXD10 010001b: ET0_ETXD1 010010b: RMII0_TXD1 011000b: EDREQ1 011001b: MMC_D4-A 011110b: GTIOC2A 100101b: LCD_DATA12-A

Register	Bit	RX71M (n = 0 to 3, 6, 7)	RX72M (n = 0 to 7)	RX72N (n = 0 to 7)
P83PFS	PSEL[5:0]	Pin function select bits 000000b: Hi-Z 000001b: MTIOC4C 001010b: SCK10 001011b: CTS10# 010001b: ET0_CRS 010010b: RMII0_CRS_DV 011000b: EDACK1 011110b: GTIOC0A	Pin function select bits 000000b: Hi-Z 000001b: MTIOC4C 001010b: SCK10 001011b: SS10#/CTS10# 010001b: ET0_CRS 010010b: RMII0_CRS_DV 011000b: EDACK1 011110b: GTIOC0A 100101b: LCD_DATA8-A 100110b: CAT0_RX_DV 101001b: DSMCLK1	Pin function select bits 000000b: Hi-Z 000001b: MTIOC4C 001010b: SCK10 001011b: SS10#/CTS10# 010001b: ET0_CRS 010010b: RMII0_CRS_DV 011000b: EDACK1 011110b: GTIOC0A 100101b: LCD_DATA8-A
P84PFS	PSEL[5:0]	—	P84 pin function control register	P84 pin function control register
P85PFS	PSEL[5:0]	—	P85 pin function control register	P85 pin function control register
P86PFS	PSEL[5:0]	Pin function select bits 000000b: Hi-Z 000011b: TIOCA0 001000b: MTIOC4D 001010b: RXD10 011100b: PIXD1 011110b: GTIOC2B	Pin function select bits 000000b: Hi-Z 000011b: TIOCA0 001000b: MTIOC4D 001010b: SMISO10/ SSCL10/RXD10 011100b: PIXD1 011110b: GTIOC2B 100111b: CATLINKACT0	Pin function select bits 000000b: Hi-Z 000011b: TIOCA0 001000b: MTIOC4D 001010b: SMISO10/ SSCL10/RXD10 011100b: PIXD1 011110b: GTIOC2B
P87PFS	PSEL[5:0]	Pin function select bits 000000b: Hi-Z 000011b: TIOCA2 001000b: MTIOC4C 001010b: TXD10 011100b: PIXD2 011110b: GTIOC1B	Pin function select bits 000000b: Hi-Z 000011b: TIOCA2 001000b: MTIOC4C 001010b: SMOSI10/ SSDA10/TXD10 010001b: EPLSOUT1 011010b: SDHI_D2-C 011100b: PIXD2 011110b: GTIOC1B 100111b: CATSYNC1	Pin function select bits 000000b: Hi-Z 000011b: TIOCA2 001000b: MTIOC4C 001010b: SMOSI10/ SSDA10/TXD10 010001b: EPLSOUT1 011010b: SDHI_D2-C 011100b: PIXD2 011110b: GTIOC1B

Table 2.41 Comparison of P9n Pin Function Control Register (P9nPFS)

Register	Bit	RX71M (n = 0 to 7)	RX72M (n = 0 to 7)	RX72N (n = 0 to 7)
P90PFS	PSEL[5:0]	Pin function select bits 000000b: Hi-Z 001010b: TXD7/SMOSI7/ SSDA7 010100b: ET1_RX_DV	Pin function select bits 000000b: Hi-Z 001010b: TXD7/SMOSI7/ SSDA7 010100b: ET1_RX_DV 100110b: CAT1_RX_DV 101001b: DSMCLK5	Pin function select bits 000000b: Hi-Z 001010b: TXD7/SMOSI7/ SSDA7 010100b: ET1_RX_DV
P91PFS	PSEL[5:0]	Pin function select bits 000000b: Hi-Z 001010b: SCK7 010100b: ET1_COL	Pin function select bits 000000b: Hi-Z 001010b: SCK7 010100b: ET1_COL 101001b: DSMDAT5	Pin function select bits 000000b: Hi-Z 001010b: SCK7 010100b: ET1_COL
P92PFS	PSEL[5:0]	Pin function select bits 000000b: Hi-Z 001000b: POE4# 001010b: RXD7/SMISO7/ SSCL7 010100b: ET1_CRS 010101b: RMII1_CRS_DV	Pin function select bits 000000b: Hi-Z 001000b: POE4# 001010b: RXD7/SMISO7/ SSCL7 010100b: ET1_CRS 010101b: RMII1_CRS_DV 100110b: CAT1_RX_DV 101001b: DSMCLK4	Pin function select bits 000000b: Hi-Z 001000b: POE4# 001010b: RXD7/SMISO7/ SSCL7 010100b: ET1_CRS 010101b: RMII1_CRS_DV
P93PFS	PSEL[5:0]	Pin function select bits 000000b: Hi-Z 001000b: POE0# 001011b: CTS7#/RTS7#/ SS7# 010100b: ET1_LINKSTA	Pin function select bits 000000b: Hi-Z 001000b: POE0# 001011b: CTS7#/RTS7#/ SS7# 010100b: ET1_LINKSTA 100110b: CAT1_LINKSTA 101001b: DSMDAT4	Pin function select bits 000000b: Hi-Z 001000b: POE0# 001011b: CTS7#/RTS7#/ SS7# 010100b: ET1_LINKSTA
P94PFS	PSEL[5:0]	Pin function select bits 000000b: Hi-Z 010100b: ET1_ERXD0 010101b: RMII1_RXD0	Pin function select bits 000000b: Hi-Z 010100b: ET1_ERXD0 010101b: RMII1_RXD0 100110b: CAT1_ERXD0	Pin function select bits 000000b: Hi-Z 010100b: ET1_ERXD0 010101b: RMII1_RXD0
P95PFS	PSEL[5:0]	Pin function select bits 000000b: Hi-Z 010100b: ET1_ERXD1 010101b: RMII1_RXD1	Pin function select bits 000000b: Hi-Z 010100b: ET1_ERXD1 010101b: RMII1_RXD1 100110b: CAT1_ERXD1	Pin function select bits 000000b: Hi-Z 010100b: ET1_ERXD1 010101b: RMII1_RXD1
P96PFS	PSEL[5:0]	Pin function select bits 000000b: Hi-Z 010100b: ET1_ERXD2	Pin function select bits 000000b: Hi-Z 010100b: ET1_ERXD2 100110b: CAT1_ERXD2	Pin function select bits 000000b: Hi-Z 010100b: ET1_ERXD2

Register	Bit	RX71M (n = 0 to 7)	RX72M (n = 0 to 7)	RX72N (n = 0 to 7)
P97PFS	PSEL[5:0]	Pin function select bits 000000b: Hi-Z 010100b: ET1_ERXD3	Pin function select bits 000000b: Hi-Z 010100b: ET1_ERXD3 100110b: CAT1_ERXD3	Pin function select bits 000000b: Hi-Z 010100b: ET1_ERXD3

Table 2.42 Comparison of PAn Pin Function Control Register (PAnPFS)

Register	Bit	RX71M (n = 0 to 7)	RX72M (n = 0 to 7)	RX72N (n = 0 to 7)
PA0PFS	PSEL[5:0]	Pin function select bits 000000b: Hi-Z 000001b: MTIOC4A 000011b: TIOCA0 000110b: PO16 000111b: CACREF 001000b: MTIOC6D 001101b: SSLA1 010001b: ET0_TX_EN 010010b: RMII0_TXD_EN 011110b: GTIOC0B	Pin function select bits 000000b: Hi-Z 000001b: MTIOC4A 000011b: TIOCA0 000110b: PO16 000111b: CACREF 001000b: MTIOC6D 001101b: SSLA1-B 010001b: ET0_TX_EN 010010b: RMII0_TXD_EN 011110b: GTIOC0B 100101b: LCD_DATA8-B 100110b: CAT0_TX_EN 100111b: CATLEDRUN	Pin function select bits 000000b: Hi-Z 000001b: MTIOC4A 000011b: TIOCA0 000110b: PO16 000111b: CACREF 001000b: MTIOC6D 001101b: SSLA1-B 010001b: ET0_TX_EN 010010b: RMII0_TXD_EN 011110b: GTIOC0B 100101b: LCD_DATA8-B
PA1PFS	PSEL[5:0]	Pin function select bits 000000b: Hi-Z 000001b: MTIOC0B 000010b: MTCLKC 000011b: TIOCB0 000110b: PO17 001000b: MTIOC7B 001010b: SCK5 001101b: SSLA2 010001b: ET0_WOL 011110b: GTIOC2A	Pin function select bits 000000b: Hi-Z 000001b: MTIOC0B 000010b: MTCLKC 000011b: TIOCB0 000110b: PO17 001000b: MTIOC7B 001010b: SCK5 001101b: SSLA2-B 010001b: ET0_WOL 011110b: GTIOC2A 100101b: LCD_DATA7-B	Pin function select bits 000000b: Hi-Z 000001b: MTIOC0B 000010b: MTCLKC 000011b: TIOCB0 000110b: PO17 001000b: MTIOC7B 001010b: SCK5 001101b: SSLA2-B 010001b: ET0_WOL 011110b: GTIOC2A 100101b: LCD_DATA7-B
PA2PFS	PSEL[5:0]	Pin function select bits 000000b: Hi-Z 000110b: PO18 001000b: MTIOC7A 001010b: RXD5/SMISO5/ SSCL5 001101b: SSLA3 011110b: GTIOC1A	Pin function select bits 000000b: Hi-Z 000110b: PO18 001000b: MTIOC7A 001010b: RXD5/SMISO5/ SSCL5 001101b: SSLA3-B 011110b: GTIOC1A 100101b: LCD_DATA6-B 100111b: CATLINKACT1	Pin function select bits 000000b: Hi-Z 000110b: PO18 001000b: MTIOC7A 001010b: RXD5/SMISO5/ SSCL5 001101b: SSLA3-B 011110b: GTIOC1A 100101b: LCD_DATA6-B

Register	Bit	RX71M (n = 0 to 7)	RX72M (n = 0 to 7)	RX72N (n = 0 to 7)
PA3PFS	PSEL[5:0]	Pin function select bits 000000b: Hi-Z 000001b: MTIOC0D 000010b: MTCLKD 000011b: TIOCD0 000100b: TCLKB 000110b: PO19 001010b: RXD5/SMISO5/ SSCL5 010001b: ET0_MDIO	Pin function select bits 000000b: Hi-Z 000001b: MTIOC0D 000010b: MTCLKD 000011b: TIOCD0 000100b: TCLKB 000110b: PO19 001010b: RXD5/SMISO5/ SSCL5 010001b: ET0_MDIO 100101b: LCD_DATA5-B 100110b: CAT0_MDIO 101000b: PMGI0_MDIO	Pin function select bits 000000b: Hi-Z 000001b: MTIOC0D 000010b: MTCLKD 000011b: TIOCD0 000100b: TCLKB 000110b: PO19 001010b: RXD5/SMISO5/ SSCL5 010001b: ET0_MDIO 100101b: LCD_DATA5-B 101000b: PMGI0_MDIO
PA4PFS	PSEL[5:0]	Pin function select bits 000000b: Hi-Z 000001b: MTIC5U 000010b: MTCLKA 000011b: TIOCA1 000101b: TMRI0 000110b: PO20 001010b: TXD5/SMOSI5/ SSDA5 001101b: SSLA0 010001b: ET0_MDC	Pin function select bits 000000b: Hi-Z 000001b: MTIC5U 000010b: MTCLKA 000011b: TIOCA1 000101b: TMRI0 000110b: PO20 001010b: TXD5/SMOSI5/ SSDA5 001101b: SSLA0-B 010001b: ET0_MDC 100101b: LCD_DATA4-B 100110b: CAT0_MDC 100111b: CATIRQ 101000b: PMGI0_MDC	Pin function select bits 000000b: Hi-Z 000001b: MTIC5U 000010b: MTCLKA 000011b: TIOCA1 000101b: TMRI0 000110b: PO20 001010b: TXD5/SMOSI5/ SSDA5 001101b: SSLA0-B 010001b: ET0_MDC 100101b: LCD_DATA4-B 101000b: PMGI0_MDC
PA5PFS	PSEL[5:0]	Pin function select bits 000000b: Hi-Z 000011b: TIOCB1 000110b: PO21 001000b: MTIOC6B 001101b: RSPCKA 010001b: ET0_LINKSTA 011110b: GTIOC0A	Pin function select bits 000000b: Hi-Z 000011b: TIOCB1 000110b: PO21 001000b: MTIOC6B 001101b: RSPCKA-B 010001b: ET0_LINKSTA 011110b: GTIOC0A 100101b: LCD_DATA3-B 100110b: CAT0_LINKSTA	Pin function select bits 000000b: Hi-Z 000011b: TIOCB1 000110b: PO21 001000b: MTIOC6B 001101b: RSPCKA-B 010001b: ET0_LINKSTA 011110b: GTIOC0A 100101b: LCD_DATA3-B

Register	Bit	RX71M (n = 0 to 7)	RX72M (n = 0 to 7)	RX72N (n = 0 to 7)
PA6PFS	PSEL[5:0]	Pin function select bits 000000b: Hi-Z 000001b: MTIC5V 000010b: MTCLKB 000011b: TIOCA2 000101b: TMCI3 000110b: PO22 000111b: POE10# 001011b: CTS5#/RTS5#/SS5# 001101b: MOSIA 010001b: ET0_EXOUT 011110b: GTETRG	Pin function select bits 000000b: Hi-Z 000001b: MTIC5V 000010b: MTCLKB 000011b: TIOCA2 000101b: TMCI3 000110b: PO22 000111b: POE10# 001011b: CTS5#/RTS5#/SS5# 001101b: MOSIA-B 010001b: ET0_EXOUT 011110b: GTETRGB 100101b: LCD_DATA2-B 100111b: CATRESTOUT	Pin function select bits 000000b: Hi-Z 000001b: MTIC5V 000010b: MTCLKB 000011b: TIOCA2 000101b: TMCI3 000110b: PO22 000111b: POE10# 001011b: CTS5#/RTS5#/SS5# 001101b: MOSIA-B 010001b: ET0_EXOUT 011110b: GTETRGB 100101b: LCD_DATA2-B
PA7PFS	PSEL[5:0]	Pin function select bits 000000b: Hi-Z 000011b: TIOCB2 000110b: PO23 001101b: MISOA 010001b: ET0_WOL	Pin function select bits 000000b: Hi-Z 000011b: TIOCB2 000110b: PO23 001101b: MISOA-B 010001b: ET0_WOL 100101b: LCD_DATA1-B	Pin function select bits 000000b: Hi-Z 000011b: TIOCB2 000110b: PO23 001101b: MISOA-B 010001b: ET0_WOL 100101b: LCD_DATA1-B

Table 2.43 Comparison of PBn Pin Function Control Register (PBnPFS)

Register	Bit	RX71M (n = 0 to 7)	RX72M (n = 0 to 7)	RX72N (n = 0 to 7)
PB0PFS	PSEL[5:0]	Pin function select bits 000000b: Hi-Z 000001b: MTIC5W 000011b: TIOCA3 000110b: PO24 001010b: RXD4/SMISO4/ SSCL4 001011b: RXD6/SMISO6/ SSCL6 010001b: ET0_ERXD1 010010b: RMII0_RXD1	Pin function select bits 000000b: Hi-Z 000001b: MTIC5W 000011b: TIOCA3 000110b: PO24 001010b: RXD4/SMISO4/ SSCL4 001011b: RXD6/SMISO6/ SSCL6 010001b: ET0_ERXD1 010010b: RMII0_RXD1 100101b: LCD_DATA0-B 100110b: CAT0_ERXD1	Pin function select bits 000000b: Hi-Z 000001b: MTIC5W 000011b: TIOCA3 000110b: PO24 001010b: RXD4/SMISO4/ SSCL4 001011b: RXD6/SMISO6/ SSCL6 010001b: ET0_ERXD1 010010b: RMII0_RXD1 100101b: LCD_DATA0-B
PB1PFS	PSEL[5:0]	Pin function select bits 000000b: Hi-Z 000001b: MTIOC0C 000010b: MTIOC4C 000011b: TIOCB3 000101b: TMCI0 000110b: PO25 001010b: TXD4/SMOSI4/ SSDA4 001011b: TXD6/SMOSI6/ SSDA6 010001b: ET0_ERXD0 010010b: RMII0_RXD0	Pin function select bits 000000b: Hi-Z 000001b: MTIOC0C 000010b: MTIOC4C 000011b: TIOCB3 000101b: TMCI0 000110b: PO25 001010b: TXD4/SMOSI4/ SSDA4 001011b: TXD6/SMOSI6/ SSDA6 010001b: ET0_ERXD0 010010b: RMII0_RXD0 100101b: LCD_TCON3-B 100110b: CAT0_ERXD0	Pin function select bits 000000b: Hi-Z 000001b: MTIOC0C 000010b: MTIOC4C 000011b: TIOCB3 000101b: TMCI0 000110b: PO25 001010b: TXD4/SMOSI4/ SSDA4 001011b: TXD6/SMOSI6/ SSDA6 010001b: ET0_ERXD0 010010b: RMII0_RXD0 100101b: LCD_TCON3-B
PB2PFS	PSEL[5:0]	Pin function select bits 000000b: Hi-Z 000011b: TIOCC3 000100b: TCLKC 000110b: PO26 001010b: CTS4#/RTS4#/ SS4# 001011b: CTS6#/RTS6#/ SS6# 010001b: ET0_RX_CLK 010010b: REF50CK0	Pin function select bits 000000b: Hi-Z 000011b: TIOCC3 000100b: TCLKC 000110b: PO26 001010b: CTS4#/RTS4#/ SS4# 001011b: CTS6#/RTS6#/ SS6# 010001b: ET0_RX_CLK 010010b: REF50CK0 100101b: LCD_TCON2-B 100110b: CAT0_RX_CLK	Pin function select bits 000000b: Hi-Z 000011b: TIOCC3 000100b: TCLKC 000110b: PO26 001010b: CTS4#/RTS4#/ SS4# 001011b: CTS6#/RTS6#/ SS6# 010001b: ET0_RX_CLK 010010b: REF50CK0 100101b: LCD_TCON2-B

Register	Bit	RX71M (n = 0 to 7)	RX72M (n = 0 to 7)	RX72N (n = 0 to 7)
PB3PFS	PSEL[5:0]	Pin function select bits 000000b: Hi-Z 000001b: MTIOC0A 000010b: MTIOC4A 000011b: TIOCD3 000100b: TCLKD 000101b: TMO0 000110b: PO27 000111b: POE11# 001010b: SCK4 001011b: SCK6 010001b: ET0_RX_ER 010010b: RMII0_RX_ER	Pin function select bits 000000b: Hi-Z 000001b: MTIOC0A 000010b: MTIOC4A 000011b: TIOCD3 000100b: TCLKD 000101b: TMO0 000110b: PO27 000111b: POE11# 001010b: SCK4 001011b: SCK6 010001b: ET0_RX_ER 010010b: RMII0_RX_ER 100101b: LCD_TCON1-B 100110b: CAT0_RX_ER	Pin function select bits 000000b: Hi-Z 000001b: MTIOC0A 000010b: MTIOC4A 000011b: TIOCD3 000100b: TCLKD 000101b: TMO0 000110b: PO27 000111b: POE11# 001010b: SCK4 001011b: SCK6 010001b: ET0_RX_ER 010010b: RMII0_RX_ER 100101b: LCD_TCON1-B
PB4PFS	PSEL[5:0]	Pin function select bits 000000b: Hi-Z 000011b: TIOCA4 000110b: PO28 001011b: CTS9# 010001b: ET0_TX_EN 010010b: RMII0_TXD_EN	Pin function select bits 000000b: Hi-Z 000011b: TIOCA4 000110b: PO28 001011b: SS9#/CTS9# 010001b: ET0_TX_EN 010010b: RMII0_TXD_EN 100100b: SS11#/CTS11#/RTS11# 100101b: LCD_TCON0-B 100110b: CAT0_TX_EN	Pin function select bits 000000b: Hi-Z 000011b: TIOCA4 000110b: PO28 001011b: SS9#/CTS9# 010001b: ET0_TX_EN 010010b: RMII0_TXD_EN 100100b: SS11#/CTS11#/RTS11# 100101b: LCD_TCON0-B
PB5PFS	PSEL[5:0]	Pin function select bits 000000b: Hi-Z 000001b: MTIOC2A 000010b: MTIOC1B 000011b: TIOCB4 000101b: TMRI1 000110b: PO29 000111b: POE4# 001010b: SCK9 001011b: RTS9# 010001b: ET0_ETXD0 010010b: RMII0_TXD0	Pin function select bits 000000b: Hi-Z 000001b: MTIOC2A 000010b: MTIOC1B 000011b: TIOCB4 000101b: TMRI1 000110b: PO29 000111b: POE4# 001010b: SCK9 001011b: RTS9# 010001b: ET0_ETXD0 010010b: RMII0_TXD0 100100b: SCK11 100101b: LCD_CLK-B 100110b: CAT0_ETXD0	Pin function select bits 000000b: Hi-Z 000001b: MTIOC2A 000010b: MTIOC1B 000011b: TIOCB4 000101b: TMRI1 000110b: PO29 000111b: POE4# 001010b: SCK9 001011b: RTS9# 010001b: ET0_ETXD0 010010b: RMII0_TXD0 100100b: SCK11 100101b: LCD_CLK-B 100110b: CAT0_ETXD0

Register	Bit	RX71M (n = 0 to 7)	RX72M (n = 0 to 7)	RX72N (n = 0 to 7)
PB6PFS	PSEL[5:0]	Pin function select bits 000000b: Hi-Z 000001b: MTIOC3D 000011b: TIOCA5 000110b: PO30 001010b: RXD9 010001b: ET0_ETXD1 010010b: RMII0_TXD1	Pin function select bits 000000b: Hi-Z 000001b: MTIOC3D 000011b: TIOCA5 000110b: PO30 001010b: RXD9/ SMISO9/ SSCL9 010001b: ET0_ETXD1 010010b: RMII0_TXD1 100100b: SMISO11/ SSCL11/RXD11 100110b: CAT0_ETXD1	Pin function select bits 000000b: Hi-Z 000001b: MTIOC3D 000011b: TIOCA5 000110b: PO30 001010b: RXD9/ SMISO9/ SSCL9 010001b: ET0_ETXD1 010010b: RMII0_TXD1 100100b: SMISO11/ SSCL11/RXD11
PB7PFS	PSEL[5:0]	Pin function select bits 000000b: Hi-Z 000001b: MTIOC3B 000011b: TIOCB5 000110b: PO31 001010b: TXD9 010001b: ET0_CRS 010010b: RMII0_CRS_DV	Pin function select bits 000000b: Hi-Z 000001b: MTIOC3B 000011b: TIOCB5 000110b: PO31 001010b: TXD9/ SMOSI9/ SSDA9 010001b: ET0_CRS 010010b: RMII0_CRS_DV 100100b: SMOSI11/ SSDA11/TXD11 100110b: CAT0_RX_DV	Pin function select bits 000000b: Hi-Z 000001b: MTIOC3B 000011b: TIOCB5 000110b: PO31 001010b: TXD9/ SMOSI9/ SSDA9 010001b: ET0_CRS 010010b: RMII0_CRS_DV 100100b: SMOSI11/ SSDA11/TXD11

Table 2.44 Comparison of PCn Pin Function Control Register (PCnPFS)

Register	Bit	RX71M (n = 0 to 7)	RX72M (n = 0 to 7)	RX72N (n = 0 to 7)
PC0PFS	PSEL[5:0]	Pin function select bits 000000b: Hi-Z 000001b: MTIOC3C 000011b: TCLKC 000110b: PO17 001011b: CTS5#/RTS5#/ SS5# 001101b: SSLA1 010001b: ET0_ERXD3	Pin function select bits 000000b: Hi-Z 000001b: MTIOC3C 000011b: TCLKC 000110b: PO17 001011b: CTS5#/RTS5#/ SS5# 001101b: SSLA1- A 010001b: ET0_ERXD3 100110b: CAT0_ERXD3	Pin function select bits 000000b: Hi-Z 000001b: MTIOC3C 000011b: TCLKC 000110b: PO17 001011b: CTS5#/RTS5#/ SS5# 001101b: SSLA1- A 010001b: ET0_ERXD3
PC1PFS	PSEL[5:0]	Pin function select bits 000000b: Hi-Z 000001b: MTIOC3A 000011b: TCLKD 000110b: PO18 001010b: SCK5 001101b: SSLA2 010001b: ET0_ERXD2	Pin function select bits 000000b: Hi-Z 000001b: MTIOC3A 000011b: TCLKD 000110b: PO18 001010b: SCK5 001101b: SSLA2- A 010001b: ET0_ERXD2 100101b: LCD_DATA22-A 100110b: CAT0_ERXD2	Pin function select bits 000000b: Hi-Z 000001b: MTIOC3A 000011b: TCLKD 000110b: PO18 001010b: SCK5 001101b: SSLA2- A 010001b: ET0_ERXD2 100101b: LCD_DATA22-A

Register	Bit	RX71M (n = 0 to 7)	RX72M (n = 0 to 7)	RX72N (n = 0 to 7)
PC2PFS	PSEL[5:0]	Pin function select bits 000000b: Hi-Z 000001b: MTIOC4B 000011b: TCLKA 000110b: PO21 001010b: RXD5/SMISO5/ SSCL5 001101b: SSLA3 010001b: ET0_RX_DV 011001b: MMC_CD 011010b: SDHI_D3 011110b: GTIOC2B 100101b: LCD_DATA19-A 100110b: CAT0_RX_DV	Pin function select bits 000000b: Hi-Z 000001b: MTIOC4B 000011b: TCLKA 000110b: PO21 001010b: RXD5/SMISO5/ SSCL5 001101b: SSLA3-A 010001b: ET0_RX_DV 011001b: MMC_CD-A 011010b: SDHI_D3-A 011110b: GTIOC2B 100101b: LCD_DATA19-A 100110b: CAT0_RX_DV	Pin function select bits 000000b: Hi-Z 000001b: MTIOC4B 000011b: TCLKA 000110b: PO21 001010b: RXD5/SMISO5/ SSCL5 001101b: SSLA3-A 010001b: ET0_RX_DV 011001b: MMC_CD-A 011010b: SDHI_D3-A 011110b: GTIOC2B 100101b: LCD_DATA19-A 100110b: CAT0_RX_DV
PC3PFS	PSEL[5:0]	Pin function select bits 000000b: Hi-Z 000001b: MTIOC4D 000011b: TCLKB 000110b: PO24 001010b: TXD5/SMOSI5/ SSDA5 010001b: ET0_TX_ER 011001b: MMC_D0 011010b: SDHI_D0 011011b: QIO0/QMO 011110b: GTIOC1B 100101b: LCD_DATA16-A	Pin function select bits 000000b: Hi-Z 000001b: MTIOC4D 000011b: TCLKB 000110b: PO24 001010b: TXD5/SMOSI5/ SSDA5 010001b: ET0_TX_ER 011001b: MMC_D0-A 011010b: SDHI_D0-A 011011b: QMO-A/QIO0-A 011110b: GTIOC1B 100101b: LCD_DATA16-A	Pin function select bits 000000b: Hi-Z 000001b: MTIOC4D 000011b: TCLKB 000110b: PO24 001010b: TXD5/SMOSI5/ SSDA5 010001b: ET0_TX_ER 011001b: MMC_D0-A 011010b: SDHI_D0-A 011011b: QMO/QIO0 011110b: GTIOC1B 100101b: LCD_DATA16-A
PC4PFS	PSEL[5:0]	Pin function select bits 000000b: Hi-Z 000001b: MTIOC3D 000010b: MTCLKC 000101b: TMCI1 000110b: PO25 000111b: POE0# 001010b: SCK5 001011b: CTS8# 001101b: SSLA0 010001b: ET0_TX_CLK 011001b: MMC_D1 011010b: SDHI_D1 011011b: QIO1/QMI 011110b: GTETRG 100100b: SS10#/CTS10#/ RTS10# 100101b: LCD_DATA15-A 100110b: CAT0_TX_CLK 100111b: CATSYNC0	Pin function select bits 000000b: Hi-Z 000001b: MTIOC3D 000010b: MTCLKC 000101b: TMCI1 000110b: PO25 000111b: POE0# 001010b: SCK5 001011b: SS8#/CTS8# 001101b: SSLA0-A 010001b: ET0_TX_CLK 011001b: MMC_D1-A 011010b: SDHI_D1-A 011011b: QMI-A/QIO1-A 011110b: GTETRGC 100100b: SS10#/CTS10#/ RTS10# 100101b: LCD_DATA15-A 100110b: CAT0_TX_CLK 100111b: CATSYNC0	Pin function select bits 000000b: Hi-Z 000001b: MTIOC3D 000010b: MTCLKC 000101b: TMCI1 000110b: PO25 000111b: POE0# 001010b: SCK5 001011b: SS8#/CTS8# 001101b: SSLA0-A 010001b: ET0_TX_CLK 011001b: MMC_D1-A 011010b: SDHI_D1-A 011011b: QMI/QIO1 011110b: GTETRGC 100100b: SS10#/CTS10#/ RTS10# 100101b: LCD_DATA15-A

Register	Bit	RX71M (n = 0 to 7)	RX72M (n = 0 to 7)	RX72N (n = 0 to 7)
PC5PFS	PSEL[5:0]	Pin function select bits 000000b: Hi-Z 000001b: MTIOC3B 000010b: MTCLKD 000101b: TMRI2 000110b: PO29 001010b: SCK8 001011b: RTS8# 001101b: RSPCKA 010001b: ET0_ETXD2 011001b: MMC_D5 011110b: GTIOC1A	Pin function select bits 000000b: Hi-Z 000001b: MTIOC3B 000010b: MTCLKD 000101b: TMRI2 000110b: PO29 001010b: SCK8 001011b: RTS8# 001101b: RSPCKA-A 010001b: ET0_ETXD2 011001b: MMC_D5-A 011110b: GTIOC1A 100100b: SCK10 100101b: LCD_DATA11-A 100110b: CAT0_ETXD2	Pin function select bits 000000b: Hi-Z 000001b: MTIOC3B 000010b: MTCLKD 000101b: TMRI2 000110b: PO29 001010b: SCK8 001011b: RTS8# 001101b: RSPCKA-A 010001b: ET0_ETXD2 011001b: MMC_D5-A 011110b: GTIOC1A 100100b: SCK10 100101b: LCD_DATA11-A
PC6PFS	PSEL[5:0]	Pin function select bits 000000b: Hi-Z 000001b: MTIOC3C 000010b: MTCLKA 000101b: TMCI2 000110b: PO30 001010b: RXD8 001101b: MOSIA 010001b: ET0_ETXD3 011001b: MMC_D6 011101b: TIC0 011110b: GTIOC3B	Pin function select bits 000000b: Hi-Z 000001b: MTIOC3C 000010b: MTCLKA 000101b: TMCI2 000110b: PO30 001010b: RXD8/SMISO8/ SSCL8 001101b: MOSIA-A 010001b: ET0_ETXD3 011001b: MMC_D6-A 011101b: TIC0 011110b: GTIOC3B 100100b: SMISO10/ SSCL10/RXD10 100101b: LCD_DATA10-A 100110b: CAT0_ETXD3 100111b: CATLATCH1	Pin function select bits 000000b: Hi-Z 000001b: MTIOC3C 000010b: MTCLKA 000101b: TMCI2 000110b: PO30 001010b: RXD8/SMISO8/ SSCL8 001101b: MOSIA-A 010001b: ET0_ETXD3 011001b: MMC_D6-A 011101b: TIC0 011110b: GTIOC3B 100100b: SMISO10/ SSCL10/RXD10 100101b: LCD_DATA10-A
PC7PFS	PSEL[5:0]	Pin function select bits 000000b: Hi-Z 000001b: MTIOC3A 000010b: MTCLKB 000101b: TMO2 000110b: PO31 000111b: CACREF 001010b: TXD8 001101b: MISOA 010001b: ET0_COL 011001b: MMC_D7 011101b: TOC0 011110b: GTIOC3A	Pin function select bits 000000b: Hi-Z 000001b: MTIOC3A 000010b: MTCLKB 000101b: TMO2 000110b: PO31 000111b: CACREF 001010b: TXD8/SMOSI8/SSDA8 001101b: MISOA-A 010001b: ET0_COL 011001b: MMC_D7-A 011101b: TOC0 011110b: GTIOC3A 100100b: SMOSI10/ SSDA10/TXD10 100101b: LCD_DATA9-A	Pin function select bits 000000b: Hi-Z 000001b: MTIOC3A 000010b: MTCLKB 000101b: TMO2 000110b: PO31 000111b: CACREF 001010b: TXD8/SMOSI8/SSDA8 001101b: MISOA-A 010001b: ET0_COL 011001b: MMC_D7-A 011101b: TOC0 011110b: GTIOC3A 100100b: SMOSI10/ SSDA10/TXD10 100101b: LCD_DATA9-A

Table 2.45 Comparison of PDn Pin Function Control Register (PDnPFS)

Register	Bit	RX71M (n = 0 to 7)	RX72M (n = 0 to 7)	RX72N (n = 0 to 7)
PD0PFS	PSEL[5:0]	Pin function select bits 000000b: Hi-Z 001000b: POE4# 011110b: GTIOC1B	Pin function select bits 000000b: Hi-Z 001000b: POE4# 011110b: GTIOC1B 100101b: LCD_EXTCLK-B	Pin function select bits 000000b: Hi-Z 001000b: POE4# 011110b: GTIOC1B 100101b: LCD_EXTCLK-B
PD1PFS	PSEL[5:0]	Pin function select bits 000000b: Hi-Z 000001b: MTIOC4B 001000b: POE0# 010000b: CTX0 011110b: GTIOC1A	Pin function select bits 000000b: Hi-Z 000001b: MTIOC4B 001000b: POE0# 001101b: MOSIC-A 010000b: CTX0 011110b: GTIOC1A 100101b: LCD_DATA23-B	Pin function select bits 000000b: Hi-Z 000001b: MTIOC4B 001000b: POE0# 001101b: MOSIC-A 010000b: CTX0 011110b: GTIOC1A 100101b: LCD_DATA23-B
PD2PFS	PSEL[5:0]	Pin function select bits 000000b: Hi-Z 000001b: MTIOC4D 010000b: CRX0 011001b: MMC_D2 011010b: SDHI_D2 011011b: QIO2 011101b: TIC2 011110b: GTIOC0B	Pin function select bits 000000b: Hi-Z 000001b: MTIOC4D 001101b: MISOC-A 010000b: CRX0 010100b: ET1_EXOUT 011001b: MMC_D2-B 011010b: SDHI_D2-B 011011b: QIO2-B 011101b: TIC2 011110b: GTIOC0B 100101b: LCD_DATA22-B	Pin function select bits 000000b: Hi-Z 000001b: MTIOC4D 001101b: MISOC-A 010000b: CRX0 010100b: ET1_EXOUT 011001b: MMC_D2-B 011010b: SDHI_D2-B 011011b: QIO2-B 011101b: TIC2 011110b: GTIOC0B 100101b: LCD_DATA22-B
PD3PFS	PSEL[5:0]	Pin function select bits 000000b: Hi-Z 000111b: POE8# 001000b: MTIOC8D 011001b: MMC_D3 011010b: SDHI_D3 011011b: QIO3 011101b: TOC2 011110b: GTIOC0A	Pin function select bits 000000b: Hi-Z 000111b: POE8# 001000b: MTIOC8D 001101b: RSPCKC-A 010100b: ET1_WOL 011001b: MMC_D3-B 011010b: SDHI_D3-B 011011b: QIO3-B 011101b: TOC2 011110b: GTIOC0A 100101b: LCD_DATA21-B	Pin function select bits 000000b: Hi-Z 000111b: POE8# 001000b: MTIOC8D 001101b: RSPCKC-A 010100b: ET1_WOL 011001b: MMC_D3-B 011010b: SDHI_D3-B 011011b: QIO3-B 011101b: TOC2 011110b: GTIOC0A 100101b: LCD_DATA21-B

Register	Bit	RX71M (n = 0 to 7)	RX72M (n = 0 to 7)	RX72N (n = 0 to 7)
PD4PFS	PSEL[5:0]	Pin function select bits 000000b: Hi-Z 000111b: POE11# 001000b: MTIOC8B 011001b: MMC_CMD 011010b: SDHI_CMD 011011b: QSSL	Pin function select bits 000000b: Hi-Z 000111b: POE11# 001000b: MTIOC8B 001101b: SSLC0-A 010100b: ET1_MDIO 011001b: MMC_CMD-B 011010b: SDHI_CMD-B 011011b: QSSL-B 100101b: LCD_DATA20-B 101000b: PMGI1_MDIO	Pin function select bits 000000b: Hi-Z 000111b: POE11# 001000b: MTIOC8B 001101b: SSLC0-A 010100b: ET1_MDIO 011001b: MMC_CMD-B 011010b: SDHI_CMD-B 011011b: QSSL-B 100101b: LCD_DATA20-B 101000b: PMGI1_MDIO
PD5PFS	PSEL[5:0]	Pin function select bits 000000b: Hi-Z 000001b: MTIC5W 000111b: POE10# 001000b: MTIOC8C 011001b: MMC_CLK 011010b: SDHI_CLK 011011b: QSPCLK	Pin function select bits 000000b: Hi-Z 000001b: MTIC5W 000010b: MTCLKA 000111b: POE10# 001000b: MTIOC8C 001101b: SSLC1-A 010100b: ET1_MDC 011001b: MMC_CLK-B 011010b: SDHI_CLK-B 011011b: QSPCLK-B 100101b: LCD_DATA19-B 101000b: PMGI1_MDC	Pin function select bits 000000b: Hi-Z 000001b: MTIC5W 000010b: MTCLKA 000111b: POE10# 001000b: MTIOC8C 001101b: SSLC1-A 010100b: ET1_MDC 011001b: MMC_CLK-B 011010b: SDHI_CLK-B 011011b: QSPCLK-B 100101b: LCD_DATA19-B 101000b: PMGI1_MDC
PD6PFS	PSEL[5:0]	Pin function select bits 000000b: Hi-Z 000001b: MTIC5V 000111b: POE4# 001000b: MTIOC8A 011001b: MMC_D0 011010b: SDHI_D0 011011b: QIO0/QMO	Pin function select bits 000000b: Hi-Z 000001b: MTIC5V 000111b: POE4# 001000b: MTIOC8A 001101b: SSLC2-A 010100b: ET1_RX_CLK 010101b: REF50CK1 011001b: MMC_D0-B 011010b: SDHI_D0-B 011011b: QMO-B/QIO0-B 100101b: LCD_DATA18-B 100110b: CAT1_RX_CLK	Pin function select bits 000000b: Hi-Z 000001b: MTIC5V 000111b: POE4# 001000b: MTIOC8A 001101b: SSLC2-A 010100b: ET1_RX_CLK 010101b: REF50CK1 011001b: MMC_D0-B 011010b: SDHI_D0-B 011011b: QMO/QIO0 100101b: LCD_DATA18-B

Register	Bit	RX71M (n = 0 to 7)	RX72M (n = 0 to 7)	RX72N (n = 0 to 7)
PD7PFS	PSEL[5:0]	Pin function select bits 000000b: Hi-Z 000001b: MTIC5U 000111b: POE0# 011001b: MMC_D1 011010b: SDHI_D1 011011b: QIO1/QMI	Pin function select bits 000000b: Hi-Z 000001b: MTIC5U 000111b: POE0# 001101b: SSLC3-A 010100b: ET1_RX_ER 010101b: RMII1_RX_ER 011001b: MMC_D1-B 011010b: SDHI_D1-B 011011b: QMI-B/QIO1-B 100101b: LCD_DATA17-B 100110b: CAT1_RX_ER	Pin function select bits 000000b: Hi-Z 000001b: MTIC5U 000111b: POE0# 001101b: SSLC3-A 010100b: ET1_RX_ER 010101b: RMII1_RX_ER 011001b: MMC_D1-B 011010b: SDHI_D1-B 011011b: QMI/QIO1 100101b: LCD_DATA17-B

Table 2.46 Comparison of PEn Pin Function Control Register (PEnPFS)

Register	Bit	RX71M (n = 0 to 7)	RX72M (n = 0 to 7)	RX72N (n = 0 to 7)
PE0PFS	PSEL[5:0]	Pin function select bits 000000b: Hi-Z 001000b: MTIOC3D 001100b: SCK12 001101b: SSLB1 011001b: MMC_D4 011110b: GTIOC2B	Pin function select bits 000000b: Hi-Z 001000b: MTIOC3D 001100b: SCK12 001101b: SSLB1-B 011001b: MMC_D4-B 011110b: GTIOC2B 100101b: LCD_DATA16-B	Pin function select bits 000000b: Hi-Z 001000b: MTIOC3D 001100b: SCK12 001101b: SSLB1-B 011001b: MMC_D4-B 011110b: GTIOC2B 100101b: LCD_DATA16-B
PE1PFS	PSEL[5:0]	Pin function select bits 000000b: Hi-Z 000001b: MTIOC4C 000110b: PO18 001000b: MTIOC3B 001100b: TXD12/ SMOSI12/ SSDA12/ TXDX12/SIOX12 001101b: SSLB2 011001b: MMC_D5 011110b: GTIOC1B	Pin function select bits 000000b: Hi-Z 000001b: MTIOC4C 000110b: PO18 001000b: MTIOC3B 001100b: TXD12/ SMOSI12/ SSDA12/ TXDX12/SIOX12 001101b: SSLB2-B 011001b: MMC_D5-B 011110b: GTIOC1B 100101b: LCD_DATA15-B	Pin function select bits 000000b: Hi-Z 000001b: MTIOC4C 000110b: PO18 001000b: MTIOC3B 001100b: TXD12/ SMOSI12/ SSDA12/ TXDX12/SIOX12 001101b: SSLB2-B 011001b: MMC_D5-B 011110b: GTIOC1B 100101b: LCD_DATA15-B
PE2PFS	PSEL[5:0]	Pin function select bits 000000b: Hi-Z 000001b: MTIOC4A 000110b: PO23 001100b: RXD12/ SMISO12/ SSCL12/ RXDX12 001101b: SSLB3 011001b: MMC_D6 011101b: TIC3 011110b: GTIOC0B	Pin function select bits 000000b: Hi-Z 000001b: MTIOC4A 000110b: PO23 001100b: RXD12/ SMISO12/ SSCL12/RXDX12 001101b: SSLB3-B 011001b: MMC_D6-B 011101b: TIC3 011110b: GTIOC0B 100101b: LCD_DATA14-B	Pin function select bits 000000b: Hi-Z 000001b: MTIOC4A 000110b: PO23 001100b: RXD12/ SMISO12/ SSCL12/RXDX12 001101b: SSLB3-B 011001b: MMC_D6-B 011101b: TIC3 011110b: GTIOC0B 100101b: LCD_DATA14-B

Register	Bit	RX71M (n = 0 to 7)	RX72M (n = 0 to 7)	RX72N (n = 0 to 7)
PE3PFS	PSEL[5:0]	Pin function select bits 000000b: Hi-Z 000001b: MTIOC4B 000110b: PO26 000111b: POE8# 001100b: CTS12#/RTS12#/SS12# 010001b: ET0_ERXD3 011001b: MMC_D7 011101b: TOC3 011110b: GTIOC2A	Pin function select bits 000000b: Hi-Z 000001b: MTIOC4B 000110b: PO26 000111b: POE8# 001100b: CTS12#/RTS12#/SS12# 010001b: ET0_ERXD3 011001b: MMC_D7-B 011101b: TOC3 011110b: GTIOC2A 100101b: LCD_DATA13-B 100110b: CAT0_ERXD3	Pin function select bits 000000b: Hi-Z 000001b: MTIOC4B 000110b: PO26 000111b: POE8# 001100b: CTS12#/RTS12#/SS12# 010001b: ET0_ERXD3 011001b: MMC_D7-B 011101b: TOC3 011110b: GTIOC2A 100101b: LCD_DATA13-B
PE4PFS	PSEL[5:0]	Pin function select bits 000000b: Hi-Z 000001b: MTIOC4D 000010b: MTIOC1A 000110b: PO28 001101b: SSLB0 010001b: ET0_ERXD2 011110b: GTIOC1A	Pin function select bits 000000b: Hi-Z 000001b: MTIOC4D 000010b: MTIOC1A 000110b: PO28 001101b: SSLB0-B 010001b: ET0_ERXD2 011110b: GTIOC1A 100101b: LCD_DATA12-B 100110b: CAT0_ERXD2	Pin function select bits 000000b: Hi-Z 000001b: MTIOC4D 000010b: MTIOC1A 000110b: PO28 001101b: SSLB0-B 010001b: ET0_ERXD2 011110b: GTIOC1A 100101b: LCD_DATA12-B
PE5PFS	PSEL[5:0]	Pin function select bits 000000b: Hi-Z 000001b: MTIOC4C 000010b: MTIOC2B 001101b: RSPCKB 010001b: ET0_RX_CLK 010010b: REF50CK0 011110b: GTIOC0A	Pin function select bits 000000b: Hi-Z 000001b: MTIOC4C 000010b: MTIOC2B 001101b: RSPCKB-B 010001b: ET0_RX_CLK 010010b: REF50CK0 011110b: GTIOC0A 100101b: LCD_DATA11-B 100110b: CAT0_RX_CLK	Pin function select bits 000000b: Hi-Z 000001b: MTIOC4C 000010b: MTIOC2B 001101b: RSPCKB-B 010001b: ET0_RX_CLK 010010b: REF50CK0 011110b: GTIOC0A 100101b: LCD_DATA11-B
PE6PFS	PSEL[5:0]	Pin function select bits 000000b: Hi-Z 001000b: MTIOC6C 001101b: MOSIB 011001b: MMC_CD 011010b: SDHI_CD 011101b: TIC1 011110b: GTIOC3B	Pin function select bits 000000b: Hi-Z 001000b: MTIOC6C 001101b: MOSIB-B 011001b: MMC_CD-B 011010b: SDHI_CD 011101b: TIC1 011110b: GTIOC3B 100101b: LCD_DATA10-B	Pin function select bits 000000b: Hi-Z 001000b: MTIOC6C 001101b: MOSIB-B 011001b: MMC_CD-B 011010b: SDHI_CD-B 011101b: TIC1 011110b: GTIOC3B 100101b: LCD_DATA10-B

Register	Bit	RX71M (n = 0 to 7)	RX72M (n = 0 to 7)	RX72N (n = 0 to 7)
PE7PFS	PSEL[5:0]	Pin function select bits 000000b: Hi-Z 001000b: MTIOC6A 001101b: MISOB 011001b: MMC_RES# 011010b: SDHI_WP 011101b: TOC1 011110b: GTIOC3A 100101b: LCD_DATA9-B	Pin function select bits 000000b: Hi-Z 001000b: MTIOC6A 001101b: MISOB-B 011001b: MMC_RES#-B 011010b: SDHI_WP 011101b: TOC1 011110b: GTIOC3A 100101b: LCD_DATA9-B	Pin function select bits 000000b: Hi-Z 001000b: MTIOC6A 001101b: MISOB-B 011001b: MMC_RES#-B 011010b: SDHI_WP-B 011101b: TOC1 011110b: GTIOC3A 100101b: LCD_DATA9-B

Table 2.47 Comparison of PFn Pin Function Control Register (PFnPFS)

Register	Bit	RX71M (n = 0 to 2, 5)	RX72M (n = 0 to 2, 5)	RX72N (n = 0 to 2, 5)
PF0PFS	PSEL[5:0]	Pin function select bits 000000b: Hi-Z 001010b: TXD1/SMOSI1/ SSDA1 100111b: CATI2CDATA	Pin function select bits 000000b: Hi-Z 001010b: TXD1/SMOSI1/ SSDA1 100111b: CATI2CDATA	Pin function select bits 000000b: Hi-Z 001010b: TXD1/SMOSI1/ SSDA1
PF2PFS	PSEL[5:0]	Pin function select bits 000000b: Hi-Z 001010b: RXD1/SMISO1/ SSCL1 100111b: CATI2CCLK	Pin function select bits 000000b: Hi-Z 001010b: RXD1/SMISO1/ SSCL1 100111b: CATI2CCLK	Pin function select bits 000000b: Hi-Z 001010b: RXD1/SMISO1/ SSCL1
PF5PFS	PSEL[5:0]	—	Pin function select bits	Pin function select bits

Table 2.48 Comparison of PGn Pin Function Control Register (PGnPFS)

Register	Bit	RX71M (n = 0 to 7)	RX72M (n = 0 to 7)	RX72N (n = 0 to 7)
PG0PFS	PSEL[5:0]	Pin function select bits 000000b: Hi-Z 010100b: ET1_RX_CLK 010101b: REF50CK1 100110b: CAT1_RX_CLK	Pin function select bits 000000b: Hi-Z 010100b: ET1_RX_CLK 010101b: REF50CK1 100110b: CAT1_RX_CLK	Pin function select bits 000000b: Hi-Z 010100b: ET1_RX_CLK 010101b: REF50CK1 100110b: CAT1_RX_CLK
PG1PFS	PSEL[5:0]	Pin function select bits 000000b: Hi-Z 010100b: ET1_RX_ER 010101b: RMII1_RX_ER 100110b: CAT1_RX_ER	Pin function select bits 000000b: Hi-Z 010100b: ET1_RX_ER 010101b: RMII1_RX_ER 100110b: CAT1_RX_ER	Pin function select bits 000000b: Hi-Z 010100b: ET1_RX_ER 010101b: RMII1_RX_ER
PG2PFS	PSEL[5:0]	Pin function select bits 000000b: Hi-Z 010100b: ET1_TX_CLK 100110b: CAT1_TX_CLK	Pin function select bits 000000b: Hi-Z 010100b: ET1_TX_CLK 100110b: CAT1_TX_CLK	Pin function select bits 000000b: Hi-Z 010100b: ET1_TX_CLK
PG3PFS	PSEL[5:0]	Pin function select bits 000000b: Hi-Z 010100b: ET1_ETXD0 010101b: RMII1_TXD0 100110b: CAT1_ETXD0	Pin function select bits 000000b: Hi-Z 010100b: ET1_ETXD0 010101b: RMII1_TXD0 100110b: CAT1_ETXD0	Pin function select bits 000000b: Hi-Z 010100b: ET1_ETXD0 010101b: RMII1_TXD0
PG4PFS	PSEL[5:0]	Pin function select bits 000000b: Hi-Z 010100b: ET1_ETXD1 010101b: RMII1_TXD1 100110b: CAT1_ETXD1	Pin function select bits 000000b: Hi-Z 010100b: ET1_ETXD1 010101b: RMII1_TXD1 100110b: CAT1_ETXD1	Pin function select bits 000000b: Hi-Z 010100b: ET1_ETXD1 010101b: RMII1_TXD1
PG5PFS	PSEL[5:0]	Pin function select bits 000000b: Hi-Z 010100b: ET1_ETXD2 100110b: CAT1_ETXD2	Pin function select bits 000000b: Hi-Z 010100b: ET1_ETXD2 100110b: CAT1_ETXD2	Pin function select bits 000000b: Hi-Z 010100b: ET1_ETXD2
PG6PFS	PSEL[5:0]	Pin function select bits 000000b: Hi-Z 010100b: ET1_ETXD3 100110b: CAT1_ETXD3	Pin function select bits 000000b: Hi-Z 010100b: ET1_ETXD3 100110b: CAT1_ETXD3	Pin function select bits 000000b: Hi-Z 010100b: ET1_ETXD3

Table 2.49 Comparison of PHn Pin Function Control Register (PHnPFS)

Register	Bit	RX71M	RX72M (n = 0 to 7)	RX72N (n = 0 to 7)
PHnPFS	—	—	PHn pin function control register	PHn pin function control register

Table 2.50 Comparison of PJn Pin Function Control Register (PJnPFS)

Register	Bit	RX72M (n = 3, 5)	RX72M (n = 0 to 3, 5)	RX72N (n = 0 to 3, 5)
PJ0PFS	—	—	PJ0 pin function control register	PJ0 pin function control register
PJ1PFS	—	—	PJ1 pin function control register	PJ1 pin function control register
PJ2PFS	—	—	PJ2 pin function control register	PJ2 pin function control register
PJ3PFS	PSEL[5:0]	Pin function select bits 000000b: Hi-Z 000001b: MTIOC3C 001010b: CTS6#/RTS6#/SS6# 001011b: CTS0#/RTS0#/SS0# 010001b: ET0_EXOUT 011000b: EDACK1	Pin function select bits 000000b: Hi-Z 000001b: MTIOC3C 001010b: CTS6#/RTS6#/SS6# 001011b: CTS0#/RTS0#/SS0# 010001b: ET0_EXOUT 010111b: SSITXD0 011000b: EDACK1 011011b: QMO-C/QIO0-C 100111b: CATRESTOUT	Pin function select bits 000000b: Hi-Z 000001b: MTIOC3C 001010b: CTS6#/RTS6#/SS6# 001011b: CTS0#/RTS0#/SS0# 010001b: ET0_EXOUT 010111b: SSITXD0 011000b: EDACK1 011011b: QMO-C/QIO0-C
PJ5PFS	PSEL[5:0]	Pin function select bits 000000b: Hi-Z 001011b: CTS2#/RTS2#/SS2# 100001b: POE8#	Pin function select bits 000000b: Hi-Z 001011b: CTS2#/RTS2#/SS2# 010001b: EPLSOUT0 010111b: SSIRXD0 011011b: QMI-C/QIO1-C 100001b: POE8# 100111b: CATSYNC0	Pin function select bits 000000b: Hi-Z 001011b: CTS2#/RTS2#/SS2# 010001b: EPLSOUT0 010111b: SSIRXD0 011011b: QMI-C/QIO1-C 100001b: POE8#

Table 2.51 Comparison of PKn Pin Function Control Register (PKnPFS)

Register	Bit	RX71M	RX72M (n = 0 to 7)	RX72N (n = 0 to 7)
PKnPFS	—	—	PKn pin function control register	PKn pin function control register

Table 2.52 Comparison of PLn Pin Function Control Register (PLnPFS)

Register	Bit	RX71M	RX72M (n = 0 to 7)	RX72N (n = 0 to 7)
PLnPFS	—	—	PLn pin function control register	PLn pin function control register

Table 2.53 Comparison of PMn Pin Function Control Register (PMnPFS)

Register	Bit	RX71M	RX72M (n = 0 to 7)	RX72N (n = 0 to 7)
PMnPFS	—	—	PMn pin function control register	PMn pin function control register

Table 2.54 Comparison of PNn Pin Function Control Register (PNnPFS)

Register	Bit	RX71M	RX72M (n = 0 to 5)	RX72N (n = 0 to 5)
PNnPFS	—	—	PNn pin function control register	PNn pin function control register

Table 2.55 Comparison of PQn Pin Function Control Register (PQnPFS)

Register	Bit	RX71M	RX72M (n = 0 to 7)	RX72N (n = 0 to 7)
PQnPFS	—	—	PQn pin function control register	PQn pin function control register

Table 2.56 Comparison of Multi-Function Pin Controller Registers

Register	Bit	RX71M (MPC)	RX72M (MPC)	RX72N (MPC)
PFCSS0	CS3S[1:0]	CS3# output pin select bits b7 b6 0 0: Set P63 as CS3# output pin. 0 1: Set P73 as CS3# output pin. 1 0: Set PC4 as CS3# output pin. 1 1: Setting prohibited.	CS3# output pin select bits b7 b6 0 0: Set P63 as CS3# output pin. 0 1: Set P73 as CS3# output pin. 1 x: Set PC4 as CS3# output pin.	CS3# output pin select bits b7 b6 0 0: Set P63 as CS3# output pin. 0 1: Set P73 as CS3# output pin. 1 x: Set PC4 as CS3# output pin.
PFBCR0	ADRHMS	A16 to A23 output enable bit	A16 to A23 output enable bit	A16 to A23 output enable bit
	ADRHMS2	A16 to A23 output enable 2 bit ADRHMS / ADRHMS2 0 / 0: Set PC0 to PC7. 0 / 1: Set PC0, PC1, P71, P72, P74, PC5 to PC7. 1 / 0: Set P90 to P97. 1 / 1: Setting prohibited.	A16 to A23 output enable 2 bit ADRHMS / ADRHMS2 0 / 0: Set PC0 to PC7. 0 / 1: Set PC0, PC1, P71, P72, P74, PC5 to PC7. 1 / 0: Set P90 to P97. 1 / 1: Setting prohibited.	A16 to A23 output enable 2 bit ADRHMS / ADRHMS2 0 / 0: Set PC0 to PC7. 0 / 1: Set PC0, PC1, P71, P72, P74, and PC5 to PC7. 1 / 0: 224- and 176-pin products: Set P90 to P97. 145- and 144-pin products: Set P90 to P93. (A20 to A23 not assigned.) 1 / 1: Setting prohibited.
PFBCR1	WAITS[1:0]	WAIT select bits b1 b0 0 0: Setting invalid 0 1: Set P55 as WAIT# input pin. 1 0: Set PC5 as WAIT# input pin. 1 1: Set P51 as WAIT# input pin.	WAIT select bits • When PFBCR3.WAITS2 bit = 0 b1 b0 0 0: Setting prohibited. 0 1: Set P55 as WAIT# input pin. 1 0: Set PC5 as WAIT# input pin. 1 1: Set P51 as WAIT# input pin.	WAIT select bits • When PFBCR3.WAITS2 bit = 0 b1 b0 0 0: Setting prohibited. 0 1: Set P55 as WAIT# input pin. 1 0: Set PC5 as WAIT# input pin. 1 1: Set P51 as WAIT# input pin.

Register	Bit	RX71M (MPC)	RX72M (MPC)	RX72N (MPC)
PFBCR1	WAITS[1:0]		<ul style="list-style-type: none"> • When PFBCR3.WAITS2 bit = 1 b1 b0 0 0: Set PF5 as WAIT# input pin. 0 1: Setting prohibited. 1 x: Setting prohibited. 	<ul style="list-style-type: none"> • When PFBCR3.WAITS2 bit = 1 b1 b0 0 0: Set PF5 as WAIT# input pin. 0 1: Setting prohibited. 1 x: Setting prohibited.
PFBCR2	—	—	External bus control register 2	External bus control register 2
PFBCR3	—	—	External bus control register 3	External bus control register 3

2.16 Port Output Enable 3

Table 2.57 is a comparative overview of the port output enable 3 modules, and Table 2.58 is a comparison of port output enable 3 registers.

Table 2.57 Comparative Overview of Port Output Enable 3 Modules

Item	RX71M (POE3a)	RX72M (POE3a)/RX72N (POE3a)
Pin status while output is disabled	High-impedance	High-impedance
Pins subject to high-impedance control	<ul style="list-style-type: none"> • MTU output pins <ul style="list-style-type: none"> — MTU0 pin (MTIOC0A, MTIOC0B, MTIOC0C, MTIOC0D) — MTU3 pin (MTIOC3B, MTIOC3D) — MTU4 pin (MTIOC4A, MTIOC4B, MTIOC4C, MTIOC4D) — MTU6 pin (MTIOC6B, MTIOC6D) — MTU7 pin (MTIOC7A, MTIOC7B, MTIOC7C, MTIOC7D) • GPT output pins <ul style="list-style-type: none"> — GPT0 pin (GTIOC0A, GTIOC0B) — GPT1 pin (GTIOC1A, GTIOC1B) — GPT2 pin (GTIOC2A, GTIOC2B) — GPT3 pin (GTIOC3A, GTIOC3B) 	<ul style="list-style-type: none"> • MTU output pins <ul style="list-style-type: none"> — MTU0 pin (MTIOC0A, MTIOC0B, MTIOC0C, MTIOC0D) — MTU3 pin (MTIOC3B, MTIOC3D) — MTU4 pin (MTIOC4A, MTIOC4B, MTIOC4C, MTIOC4D) — MTU6 pin (MTIOC6B, MTIOC6D) — MTU7 pin (MTIOC7A, MTIOC7B, MTIOC7C, MTIOC7D)
High-impedance request generation conditions	<ul style="list-style-type: none"> • Input pin changes When signal input occurs on pin POE0#, POE4#, POE8#, POE10#, or POE11# • Short circuit of output pins: When an output signal level (active level) combination listed below (short circuit) continues for one or more cycles [MTU complementary PWM output pins] <ul style="list-style-type: none"> — MTIOC3B and MTIOC3D — MTIOC4A and MTIOC4C — MTIOC4B and MTIOC4D — MTIOC6B and MTIOC6D — MTIOC7A and MTIOC7C — MTIOC7B and MTIOC7D [GPT output pins] <ul style="list-style-type: none"> — GTIOC0A and GTIOC0B — GTIOC1A and GTIOC1B — GTIOC2A and GTIOC2B • Making of SPOER register setting • Detection of stopped oscillation on main clock oscillator 	<ul style="list-style-type: none"> • Input pin changes When signal input occurs on pin POE0#, POE4#, POE8#, POE10#, or POE11# • Short circuit of output pins: When an output signal level (active level) combination listed below (short circuit) continues for one or more cycles [MTU complementary PWM output pins] <ul style="list-style-type: none"> — MTIOC3B and MTIOC3D — MTIOC4A and MTIOC4C — MTIOC4B and MTIOC4D — MTIOC6B and MTIOC6D — MTIOC7A and MTIOC7C — MTIOC7B and MTIOC7D • Making of SPOER register setting • Detection of stopped oscillation on main clock oscillator

Item	RX71M (POE3a)	RX72M (POE3a)/RX72N (POE3a)
Functions	<ul style="list-style-type: none"> Input pins POE0#, POE4#, POE8#, POE10#, and POE11# can each be set for falling edge, PCLK/8 × 16, PCLK/16 × 16, or PCLK/128 × 16 low sampling. The outputs of all the target pins can be put in the high-impedance state by falling-edge or low-level sampling of the POE0#, POE4#, POE8#, POE10#, or POE11# pin. The outputs of all the target pins can be put in the high-impedance state when oscillation stop of the clock generator is detected. The MTU complementary PWM outputs can be put in the high-impedance state when the output levels of the MTU complementary PWM output pins are compared and simultaneous active-level output continues for one clock cycle or more. The GPT output pins can be put in the high-impedance state when output levels of the GPT output pins (GPT0, GPT1, and GPT2) are compared and simultaneous active-level output continues for one clock cycle or more. The outputs of all the target pins can be put in the high-impedance state by modifying the settings of the POE registers. Interrupts can be generated by input-level sampling or output-level comparison results. 	<ul style="list-style-type: none"> Input pins POE0#, POE4#, POE8#, POE10#, and POE11# can each be set for falling edge, PCLK/8 × 16, PCLK/16 × 16, or PCLK/128 × 16 low sampling. The outputs of all the target pins can be put in the high-impedance state by falling-edge or low-level sampling of the POE0#, POE4#, POE8#, POE10#, or POE11# pin. The outputs of all the target pins can be put in the high-impedance state when oscillation stop of the clock generator is detected. The MTU complementary PWM outputs can be put in the high-impedance state when the output levels of the MTU complementary PWM output pins are compared and simultaneous active-level output continues for one clock cycle or more. The outputs of all the target pins can be put in the high-impedance state by modifying the settings of the POE3 registers. Interrupts can be generated by input-level sampling or output-level comparison results.

Table 2.58 Comparison of Port Output Enable 3 Registers

Register	Bit	RX71M (POE3a)	RX72M (POE3a)/RX72N (POE3a)
OCSR1	OSF1	<p>Output short flag 1</p> <p>This flag indicates that at least one of the three pairs of two-phase output pins for MTU complementary PWM output pins (pins MTU3 and MTU4) or GPT output pins (pins GPT0 to GPT2) has simultaneously entered the active level. If high-impedance control is not enabled for the corresponding pins, this flag is not set to 1.</p> <p>[Setting condition]</p> <ul style="list-style-type: none"> When the MTIOC3B/GTIOC0A and MTIOC3D/GTIOC0B pins simultaneously go to the active level while the value of the POECR2.MTU3BDZE bit is 1. When the MTIOC4A/GTIOC1A and MTIOC4C/GTIOC1B pins simultaneously go to the active level while the value of the POECR2.MTU4ACZE bit is 1. When the MTIOC4B/GTIOC2A and MTIOC4D/GTIOC2B pins simultaneously go to the active level while the value of the POECR2.MTU4BDZE bit is 1. <p>[Clearing condition]</p> <p>When 0 is written to the OSF1 flag after reading it as 1 To write 0 to this flag, the inactive level must be output from the MTU complementary PWM output pins or GPT output pins.</p>	<p>Output short flag 1</p> <p>This flag indicates that at least one of the three pairs of two-phase output pins for MTU complementary PWM output pins (pins MTU3 and MTU4) has simultaneously entered the active level. If high-impedance control is not enabled for the corresponding pins, this flag is not set to 1.</p> <p>[Setting condition]</p> <ul style="list-style-type: none"> When the MTIOC3B and MTIOC3D pins simultaneously go to the active level while the value of the POECR2.MTU3BDZE bit is 1. When the MTIOC4A and MTIOC4C pins simultaneously go to the active level while the value of the POECR2.MTU4ACZE bit is 1. When the MTIOC4B and MTIOC4D pins simultaneously go to the active level while the value of the POECR2.MTU4BDZE bit is 1. <p>[Clearing condition]</p> <p>When 0 is written to the OSF1 flag after reading it as 1 To write 0 to this flag, the inactive level must be output from the MTU complementary PWM output pins.</p>
ALR1	OLSG0A	MTIOC3B/GTIOC0A pin active level setting bit	MTIOC3B pin active level setting bit
	OLSG0B	MTIOC3D/GTIOC0B pin active level setting bit	MTIOC3D pin active level setting bit
	OLSG1A	MTIOC4A/GTIOC1A pin active level setting bit	MTIOC4A pin active level setting bit
	OLSG1B	MTIOC4C/GTIOC1B pin active level setting bit	MTIOC4C pin active level setting bit
	OLSG2A	MTIOC4B/GTIOC2A pin active level setting bit	MTIOC4B pin active level setting bit
	OLSG2B	MTIOC4D/GTIOC2B pin active level setting bit	MTIOC4D pin active level setting bit

Register	Bit	RX71M (POE3a)	RX72M (POE3a)/RX72N (POE3a)
SPOER	MTUCH34HIZ	MTU3 and MTU4 or GPT0 to GPT2 pin high-impedance enable bit	MTU3 and MTU4 pin high-impedance enable bit
	GPT01HIZ	GPT0 and GPT1 pin high-impedance enable bit	—
	GPT23HIZ	GPT2 and GPT3 pin high-impedance enable bit	—
POECR2	MTU4BDZE* ¹	MTIOC4B/MTIOC4D pin high-impedance enable bit	MTIOC4B/MTIOC4D pin high-impedance enable bit
	MTU4ACZE* ¹	MTIOC4A/MTIOC4C pin high-impedance enable bit	MTIOC4A/MTIOC4C pin high-impedance enable bit
	MTU3BDZE* ¹	MTIOC3B/MTIOC3D pin high-impedance enable bit	MTIOC3B/MTIOC3D pin high-impedance enable bit
POECR3	—	Port output enable control register 3	—
POECR4	IC2ADDMT34ZE * ¹	MTU3 and MTU4 high-impedance condition POE4F add bit	MTU3 and MTU4 high-impedance condition POE4F add bit
	IC3ADDMT34ZE * ¹	MTU3 and MTU4 high-impedance condition POE8F add bit	MTU3 and MTU4 high-impedance condition POE8F add bit
	IC4ADDMT34ZE * ¹	MTU3 and MTU4 high-impedance condition POE10F add bit	MTU3 and MTU4 high-impedance condition POE10F add bit
	IC5ADDMT34ZE * ¹	MTU3 and MTU4 high-impedance condition POE11F add bit	MTU3 and MTU4 high-impedance condition POE11F add bit
POECR6	—	Port output enable control register 6	—
G0SELR	—	GPT0 pin select register	—
G1SELR	—	GPT1 pin select register	—
G2SELR	—	GPT2 pin select register	—
G3SELR	—	GPT3 pin select register	—
M6SELR	—	—	MTU6 pin select register
MGSELR	—	MTU/GPT pin function select register	—

Note: 1. On the RX71M the GPT and MTU pins can be controlled, but on the RX72M/RX72N only the MTU pins can be controlled.

2.17 General PWM Timer

Table 2.59 is a comparative overview of the general PWM timers, Table 2.60 is a comparison of general PWM timer registers, and Table 2.61 is a comparative listing of GTIOA and GTIOB bit settings.

Table 2.59 Comparative Overview of General PWM Timers

Item	RX71M (GPTA)	RX72M (GPTW)/RX72N (GPTW)
Functions	<ul style="list-style-type: none"> • 16 bits × 4 channels • Up-count or down-count operation (saw waves) or up/down-count operation (triangle waves) for each counter • Operating modes <ul style="list-style-type: none"> — Saw-wave PWM mode — Saw-wave one-shot pulse mode — Triangle-wave PWM mode 1 — Triangle-wave PWM mode 2 — Triangle-wave PWM mode 3 • Independently selectable clock source for each channel • Two input/output pins per channel • Ability to select noise filter for each pin input path*¹ • Two output compare/input capture registers per channel • For each pair of output compare/input capture registers for each channel, four registers are provided as buffer registers and are capable of operating as compare registers when buffering is not in use. • During output compare operation, buffer switching can be at peaks or troughs, enabling the generation of laterally asymmetric PWM waveforms. • Registers for setting up frame cycles in each channel (with capability for generating interrupts at overflow or underflow) • Simultaneous start and clearing of desired channel counters • Synchronized operation modes (synchronized, or displaced by desired times for phase shifting) • Generation of dead time during PWM operation • Ability to generate three-phase PWM waveforms incorporating dead time using combination of three counters • Operation of count start, count stop, counter restart, or input capture based on ELC settings 	<ul style="list-style-type: none"> • 32 bits × 4 channels • Up-count or down-count operation (saw waves) or up/down-count operation (triangle waves) for each counter • Operating modes <ul style="list-style-type: none"> — Saw-wave PWM mode — Saw-wave one-shot pulse mode — Triangle-wave PWM mode 1 — Triangle-wave PWM mode 2 — Triangle-wave PWM mode 3 • Independently selectable clock source for each channel • Two input/output pins per channel • Ability to select noise filter for each pin input path*¹ • Two output compare/input capture registers per channel • For each pair of output compare/input capture registers for each channel, four registers are provided as buffer registers and are capable of operating as compare registers when buffering is not in use. • During output compare operation, buffer switching can be at peaks or troughs, enabling the generation of laterally asymmetric PWM waveforms. • Registers for setting up frame cycles in each channel (with capability for generating interrupts at overflow or underflow) • Simultaneous start, stop, and clearing of desired channel counters • Synchronized operation modes (synchronized, or displaced by desired times for phase shifting) • Generation of dead time during PWM operation • Ability to generate three-phase PWM waveforms incorporating dead time using combination of three counters • Operation of count start, count stop, counter clearing, up-counting, down-counting, or input capture by up to of eight ELC events based on ELC settings

Item	RX71M (GPTA)	RX72M (GPTW)/RX72N (GPTW)
Functions	<ul style="list-style-type: none"> Count start, count stop, counter clearing in response to external or internal triggers (hardware sources) Internal trigger sources: software or compare match A/D converter start trigger generation function Event signals for compare match A to D and for overflow/underflow can be output to the ELC. Bus clock: PCLKA, GPTA count reference clock: PCLKA 	<ul style="list-style-type: none"> Count start, count stop, counter clearing, up-counting, down-counting, or input capture at detection of two input signal conditions Count start, count stop, counter clearing, up-counting, down-counting, or input capture by up to four external triggers Function to control output negation by output disable requests from the POEG A/D converter start trigger generation function Event signals for compare match A to F and for overflow/underflow can be output to the ELC. Bus clock: PCLKA, GPTW count reference clock: PCLKA

Note 1. The RX71M supports noise filtering on the input capture input pins and external trigger input pins, but the RX72M/RX72N supports noise filtering on the input capture input pins only.

Table 2.60 Comparison of General PWM Timer Registers

Register	Bit	RX71M (GPTA)	RX72M (GPTW)/RX72N (GPTW)
GTSTR	—	General PWM timer software start register GTSTR is a 16-bit register.	General PWM timer software start register GTSTR is a 32-bit register .
	CST0 (RX71M) CSTRT0 (RX72M/RX72N)	GPT0.GTCNT count start bit	Channel 0 count start bit
	CST1 (RX71M) CSTRT1 (RX72M/RX72N)	GPT1.GTCNT count start bit	Channel 1 count start bit
	CST2 (RX71M) CSTRT2 (RX72M/RX72N)	GPT2.GTCNT count start bit	Channel 2 count start bit
	CST3 (RX71M) CSTRT3 (RX72M/RX72N)	GPT3.GTCNT count start bit	Channel 3 count start bit
NFCR	—	Noise filter control register	—
GTHSCR	—	General PWM timer hardware source start/stop control register	—
GTHCCR	—	General PWM timer hardware source clear control register	—
GTHSSR	—	General PWM timer hardware start source select register	—
GTHPSR	—	General PWM timer hardware stop/clear source select register	—
GTWP	—	General PWM timer write-protection register GTWP is a 16-bit register.	General PWM timer write-protection register GTWP is a 32-bit register .
	WP0 to WP3 (RX71M) WP (RX72M/RX72N)	GPT0 to GPT3 register write enable bits	Register write disabled bits
	STRWP	—	GTSTR.CSTRT bit write disabled bit
	STPWP	—	GTSTP.CSTOP bit write disabled bit
	CLRWP	—	GTCLR.CCLR bit write disabled bit
	CMNWP	—	Common register write disabled bit
	PRKEY[7:0]	—	GTWP key code bits
GTSYNC	—	General PWM timer sync register	—
GTETINT	—	General PWM timer external trigger input interrupt register	—
GTBDR	—	General PWM timer buffer operation disable register	—
GTSWP	—	General PWM timer start write-protection register	—

Register	Bit	RX71M (GPTA)	RX72M (GPTW)/RX72N (GPTW)
GTIOR	—	General PWM Timer I/O control register GTIOR is a 16-bit register.	General PWM Timer I/O control register GTIOR is a 32-bit register.
	GTIOA[5:0] (RX71M) GTIOA[4:0] (RX72M/RX72N)	GTIOCnA pin function select bits (b5 to b0) Refer to Table 2.62 for details.	GTIOCnA pin function select bits (b4 to b0) Refer to Table 2.62 for details.
	OAE	—	GTIOCnA pin output enable bit
	OADF[1:0]	—	GTIOCnA pin negate value setting bits
	NFAEN	—	GTIOCnA pin input noise filter enable bit
	NFCSA[1:0]	—	GTIOCnA pin input noise filter sampling clock select bits
	GTIOB[5:0] (RX71M) GTIOB[4:0] (RX72M/RX72N)	GTIOCnB pin function select bits (b13 to b8) Refer to Table 2.62 for details.	GTIOCnB pin function select bits (b20 to b16) Refer to Table 2.62 for details.
	OBDFLT	GTIOCnB pin output value setting at count stop bit (b14)	GTIOCnB pin output value setting at count stop bit (b22)
	OBHLD	GTIOCnB pin output retention at start/stop count (b15)	GTIOCnB pin output retention at start/stop count (b23)
	OBE	—	GTIOCnB pin output enable bit
	OBDF[1:0]	—	GTIOCnB pin negate value setting bits
	NFBEN	—	GTIOCnB pin input noise filter enable bit
	NFCSB[1:0]	—	GTIOCnB pin input noise filter sampling clock select bits
GTINTAD	—	General PWM timer interrupt output setting register GTINTAD is a 16-bit register.	General PWM timer interrupt output setting register GTINTAD is a 32-bit register.
	EINT	Dead time error interrupt enable bit	—
	ADTRAUEN	GTADTRA compare match (up-counting) A/D converter start request enable bit (b12)	GTADTRA register compare match (up-counting) A/D converter start request enable bit (b16)
	ADTRADEN	GTADTRA compare match (down-counting) A/D converter start request enable bit (b13)	GTADTRA register compare match (down-counting) A/D converter start request enable bit (b17)
	ADTRBUEN	GTADTRB compare match (up-counting) A/D converter start request enable bit (b14)	GTADTRB register compare match (up-counting) A/D converter start request enable bit (b18)
	ADTRBDEN	GTADTRB compare match (down-counting) A/D converter start request enable bit (b15)	GTADTRB register compare match (down-counting) A/D converter start request enable bit (b19)
	GRP[1:0]	—	Output stop group select bits

Register	Bit	RX71M (GPTA)	RX72M (GPTW)/RX72N (GPTW)
GTINTAD	GRPDTE	—	Dead time error output stop detection enable bit
	GRPABH	—	Simultaneous high output stop detection enable bit
	GRPABL	—	Simultaneous low output stop detection enable bit
GTCR	—	General PWM timer control register GTCR is a 16-bit register.	General PWM timer control register GTCR is a 32 -bit register.
	CST	—	Count start bit
	ICDS	—	Input capture operation select at count stop bit
	MD[2:0]	Mode select bits (b2 to b0) b2 b0 0 0 0: Sawtooth-wave PWM mode (single buffer or double buffer possible) 0 0 1: Sawtooth-wave one-shot pulse mode (fixed buffer operation) 0 1 0: Setting prohibited. 0 1 1: Setting prohibited. 1 0 0: Triangle-wave PWM mode 1 (16-bit transfer at trough) (single buffer or double buffer possible) 1 0 1: Triangle-wave PWM mode 2 (16-bit transfer at crest and trough) (single buffer or double buffer possible) 1 1 0: Triangle-wave PWM mode 3 (32-bit transfer at trough) (fixed buffer operation) 1 1 1: Setting prohibited.	Mode select bits (b18 to b16) b18 b16 0 0 0: Sawtooth-wave PWM mode (single buffer or double buffer possible) 0 0 1: Sawtooth-wave one-shot pulse mode (fixed buffer operation) 0 1 0: Setting prohibited. 0 1 1: Setting prohibited. 1 0 0: Triangle-wave PWM mode 1 (32 -bit transfer at trough) (single buffer or double buffer possible) 1 0 1: Triangle-wave PWM mode 2 (32 -bit transfer at crest and trough) (single buffer or double buffer possible) 1 1 0: Triangle-wave PWM mode 3 (64 -bit transfer at trough) (fixed buffer operation) 1 1 1: Setting prohibited.

Register	Bit	RX71M (GPTA)	RX72M (GPTW)/RX72N (GPTW)
GTCR	TPCS[1:0] (RX71M) TPCS[3:0] (RX72M/RX72N)	Timer prescaler select bits (b9 to b8) b9 b8 0 0: PCLKA 0 1: PCLKA/2 1 0: PCLKA/4 1 1: PCLKA/8	Timer prescaler select bits (b26 to b23) b26 b23 0 0 0: PCLKA 0 0 1: PCLKA/2 0 0 1 0: PCLKA/4 0 0 1 1: PCLKA/8 0 1 0 0: PCLKA/16 0 1 0 1: PCLKA/32 0 1 1 0: PCLKA/64 0 1 1 1: Setting prohibited. 1 0 0 0: PCLKA/256 1 0 0 1: Setting prohibited. 1 0 1 0: PCLKA/1024 1 0 1 1: Setting prohibited. 1 1 0 0: GTETRGA (via the POEG) 1 1 0 1: GTETRGB (via the POEG) 1 1 1 0: GTETRGC (via the POEG) 1 1 1 1: GTETRGD (via the POEG)
	CCLR[1:0]	Count clear source select bits	—
GTBER	—	General PWM timer buffer enable register GTBER is a 16-bit register.	General PWM timer buffer enable register GTBER is a 32-bit register.
	BD[0]	—	GTCCR/GTCCRB registers buffer operation disable bit
	BD[1]	—	GTPR register buffer operation disable bit
	BD[2]	—	GTADTRA/GTADTRB registers buffer operation disable bit
	BD[3]	—	GTDVU/GTDVD registers buffer operation disable bit
	DBRTECA	—	GTCCR/A register double buffer repeat operation enable bit
	DBRTECB	—	GTCCR/B register double buffer repeat operation enable bit
	CCRA[1:0]	GTCCR/A buffer operation bits (b1 and b0)	GTCCR/A register buffer operation bits (b17 and 16)
	CCRB[1:0]	GTCCR/B buffer operation bits (b3 and b2)	GTCCR/B register buffer operation bits (b19 and 18)
	PR[1:0]	GTPR buffer operation bits (b5 and b4)	GTPR register buffer operation bits (b21 and b20)
	CCRSWT	GTCCR/A and GTCCR/B forcible buffer operation bit (b6)	GTCCR/A and GTCCR/B registers forcible buffer operation bit (b22)

Register	Bit	RX71M (GPTA)	RX72M (GPTW)/RX72N (GPTW)
GTBER	ADTTA[1:0]	GTADTRA buffer transfer timing select bits (b9 and b8)	GTADTRA register buffer transfer timing select bits (b25 and b24)
	ADTDA	GTADTRA double buffer operation bit (b10)	GTADTRA register double buffer operation bit (b26)
	ADTTB[1:0]	GTADTRB buffer transfer timing select bits (b13 and b12)	GTADTRB register buffer transfer timing select bits (b29 and b28)
	ADTDB	GTADTRB double buffer operation bit (b14)	GTADTRB register double buffer operation bit (b30)
GTUDC	—	General PWM timer count direction register	—
GTITC	—	General PWM timer interrupt and A/D converter start request skipping setting register GTITC is a 16-bit register.	General PWM timer interrupt and A/D converter start request skipping setting register GTITC is a 32-bit register.
GTST	—	General PWM timer status register GTST is a 16-bit register.	General PWM timer status register GTST is a 32-bit register.
	DTEF	Dead time error flag (b11)	Dead time error flag (b28)
	ADTRAUF	—	GTADTRA register compare match (up-counting) A/D converter start request flag
	ADTRADF	—	GTADTRA register compare match (down-counting) A/D converter start request flag
	ADTRBUF	—	GTADTRB register compare match (up-counting) A/D converter start request flag
	ADTRBDF	—	GTADTRB register compare match (down-counting) A/D converter start request flag
	ODF	—	Output stop request flag
	OABHF	—	Simultaneous high output flag
	OABLFF	—	Simultaneous low output flag
	GTCNT	General PWM timer counter The GTCNT counter is a 16-bit readable/writable counter. Access in 8-bit units to the GTCNT counter is prohibited; it must be accessed in 16-bit units.	General PWM timer counter The GTCNT register is a 32-bit readable/writable counter. Access in 8-bit or 16-bit units to the GTCNT register is prohibited; it must be accessed in 32-bit units. Set the GTCNT counter within a range of $0 \leq \text{GTCNT counter} \leq \text{GTPR register}$.

Register	Bit	RX71M (GPTA)	RX72M (GPTW)/RX72N (GPTW)
GTCCRm	—	General PWM timer compare capture register m (m = A to F) GTCCRm register is a 16-bit readable/writable register.	General PWM timer compare capture register m (m = A to F) GTCCRm register is a 32-bit readable/writable register. Access in 8-bit or 16-bit units to the GTCCRm register is prohibited; it must be accessed in 32-bit units.
GTPR	—	General PWM timer period setting register GTPR register is a 16-bit readable/writable register.	General PWM timer period setting register GTPR register is a 32-bit readable/writable counter. Access in 8-bit or 16-bit units to the GTPR register is prohibited; it must be accessed in 32-bit units.
GTPBR	—	General PWM timer period setting buffer register GTPBR register is a 16-bit readable/writable register.	General PWM timer period setting buffer register GTPBR register is a 32-bit readable/writable counter. Access in 8-bit or 16-bit units to the GTPBR register is prohibited; it must be accessed in 32-bit units.
GTPDBR	—	General PWM timer period setting double-buffer register GTPDBR register is a 16-bit readable/writable register.	General PWM timer period setting double-buffer register GTPDBR register is a 32-bit readable/writable counter. Access in 8-bit or 16-bit units to the GTPDBR register is prohibited; it must be accessed in 32-bit units.
GTADTRm	—	A/D converter start request timing register m (m = A or B) GTADTRm register is a 16-bit readable/writable register. Access in 8-bit unit to the GTADTRm register is prohibited; it must be accessed in 16-bit units.	A/D converter start request timing register m (m = A or B) GTADTRm register is a 32-bit readable/writable counter. Access in 8-bit or 16-bit units to the GTADTRm register is prohibited; it must be accessed in 32-bit units.
GTADTBRm	—	A/D converter start request timing buffer register m (m = A or B) GTADTBRm register is a 16-bit readable/writable register. Access in 8-bit unit to the GTADTBRm register is prohibited; it must be accessed in 16-bit units.	A/D converter start request timing buffer register m (m = A or B) GTADTBRm register is a 32-bit readable/writable counter. Access in 8-bit or 16-bit units to the GTADTBRm register is prohibited; it must be accessed in 32-bit units.

Register	Bit	RX71M (GPTA)	RX72M (GPTW)/RX72N (GPTW)
GTADTDBRm	—	A/D converter start request timing double-buffer register m (m = A or B) GTADTDBRm register is a 16-bit readable/writable register. Access in 8-bit unit to the GTADTDBRm register is prohibited; it must be accessed in 16-bit units.	A/D converter start request timing double-buffer register m (m = A or B) GTADTDBRm register is a 32-bit readable/writable counter. Access in 8-bit or 16-bit units to the GTADTDBRm register is prohibited; it must be accessed in 32-bit units.
GTONCR	—	General PWM timer output negate control register	—
GTDTCR	—	General PWM timer dead time control register GTDTCR register is a 16-bit register.	General PWM timer dead time control register GTDTCR register is a 32-bit register.
GTDVm	—	General PWM timer dead time value register m (m = U or D) GTDVm register is a 16-bit readable/writable register. Access in 8-bit unit to the GTDVm register is prohibited; it must be accessed in 16-bit units.	General PWM timer dead time value register m (m = U or D) GTDVm register is a 32-bit readable/writable counter. Access in 8-bit or 16-bit units to the GTDVm register is prohibited; it must be accessed in 32-bit units.
GTDBm	—	General PWM timer dead time value buffer register m (m = U or D) GTDBm register is a 16-bit readable/writable register.	General PWM timer dead time value buffer register m (m = U or D) GTDBm register is a 32-bit readable/writable counter. Access in 8-bit or 16-bit units to the GTDBm register is prohibited; it must be accessed in 32-bit units.
GTSOS	—	General PWM timer output protection function status register GTSOS register is a 16-bit register.	General PWM timer output protection function status register GTSOS register is a 32-bit register.
GTSOTR	—	General PWM timer output protection function temporary release register GTSOTR register is a 16-bit register.	General PWM timer output protection function temporary release register GTSOTR register is a 32-bit register.
GTSTP	—	—	General PWM timer software stop register
GTCLR	—	—	General PWM timer software clear register
GTSSR	—	—	General PWM timer start source select register

Register	Bit	RX71M (GPTA)	RX72M (GPTW)/RX72N (GPTW)
GTPSR	—	—	General PWM timer stop source select register
GTCCSR	—	—	General PWM timer clear source select register
GTUPSR	—	—	General PWM timer count-up source select register
GTDNSR	—	—	General PWM timer count-down source select register
GTICASR	—	—	General PWM timer input capture source select register A
GTICBSR	—	—	General PWM timer input capture source select register B
GTUDDTYC	—	—	General PWM timer count direction and duty setting register
GTADSMR	—	—	General PWM timer A/D converter start request signal monitoring register
GTEITC	—	—	General PWM timer extended interrupt skipping counter control register
GTEITLI1	—	—	General PWM timer extended interrupt skipping setting register 1
GTEITLI2	—	—	General PWM timer extended interrupt skipping setting register 2
GTEITLB	—	—	General PWM timer extended buffer transfer skipping setting register
GTSECSR	—	—	General PWM timer operation enable bit simultaneous control channel select register
GTSECR	—	—	General PWM timer operation enable bit simultaneous control register

Table 2.61 Comparative Listing of GTIOA and GTIOB Bit Settings

Bit	RX71M (GPTA)	RX72M (GPTW)/RX72N (GPTW)
	GTIOA/GTIOB[5:0] Bits	GTIOA/GTIOB[4:0] Bits
b5	0: Compare match 1: Input capture	—
b4	<ul style="list-style-type: none"> When b5 = 0 <ul style="list-style-type: none"> 0: Initial output is low-level 1: Initial output is high-level When b5 = 1 <ul style="list-style-type: none"> x: Don't care 	0: Initial output is low-level 1: Initial output is high-level
b3, b2	<ul style="list-style-type: none"> When b5 = 0 <ul style="list-style-type: none"> 0 0: Output retained at cycle end 0 1: Low-level output at cycle end 1 0: High-level output at cycle end 1 1: Toggle output at cycle end When b5 = 1 <ul style="list-style-type: none"> x: Don't care 	0 0: Output retained at cycle end 0 1: Low-level output at cycle end 1 0: High-level output at cycle end 1 1: Toggle output at cycle end
b1, b0	<ul style="list-style-type: none"> When b5 = 0 <ul style="list-style-type: none"> 0 0: Output retained at GPTn.GTCCRA/GPTn.GTCCRB compare match 0 1: Low-level output at GPTn.GTCCRA/GPTn.GTCCRB compare match 1 0: High-level output at GPTn.GTCCRA/GPTn.GTCCRB compare match 1 1: Toggle output at GPTn.GTCCRA/GPTn.GTCCRB compare match When b5 = 1 <ul style="list-style-type: none"> 0 0: Input capture at rising edge 0 1: Input capture at falling edge 1 0: Input capture at both edges 1 1: Input capture at both edges 	0 0: Output retained at GTCCRA/GTCCRB register compare match 0 1: Low-level output at GTCCRA/GTCCRB register compare match 1 0: High-level output at GTCCRA/GTCCRB register compare match 1 1: Toggle output at GTCCRA/GTCCRB register compare match

2.18 PTP Module for the Ethernet Controller

Table 2.62 is a comparative overview of the PTP module for the Ethernet controllers, and Table 2.63 is a comparison of PTP module for the Ethernet controller registers.

Table 2.62 Comparative Overview of PTP Module for the Ethernet Controllers

Item	RX71M (EPTPCa)	RX72M (EPTPCb)/RX72N (EPTPCb)
Protocol	Compliant with the Precision Time Protocol (PTP) defined in IEEE 1588	Compliant with the Precision Time Protocol (PTP) defined in IEEE 1588
Synchronization frame processing units (SYNFP0 and SYNFP1)	<ul style="list-style-type: none"> Transmits and receives PTP messages as a master or slave device. The following four clock devices are supported: <ul style="list-style-type: none"> — Ordinary Clock (OC) — Boundary Clock (BC) — End-to-End Transparent Clock (E2E TC) — Peer-to-Peer Transparent Clock (P2P TC) Calculates the meanPathDelay and offsetFromMaster values defined in IEEE 1588. Capable of generating a master clock. Capable of hardware filtering of received multicast packets based on MAC address. Capable of hardware filtering based on type of PTP message. Supports layer 4 (IPv4 and UDP) and layer 2 (Ethernet frame) PTP message frames. Usable as a regular Ethernet port when time synchronization is not in use. 	<ul style="list-style-type: none"> Transmits and receives PTP messages as a master or slave device. The following four clock devices are supported: <ul style="list-style-type: none"> — Ordinary Clock (OC) — Boundary Clock (BC) — End-to-End Transparent Clock (E2E TC) — Peer-to-Peer Transparent Clock (P2P TC) Calculates the meanPathDelay and offsetFromMaster values defined in IEEE 1588. Capable of generating a master clock. Capable of hardware filtering of received multicast packets based on MAC address. Capable of hardware filtering based on type of PTP message. Supports layer 4 (IPv4 and UDP) and layer 2 (Ethernet frame) PTP message frames. Usable as a regular Ethernet port when time synchronization is not in use.
Packet relation controller unit (PRC-TC)	<ul style="list-style-type: none"> Relaying of received data between Ethernet ports 0 and 1 Setting the same MAC address for Ethernet ports 0 and 1 allows transmission of data from both ports or from only one of them. Ability to select store-and-forward method or cut-through method for relaying of packets 	<ul style="list-style-type: none"> Relaying of received data between Ethernet ports 0 and 1 Setting the same MAC address for Ethernet ports 0 and 1 allows transmission of data from both ports or from only one of them. Ability to select store-and-forward method or cut-through method for relaying of packets
Statistical time correction algorithm unit (STCA)	<ul style="list-style-type: none"> Ability to select 20, 25, 50, or 100 MHz as frequency of clock signal supplied to statistical time correction algorithm unit In slave operation, the synchronized state can be determined by tracking when the offsetFromMaster stays below a previously specified threshold. Additionally, the threshold can be calculated statistically from collected positive and negative gradient values (worst-10 acquisition). 	<ul style="list-style-type: none"> Ability to select 20, 25, 50, or 100 MHz as frequency of clock signal supplied to statistical time correction algorithm unit In slave operation, the synchronized state can be determined by tracking when the offsetFromMaster stays below a previously specified threshold. Additionally, the threshold can be calculated statistically from collected positive and negative gradient values (worst-10 acquisition).

Item	RX71M (EPTPCa)	RX72M (EPTPCb)/RX72N (EPTPCb)
Statistical time correction algorithm unit (STCA)	<ul style="list-style-type: none"> The local clock counter holds corrected time information obtained from a master clock. The STCA clock can be used as the clock source for generating pulse signals from pulse output timer m (m = 0 to 5). Peripheral modules such as MTU3 can be started or stopped at the edge of pulses synchronized with the master clock in response to interrupt requests by the pulse output timer or the output of event signals to the ELC. 	<ul style="list-style-type: none"> The local clock counter holds corrected time information obtained from a master clock. The STCA clock can be used as the clock source for generating pulse signals from pulse output timer m (m = 0 to 5). Peripheral modules such as MTU3 can be started or stopped at the edge of pulses synchronized with the master clock in response to interrupt requests by the pulse output timer or the output of event signals to the ELC. Pulses generated by pulse output timers 0 and 1 can be output on the EPLSOUT0 and EPLSOUT1 pins, respectively.
Interrupt sources	<p>MINT interrupt</p> <ul style="list-style-type: none"> Requested when the state of a module changes. Requested at rising edge of the pulse signal generated by the pulse output timer. <p>IPLS interrupt</p> <ul style="list-style-type: none"> Requested at rising or falling edge of the pulse signal generated by the previously selected pulse output timer group. Can be requested at every edge or only once. 	<p>MINT interrupt</p> <ul style="list-style-type: none"> Requested when the state of a module changes. Requested at rising edge of the pulse signal generated by the pulse output timer. <p>IPLS interrupt</p> <ul style="list-style-type: none"> Requested at rising or falling edge of the pulse signal generated by the previously selected pulse output timer group. Can be requested at every edge or only once.
Event linking function (output)	<ul style="list-style-type: none"> An event signal is output to the ELC at the rising or falling edge of the pulse signal generated by the pulse output timer. An event signal can be output at every edge or only once. 	<ul style="list-style-type: none"> An event signal is output to the ELC at the rising or falling edge of the pulse signal generated by the pulse output timer. An event signal can be output at every edge or only once.

Table 2.63 Comparison of PTP Module for the Ethernet Controller Registers

Register	Bit	RX71M (EPTPCa)	RX72M (EPTPCb)/RX72N (EPTPCb)
SYBYPSR	—	—	SYNFP bypass register

2.19 Serial Communications Interface

Table 2.64 is a comparative overview of the serial communications interfaces, Table 2.65 is a comparative listing of serial communications interface channels, and Table 2.66 is a comparison of serial communications interface registers.

Table 2.64 Comparative Overview of Serial Communications Interfaces

Item	RX71M (SCIg, SC Ih)	RX72M (SCIj, SCIi, SC Ih)/ RX72N (SCIj, SCIi, SC Ih)
Number of channels	<ul style="list-style-type: none"> SCIg: 8 channels SC Ih: 1 channel 	<ul style="list-style-type: none"> SCIj: 7 channels SCIi: 5 channels SC Ih: 1 channel
Serial communications modes	<ul style="list-style-type: none"> Asynchronous operation Clock synchronous operation Smart card interface Simple I²C bus Simple SPI bus 	<ul style="list-style-type: none"> Asynchronous operation Clock synchronous operation Smart card interface Simple I²C bus Simple SPI bus
Transfer speed	Bit rate specifiable using on-chip baud rate generator.	Bit rate specifiable using on-chip baud rate generator.
Full-duplex communication	<ul style="list-style-type: none"> Transmitter: Support for continuous transmission using double-buffering Receiver: Support for continuous reception using double-buffering 	<ul style="list-style-type: none"> Transmitter: Support for continuous transmission using double-buffering Receiver: Support for continuous reception using double-buffering
Data transfer	Selectable between LSB-first and MSB-first* ¹	Selectable between LSB-first and MSB-first* ¹
Interrupt sources	<ul style="list-style-type: none"> Transmit end, transmit data empty, receive data full, receive error Completion of generation of a start condition, restart condition, or stop condition (simple I²C mode) 	<ul style="list-style-type: none"> Transmit end, transmit data empty, receive data full, receive error, receive data ready (SCI7 to SCI11), and data match (SCI0 to SCI11) Completion of generation of a start condition, restart condition, or stop condition (simple I²C mode)
Low power consumption function	Ability to transition each channel to module stop state	Ability to transition each channel to module stop state
Asynchronous mode	Data length	7, 8, or 9 bits
	Transmission stop bits	1 or 2 bits
	Parity	Even, odd, or none
	Receive error detection function	Parity, overrun, and framing errors
	Hardware flow control	Ability to use CTSn# and RTSn# pins for transmission and reception control
	Transmit/receive FIFO	Ability to use 16-stage FIFOs for transmission and reception (SCI7 to SCI11)

Item	RX71M (SCIg, SC Ih)	RX72M (SCIj, SC Ii, SC Ih)/ RX72N (SCIj, SC Ii, SC Ih)
Asynchronous mode	Data match detection	Ability to compare receive data and comparison data, and generates an interrupt when they match (SCI0 to SCI11)
	Start-bit detection	Selectable between low level and falling edge
	Break detection	Ability to detect a break by reading the RXDn pin level directly when a framing error occurs
	Clock source	<ul style="list-style-type: none"> Selectable between internal or external clock Ability to input transfer rate clock from TMR (SCI5, SCI6, and SCI12)
	Double-speed mode	Ability to select baud rate generator double-speed mode
	Multi-processor communications function	Serial communication among multiple processors
	Noise cancellation function	The input signal paths from the RXDn pins incorporate digital noise filters.
Clock synchronous mode	Data length	8 bits
	Receive error detection	Overrun error
	Hardware flow control	Ability to use CTSn# and RTSn# pins for transmission and reception control
	Transmit/receive FIFO	Ability to use 16-stage FIFOs for transmission and reception (SCI7 to SCI11)
Smart card interface mode	Error processing	<ul style="list-style-type: none"> Automatic transmission of an error signal at detection of a parity error during reception Automatic re-transmission of data at reception of an error signal during transmission
	Data type	Support for direct convention and inverse convention

Item		RX71M (SCIg, SCIh)	RX72M (SCIj, SCIi, SCIh)/ RX72N (SCIj, SCIi, SCIh)
Simple I ² C mode	Communication format	I ² C bus format	I ² C bus format
	Operating mode	Master (single-master operation only)	Master (single-master operation only)
	Transfer speed	Support for fast mode (Refer to description of bit rate register (BRR) for details on setting the transfer rate.)	Support for fast mode (Refer to description of bit rate register (BRR) for details on setting the transfer rate.)
	Noise cancellation	<ul style="list-style-type: none"> The SSCLn and SSDAn input signal paths incorporate digital noise filters. The noise cancellation interval is adjustable. 	<ul style="list-style-type: none"> The SSCLn and SSDAn input signal paths incorporate digital noise filters. The noise cancellation interval is adjustable.
Simple SPI mode	Data length	8 bits	8 bits
	Error detection	Overrun error	Overrun error
	SS input pin function	Ability to place output pins in high-impedance state by applying a high-level signal to the SSn# pin.	Ability to place output pins in high-impedance state by applying a high-level signal to the SSn# pin.
	Clock settings	Ability to select among four clock phase and clock polarity settings	Ability to select among four clock phase and clock polarity settings
Event link function (supported by SCI5 only)		<ul style="list-style-type: none"> Error (receive error or error signal detection) event output Receive data full event output Transmit data empty event output Transmit end event output 	<ul style="list-style-type: none"> Error (receive error or error signal detection) event output Receive data full event output Transmit data empty event output Transmit end event output
Extended serial mode (supported by SCI12 only)	Start frame transmission	<ul style="list-style-type: none"> Ability to output break field low width/output completion interrupt function Bus collision detection function/detection interrupt function 	<ul style="list-style-type: none"> Ability to output break field low width/output completion interrupt function Bus collision detection function/detection interrupt function
	Start frame reception	<ul style="list-style-type: none"> Ability to detect break field low width/detection completion interrupt function Control field 0 and control field 1 data comparison/match interrupt function Ability to select between two data types for comparison (primary and secondary) in control field 1 Ability to set priority interrupt bit in control field 1 Support for start frames that do not include a break field Support for start frames that do not include control field 0 Bit rate measurement function 	<ul style="list-style-type: none"> Ability to detect break field low width/detection completion interrupt function Control field 0 and control field 1 data comparison/match interrupt function Ability to select between two data types for comparison (primary and secondary) in control field 1 Ability to set priority interrupt bit in control field 1 Support for start frames that do not include a break field Support for start frames that do not include control field 0 Bit rate measurement function

Item	RX71M (SCIg, SCIh)	RX72M (SCIj, SCli, SCIh)/ RX72N (SCIj, SCli, SCIh)
Extended serial mode (supported by SCI12 only)	I/O control function	<ul style="list-style-type: none"> Ability to select polarity of TXDX12 and RXDX12 signals Ability to specify digital filter function for RXDX12 signal Half-duplex operation employing RXDX12 and TXDX12 signals multiplexed on the same pin Ability to select sampling timing for data received on RXDX12
	Timer function	Usable as reload timer
Bit rate modulation function	Ability to reduce errors by correcting output from the on-chip baud rate generator	Ability to reduce errors by correcting output from the on-chip baud rate generator

Note: 1. Simple I²C mode can only be used with MSB-first data transfer.

Table 2.65 Comparative Listing of Serial Communications Interface Channels

Item	RX71M (SCIg, SCIh)	RX72M (SCIj, SCli, SCIh)/ RX72N (SCIj, SCli, SCIh)
Asynchronous mode	SCI0 to SCI7, SCI12	SCI0 to SCI12
Clock synchronous mode	SCI0 to SCI7, SCI12	SCI0 to SCI12
Smart card interface mode	SCI0 to SCI7, SCI12	SCI0 to SCI12
Simple I ² C mode	SCI0 to SCI7, SCI12	SCI0 to SCI12
Simple SPI mode	SCI0 to SCI7, SCI12	SCI0 to SCI12
FIFO mode	—	SCI7 to SCI11
Data match detection	—	SCI0 to SCI11
Extended serial mode	SCI12	SCI12
TMR clock input	SCI5, SCI6, SCI12	SCI5, SCI6, SCI12
Event link function	SCI5	SCI5
Peripheral module clock	PCLKB: SCI0 to SCI7, SCI12	PCLKB: SCI0 to SCI6, SCI12 PCLKA: SCI7 to SCI11

Table 2.66 Comparison of Serial Communications Interface Registers

Register	Bit	RX71M (SCIg, SCIh)	RX72M (SCIj, SCli, SCIh)/ RX72N (SCIj, SCli, SCIh)
FRDR	—	—	Receive FIFO data register
FTDR	—	—	Transmit FIFO data register
SSRFIFO	—	—	Serial status register
SEMR	ABCSE	—	Asynchronous mode base clock select extended bit*1
FCR	—	—	FIFO control register
FDR	—	—	FIFO data count register
LSR	—	—	Line status register
CDR	—	—	Comparison data register
DCCR	—	—	Data comparison control register
SPTR	—	—	Serial port register

Note: 1. This bit is reserved on SCI12. It is read as 0. The write value should be 0.

2.20 I²C Bus Interface

Table 2.67 is a comparative overview of the I²C bus interfaces.

Table 2.67 Comparative Overview of I²C Bus Interfaces

Item	RX71M (RIICa)	RX72M (RIICa)/RX72N (RIICa)
Number of channels	2 channels	3 channels
Communication format	<ul style="list-style-type: none"> I²C bus format or SMBus format Selectable between master mode and slave mode Automatic securing of set-up times, hold times, and bus-free times to match the specified transfer speed 	<ul style="list-style-type: none"> I²C bus format or SMBus format Selectable between master mode and slave mode Automatic securing of set-up times, hold times, and bus-free times to match the specified transfer speed
Transfer speed	Support for Fast-mode Plus (up to 1 Mbps)	Support for Fast-mode Plus (up to 1 Mbps)
SCL clock	Ability to select duty cycle of SCL clock within range of 4% to 96% during master operation	Ability to select duty cycle of SCL clock within range of 4% to 96% during master operation
Issuing and detecting conditions	Start, restart, and stop conditions are generated automatically. Start conditions (including restart conditions) and stop conditions are detectable.	Start, restart, and stop conditions are generated automatically. Start conditions (including restart conditions) and stop conditions are detectable.
Slave address	<ul style="list-style-type: none"> Ability to set up to three different slave addresses Support for 7- and 10-bit address formats (along with use of both at once) Ability to detect general call addresses, device ID addresses, and SMBus host addresses 	<ul style="list-style-type: none"> Ability to set up to three different slave addresses Support for 7- and 10-bit address formats (along with use of both at once) Ability to detect general call addresses, device ID addresses, and SMBus host addresses
Acknowledgment	<ul style="list-style-type: none"> Automatic loading of acknowledge bit during transmission <ul style="list-style-type: none"> Ability to suspend the next data transfer automatically on detection of a not-acknowledge bit Automatic transmission of acknowledge bit during reception <ul style="list-style-type: none"> Support for software control of value of the acknowledge bit according to the received data when a wait between the eighth and ninth clock cycles is selected 	<ul style="list-style-type: none"> Automatic loading of acknowledge bit during transmission <ul style="list-style-type: none"> Ability to suspend the next data transfer automatically on detection of a not-acknowledge bit Automatic transmission of acknowledge bit during reception <ul style="list-style-type: none"> Support for software control of value of the acknowledge bit according to the received data when a wait between the eighth and ninth clock cycles is selected
Wait function	<ul style="list-style-type: none"> Ability to implement a wait by holding the SCL clock signal low <ul style="list-style-type: none"> Wait between the eighth and ninth clock cycles Wait between the ninth and first clock cycles 	<ul style="list-style-type: none"> Ability to implement a wait by holding the SCL clock signal low <ul style="list-style-type: none"> Wait between the eighth and ninth clock cycles Wait between the ninth and first clock cycles
SDA output delay function	Ability to delay output timing of transmitted data, including the acknowledge bit	Ability to delay output timing of transmitted data, including the acknowledge bit

Item	RX71M (RIICa)	RX72M (RIICa)/RX72N (RIICa)
Arbitration	<ul style="list-style-type: none"> Multi-master support <ul style="list-style-type: none"> Ability to synchronize operation with the clock of another master in cases of conflict with the SCL clock Ability to detect loss of arbitration in case of an SDA line signal state mismatch when a start condition issuance conflict occurs Ability to detect loss of arbitration when a start transmit data mismatch occurs during master operation Ability to detect loss of arbitration due to start condition issuance when the bus is busy (to prevent issuance of duplicate start conditions) Ability to detect loss of arbitration in case of an SDA line signal state mismatch when a not-acknowledge bit is sent Ability to detect loss of arbitration when a data mismatch occurs during slave transmission 	<ul style="list-style-type: none"> Multi-master support <ul style="list-style-type: none"> Ability to synchronize operation with the clock of another master in cases of conflict with the SCL clock Ability to detect loss of arbitration in case of an SDA line signal state mismatch when a start condition issuance conflict occurs Ability to detect loss of arbitration when a start transmit data mismatch occurs during master operation Ability to detect loss of arbitration due to start condition issuance when the bus is busy (to prevent issuance of duplicate start conditions) Ability to detect loss of arbitration in case of an SDA line signal state mismatch when a not-acknowledge bit is sent Ability to detect loss of arbitration when a data mismatch occurs during slave transmission
Timeout detection function	Ability to detect extended stopping of the SCL clock using built-in time-out function	Ability to detect extended stopping of the SCL clock using built-in time-out function
Noise cancellation	Built-in digital noise filters for SCL and SDA signals, and ability to adjust the noise cancellation width by software.	Built-in digital noise filters for SCL and SDA signals, and ability to adjust the noise cancellation width by software.
Interrupt sources	Four sources <ul style="list-style-type: none"> Communication error/event occurrence, arbitration detection, NACK detection, timeout detection, start condition (including restart condition) detection, or stop condition detection Receive data full (including match with slave address) Transmit data empty (including match with slave address) Transmission complete 	Four sources <ul style="list-style-type: none"> Communication error/event occurrence, arbitration detection, NACK detection, timeout detection, start condition (including restart condition) detection, or stop condition detection Receive data full (including match with slave address) Transmit data empty (including match with slave address) Transmission complete
Low power consumption function	Ability to transition to module stop state	Ability to transition to module stop state
RIIC operating modes	Four modes: Master transmit mode, master receive mode, slave transmit mode, and slave receive mode	Four modes: Master transmit mode, master receive mode, slave transmit mode, and slave receive mode

Item	RX71M (RIICa)	RX72M (RIICa)/RX72N (RIICa)
Event link function (output)	<p>Four sources (RIIC0)</p> <ul style="list-style-type: none"> • Communication error/event occurrence, arbitration detection, NACK detection, timeout detection, start condition (including restart condition) detection, or stop condition detection • Receive data full (including match with slave address) • Transmit data empty (including match with slave address) • Transmission complete 	<p>Four sources (RIIC0)</p> <ul style="list-style-type: none"> • Communication error/event occurrence, arbitration detection, NACK detection, timeout detection, start condition (including restart condition) detection, or stop condition detection • Receive data full (including match with slave address) • Transmit data empty (including match with slave address) • Transmission complete

2.21 Serial Peripheral Interface

Table 2.68 is a comparative overview of the serial peripheral interfaces, and Table 2.69 is a comparison of serial peripheral interface registers.

Table 2.68 Comparative Overview of Serial Peripheral Interfaces

Item	RX71M (RSPIa)	RX72M (RSPIc)/RX72N (RSPIc)
Number of channels	2 channels	3 channels
RSPI transfer functions	<ul style="list-style-type: none"> Ability to use MOSI (master out/slave in), MISO (master in/slave out), SSL (slave select), and RSPCK (RSPI clock) signals to implement serial communication through SPI operation (four-wire method) or clock synchronous operation (three-wire method). Ability to perform transmit-only operation Communication mode: Selectable between full-duplex and transmit-only Ability to switch the polarity of RSPCK Ability to switch the phase of RSPCK 	<ul style="list-style-type: none"> Ability to use MOSI (master out/slave in), MISO (master in/slave out), SSL (slave select), and RSPCK (RSPI clock) signals to implement serial communication through SPI operation (four-wire method) or clock synchronous operation (three-wire method). Ability to perform transmit-only operation Communication mode: Selectable between full-duplex and transmit-only Ability to switch the polarity of RSPCK Ability to switch the phase of RSPCK
Data format	<ul style="list-style-type: none"> Selectable between MSB-first and LSB-first Ability to select transfer bit length among 8, 9, 10, 11, 12, 13, 14, 15, 16, 20, 24, and 32 bits 128-bit transmit/receive buffers Ability to transfer up to four frames in each round of transmission/reception (with up to 32 bits per frame) 	<ul style="list-style-type: none"> Selectable between MSB-first and LSB-first Ability to select transfer bit length among 8, 9, 10, 11, 12, 13, 14, 15, 16, 20, 24, and 32 bits 128-bit transmit/receive buffers Ability to transfer up to four frames in each round of transmission/reception (with up to 32 bits per frame) Ability to perform byte swapping of transmit and receive data
Bit rate	<ul style="list-style-type: none"> In master mode, the on-chip baud rate generator generates RSPCK by frequency-dividing PCLK (division ratio: 2 to 4,096). In slave mode, PCLK divided by a minimum of 8 can be input as RSPCK (RSPCK maximum frequency: PCLK divided by 8). <ul style="list-style-type: none"> Width at high level: 4 cycles of PCLK; width at low level: 4 cycles of PCLK 	<ul style="list-style-type: none"> In master mode, the on-chip baud rate generator generates RSPCK by frequency-dividing PCLK (division ratio: 2 to 4,096). In slave mode, PCLK divided by a minimum of 4 can be input as RSPCK (RSPCK maximum frequency: PCLK divided by 4). <ul style="list-style-type: none"> Width at high level: 2 cycles of PCLK; width at low level: 2 cycles of PCLK
Buffer configuration	<ul style="list-style-type: none"> Double buffer configuration for both the transmit and receive buffers 128 bits for the transmit/receive buffers 	<ul style="list-style-type: none"> Double buffer configuration for both the transmit and receive buffers 128 bits for the transmit/receive buffers
Error detection	<ul style="list-style-type: none"> Mode fault error detection Overrun error detection Parity error detection 	<ul style="list-style-type: none"> Mode fault error detection Overrun error detection Parity error detection Underrun error detection

Item	RX71M (RSPIa)	RX72M (RSPIc)/RX72N (RSPIc)
SSL control function	<ul style="list-style-type: none"> Four SSL pins (SSLn0 to SSLn3) per channel In single-master mode, SSLn0 to SSLn3 pins are output. In multi-master mode, the SSLn0 pin is input, and SSLn1 to SSLn3 pins are either output or unused. In slave mode, the SSLn0 pin is input, and SSLn1 to SSLn3 pins are unused. Controllable delay from SSL output assertion to RSPCK operation (RSPCK delay) <ul style="list-style-type: none"> Setting range: 1 to 8 RSPCK cycles Setting unit: One RSPCK cycle Controllable delay from RSPCK stop to SSL output negation (SSL negation delay) <ul style="list-style-type: none"> Setting range: 1 to 8 RSPCK cycles Setting unit: One RSPCK cycle Controllable wait until next-access SSL output assertion (next-access delay) <ul style="list-style-type: none"> Setting range: 1 to 8 RSPCK cycles Setting unit: One RSPCK cycle Function for changing SSL polarity 	<ul style="list-style-type: none"> Four SSL pins (SSLn0 to SSLn3) per channel In single-master mode, SSLn0 to SSLn3 pins are output. In multi-master mode, the SSLn0 pin is input, and SSLn1 to SSLn3 pins are either output or unused. In slave mode, the SSLn0 pin is input, and SSLn1 to SSLn3 pins are unused. Controllable delay from SSL output assertion to RSPCK operation (RSPCK delay) <ul style="list-style-type: none"> Setting range: 1 to 8 RSPCK cycles Setting unit: One RSPCK cycle Controllable delay from RSPCK stop to SSL output negation (SSL negation delay) <ul style="list-style-type: none"> Setting range: 1 to 8 RSPCK cycles Setting unit: One RSPCK cycle Controllable wait until next-access SSL output assertion (next-access delay) <ul style="list-style-type: none"> Setting range: 1 to 8 RSPCK cycles Setting unit: One RSPCK cycle Function for changing SSL polarity
Control during master transfer	<ul style="list-style-type: none"> A transfer of up to eight commands can be executed sequentially in looped execution. For each command, the following items can be set: <ul style="list-style-type: none"> SSL signal value, bit rate, RSPCK polarity/phase, transfer data length, MSB/LSB-first, burst, RSPCK delay, SSL negation delay, and next-access delay A transfer can be initiated by writing to the transmit buffer. The MOSI signal value at SSL negation can be specified. RSPCK auto-stop function 	<ul style="list-style-type: none"> A transfer of up to eight commands can be executed sequentially in looped execution. For each command, the following items can be set: <ul style="list-style-type: none"> SSL signal value, bit rate, RSPCK polarity/phase, transfer data length, MSB/LSB-first, burst, RSPCK delay, SSL negation delay, and next-access delay A transfer can be initiated by writing to the transmit buffer. The MOSI signal value at SSL negation can be specified. RSPCK auto-stop function
Interrupt sources	<p>Interrupt sources</p> <ul style="list-style-type: none"> Receive buffer full interrupt Transmit buffer empty interrupt RSPI error interrupt (mode fault, overrun, or parity error) RSPI idle interrupt (RSPI idle) 	<p>Interrupt sources</p> <ul style="list-style-type: none"> Receive buffer full interrupt Transmit buffer empty interrupt RSPI error interrupt (mode fault, overrun, underrun, or parity error) RSPI idle interrupt (RSPI idle)
Event link function (output)	<p>The following events can be output to the event link controller (RSPI0):</p> <ul style="list-style-type: none"> Receive buffer full event signal Transmit buffer empty event signal Mode fault, overrun, or parity error event signal RSPI idle event signal Transmission-completed event signal 	<p>The following events can be output to the event link controller (RSPI0):</p> <ul style="list-style-type: none"> Receive buffer full event signal Transmit buffer empty event signal Mode fault, overrun, underrun, or parity error event signal RSPI idle event signal Transmission-completed event signal

Item	RX71M (RSPIa)	RX72M (RSPIc)/RX72N (RSPIc)
Other functions	<ul style="list-style-type: none"> Function for switching between CMOS and open-drain output Function for initializing the RSPI Loopback mode 	<ul style="list-style-type: none"> Function for switching between CMOS and open-drain output Function for initializing the RSPI Loopback mode
Low power consumption function	Ability to specify module stop state	Ability to specify module stop state

Table 2.69 Comparison of Serial Peripheral Interface Registers

Register	Bit	RX71M (RSPIa)	RX72M (RSPIc)/RX72N (RSPIc)
SPSR	MODF	Mode fault error flag 0: No mode fault error occurred. 1: A mode fault error occurred.	Mode fault error flag 0: No mode fault error or underrun error occurred. 1: A mode fault error or underrun error occurred.
	UDRF	—	Underrun error flag
SPDR	—	RSPI data register Available access sizes: <ul style="list-style-type: none"> Longword (SPDCR.SPLW = 1) Word (SPDCR.SPLW = 0) 	RSPI data register Available access sizes: <ul style="list-style-type: none"> Longword (SPDCR.SPLW = 1, SPDCR.SPBYT = 0) Word (SPDCR.SPLW = 0, SPDCR.SPBYT = 0) Byte (SPDCR.SPBYT = 1)
SPDCR	SPBYT	—	RSPI byte access specification bit
SPDCR2	—	—	RSPI data control register 2

2.22 CRC Calculator

Table 2.70 is a comparative overview of the CRC calculators, and Table 2.71 is a comparison of CRC calculator registers.

Table 2.70 Comparative Overview of CRC Calculators

Item	RX71M (CRC)	RX72M (CRCA)/RX72N (CRCA)
Data size	8 bits	8 bits 32 bits
Data for CRC calculation	CRC codes are generated 8n-bit data units (where n is a whole number).	CRC codes are generated 8n-bit data units (where n is a whole number). CRC codes are generated 32n-bit data units (where n is a whole number).
CRC processing method	8-bit parallel execution	8-bit parallel execution 32-bit parallel execution
CRC generation polynomial	Ability to select among three generation polynomials <ul style="list-style-type: none"> • 8-bit CRC $X^8 + X^2 + X + 1$ • 16-bit CRC $X^{16} + X^{15} + X^2 + 1$, $X^{16} + X^{12} + X^5 + 1$ 	Ability to select among three generation polynomials <ul style="list-style-type: none"> • 8-bit CRC $X^8 + X^2 + X + 1$ • 16-bit CRC $X^{16} + X^{15} + X^2 + 1$, $X^{16} + X^{12} + X^5 + 1$ • 32-bit CRC $X^{32} + X^{26} + X^{23} + X^{22}$ $+ X^{16} + X^{12} + X^{11} + X^{10}$ $+ X^8 + X^7 + X^5 + X^4 + X^2$ $+ X + 1$, $X^{32} + X^{28} + X^{27} + X^{26}$ $+ X^{25} + X^{23} + X^{22} + X^{20}$ $+ X^{19} + X^{18} + X^{14} + X^{13}$ $+ X^{11} + X^{10} + X^9 + X^8$ $+ X^6 + 1$
CRC calculation switching	The bit order of the CRC calculation result can be switched to accommodate LSB-first or MSB-first for communication.	The bit order of the CRC calculation result can be switched to accommodate LSB-first or MSB-first for communication.
Low power consumption function	Ability to specify transition to module stop state	Ability to transition to module stop state

Table 2.71 Comparison of CRC Calculator Registers

Register	Bit	RX71M (CRC)	RX72M (CRCA)/RX72N (CRCA)
CRCCR	GPS[1:0] (RX71M) GPS[2:0] (RX72M/RX72N)	CRC generating polynomial switching bits (b1, b0) b1 b0 0 0: No calculation 0 1: 8-bit CRC $(X^8 + X^2 + X + 1)$ 1 0: 16-bit CRC $(X^{16} + X^{15} + X^2 + 1)$ 1 1: 16-bit CRC $(X^{16} + X^{12} + X^5 + 1)$	CRC generating polynomial switching bits (b2 to b0) b2 b0 0 0 0: No calculation 0 0 1: 8-bit CRC $(X^8 + X^2 + X + 1)$ 0 1 0: 16-bit CRC $(X^{16} + X^{15} + X^2 + 1)$ 0 1 1: 16-bit CRC $(X^{16} + X^{12} + X^5 + 1)$ 1 0 0: 32-bit CRC $(X^{32} + X^{26} + X^{23} + X^{22} + X^{16} + X^{12} + X^{11} + X^{10} + X^8 + X^7 + X^5 + X^4 + X^2 + X + 1)$ 1 0 1: 32-bit CRC $(X^{32} + X^{28} + X^{27} + X^{26} + X^{25} + X^{23} + X^{22} + X^{20} + X^{19} + X^{18} + X^{14} + X^{13} + X^{11} + X^{10} + X^9 + X^8 + X^6 + 1)$ 1 1 0: No calculation 1 1 1: No calculation
	LMS	CRC calculation switching bit (b2)	CRC calculation switching bit (b6)
CRCDIR	—	CRC data input register Available access sizes: • Byte	CRC data input register Available access sizes: • Longword (for 32-bit CRC generation) • Byte (for 16-bit or 8-bit CRC generation)
CRCDOR	—	CRC data output register Available access sizes: • Word When generating 8-bit CRCs, the lower-order byte (bits b7 to b0) is used.	CRC data output register Available access sizes: • Longword (for 32-bit CRC generation) • Word (for 16-bit CRC generation) • Byte (for 8-bit CRC generation)

2.23 Serial Sound Interface (SSI)/Enhanced Serial Sound Interface (SSIE)

Table 2.72 is a comparative overview of the serial sound interface and enhanced serial sound interface, and Table 2.73 is a comparison of serial sound interface and enhanced serial sound interface registers.

Table 2.72 Comparative Overview of Serial Sound Interface and Enhanced Serial Sound Interface

Item	RX71M (SSI)		RX72M (SSIE)/RX72N (SSIE)
Number of channels	2 channels (SSI0 and SSI1)		2 channels (SSIE0 and SSIE1)
Operating mode	Non-compressed mode		Non-compressed mode
Transfer modes	<ul style="list-style-type: none"> Master/slave Transmission, reception, or transception (transception on SSI0 only) 		<ul style="list-style-type: none"> Master/slave Transmission, reception, or transception (transception on SSIE0 only)
Data formats	<ul style="list-style-type: none"> I²S format supported. MSB-first supported. Selectable between left-justified and right-justified formats. 		<ul style="list-style-type: none"> I²S format Left-justified format Right-justified format Monaural format TDM format
Serial data	<ul style="list-style-type: none"> Fixed at MSB first System word length: 8, 16, 24, or 32 bits Data word length: 8, 16, 18, 20, 22, or 24 bits Polarity of the padding bits is selectable. Mute function 		<ul style="list-style-type: none"> Fixed at MSB first System word length: Selectable among 8, 16, 24, 32, 48, 64, 128, or 256 bits Data word length: Selectable among 8, 16, 18, 20, 22, 24, or 32 bits Polarity of the padding bits is selectable. Mute function
Bit clock (SSISCK: RX71M) (BCK: RX72M/RX72N)	In master mode	<ul style="list-style-type: none"> Clock source: AUDIO_MCLK Frequency: Selectable among: 1/1, 1/2, 1/4, 1/6, 1/8, 1/12, 1/16, 1/24, 1/32, 1/48, 1/64, 1/96, or 1/128 of the AUDIO_MCLK frequency 	
	In master and slave modes	Ability to select polarity (rising or falling edge)	
Word select (SSIWS: RX71M) LR clock (LRCK: RX72M/RX72N)	<ul style="list-style-type: none"> Ability to select polarity (low or high) Ability to select supply or stop while data transfer is halted 		<ul style="list-style-type: none"> Ability to select polarity (low or high) Ability to select supply or stop while data transfer is halted
FIFO	Capacity	<ul style="list-style-type: none"> Transmit FIFO: 4 bytes × 8 stages Receive FIFO: 4 bytes × 8 stages 	
	Data alignment	Ability to select alignment of data (left-justified or right-justified) in the FIFO	
Interrupts	<ul style="list-style-type: none"> Data transfer error/idle state Receive data full Transmit data empty 		<ul style="list-style-type: none"> Data transfer error/idle state Receive data full Transmit data empty

Item	RX71M (SSI)	RX72M (SSIE)/RX72N (SSIE)
Module stop function	<ul style="list-style-type: none"> Ability to specify that modules enter the module stop state 	<ul style="list-style-type: none"> Module stop function Master clock (MCK) supply stop function

Table 2.73 Comparison of Serial Sound Interface and Enhanced Serial Sound Interface Registers

Register	Bit	RX71M (SSI)	RX72M (SSIE)/RX72N (SSIE)
SSICR	PDTA	<p>Parallel data allocation bit</p> <p>(When data word length is 8 or 16 bits)</p> <p>0: The lower bits of parallel data (SSIIFTDR, SSIFRDR) are transferred prior to the upper bits.</p> <p>1: The upper bits of parallel data (SSIIFTDR, SSIFRDR) are transferred prior to the lower bits.</p> <p>(When data word length is 18, 20, 22, or 24 bits)</p> <p>0: Parallel data (SSIIFTDR, SSIFRDR) is left-justified.</p> <p>1: Parallel data (SSIIFTDR, SSIFRDR) is right-justified.</p>	<p>Data alignment select bit</p> <p>Sets the data alignment of the SSIIFTDR and SSIFRDR registers.</p> <p>0: Data is left-justified.</p> <p>1: Data is right-justified.</p>
	SWSP (RX71M) LRCKP (RX72M/RX72N)	Word select polarity bit	LR clock polarity select bit
	SCKP (RX71M) BCKP (RX72M/RX72N)	Serial bit clock polarity bit	Bit clock polarity select bit
	SWSD	Word select direction bit	—
	SCKD	Serial bit clock direction bit	—
	MST	—	Master mode bit
	SWL[2:0]	<p>System word length bits</p> <p>Set the system word length to (serial bit clock frequency / 2) fs.</p> <p>b18 b16</p> <p>0 0 0: 8 bits (serial bit clock frequency = 16 fs)</p> <p>0 0 1: 16 bits (serial bit clock frequency = 32 fs)</p> <p>0 1 0: 24 bits (serial bit clock frequency = 48 fs)</p> <p>0 1 1: 32 bits (serial bit clock frequency = 64 fs)</p> <p>Settings other than the above are prohibited.</p>	<p>System word length select bits</p> <p>b18 b16</p> <p>0 0 0: 8 bits</p> <p>0 0 1: 16 bits</p> <p>0 1 0: 24 bits</p> <p>0 1 1: 32 bits</p> <p>1 0 0: 48 bits</p> <p>1 0 1: 64 bits</p> <p>1 1 0: 128 bits</p> <p>1 1 1: 256 bits</p>

Register	Bit	RX71M (SSI)	RX72M (SSIE)/RX72N (SSIE)
SSICR	DWL[2:0]	Data word length bits b21 b19 0 0 0: 8 bits 0 0 1: 16 bits 0 1 0: 18 bits 0 1 1: 20 bits 1 0 0: 22 bits 1 0 1: 24 bits Settings other than the above are prohibited.	Data word length select bits b21 b19 0 0 0: 8 bits 0 0 1: 16 bits 0 1 0: 18 bits 0 1 1: 20 bits 1 0 0: 22 bits 1 0 1: 24 bits 1 1 0: 32 bits 1 1 1: Setting prohibited.
	CHNL[1:0]	Channels bits	—
	FRM[1:0]	—	Frame word length select bits
	CKS	Audio clock select bit	—
SSISR	IDST	Idle status flag	—
	RSWNO	Receive system word number flag	—
	RCHNO[1:0]	Receive channel number flag	—
	TSWNO	Transmit system word number flag	—
	TCHNO[1:0]	Transmit channel number flag	—
SSIFCR	RTRG[1:0]	Receive FIFO threshold setting bits	—
	TTRG[1:0]	Transmit FIFO threshold setting bits	—
	BSW	—	Byte swap bit
SSIFSR	RDC[3:0] (RX71M) RDC[5:0] (RX72M/RX72N)	Receive data indicate flag (b11 to b8)	Receive FIFO data count bits (b13 to b8)
	TDC[3:0] (RX71M) TDC[5:0] (RX72M/RX72N)	Transmit data indicate flag (b27 to b24)	Transmit FIFO data count bits (b29 to b24)
SSIFTDR	—	Transmit FIFO data register Transmit data must be written to this register in 64-bit (two stages of FIFO) units regardless of the data word length setting.	Transmit FIFO data register The access size differs according to the data word length. For details, refer to RX72M Group, RX72N Group User's Manual: Hardware.
SSIFRDR	—	Receive FIFO data register The access size differs according to the data word length. For details, refer to RX72M Group User's Manual: Hardware.	Receive FIFO data register The value after a reset differs.
SSITDMR	—	TDM mode register	—
SSIOFR	—	—	Audio format register
SSISCR	—	—	FIFO status control register

2.24 SD Host Interface

Table 2.74 is a comparative overview of the SD host interfaces, and Table 2.75 is a comparison of SD host interface registers.

Table 2.74 Comparative Overview of the SD Host Interfaces

Item	RX71M (SDHI)	RX72M (SDHI)/RX72N (SDHI)
SD bus interface	<ul style="list-style-type: none"> Compatible with SD memory cards and SDIO cards.*¹ Transfer bus mode selectable between wide bus (4-bit) mode and default bus (1-bit) modes. Compatible with SD, SDHC, and SDXC SD memory card formats. 	<ul style="list-style-type: none"> Compatible with SD memory cards and SDIO cards.*¹ Transfer bus mode selectable between wide bus (4-bit) mode and default bus (1-bit) modes. Compatible with SD, SDHC, and SDXC SD memory card formats.
Transfer modes	Selectable between high-speed and default speed modes.	Selectable between high-speed and default speed modes.
SDHI clock	SDHI clock generated by dividing peripheral module clock B (PCLKB) by n (n = 2, 4, 8, 16, 32, 64, 128, 256, or 512).	SDHI clock generated by dividing peripheral module clock B (PCLKB) by n (n = 1, 2, 4, 8, 16, 32, 64, 128, 256, or 512).
Error checking functions	<ul style="list-style-type: none"> CRC7 (command/response) CRC16 (transfer data) 	<ul style="list-style-type: none"> CRC7 (command/response) CRC16 (transfer data)
Interrupt sources	Four sources: <ul style="list-style-type: none"> Card access interrupt (CACI) SDIO access interrupt (SDACI) Card detection interrupt (CDETI) SD buffer access interrupt (SBFAI) 	Four sources: <ul style="list-style-type: none"> Card access interrupt (CACI) SDIO access interrupt (SDACI) Card detection interrupt (CDETI) SD buffer access interrupt (SBFAI)
DMA transfer request sources	<ul style="list-style-type: none"> DMAC and DTC can be activated by the SD buffer access (SBFAI) interrupt SD buffer is read and write accessible by DMAC and DTC. 	<ul style="list-style-type: none"> DMAC and DTC can be activated by the SD buffer access (SBFAI) interrupt SD buffer is read and write accessible by DMAC and DTC.
Other functions	<ul style="list-style-type: none"> Card detection function Write protection function 	<ul style="list-style-type: none"> Card detection function Write protection function

Note: 1. SPI bus interface, embedded SDIO shared bus, 8-bit SD bus, and SDIO suspend/resume functions not supported.

Table 2.75 Comparison of SD Host Interface Registers

Register	Bit	RX71M (SDHI)	RX72M (SDHI)/RX72N (SDHI)
SDCLKCR	CLKSEL[7:0]	SDHI clock frequency select bits b7 b0 0 0 0 0 0 0 0 0: PCLKB divided by 2 0 0 0 0 0 0 0 1: PCLKB divided by 4 0 0 0 0 0 0 1 0: PCLKB divided by 8 0 0 0 0 0 1 0 0: PCLKB divided by 16 0 0 0 0 1 0 0 0: PCLKB divided by 32 0 0 0 1 0 0 0 0: PCLKB divided by 64 0 0 1 0 0 0 0 0: PCLKB divided by 128 0 1 0 0 0 0 0 0: PCLKB divided by 256 1 0 0 0 0 0 0 0: PCLKB divided by 512 Settings other than the above are prohibited.	SDHI clock frequency select bits b7 b0 0 0 0 0 0 0 0 0: PCLKB divided by 2 0 0 0 0 0 0 0 1: PCLKB divided by 4 0 0 0 0 0 0 1 0: PCLKB divided by 8 0 0 0 0 0 1 0 0: PCLKB divided by 16 0 0 0 0 1 0 0 0: PCLKB divided by 32 0 0 0 1 0 0 0 0: PCLKB divided by 64 0 0 1 0 0 0 0 0: PCLKB divided by 128 0 1 0 0 0 0 0 0: PCLKB divided by 256 1 0 0 0 0 0 0 0: PCLKB divided by 512 1 1 1 1 1 1 1: PCLKB Settings other than the above are prohibited.
SDVER	CLKRAT	Operating clock condition bit The value after a reset differs.	Operating clock condition bit

2.25 Boundary Scan

Table 2.76 is a comparative overview of boundary scan, and Table 2.77 is a comparison of boundary scan registers.

Table 2.76 Comparative Overview of Boundary Scan

Item	RX71M	RX72M	RX72N
Boundary scan enable/disable	Boundary scan is enabled when the RES# pin and the BSCANP pin are driven high and the EMLE pin is driven low.	Boundary scan is enabled when the RES# pin and the BSCANP pin are driven high and the EMLE pin is driven low.	Boundary scan is enabled when the RES# pin and the BSCANP pin are driven high and the EMLE pin is driven low.
Dedicated boundary scan pins	Pins exclusively for use by the JTAG when the boundary scan function is enabled (TDO, TCK, TDI, TMS, and TRST#): 177-pin TFLGA/176-pin LFBGA: PF0, PF1, PF2, PF3, and PF4 145-pin TFLGA: P26, P27, P30, P31, and P34	Pins exclusively for use by the JTAG when the boundary scan function is enabled (TDO, TCK, TDI, TMS, and TRST#): 224-pin LFBGA/176-pin LFBGA: PF0, PF1, PF2, PF3, and PF4	Pins exclusively for use by the JTAG when the boundary scan function is enabled (TDO, TCK, TDI, TMS, and TRST#): 224-pin LFBGA/176-pin LFBGA: PF0, PF1, PF2, PF3, and PF4 145-pin TFLGA: P26, P27, P30, P31, and P34
Six test modes	<ul style="list-style-type: none"> • BYPASS mode • EXTEST mode • SAMPLE/PRELOAD mode • CLAMP mode • HIGHZ mode • IDCODE mode 	<ul style="list-style-type: none"> • BYPASS mode • EXTEST mode • SAMPLE/PRELOAD mode • CLAMP mode • HIGHZ mode • IDCODE mode 	<ul style="list-style-type: none"> • BYPASS mode • EXTEST mode • SAMPLE/PRELOAD mode • CLAMP mode • HIGHZ mode • IDCODE mode

Table 2.77 Comparison of Boundary Scan Registers

Register	Bit	RX71M	RX72M/RX72N
JTIDR	—	ID code register	ID code register The value after a reset differs.

2.26 12-Bit A/D Converter

Table 2.78 is a comparative overview of the 12-bit A/D converters, and Table 2.79 is a comparison of 12-bit A/D converter registers), and Table 2.80 is a comparison of A/D conversion start triggers that can be set in the ADSTRGR register.

Table 2.78 Comparative Overview of 12-Bit A/D Converters

Item	RX71M (S12ADC)	RX72M (S12ADFa)/RX72N (S12ADFa)
Number of units	2 units (S12AD, S12AD1)	2 units (S12AD, S12AD1)
Input channels	Unit 0: 8 channels Unit 1: 21 channels + one extended	S12AD: 8 channels, S12AD1: 21 channels + one extended
Extended analog function	Temperature sensor output, internal reference voltage	Temperature sensor output, internal reference voltage
A/D conversion method	Successive approximation method	Successive approximation method
Resolution	12 bits	12 bits
Conversion time	0.48 µs per channel (12-bit conversion mode) 0.45µs per channel (10-bit conversion mode) 0.42µs per channel (8-bit conversion mode) (when A/D conversion clock ADCLK = 60 MHz)	0.48 µs per channel (12-bit conversion mode) 0.45 µs per channel (10-bit conversion mode) 0.42 µs per channel (8-bit conversion mode) (when A/D conversion clock ADCLK = 60 MHz)
A/D conversion clock	<ul style="list-style-type: none"> The available peripheral module clock (PCLKB) and A/D conversion clock (ADCLK) frequency division ratio settings are as follows: PCLKB:ADCLK frequency division ratio = 1:1, 1:2, 1:4, or 1:8 ADCLK is set by the clock generation circuit (CPG). 	<ul style="list-style-type: none"> The available peripheral module clock (PCLK) and A/D conversion clock (ADCLK) frequency ratio settings are as follows: PCLK:ADCLK frequency ratio = 1:1, 2:1, 4:1, or 8:1 ADCLK is set by the clock generation circuit.
Data registers	<ul style="list-style-type: none"> 29 registers (unit 0: 8, unit 1: 21) for analog input, one for A/D-converted data duplication in double trigger mode per unit, and two for A/D-converted data duplication during extended operation in double trigger mode per unit. One register for temperature sensor (unit 1 only) One register for internal reference voltage (unit 1 only) A/D conversion results are stored in 12-bit A/D data registers. 8-, 10-, and 12-bit accuracy output of A/D conversion results In A/D-converted value addition mode, the value obtained by adding up A/D-converted results is stored as (conversion accuracy bit count + 2 bits) in the A/D data registers. 	<ul style="list-style-type: none"> 29 registers (S12AD: 8, S12AD1: 21) for analog input, one for A/D-converted data duplication in double trigger mode per unit, and two for A/D-converted data duplication during extended operation in double trigger mode per unit. One register for temperature sensor (S12AD1) One register for internal reference voltage (S12AD1) One register for self-diagnosis per unit A/D conversion results are stored in 12-bit A/D data registers. 8-, 10-, and 12-bit accuracy output of A/D conversion results In A/D-converted value addition mode, the value obtained by adding up A/D-converted results is stored as (conversion accuracy bit count + 2 bits / 4 bits) in the A/D data registers.

Item	RX71M (S12ADC)	RX72M (S12ADFa)/RX72N (S12ADFa)
Data registers	<ul style="list-style-type: none"> Double trigger mode (selectable in single scan or group scan mode) <ul style="list-style-type: none"> The first piece of A/D-converted analog input data on one selected channel is stored in the data register for the channel, and the second piece is stored in the duplication register. Extended operation in double trigger mode (available for specific triggers) <ul style="list-style-type: none"> A/D-converted analog input data on one selected channel is stored in the duplication register prepared for each trigger. 	<ul style="list-style-type: none"> Double trigger mode (selectable in single scan or group scan mode) <ul style="list-style-type: none"> The first piece of A/D-converted analog input data on one selected channel is stored in the data register for the channel, and the second piece is stored in the duplication register. Extended operation in double trigger mode (available for specific triggers) <ul style="list-style-type: none"> A/D-converted analog input data on one selected channel is stored in the duplication register prepared for each trigger.
Operating modes	<ul style="list-style-type: none"> Single scan mode: <ul style="list-style-type: none"> A/D conversion is performed only once on the analog inputs of up to 8 (unit 0) or 21 (unit 1) arbitrarily selected channels, on the temperature sensor output (unit 1 only), or on the internal reference voltage (unit 1 only). A/D conversion is performed only once on the extended analog input (unit 1 only). Continuous scan mode: <ul style="list-style-type: none"> A/D conversion is performed repeatedly on the analog inputs of up to 8 (unit 0) or 21 (unit 1) arbitrarily selected channels, on the temperature sensor output (unit 1 only), or on the internal reference voltage (unit 1 only). A/D conversion is performed repeatedly on the extended analog input (unit 1 only). 	<p>The operating mode can be set independently for two units.</p> <ul style="list-style-type: none"> Single scan mode: <ul style="list-style-type: none"> A/D conversion is performed only once on arbitrarily selected analog inputs. A/D conversion is performed only once on the temperature sensor output (S12AD1). A/D conversion is performed only once on the internal reference voltage (S12AD1). A/D conversion is performed only once on the extended analog input (S12AD1). Continuous scan mode: <ul style="list-style-type: none"> A/D conversion is performed repeatedly on the analog inputs of arbitrarily selected channels, the temperature sensor output (S12AD1), or internal reference voltage (S12AD1). A/D conversion is performed repeatedly on the extended analog input (S12AD1).

Item	RX71M (S12ADC)	RX72M (S12ADFa)/RX72N (S12ADFa)
Operating modes	<ul style="list-style-type: none"> Group scan mode: <ul style="list-style-type: none"> Analog inputs of up to 8 (unit 0) or 21 (unit 1) arbitrarily selected channels, the temperature sensor output (unit 1 only), and the internal reference voltage (unit 1 only) are divided into group A and group B, and A/D conversion of the analog inputs selected on a group basis is performed only once. The conditions for starting scanning of groups A and B (synchronous trigger) can be selected independently, allowing A/D conversion of each group to be started at different times. Group scan mode (group A priority control selected): <ul style="list-style-type: none"> When a group A trigger (synchronous or asynchronous) is input during A/D conversion on group B, A/D conversion on group B is stopped and A/D conversion is performed on group A. It is possible to specify restarting (rescan) of A/D conversion on group B after completion of A/D conversion on group A. 	<ul style="list-style-type: none"> Group scan mode: <ul style="list-style-type: none"> Two (groups A and B) or three (groups A, B, and C) can be selected as the number of the groups to be used. (Only the combination of groups A and B can be selected when the number of the groups is two.) Analog inputs on arbitrarily selected channels, the temperature sensor output (S12AD1), and the internal reference voltage (S12AD1) are divided into groups A and B or into groups A, B, and C, and A/D conversion is performed only once on the inputs selected in group units. The conditions for starting scanning of groups A, B, and C (synchronous trigger) can be selected independently, allowing A/D conversion of each group to be started at different times. Group scan mode (group priority control selected): <ul style="list-style-type: none"> If a higher-priority group trigger is input during scanning of a lower-priority group, scan of the lower-priority group is stopped and scan of the higher-priority group is started. The priority order is group A (highest) > group B > group C (lowest). Whether or not to restart scanning of (rescan) the lower-priority group after processing for the higher-priority group completes, is selectable. Rescan can also be set to start either from the first selected channel or from the channel on which A/D conversion is not completed.
Conditions for A/D conversion start	<ul style="list-style-type: none"> Software trigger Synchronous trigger <ul style="list-style-type: none"> A/D conversion start can be triggered by the multi-function timer pulse unit (MTU), general-purpose PWM timer (GPT), event link controller (ELC), 8-bit timer (TMR), or 16-bit timer pulse unit (TPU). Asynchronous trigger <ul style="list-style-type: none"> A/D conversion start can be triggered by external trigger pin ADTRG0# (unit 0) or ADTRG1# (unit 1). 	<ul style="list-style-type: none"> Software trigger Synchronous trigger <ul style="list-style-type: none"> A/D conversion start can be triggered by the multi-function timer pulse unit (MTU), 8-bit timer (TMR), 16-bit timer pulse unit (TPU), or event link controller (ELC). Asynchronous trigger <ul style="list-style-type: none"> A/D conversion start can be triggered by external trigger pin ADTRG0# (S12AD) or DTRG1# (S12AD1) (independently for two units).

Item	RX71M (S12ADC)	RX72M (S12ADFa)/RX72N (S12ADFa)
Functions	<ul style="list-style-type: none"> • Sample-and-hold function • Channel-dedicated sample-and-hold function (three channels for unit 0 only; ability to specify continuous sampling) • Variable sampling state count • 12-bit A/D converter self-diagnostic function • Ability to select between A/D-converted value addition mode and average mode • Analog input disconnection detection assist function (discharge function/ precharge function) • Double trigger mode (duplication of A/D conversion data) • 12-, 10-, or 8-bit conversion switching • Automatic clearing function for A/D data registers • Extended analog input • Digital comparison (ability to select window function) 	<ul style="list-style-type: none"> • Channel-dedicated sample-and-hold function (three channels for S12AD only) • Variable sampling state count (ability to specify on per channel basis) • 12-bit A/D converter self-diagnostic function • Ability to select between A/D-converted value addition mode and average mode • Analog input disconnection detection assist function (discharge function/ precharge function) • Double trigger mode (duplication of A/D conversion data) • 12-, 10-, or 8-bit conversion switching • Automatic clearing function for A/D data registers • Extended analog input • Comparison function (windows A and B)
Interrupt sources	<ul style="list-style-type: none"> • In modes other than double trigger mode and group scan mode, a scan end interrupt request (S12ADI) can be generated on completion of single scan. • In double trigger mode, a scan end interrupt request (S12ADI) can be generated on completion of double scan. • In group scan mode, a scan end interrupt request (S12ADI) can be generated on completion of group A scan, a group B scan end interrupt request (S12GBADI) can be generated on completion of group B scan. 	<ul style="list-style-type: none"> • In modes other than double trigger mode and group scan mode, a scan end interrupt request (S12ADI or S12ADI1) can be generated on completion of single scan (independently for two units). • In double trigger mode, a scan end interrupt request (S12ADI or S12ADI1) can be generated on completion of double scan (independently for two units). • In group scan mode, a scan end interrupt request (S12ADI or S12ADI1) can be generated on completion of group A scan, a group B scan end interrupt request (S12GBADI or S12GBADI1) can be generated on completion of group B scan, and a group C scan end interrupt request (S12GCADI or S12GCADI1) can be generated on completion of group C scan.

Item	RX71M (S12ADC)	RX72M (S12ADFa)/RX72N (S12ADFa)
Interrupt sources	<ul style="list-style-type: none"> When double trigger group scan mode is selected, a scan end interrupt request (S12ADI) can be generated on completion of double scan of group A, a group B scan end interrupt request (S12GBADI) can be generated on completion of group B scan. A compare interrupt (S12CMPI) can be generated upon a match with the comparison condition of the digital compare function. The S12ADI and S12GBADI interrupts can be used to activate the DMA controller (DMAC) and data transfer controller (DTC). 	<ul style="list-style-type: none"> When double trigger group scan mode is selected, a scan end interrupt request (S12ADI or S12ADI1) can be generated on completion of double scan of group A, and a corresponding scan end interrupt request (S12GBADI/S12GCADI or S12GBADI1/S12GCADI1) can be generated on completion of group B or group C scan. A compare interrupt request (S12CMPAI, S12CMPAI1, S12CMPBI, or S12CMPBI1) can be generated upon a match with the comparison condition of the digital compare function. The S12ADI/S12ADI1, S12GBADI/S12GBADI1, and S12GCADI/S12GCADI1 interrupts can be used to activate the DMA controller (DMAC) and data transfer controller (DTC).
Event linking function	<ul style="list-style-type: none"> An ELC event is generated on completion of scans other than group B scan in group scan mode. Ability to trigger scanning start from the ELC 	<ul style="list-style-type: none"> An ELC event is generated upon completion of all scans. Ability to trigger scanning start from the ELC
Low power consumption function	Ability to specify module stop state	Ability to specify module stop state

Table 2.79 Comparison of 12-Bit A/D Converter Registers

Register	Bit	RX71M (S12ADC)	RX72M (S12ADFa)/ RX72N (S12ADFa)
ADRD	AD[11:0] (RX71M) — (RX72M/RX72N)	12-bit A/D converted value	12-bit A/D converted value
	DIAGST[1:0] (RX71M) — (RX72M/RX72N)	Self-diagnosis status bits	Self-diagnosis status bits
ADANSA0	[S12AD.ADANSA0] ANSA0[15:0] (RX71M) ANSA0n (n = 00 to 07) (RX72M/RX72N) [S12AD1.ADANSA0] ANSA0[15:0] (RX71M) ANSA0n (n = 00 to 15) (RX72M/RX72N)	A/D conversion channel select bits	A/D conversion channel select bits
ADANSA1	ANSA1[4:0] (RX71M) ANSA1n (n = 00 to 04) (RX72M/RX72N)	A/D conversion channel select bits	A/D conversion channel select bits
ADANSB0	[S12AD.ADANSB0] ANSB0[15:0] (RX71M) ANSB0n (n = 00 to 07) (RX72M/RX72N) [S12AD1.ADANSB0] ANSB0[15:0] (RX71M) ANSB0n (n = 00 to 15) (RX72M/RX72N)	A/D conversion channel select bits	A/D conversion channel select bits
ADANSB1	ANSB1[4:0] (RX71M) ANSB1n (n = 00 to 04) (RX72M/RX72N)	A/D conversion channel select bits	A/D conversion channel select bits
ADANSC0	—	—	A/D channel select register C0
ADANSC1	—	—	A/D channel select register C1
ADADS0	[S12AD.ADADS0] ADS0[15:0] (RX71M) ADS0n (n = 00 to 07) (RX72M/RX72N) [S12AD1.ADADS0] ADS0[15:0] (RX71M) ADS0n (n = 00 to 15) (RX72M/RX72N)	A/D-converted value addition/average channel select bits	A/D-converted value addition/average channel select bits
ADADS1	ADS1[4:0](RX71M) ADS1n (n = 00 to 04) (RX72M/RX72N)	A/D-converted value addition/average channel select bits	A/D-converted value addition/average channel select bits

Register	Bit	RX71M (S12ADC)	RX72M (S12ADFa)/ RX72N (S12ADFa)
ADADC	ADC[1:0] (RX71M) ADC[2:0] (RX72M/RX72N)	Addition count select bits (b1, b0) b1 b0 0 0: 1-time conversion (no addition; same as normal conversion) 0 1: 2-time conversion (addition once) 1 0: 3-time conversion (addition twice)* ¹ 1 1: 4-time conversion (addition three times)	Addition count select bits (b2 to b0) b2 b0 0 0 0: 1-time conversion (no addition; same as normal conversion) 0 0 1: 2-time conversion (addition once) 0 1 0: 3-time conversion (addition twice)* ¹ 0 1 1: 4-time conversion (addition three times) 1 0 1: 16-time conversion (addition 15 times)* ¹ Settings other than the above are prohibited.
ADSTRGR	TRSB[5:0]	A/D conversion start trigger select for group B bits Refer to Table 2.81 for details.	A/D conversion start trigger select for group B bits Refer to Table 2.81 for details.
	TRSA[5:0]	A/D conversion start trigger select bits Refer to Table 2.81 for details.	A/D conversion start trigger select bits Refer to Table 2.81 for details.
ADGCEXCR	—	—	A/D group C extended input control register
ADGCTRGR	—	—	A/D group C trigger select register
ADSSTRn	—	A/D sampling state register n (n = 0 to 7, L, T and O)	A/D sampling state register n (n = 0 to 15, L, T, and O)
ADGSPCR	LGRRS	—	Restart channel select bit
ADCMPCR	CMPAB[1:0]	—	Window A/B complex conditions setting bits
	CMPBE	—	Comparison window B enable bit
	CMPAE	—	Comparison window A enable bit
	CMPBIE	—	Comparison window B interrupt enable bit
	WCMPE	Window function setting bit (b6)	Window function setting bit (b14)
	CMPIE (RX71M) CMPAIE (RX72M/RX72N)	Compare interrupt enable bit (b7)	Comparison window A interrupt enable bit (b15)

Register	Bit	RX71M (S12ADC)	RX72M (S12ADFa)/ RX72N (S12ADFa)
ADCMAPSRO	[S12AD.ADCMPANSR0] CMPS0[15:0] (RX71M) CMPCHA0n (n = 00 to 07) (RX72M/RX72N) [S12AD1.ADCMPANSR0] CMPS0[15:0] (RX71M) CMPCHA0n (n = 00 to 15) (RX72M/RX72N)	Compare channel select bits	Comparison window A channel select bits
ADCMAPSRI	CMPS1[4:0] (RX71M) CMPCHA1n (n = 00 to 04) (RX72M/RX72N)	Compare channel select bits	Comparison window A channel select bits
ADMPLR0	[S12AD.ADCMPLR0] CMPL0[15:0] (RX71M) CMPLCHA0n (n = 00 to 07) (RX72M/RX72N) [S12AD1.ADCMPLR0] CMPL0[15:0] (RX71M) CMPLCHA0n (n = 00 to 15) (RX72M/RX72N)	Compare level select bits	Comparison window A comparison condition select bits
ADMPLR1	CMPL1[4:0] (RX71M) CMPLCHA1n (n = 00 to 04) (RX72M/RX72N)	Compare level select bits	Comparison window A comparison condition select bits

Register	Bit	RX71M (S12ADC)	RX72M (S12ADFa)/ RX72N (S12ADFa)
ADCMPDRy	—	<p>A/D compare data register y (y = 0, 1)</p> <p>The format differs depending on the following conditions. Refer to RX71M Group User's Manual: Hardware for details.</p> <ul style="list-style-type: none"> • The value of A/D data register format select bit (flush-right or flush-left) • The value of A/D-conversion accuracy specification bits (12 bits, 10 bits, 8 bits) • The value of A/D-converted value addition/average mode select register (A/D-converted value addition mode selected or not selected) 	<p>A/D compare function window A low-side (y = 0)/high-side (y = 1) level setting register</p> <p>The format differs depending on the following conditions. Refer to RX72M Group, RX72N Group User's Manual: Hardware for details.</p> <ul style="list-style-type: none"> • The value of A/D data register format select bit (flush-right or flush-left) • The value of A/D-conversion accuracy specification bits (12 bits, 10 bits, 8 bits) • The value of A/D-converted value addition/average mode select register (A/D-converted value addition mode selected or not selected) • The value of A/D-converted value addition/average count select register (A/D-converted value addition/average mode selected, addition count selected)
ADCMPSR0	[S12AD.ADCMPSR0] CMPF0[15:0](RX71M) CMPSTCHA0n (n = 00 to 07) (RX72M/RX72N)	Compare flag	Comparison window A flag
	[S12AD1.ADCMPSR0] CMPF0[15:0](RX71M) CMPSTCHA0n (n = 00 to 15) (RX72M/RX72N)		
ADCMPSR1	CMPF1[4:0](RX71M) CMPSTCHA1n (n = 00 to 04) (RX72M/RX72N)	Compare flag	Comparison window A flag
ADWINMON	—	—	A/D comparison function window A/B status monitoring register

Register	Bit	RX71M (S12ADC)	RX72M (S12ADFa)/ RX72N (S12ADFa)
ADCMPBNSR	—	—	A/D comparison function window B channel select register
ADWINLLB	—	—	A/D comparison function window B lower level setting register
ADWINULB	—	—	A/D comparison function window B upper level setting register
ADCMPBSR	—	—	A/D comparison function window B channel status register
ADSAM	—	—	A/D conversion time setting register
ADSAMPR	—	—	A/D conversion time setting protection release register

Note: 1. When average mode is selected (ADADC.AVEE = 1), do not select three-time conversion or 16-time conversion (RX72M Group and RX72N Group only).

Table 2.80 Comparison of A/D Conversion Start Triggers Set in ADSTRGR Register

Bit	RX71M (S12ADC)	RX72M (S12ADFa)/RX72N (S12ADFa)
TRSB[5:0]	<p>Group B A/D conversion start trigger select bits</p> <p>b5 b0</p> <p>1 1 1 1 1 1: No trigger source selected state</p> <p>0 0 0 0 0 1: TRGA0N</p> <p>0 0 0 0 1 0: TRGA1N</p> <p>0 0 0 0 1 1: TRGA2N</p> <p>0 0 0 1 0 0: TRGA3N</p> <p>0 0 0 1 0 1: TRGA4N</p> <p>0 0 0 1 1 0: TRGA6N</p> <p>0 0 0 1 1 1: TRGA7N</p> <p>0 0 1 0 0 0: TRG0N</p> <p>0 0 1 0 0 1: TRG4AN</p> <p>0 0 1 0 1 0: TRG4BN</p> <p>0 0 1 0 1 1: TRG4AN or TRG4BN</p> <p>0 0 1 1 0 0: TRG4ABN</p> <p>0 0 1 1 0 1: TRG7AN</p> <p>0 0 1 1 1 0: TRG7BN</p> <p>0 0 1 1 1 1: TRG7AN or TRG7BN</p> <p>0 1 0 0 0 0: TRG7ABN</p> <p>0 1 0 0 0 1: GTADTRA0N</p> <p>0 1 0 0 1 0: GTADTRB0N</p> <p>0 1 0 0 1 1: GTADTRA1N</p> <p>0 1 0 1 0 0: GTADTRB1N</p> <p>0 1 0 1 0 1: GTADTRA2N</p> <p>0 1 0 1 1 0: GTADTRB2N</p> <p>0 1 0 1 1 1: GTADTRA3N</p> <p>0 1 1 0 0 0: GTADTRB3N</p> <p>0 1 1 0 0 1: GTADTRA0N or GTADTRB0N</p> <p>0 1 1 0 1 0: GTADTRA1N or GTADTRB1N</p> <p>0 1 1 0 1 1: GTADTRA2N or GTADTRB2N</p> <p>0 1 1 1 0 0: GTADTRA3N or GTADTRB3N</p> <p>0 1 1 1 0 1: TMTRG0AN_0</p> <p>0 1 1 1 1 0: TMTRG0AN_1</p> <p>0 1 1 1 1 1: TPTRGAN</p> <p>1 0 0 0 0 0: TPTRG0AN</p> <p>1 1 0 0 0 0: ELCTR00N/ELCTR01N</p>	<p>Group B A/D conversion start trigger select bits</p> <p>b5 b0</p> <p>1 1 1 1 1 1: No trigger source selected state</p> <p>0 0 0 0 0 1: TRGA0N</p> <p>0 0 0 0 1 0: TRGA1N</p> <p>0 0 0 0 1 1: TRGA2N</p> <p>0 0 0 1 0 0: TRGA3N</p> <p>0 0 0 1 0 1: TRGA4N</p> <p>0 0 0 1 1 0: TRGA6N</p> <p>0 0 0 1 1 1: TRGA7N</p> <p>0 0 1 0 0 0: TRG0N</p> <p>0 0 1 0 0 1: TRG4AN</p> <p>0 0 1 0 1 0: TRG4BN</p> <p>0 0 1 0 1 1: TRG4AN or TRG4BN</p> <p>0 0 1 1 0 0: TRG4ABN</p> <p>0 0 1 1 0 1: TRG7AN</p> <p>0 0 1 1 1 0: TRG7BN</p> <p>0 0 1 1 1 1: TRG7AN or TRG7BN</p> <p>0 1 0 0 0 0: TRG7ABN</p> <p>0 1 0 0 0 1: ELCTR00N/ELCTR01N</p> <p>0 1 0 0 1 0: ELCTR01N/ELCTR01N</p> <p>0 1 1 0 0 1: ELCTR00N or ELCTR01N/ELCTR01N or ELCTR01N</p> <p>0 1 1 1 0 1: TMTRG0AN_0</p> <p>0 1 1 1 1 0: TMTRG0AN_1</p> <p>0 1 1 1 1 1: TPTRGAN</p> <p>1 0 0 0 0 0: TPTRG0AN</p>

Bit	RX71M (S12ADC)	RX72M (S12ADFa)/RX72N (S12ADFa)
TRSA[5:0]	<p>A/D conversion start trigger select bits</p> <p>b13 b8</p> <p>1 1 1 1 1 1: No trigger source selected state</p> <p>0 0 0 0 0 0: ADTRG0#</p> <p>0 0 0 0 0 1: TRGA0N</p> <p>0 0 0 0 1 0: TRGA1N</p> <p>0 0 0 0 1 1: TRGA2N</p> <p>0 0 0 1 0 0: TRGA3N</p> <p>0 0 0 1 0 1: TRGA4N</p> <p>0 0 0 1 1 0: TRGA6N</p> <p>0 0 0 1 1 1: TRGA7N</p> <p>0 0 1 0 0 0: TRG0N</p> <p>0 0 1 0 0 1: TRG4AN</p> <p>0 0 1 0 1 0: TRG4BN</p> <p>0 0 1 0 1 1: TRG4AN or TRG4BN</p> <p>0 0 1 1 0 0: TRG4ABN</p> <p>0 0 1 1 0 1: TRG7AN</p> <p>0 0 1 1 1 0: TRG7BN</p> <p>0 0 1 1 1 1: TRG7AN or TRG7BN</p> <p>0 1 0 0 0 0: TRG7ABN</p> <p>0 1 0 0 0 1: GTADTRA0N</p> <p>0 1 0 0 1 0: GTADTRB0N</p> <p>0 1 0 0 1 1: GTADTRA1N</p> <p>0 1 0 1 0 0: GTADTRB1N</p> <p>0 1 0 1 0 1: GTADTRA2N</p> <p>0 1 0 1 1 0: GTADTRB2N</p> <p>0 1 0 1 1 1: GTADTRA3N</p> <p>0 1 1 0 0 0: GTADTRB3N</p> <p>0 1 1 0 0 1: GTADTRA0N or GTADTRB0N</p> <p>0 1 1 0 1 0: GTADTRA1N or GTADTRB1N</p> <p>0 1 1 0 1 1: GTADTRA2N or GTADTRB2N</p> <p>0 1 1 1 0 0: GTADTRA3N or GTADTRB3N</p> <p>0 1 1 1 0 1: TMTRG0AN_0</p> <p>0 1 1 1 1 0: TMTRG0AN_1</p> <p>0 1 1 1 1 1: TPTRGAN</p> <p>1 0 0 0 0 0: TPTRG0AN</p> <p>1 1 0 0 0 0: ELCTR0N/ELCTR01N</p>	<p>A/D conversion start trigger select bits</p> <p>b13 b8</p> <p>1 1 1 1 1 1: No trigger source selected state</p> <p>0 0 0 0 0 1: TRGA0N</p> <p>0 0 0 0 1 0: TRGA1N</p> <p>0 0 0 0 1 1: TRGA2N</p> <p>0 0 0 1 0 0: TRGA3N</p> <p>0 0 0 1 0 1: TRGA4N</p> <p>0 0 0 1 1 0: TRGA6N</p> <p>0 0 0 1 1 1: TRGA7N</p> <p>0 0 1 0 0 0: TRG0N</p> <p>0 0 1 0 0 1: TRG4AN</p> <p>0 0 1 0 1 0: TRG4BN</p> <p>0 0 1 0 1 1: TRG4AN or TRG4BN</p> <p>0 0 1 1 0 0: TRG4ABN</p> <p>0 0 1 1 0 1: TRG7AN</p> <p>0 0 1 1 1 0: TRG7BN</p> <p>0 0 1 1 1 1: TRG7AN or TRG7BN</p> <p>0 1 0 0 0 0: TRG7ABN</p> <p>0 1 0 0 0 1: ELCTR00N/ELCTR01N</p> <p>0 1 0 0 1 0: ELCTR01N/ELCTR011N</p> <p>0 1 1 0 0 1: ELCTR00N or ELCTR01N/ELCTR010N or ELCTR011N</p> <p>0 1 1 1 0 1: TMTRG0AN_0</p> <p>0 1 1 1 1 0: TMTRG0AN_1</p> <p>0 1 1 1 1 1: TPTRGAN</p> <p>1 0 0 0 0 0: TPTRG0AN</p> <p>1 1 0 0 0 0: ELCTR0N/ELCTR01N</p>

2.27 12-Bit D/A Converter

Table 2.81 is a comparison of 12-bit D/A converter registers.

Table 2.81 Comparison of 12-Bit D/A Converter Registers

Register	Bit	RX71M (R12DA)	RX72M (R12DAa)/RX72N (R12DAa)
DAASWCR	—	—	D/A output amplifier stabilization wait control register

2.28 RAM

Table 2.82 is a comparative overview of RAM, and Table 2.83 is a comparison of RAM registers.

Table 2.82 Comparative Overview of RAM

Item	RX71M	RX72M/RX72N
RAM	Capacity	512 KB
	Address	0000 0000h to 0007 FFFFh
	Memory bus	Memory bus 1
	Access	<ul style="list-style-type: none"> Single-cycle access is possible for both reading and writing. <p>However, access to addresses in the range from 0004 0000h to 0007 FFFFh takes two cycles for both reading and writing when MEMWAIT = 1 (this setting is required when the frequency of ICLK is greater than 120 MHz).</p> <ul style="list-style-type: none"> RAM can be enabled or disabled.
	Data retention function	Not available in deep software standby mode
	Low power consumption function	Ability to transition RAM and ECCRAM to the module stop state independently
	Error checking	<ul style="list-style-type: none"> 1-bit error detection When an error is found, a non-maskable interrupt or an interrupt is generated.
		<ul style="list-style-type: none"> RAM can be enabled or disabled.
Expansion RAM	Capacity	512 KB
	Address	0080 0000h to 0087 FFFFh
	Memory bus	Memory bus 3
	Access	<p>[When MEMWAIT = 0]</p> <ul style="list-style-type: none"> Access takes one cycles for both reading and writing. <p>[When MEMWAIT = 1]</p> <ul style="list-style-type: none"> Access takes two cycles for both reading and writing. Ability to enable or disable expansion RAM
	Data retention function	Not available in deep software standby mode
	Low power consumption function	Ability to transition RAM, expansion RAM, and ECCRAM to the module stop state independently
	Error checking	<ul style="list-style-type: none"> Parity checking: 1-bit error detection When an error is found, a non-maskable interrupt or an interrupt is generated.

Item	RX71M	RX72M/RX72N
ECCRAM	Capacity	32 KB
	Address	00FF 8000h to 00FF FFFFh
	Memory bus	Memory bus 3 (ECCRAM)
	Access	<p>Ability to enable or disable ECCRAM [When MEMWAIT = 0]</p> <ul style="list-style-type: none"> When ECC function is disabled Access takes two cycles for both reading and writing. When ECC function is enabled (when no error has occurred) Access takes two cycles for both reading and writing. When ECC function is enabled (when an error has occurred) Access takes three cycles for both reading and writing. <p>[When MEMWAIT = 1]</p> <ul style="list-style-type: none"> When ECC function is disabled Access takes three cycles for both reading and writing. When ECC function is enabled (when no error has occurred) Access takes three cycles for reading and four cycles for writing. When ECC function is enabled (when an error has occurred) Access takes five cycles for both reading and writing.
	Data retention function	Not available in deep software standby mode
	Low power consumption function	Ability to transition RAM and ECCRAM to the module stop state independently
	Error checking	<ul style="list-style-type: none"> ECC error correction 1-bit error correction and 2-bit error detection When an error is found, a non-maskable interrupt or an interrupt is generated.

Table 2.83 Comparison of RAM Registers

Register	Bit	RX71M (RAM, ECCRAM)	RX72M/RX72N (RAM, Expansion RAM, ECCRAM)
EXRAMMODE	—	—	Expansion RAM operating mode control register
EXRAMSTS	—	—	Expansion RAM error status register
EXRAMECAD	—	—	Expansion RAM error address capture register
EXRAMPRCR	—	—	Expansion RAM protection register

2.29 Standby RAM

Table 2.84 is a comparative overview of standby RAM.

Table 2.84 Comparative Overview of Standby RAM

Item	RX71M	RX72M/RX72N
RAM capacity	8 KB	8 KB
RAM address	000A 4000h to 000A 5FFFh	000A 4000h to 000A 5FFFh
Access	<ul style="list-style-type: none">Both read and write operations take 2 or 3 cycles of PCLKB when ICLK \geq PCLKB; 2 cycles of ICLK are needed when ICLK < PCLKB.Ability to enable or disable RAM accessThe endian order conforms to the endian setting of the chip.Non-aligned access is prohibited. Correct operation is not guaranteed if non-aligned access is attempted.	<ul style="list-style-type: none">Both read and write operations take 3 or 4 cycles of PCLKB when ICLK \geq PCLKB; 2 or 3 cycles of ICLK are needed when ICLK < PCLKB.Ability to enable or disable RAM accessThe endian order conforms to the endian setting of the chip.Non-aligned access is prohibited. Correct operation is not guaranteed if non-aligned access is attempted.
Data retention function	Data can be retained in deep software standby mode.	Data can be retained in deep software standby mode.
Low power consumption function	Ability to specify module stop state	Ability to specify module stop state

2.30 Flash Memory

Table 2.85 is a comparative overview of flash memory, Table 2.86 is a comparison of flash memory registers, and Table 2.87 is a comparison of address boundaries for each command.

Table 2.85 Comparative Overview of Flash Memory

Item	RX71M	RX72M (FLASH)/RX72N (FLASH)
Both code flash memory and data flash memory	<ul style="list-style-type: none"> Programming and erasing of code flash memory and data flash memory by FACI commands specified in FACI command issuing area (007E 0000h) Programming and erasing through transfer by dedicated flash-memory programmer via serial interface (serial programming) Programming and erasing of flash memory by a user program (self-programming) 	<ul style="list-style-type: none"> Programming and erasing of code flash memory and data flash memory, and programming of option-setting memory, by FACI commands specified in FACI command issuing area (007E 0000h) (self-programming) Programming and erasing through transfer by serial programmer via serial interface (serial programming)
Security function	Protection against illicit tampering or reading of data in flash memory	Protection against illicit tampering or reading of data in flash memory
Protection function	Protection against erroneous overwriting of flash memory (software protection, error protection, and boot program protection)	Protection against erroneous overwriting of flash memory (software protection, error protection, startup program protection function , area protection , and dual-bank function)
On-board programming (serial programming and self-programming)	<ul style="list-style-type: none"> Programming/erasure in boot mode (SCI interface) <ul style="list-style-type: none"> The asynchronous serial interface (SCI1) is used. The transfer rate is adjusted automatically. The user boot area can also be programmed or erased. Programming/erasure in boot mode (USB interface) <ul style="list-style-type: none"> USBb is used. Dedicated hardware is not required, so direct connection to a PC is possible. Programming/erasure in user boot mode <ul style="list-style-type: none"> The user can create an original boot program. 	<ul style="list-style-type: none"> Programming/erasure in boot mode (SCI interface) <ul style="list-style-type: none"> The asynchronous serial interface (SCI1) is used. The transfer rate is adjusted automatically. Programming/erasure in boot mode (USB interface) <ul style="list-style-type: none"> USBb is used. Dedicated hardware is not required, so direct connection to a PC is possible. Programming/erasure in boot mode (FINE interface) <ul style="list-style-type: none"> FINE is used.

Item	RX71M	RX72M (FLASH)/RX72N (FLASH)
Both code flash memory and data flash memory	On-board programming (serial programming and self-programming) <ul style="list-style-type: none"> Programming/erasure by a routine within a user program for code flash memory/data flash memory programming <ul style="list-style-type: none"> Allows code flash memory/data flash memory programming/erasure without resetting the system. 	<ul style="list-style-type: none"> Programming/erasure by self-programming Allows programming/erasure of flash memory without resetting the system.
	Background operation (BGO) function <ul style="list-style-type: none"> The code flash memory can be read while the code flash memory is being programmed or erased. The code flash memory can be read while the data flash memory is being programmed or erased. 	<ul style="list-style-type: none"> The code flash memory can be read while the code flash memory is being programmed or erased. The data flash memory can be read while the code flash memory is being programmed or erased. The code flash memory can be read while the data flash memory is being programmed or erased.
	Other functions <ul style="list-style-type: none"> Interrupts can be accepted during self-programming. Option-setting memory can be specified in the initial settings of the MCU 	<ul style="list-style-type: none"> Interrupts can be accepted during self-programming. Option-setting memory can be specified in the initial settings of the MCU
	Unique ID <p>A 12-byte unique ID code provided for each MCU.</p>	<p>A 16-byte unique ID code provided for each MCU.</p>
Code flash memory	Memory capacity <ul style="list-style-type: none"> User area: Up to 4 MB User boot area: 32 KB 	<ul style="list-style-type: none"> User area: Up to 4 MB
	Address <ul style="list-style-type: none"> When capacity is 4.0 MB FFC0 0000h to FFFF FFFFh When capacity is 3.0 MB FFD0 0000h to FFFF FFFFh When capacity is 2.5 MB FFD8 0000h to FFFF FFFFh When capacity is 2.0 MB FFE0 0000h to FFFF FFFFh 	<ul style="list-style-type: none"> When capacity is 4 MB FFC0 0000h to FFFF FFFFh When capacity is 2 MB FFE0 0000h to FFFF FFFFh
	ROM cache <ul style="list-style-type: none"> — 	<ul style="list-style-type: none"> Capacity: 8 KB Mapping method: direct mapping Line size: 16 bytes
	AFU (Advanced Fetch Unit) <p>Time-separation of instructions and operands</p>	<ul style="list-style-type: none"> —

Item		RX71M	RX72M (FLASH)/RX72N (FLASH)
Code flash memory	Read cycle	<p>Instructions</p> <ul style="list-style-type: none"> Instructions are branched <ul style="list-style-type: none"> When the AFU is hit: No cycles When the AFU is missed: One cycle if $\text{ICLK} \leq 120 \text{ MHz}$ Two cycles if $\text{ICLK} > 120 \text{ MHz}$ Instructions are not branched One cycle if $\text{ICLK} \leq 120 \text{ MHz}$ Two cycles if $\text{ICLK} > 120 \text{ MHz}$ <p>Operands</p> <ul style="list-style-type: none"> When the AFU is hit: One cycle When the AFU is missed: Two cycles if $\text{ICLK} \leq 120 \text{ MHz}$ Three cycles if $\text{ICLK} > 120 \text{ MHz}$ 	<ul style="list-style-type: none"> While ROM cache operation is enabled: <ul style="list-style-type: none"> When the cache is hit: one cycle when the cache is missed: One to two cycles if $\text{ICLK} \leq 120 \text{ MHz}$ Two to three cycles if $\text{ICLK} > 120 \text{ MHz}$ When ROM cache operation is disabled: <ul style="list-style-type: none"> One cycle if $\text{ICLK} \leq 120 \text{ MHz}$ Two cycles if $\text{ICLK} > 120 \text{ MHz}$
	Value after erasure	FFh	FFh
	Dual bank function	—	<p>The dual-bank configuration enables safe updating in cases where programming is suspended.</p> <ul style="list-style-type: none"> Linear mode: the code flash memory is used as one area. Dual mode: the code flash memory is divided into two areas.
	Trusted memory (TM) function	Protects against illicit reading of blocks 8 and 9 in the code flash memory	<p>Protects against unauthorized reading of the code flash memory.</p> <ul style="list-style-type: none"> Linear mode: blocks 8 and 9 Dual mode: blocks 8, 9, 78, and 79
	Units of programming and erasure	<ul style="list-style-type: none"> Unit of programming for the user area or user boot area: 256 bytes Unit of erasure for the user area: Block 	<ul style="list-style-type: none"> Unit of programming for the user area: 128 bytes Unit of erasure for the user area: Block
	Off-board programming	Programming or erasure of the user area or user boot area are possible by using a flash writer.	Programming or erasure of the code flash memory or option-setting memory are possible by using a parallel programmer.
Data flash memory	Memory capacity	Data area: 64 KB	Data area: 32 KB
	Address	0010 0000h to 0010 FFFFh	0010 0000h to 0010 7FFFh
	Read cycle	A read operation takes eight cycles of FCLK for word or byte access.	Reading proceeds in every cycle of FCLK.
	Value after erasure	Undefined	Undefined
	Units of programming and erasure	<ul style="list-style-type: none"> Unit of programming for data area: 4 bytes Unit of erasure for data area: 64 bytes 	<ul style="list-style-type: none"> Unit of programming for data area: 4 bytes Unit of erasure for data area: 64, 128, or 256 bytes

Item	RX71M	RX72M (FLASH)/RX72N (FLASH)
Data flash memory	Off-board programming	Programming or erasure of the data area by using a flash writer is not possible.

Table 2.86 Comparison of Flash Memory Registers

Register	Bit	RX71M	RX72M (FLASH)/RX72N (FLASH)
ROMCE	—	—	ROM cache enable register
ROMCIV	—	—	ROM cache invalidate register
NCRGn	—	—	Non-cacheable area n address register (n = 0 or 1)
NCRCn	—	—	Non-cacheable area n setting register (n = 0 or 1)
FWEPOR	FLWE[1:0]	Flash programming and erasure enable bits b1 b0 0 0: Disables programming and erasure, programming and erasure of lock bits , and blank checking. 0 1: Enables programming and erasure, programming and erasure of lock bits , and blank checking. 1 0: Disables programming and erasure, programming and erasure of lock bits , and blank checking. 1 1: Disables programming and erasure, programming and erasure of lock bits , and blank checking.	Flash programming and erasure enabling bits b1 b0 0 0: Disables programming and erasure, and blank checking. 0 1: Enables programming and erasure, and blank checking. 1 0: Disables programming and erasure, and blank checking. 1 1: Disables programming and erasure, and blank checking.
FASTAT	ECRCT	Error flag	—
FAEINT	—	Flash access error interrupt enable register	Flash access error interrupt enable register
		The value after a reset differs.	
	ECRCTIE	Error interrupt enable bit	—
FSADDR	FSADDR [31:0]	Start address for FACI command processing bits Bits 31 to 24 are ignored in FACI command processing for the code flash memory. Bits 31 to 19 are ignored in FACI command processing for the data flash memory. Bits that do not reach the address boundaries for individual commands are also ignored. Refer to Table 2.88 for details.	Start address for FACI command processing bits Bits 31 to 24 are ignored in FACI command processing for the code flash memory. Bits 31 to 17 are ignored in FACI command processing for the data flash memory. Bits 31 to 10 are ignored in FACI command processing for the option-setting memory. Bits that do not reach the address boundaries for individual commands are also ignored. Refer to Table 2.88 for details.

Register	Bit	RX71M	RX72M (FALSH)/RX72N (FALSH)
FEADDR	FEADDR [31:0]	End address for FACI command processing bits In command processing, bits 31 to b19, b1, and b0 are ignored.	End address for FACI command processing bits In command processing, bits 31 to 17 and any bits that do not reach the designated address boundaries for each command are ignored. Refer to Table 2.88 for details.
FCURAME	—	FCURAM enable register	—
FSTATR	FRCRCT	1-bit error correction monitor flag	—
	FRDTCT	2-bit error correction monitor flag	—
	FCUERR	FCU error flag	—
	FRDY	Flash ready flag 0: Programming, block erase, P/E suspend, P/E resume, forced stop, blank check, configuration setting, lock bit programming, or lock bit read command processing in progress. 1: None of the above is being processed.	Flash ready flag 0: Programming, block erase, multi-block erase, P/E suspend, P/E resume, forced stop, blank check, or configuration setting command processing in progress. 1: None of the above is being processed.
	OTERR	—	Other error flag
	SECERR	—	Security error flag
	FESETERR	—	FENTRY setting error flag
	ILGCOMERR	—	Illegal command error flag
FENTRYR	—	Flash P/E mode entry register When this register is set to a value other than 0001h or 0080h, the FSTATR.ILGLERR flag is set to 1 and the flash sequencer enters the command-locked state.	Flash P/E mode entry register Writing AA81h to this register causes the FSTATR.ILGLERR and FSTATR.FESETERR flags to be set to 1 and the flash sequencer to enter the command-locked state.
FPROTR	—	Flash protect register	—
FSUNITR	SUINIT	Set-up initialization bit 0: The FEADDR, FPROTR, FCPSR, FSADDR, FENTRYR, and FBCCNT flash sequencer set-up registers retain their current values. 1: The FEADDR, FPROTR, FCPSR, FSADDR, FENTRYR, and FBCCNT flash sequencer set-up registers are initialized.	Set-up initialization bit 0: The FEADDR, FCPSR, FSADDR, FENTRYR, and FBCCNT flash sequencer set-up registers retain their current values. 1: The FEADDR, FCPSR, FSADDR, FENTRYR, and FBCCNT flash sequencer set-up registers are initialized.
FLKSTAT	—	Lock bit status register	—
FPESTAT	—	Flash P/E status register	—
FPSADDR	PSADR[18:0] (RX71M) PSADR[16:0] (RX72M/ RX72N)	Programmed area start address bits (b18 to b0)	Programmed area start address bits (b16 to b0)
FAWMON	—	—	Flash access window monitor register

Register	Bit	RX71M	RX72M (FALSH)/RX72N (FALSH)
FSUACR	—	—	Start-up area control register
EEPCLK	—	—	Data flash memory access frequency setting register
UIDRn	—	Unique ID register n (n = 0 to 2)	Unique ID register n (n = 0 to 3)

Table 2.87 Comparison of Address Boundaries for Each Command

Command	RX71M	RX72M (FALSH)/RX72N (FALSH)
Programming (code flash memory)	256 bytes	128 bytes
Programming (data flash memory)	4 bytes	4 bytes
Block erase (code flash memory)	8 KB or 32 KB	8 KB or 32 KB
Block erase (data flash memory)	64 bytes	64 bytes
Multi-block erase (data flash memory)	—	64 bytes, 128 bytes, or 256 bytes
Blank check (data flash memory)	4 bytes	4 bytes
Configuration setting	16 bytes	16 bytes
Lock bit programming	8 KB or 32 KB	—
Lock bit read	8 KB or 32 KB	—

2.31 Packages

As indicated in Table 2.88, there are discrepancies in the package drawing codes and availability of some package types, and this should be borne in mind at the board design stage. For details, refer to RX Family Design Guide for Migration between RX Family: Differences in Package External Form (R01AN4591EJ).

Table 2.88 Packages

Package Type	Renesas Code		
	RX71M	RX72M	RX72N
224-pin LFBGA	✗	○	○
177-pin TFLGA	○	✗	✗
176-pin LFQFP	PLQP0176KB-A	PLQP0176KB-C	PLQP0176KB-C
145-pin TFLGA	○	✗	○
144-pin LFQFP	PLQP0144KA-A	PLQP0144KA-B	PLQP0144KA-B
100-pin TFLGA	○	✗	✗
100-pin LFQFP	PLQP0100KB-A	PLQP0100KB-B	PLQP0100KB-B

○: Package available (Renesas code omitted); ✗: Package not available

3. Comparison of Pin Functions

This section presents a comparative description of pin functions as well as a comparison of the pins for the power supply, clocks, and system control. Items that exist only on one group are indicated by **blue text**. Items that exists on both groups with different specifications are indicated by **red text**. **Black text** indicates there is no differences in the item's specifications between groups.

3.1 176-Pin LFBGA Package

Table 3.1 is a comparative listing of the pin functions of 176-pin LFBGA package products.

Table 3.1 Comparative Listing of 176-Pin LFBGA Package Pin Functions

176-Pin LFBGA	RX71M	RX72M	RX72N
A1	AVSS0	AVSS0	AVSS0
A2	AVCC0	AVCC0	AVCC0
A3	VREFL0	VREFL0	VREFL0
A4	P42/IRQ10-DS/AN002	P42/IRQ10-DS/AN002	P42/IRQ10-DS/AN002
A5	P46/IRQ14-DS/AN006	P46/IRQ14-DS/AN006	P46/IRQ14-DS/AN006
A6	VCC	VCC	VCC
A7	VSS	VSS	VSS
A8	P94/A20/D20/ET1_ERXD0/ RMII1_RXD0	P94/D20/A20/ET1_ERXD0/ RMII1_RXD0/ CAT1_ERXD0	P94/D20/A20/ET1_ERXD0/ RMII1_RXD0
A9	VCC	VCC	VCC
A10	P97/A23/D23/ET1_ERXD3	TRSYNC1 /P97/D23/A23/ ET1_ERXD3/ CAT1_ERXD3	TRSYNC1 /P97/D23/A23/ ET1_ERXD3
A11	PD6/D6[A6/D6]/MTIC5V/ MTIOC8A/POE4#/ MMC_D0-B/SDHI_D0-B/ QIO0-B/QMO-B/IRQ6/AN106	PD6/D6[A6/D6]/MTIC5V/ MTIOC8A/POE4#/ SSLC2-A/ ET1_RX_CLK/REF50CK1/ CAT1_RX_CLK/QMO-B/ QIO0-B/SDHI_D0-B/ MMC_D0-B/ LCD_DATA18-B/ IRQ6/AN106	PD6/D6[A6/D6]/MTIC5V/ MTIOC8A/POE4#/ SSLC2-A/ ET1_RX_CLK/REF50CK1/ QMO-B/QIO0-B/SDHI_D0-B/ MMC_D0-B/ LCD_DATA18-B/ IRQ6/AN106
A12	P60/CS0#/ET1_TX_EN/ RMII1_RXD_EN	P60/CS0#/ET1_TX_EN/ RMII1_RXD_EN/ CAT1_TX_EN	P60/CS0#/ET1_TX_EN/ RMII1_RXD_EN
A13	P63/CS3#/CAS#	P63/CAS#/D2[A2/D2]/CS3#/ ET1_ETXD1/RMII1_RXD1/ CAT1_ETXD1	P63/CAS#/D2[A2/D2]/CS3#/ ET1_ETXD1/RMII1_RXD1
A14	PE1/D9[A9/D9]/MTIOC4C/ MTIOC3B/ GTI0C1B-A/ PO18/TXD12/SMOSI12/ SSDA12/TXDX12/SIOX12/ SSLB2-B/MMC_D5-B/ ANEX1	PE1/D9[A9/D9]/D1[A1/D1]/ MTIOC4C/MTIOC3B/PO18/ GTI0C1B/TXD12/SMOSI12/ SSDA12/TXDX12/SIOX12/ SSLB2-B/MMC_D5-B/ LCD_DATA15-B/ANEX1	PE1/D9[A9/D9]/D1[A1/D1]/ MTIOC4C/MTIOC3B/PO18/ GTI0C1B/TXD12/SMOSI12/ SSDA12/TXDX12/SIOX12/ SSLB2-B/MMC_D5-B/ LCD_DATA15-B/ANEX1
A15	PE2/D10[A10/D10]/ MTIOC4A/ GTI0C0B-A/ PO23/TIC3/RXD12/ SMISO12/SSCL12/RXDX12/ SSLB3-B/MMC_D6-B/ IRQ7-DS/AN100	PE2/D10[A10/D10]/ D2[A2/D2] /MTIOC4A/PO23/ TIC3/ GTI0C0B/RXD12/ SMISO12/SSCL12/RXDX12/ SSLB3-B/MMC_D6-B/ LCD_DATA14-B/IRQ7-DS/ AN100	PE2/D10[A10/D10]/ D2[A2/D2] /MTIOC4A/PO23/ TIC3/ GTI0C0B/RXD12/ SMISO12/SSCL12/RXDX12/ SSLB3-B/MMC_D6-B/ LCD_DATA14-B/IRQ7-DS/ AN100
B1	P05/IRQ13/DA1	P05/ SSILRCK1 /IRQ13/DA1	P05/ SSILRCK1 /IRQ13/DA1
B2	P07/IRQ15/ADTRG0#	P07/IRQ15/ADTRG0#	P07/IRQ15/ADTRG0#
B3	P40/IRQ8-DS/AN000	P40/IRQ8-DS/AN000	P40/IRQ8-DS/AN000

176-Pin LFBGA	RX71M	RX72M	RX72N
B4	P41/IRQ9-DS/AN001	P41/IRQ9-DS/AN001	P41/IRQ9-DS/AN001
B5	P47/IRQ15-DS/AN007	P47/IRQ15-DS/AN007	P47/IRQ15-DS/AN007
B6	P91/A17/D17/ET1_COL/ SCK7/AN115	P91/D17/A17/SCK7/ ET1_COL/AN115/ DSMDAT5	P91/D17/A17/SCK7/ ET1_COL/AN115
B7	P92/A18/D18/POE4#/ ET1_CRS/RMII1_CRS_DV/ RXD7/SMISO7/SSCL7/ AN116	P92/D18/A18/POE4#/RXD7/ SMISO7/SSCL7/ET1_CRS/ RMII1_CRS_DV/ CAT1_RX_DV /AN116/ DSMCLK4	P92/D18/A18/POE4#/RXD7/ SMISO7/SSCL7/ET1_CRS/ RMII1_CRS_DV/AN116
B8	PD1/D1[A1/D1]/MTIOC4B/ GTIOC1A-E /POE0#/CTX0/ IRQ1/AN109	PD1/D1[A1/D1]/MTIOC4B/ POE0#/ GTIOC1A/MOSIC-A / CTX0/ LCD_DATA23-B /IRQ1/ AN109	PD1/D1[A1/D1]/MTIOC4B/ POE0#/ GTIOC1A/MOSIC-A / CTX0/ LCD_DATA23-B /IRQ1/ AN109
B9	P96/A22/D22/ET1_ERXD2	TRDATA5 /P96/D22/A22/ ET1_ERXD2/ CAT1_ERXD2	TRDATA5 /P96/D22/A22/ ET1_ERXD2
B10	PD4/D4[A4/D4]/MTIOC8B/ POE11#/MMC_CMD-B/ SDHI_CMD-B/QSSL-B/IRQ4/ AN112	PD4/D4[A4/D4]/MTIOC8B/ POE11#/ SSLC0-A / ET1_MDIO/PMGI1_MDIO / QSSL-B/SDHI_CMD-B/ MMC_CMD-B/ LCD_DATA20-B /IRQ4/AN112	PD4/D4[A4/D4]/MTIOC8B/ POE11#/ SSLC0-A / ET1_MDIO/PMGI1_MDIO / QSSL-B/SDHI_CMD-B/ MMC_CMD-B/ LCD_DATA20-B /IRQ4/ AN112
B11	PG1/D25/ET1_RX_ER/ RMII1_RX_ER	TRDATA7 /PG1/D25/ ET1_RX_ER/RMII1_RX_ER/ CAT1_RX_ER	TRDATA7 /PG1/D25/ ET1_RX_ER/ RMII1_RX_ER
B12	VSS	VSS	VSS
B13	P64/CS4#/WE#	P64/WE#/ D3[A3/D3] /CS4#/ ET1_ETXD0/RMII1_TXD0 / CAT1_ETXD0	P64/WE#/ D3[A3/D3] /CS4#/ ET1_ETXD0/RMII1_TXD0
B14	PE0/D8[A8/D8]/MTIOC3D/ GTIOC2B-A /SCK12/ SSLB1-B/MMC_D4-B/ ANEX0	PE0/D8[A8/D8]/ D0[A0/D0] / MTIOC3D/ GTIOC2B/SCK12 / SSLB1-B/MMC_D4-B/ LCD_DATA16-B /ANEX0	PE0/D8[A8/D8]/ D0[A0/D0] / MTIOC3D/ GTIOC2B/SCK12 / SSLB1-B/MMC_D4-B/ LCD_DATA16-B /ANEX0
B15	PE3/D11[A11/D11]/ MTIOC4B/ GTIOC2A-A / PO26/POE8#/TOC3/ CTS12#/RTS12#/SS12#/ ET0_ERXD3/MMC_D7-B/ AN101	PE3/D11[A11/D11]/ D3[A3/D3] /MTIOC4B/PO26/ TOC3/POE8#/ GTIOC2A / CTS12#/RTS12#/SS12#/ ET0_ERXD3/ CAT0_ERXD3 / MMC_D7-B/ LCD_DATA13-B / AN101	PE3/D11[A11/D11]/ D3[A3/D3] /MTIOC4B/PO26/ TOC3/POE8#/ GTIOC2A / CTS12#/RTS12#/SS12#/ ET0_ERXD3/MMC_D7-B/ LCD_DATA13-B /AN101
C1	AVSS1	AVSS1	AVSS1
C2	AVCC1	AVCC1	AVCC1
C3	VREFH0	VREFH0	VREFH0
C4	P43/IRQ11-DS/AN003	P43/IRQ11-DS/AN003	P43/IRQ11-DS/AN003
C5	P45/IRQ13-DS/AN005	P45/IRQ13-DS/AN005	P45/IRQ13-DS/AN005
C6	P90/A16/D16/ET1_RX_DV/ TXD7/SMOSI7/SSDA7/ AN114	P90/D16/A16/TXD7/SMOSI7/ SSDA7/ET1_RX_DV/ CAT1_RX_DV /AN114/ DSMCLK5	P90/D16/A16/TXD7/SMOSI7/ SSDA7/ET1_RX_DV/AN114
C7	PD0/D0[A0/D0]/ GTIOC1B-E / POE4#/IRQ0/AN108	PD0/D0[A0/D0]/POE4#/ GTIOC1B/LCD_EXTCLK-B / IRQ0/AN108	PD0/D0[A0/D0]/POE4#/ GTIOC1B/LCD_EXTCLK-B / IRQ0/AN108

176-Pin LFBGA	RX71M	RX72M	RX72N
C8	PD2/D2[A2/D2]/MTIOC4D/ GTIOC0B-E/TIC2/CRX0/ MMC_D2-B/SDHI_D2-B/ QIO2_B/IRQ2/AN110	PD2/D2[A2/D2]/MTIOC4D/ TIC2/GTIOC0B/MISOC-A/ CRX0/ ET1_EXOUT/QIO2-B/ SDHI_D2-B/MMC_D2-B/ LCD_DATA22-B/IRQ2/AN110	PD2/D2[A2/D2]/MTIOC4D/ TIC2/GTIOC0B/MISOC-A/ CRX0/ ET1_EXOUT/QIO2-B/ SDHI_D2-B/MMC_D2-B/ LCD_DATA22-B/IRQ2/AN110
C9	PD3/D3[A3/D3]/MTIOC8D/ GTIOC0A-E/POE8#/TOC2/ MMC_D3-B/SDHI_D3-B/ QIO3-B/IRQ3/AN111	PD3/D3[A3/D3]/MTIOC8D/ TOC2/POE8#/ GTIOC0A/ RSPCKC-A/ET1_WOL/ QIO3-B/SDHI_D3-B/ MMC_D3-B/ LCD_DATA21-B/ IRQ3/AN111	PD3/D3[A3/D3]/MTIOC8D/ TOC2/POE8#/ GTIOC0A/ RSPCKC-A/ET1_WOL/ QIO3-B/SDHI_D3-B/ MMC_D3-B/ LCD_DATA21-B/ IRQ3/AN111
C10	PG0/D24/ET1_RX_CLK/ REF50CK1	TRDATA6/PG0/D24/ ET1_RX_CLK/REF50CK1/ CAT1_RX_CLK	TRDATA6/PG0/D24/ ET1_RX_CLK/REF50CK1
C11	VCC	VCC	VCC
C12	P62/CS2#/RAS#	P62/RAS#/D1[A1/D1]/CS2#/ ET1_ERXD0/RMII1_RXD0/ CAT1_ERXD0	P62/RAS#/D1[A1/D1]/CS2#/ ET1_ERXD0/RMII1_RXD0
C13	PE4/D12[A12/D12]/ MTIOC4D/MTIOC1A/ GTIOC1A-A/PO28/ ET0_ERXD2/SSLB0-B/ AN102	PE4/D12[A12/D12]/ D4[A4/ D4]/MTIOC4D/MTIOC1A/ PO28/ GTIOC1A/SSLB0-B/ ET0_ERXD2/ CAT0_ERXD2/ LCD_DATA12-B/AN102	PE4/D12[A12/D12]/ D4[A4/ D4]/MTIOC4D/MTIOC1A/ PO28/ GTIOC1A/SSLB0-B/ ET0_ERXD2/ LCD_DATA12-B/AN102
C14	VSS	VSS	VSS
C15	P70/SDCLK	P70/SDCLK/ CATLINKACT0	P70/SDCLK
D1	P01/TMCI0/RXD6/SMISO6/ SSCL6/IRQ9/AN119	P01/TMCI0/RXD6/SMISO6/ SSCL6/ SSIBCK0/ CATLEDERR/IRQ9/AN119	P01/TMCI0/RXD6/SMISO6/ SSCL6/ SSIBCK0/IRQ9/ AN119
D2	P02/TMCI1/SCK6/IRQ10/ AN120	P02/TMCI1/SCK6/ SSIBCK1/ CATLEDSTER/IRQ10/AN120	P02/TMCI1/SCK6/ SSIBCK1/ IRQ10/AN120
D3	P03/IRQ11/DA0	P03/ SSIDATA1/IRQ11/DA0	P03/ SSIDATA1/IRQ11/DA0
D4	P00/TMRI0/TXD6/SMOSI6/ SSDA6/IRQ8/AN118	P00/TMRI0/TXD6/SMOSI6/ SSDA6/ AUDIO_CLK/ CATLATCH1/IRQ8/AN118	P00/TMRI0/TXD6/SMOSI6/ SSDA6/ AUDIO_CLK/IRQ8/ AN118
D5	P44/IRQ12-DS/AN004	P44/IRQ12-DS/AN004	P44/IRQ12-DS/AN004
D6	P93/A19/D19/POE0#/ ET1_LINKSTA/CTS7#/ RTS7#/SS7#/AN117	P93/D19/A19/POE0#/CTS7#/ RTS7#/SS7#/ET1_LINKSTA/ CAT1_LINKSTA/AN117/ DSMDAT4	P93/D19/A19/POE0#/CTS7#/ RTS7#/SS7#/ET1_LINKSTA/ AN117
D7	P95/A21/D21/ET1_ERXD1/ RMII1_RXD1	TRDATA4/P95/D21/A21/ ET1_ERXD1/RMII1_RXD1/ CAT1_ERXD1	TRDATA4/P95/D21/A21/ ET1_ERXD1/RMII1_RXD1
D8	VSS	VSS	VSS
D9	PD5/D5[A5/D5]/MTIC5W/ MTIOC8C/POE10#/ MMC_CLK-B/SDHI_CLK-B/ QSPCLK-B/IRQ5/AN113	PD5/D5[A5/D5]/MTIC5W/ MTIOC8C/ MTCLKA/ POE10#/ SSLC1-A/ ET1_MDC/PMGI1_MDC/ QSPCLK-B/SDHI_CLK-B/ MMC_CLK-B/ LCD_DATA19-B/IRQ5/AN113	PD5/D5[A5/D5]/MTIC5W/ MTIOC8C/ MTCLKA/ POE10#/ SSLC1-A/ ET1_MDC/PMGI1_MDC/ QSPCLK-B/ SDHI_CLK-B/MMC_CLK-B/ LCD_DATA19-B/IRQ5/AN113

176-Pin LFBGA	RX71M	RX72M	RX72N
D10	PD7/D7[A7/D7]/MTIC5U/ POE0#/MMC_D1-B/ SDHI_D1-B/QIO1-B/QMI-B/ IRQ7/AN107	PD7/D7[A7/D7]/MTIC5U/ POE0#/SSLC3-A/ ET1_RX_ER/RMII1_RX_ER/ CAT1_RX_ER/QMI-B/ QIO1-B/SDHI_D1-B/ MMC_D1-B/ LCD_DATA17-B/ IRQ7/AN107	PD7/D7[A7/D7]/MTIC5U/ POE0#/SSLC3-A/ ET1_RX_ER/RMII1_RX_ER/ QMI-B/QIO1-B/ SDHI_D1-B/MMC_D1-B/ LCD_DATA17-B/IRQ7/ AN107
D11	P61/CS1#/SDCS#	P61/SDCS#/D0[A0/D0]/ CS1#/ET1_RXD1/ RMII1_RXD1/CAT1_RXD1	P61/SDCS#/D0[A0/D0]/ CS1#/ET1_RXD1/ RMII1_RXD1
D12	PE5/D13[A13/D13]/ MTIOC4C/MTIOC2B/ GTIOC0A-A/ET0_RX_CLK/ REF50CK0/RSPCKB-B/ IRQ5/AN103	PE5/D13[A13/D13]/ D5[A5/D5] /MTIOC4C/ MTIOC2B/ GTIOC0A/ RSPCKB-B/ET0_RX_CLK/ REF50CK0/ CAT0_RX_CLK/ LCD_DATA11-B/IRQ5/AN103	PE5/D13[A13/D13]/ D5[A5/D5] /MTIOC4C/ MTIOC2B/ GTIOC0A/ RSPCKB-B/ET0_RX_CLK/ REF50CK0/ LCD_DATA11-B/ IRQ5/AN103
D13	VCC	VCC	VCC
D14	PE7/D15[A15/D15]/ MTIOC6A/ GTIOC3A-E/ TOC1/MISOB-B/ MMC_RES#-B/ SDHI_WP-B/ IRQ7/AN105	PE7/D15[A15/D15]/ D7[A7/D7] /MTIOC6A/TOC1/ GTIOC3A /MISOB-B/ SDHI_WP /MMC_RES#-B/ LCD_DATA9-B/IRQ7/AN105	PE7/D15[A15/D15]/ D7[A7/D7] /MTIOC6A/TOC1/ GTIOC3A /MISOB-B/ SDHI_WP /MMC_RES#-B/ LCD_DATA9-B/IRQ7/AN105
D15	P65/CS5#/CKE	P65/CKE/CS5#	P65/CKE/CS5#
E1	PJ5/POE8#/CTS2#/RTS2#/ SS2#	PJ5/POE8#/CTS2#/RTS2#/ SS2#/SSIRXD0/EPLSOUT0/ CATSYNC0	PJ5/POE8#/CTS2#/RTS2#/ SS2#/SSIRXD0/EPLSOUT0
E2	EMLE	EMLE	EMLE
E3	PF5/IRQ4	PF5/WAIT#/SSILRCK0/ CATLATCH0 /IRQ4	PF5/WAIT#/SSILRCK0/IRQ4
E4	VSS	VSS	VSS
E12	PE6/D14[A14/D14]/ MTIOC6C/ GTIOC3B-E/TIC1/ MOSIB-B/MMC_CD-B/ SDHI_CD-B/IRQ6/AN104	PE6/D14[A14/D14]/ D6[A6/D6] /MTIOC6C/TIC1/ GTIOC3B /MOSIB-B/ SDHI_CD /MMC_CD-B/ LCD_DATA10-B/IRQ6/AN104	PE6/D14[A14/D14]/ D6[A6/D6] /MTIOC6C/TIC1/ GTIOC3B /MOSIB-B/ SDHI_CD /MMC_CD-B/ LCD_DATA10-B/IRQ6/AN104
E13	TRDATA0/PG2/D26/ ET1_TX_CLK	TRDATA0/PG2/D26/ ET1_TX_CLK/ CAT1_TX_CLK	TRDATA0/PG2/D26/ ET1_TX_CLK
E14	TRDATA1/PG3/D27/ ET1_ETXD0/RMII1_TXD0	TRDATA1/PG3/D27/ ET1_ETXD0/RMII1_TXD0/ CAT1_ETXD0	TRDATA1/PG3/D27/ ET1_ETXD0/RMII1_TXD0
E15	P67/CS7#/DQM1/MTIOC7C/ GTIOC1B-C/CRX2/IRQ15	P67/DQM1/CS7#/MTIOC7C/ GTIOC1B /CRX2/EPLSOUT1/ CATSYNC1 /IRQ15	P67/DQM1/CS7#/MTIOC7C/ GTIOC1B /CRX2/EPLSOUT1/ IRQ15
F1	VBATT	VBATT	VBATT
F2	VCL	VCL	VCL
F3	PJ3/EDACK1/MTIOC3C/ ET0_EXOUT/CTS6#/RTS6#/ CTS0#/RTS0#/SS6#/SS0#	PJ3/EDACK1/MTIOC3C/ CTS6#/RTS6#/SS6#/CTS0#/ RTS0#/SS0#/SSITXD0/ ET0_EXOUT/ CATRESTOUT	PJ3/EDACK1/MTIOC3C/ CTS6#/RTS6#/SS6#/CTS0#/ RTS0#/SS0#/SSITXD0/ ET0_EXOUT
F4	BSCANP	BSCANP	BSCANP
F12	P66/CS6#/DQM0/MTIOC7D/ GTIOC2B-C/CTX2	P66/DQM0/CS6#/MTIOC7D/ GTIOC2B /CTX2	P66/DQM0/CS6#/MTIOC7D/ GTIOC2B /CTX2

176-Pin LFBGA	RX71M	RX72M	RX72N
F13	TRSYNC/PG4/D28/ ET1_ETXD1/RMII1_TXD1	TRSYNC/PG4/D28/ ET1_ETXD1/RMII1_TXD1/ CAT1_ETXD1	TRSYNC/PG4/D28/ ET1_ETXD1/RMII1_TXD1
F14	PA0/A0/BC0#/DQM2/ MTIOC4A/MTIOC6D/ GTIOC0B-C/TIOCA0/ CACREF/PO16/SSLA1-B/ ET0_TX_EN/RMII0_TXD_EN	PA0/DQM2/BC0#/A0/ MTIOC4A/MTIOC6D/ TIOCA0/PO16/CACREF/ GTIOC0B/SSLA1-B/ ET0_TX_EN/ RMII0_TXD_EN/ CAT0_TX_EN/CATLEDRUN/ LCD_DATA8-B	PA0/DQM2/BC0#/A0/ MTIOC4A/MTIOC6D/ TIOCA0/PO16/CACREF/ GTIOC0B/SSLA1-B/ ET0_TX_EN/ RMII0_TXD_EN/ LCD_DATA8-B
F15	VSS	VSS	VSS
G1	XCIN	XCIN	XCIN
G2	XCOUT	XCOUT	XCOUT
G3	MD/FINED	MD/FINED	MD/FINED
G4	TRST#/PF4	TRST#/PF4	TRST#/PF4
G12	TRCLK/PG5/D29/ ET1_ETXD2	TRCLK/PG5/D29/ ET1_ETXD2/ CAT1_ETXD2	TRCLK/PG5/D29/ ET1_ETXD2
G13	TRDATA2/PG6/D30/ ET1_ETXD3	TRDATA2/PG6/D30/ ET1_ETXD3/ CAT1_ETXD3	TRDATA2/PG6/D30/ ET1_ETXD3
G14	PA1/A1/DQM3/MTIOC0B/ MTCLKC/MTIOC7B/ GTIOC2A-C/TIOCB0/PO17/ SCK5/SSLA2-B/ET0_WOL/ IRQ11	PA1/DQM3/A1/MTIOC0B/ MTCLKC/MTIOC7B/TIOCB0/ PO17/ GTIOC2A/SCK5/ SSLA2-B/ET0_WOL/ LCD_DATA7-B/IRQ11	PA1/DQM3/A1/MTIOC0B/ MTCLKC/MTIOC7B/TIOCB0/ PO17/ GTIOC2A/SCK5/ SSLA2-B/ET0_WOL/ LCD_DATA7-B/IRQ11
G15	VCC	VCC	VCC
H1	XTAL/P37	XTAL/P37	XTAL/P37
H2	VSS	VSS	VSS
H3	RES#	RES#	RES#
H4	UPSEL/P35/NMI	UPSEL/P35/NMI	UPSEL/P35/NMI
H12	PA4/A4/MTIC5U/MTCLKA/ TIOCA1/TMRI0/PO20/TXD5/ SMOSI5/SSDA5/SSLA0-B/ ET0_MDC/IRQ5-DS	PA4/A4/MTIC5U/MTCLKA/ TIOCA1/TMRI0/PO20/TXD5/ SMOSI5/SSDA5/SSLA0-B/ ET0_MDC/ CAT0_MDC/ CATIRQ/PMGI0_MDC/ LCD_DATA4-B/IRQ5-DS	PA4/A4/MTIC5U/MTCLKA/ TIOCA1/TMRI0/PO20/TXD5/ SMOSI5/SSDA5/SSLA0-B/ ET0_MDC/ PMGI0_MDC/ LCD_DATA4-B/IRQ5-DS
H13	PA3/A3/MTIOC0D/MTCLKD/ TIOCD0/TCLKB/PO19/ RXD5/SMISO5/SSCL5/ ET0_MDIO/IRQ6-DS	PA3/A3/MTIOC0D/MTCLKD/ TIOCD0/TCLKB/PO19/ RXD5/SMISO5/SSCL5/ ET0_MDIO/ CAT0_MDIO/ PMGI0_MDIO/ LCD_DATA5-B/IRQ6-DS	PA3/A3/MTIOC0D/MTCLKD/ TIOCD0/TCLKB/PO19/ RXD5/SMISO5/SSCL5/ ET0_MDIO/ PMGI0_MDIO/ LCD_DATA5-B/IRQ6-DS
H14	PA2/A2/MTIOC7A/ GTIOC1A-C/PO18/RXD5/ SMISO5/SSCL5/SSLA3-B	PA2/A2/MTIOC7A/PO18/ GTIOC1A/RXD5/SMISO5/ SSCL5/SSLA3-B/ CATLINKACT1/ LCD_DATA6-B	PA2/A2/MTIOC7A/PO18/ GTIOC1A/RXD5/SMISO5/ SSCL5/SSLA3-B/ LCD_DATA6-B
H15	TRDATA3/PG7/D31/ ET1_TX_ER	TRDATA3/PG7/D31/ ET1_TX_ER	TRDATA3/PG7/D31/ ET1_TX_ER
J1	EXTAL/P36	EXTAL/P36	EXTAL/P36
J2	VCC	VCC	VCC

176-Pin LFBGA	RX71M	RX72M	RX72N
J3	P34/MTIOC0A/TMCI3/PO12/ POE10#/SCK6/SCK0/ ET0_LINKSTA/IRQ4	P34/MTIOC0A/TMCI3/PO12/ POE10#/SCK6/SCK0/ ET0_LINKSTA/ CAT0_LINKSTA/IRQ4/ DSMDATO	P34/MTIOC0A/TMCI3/PO12/ POE10#/SCK6/SCK0/ ET0_LINKSTA/IRQ4
J4	TMS/PF3	TMS/PF3	TMS/PF3
J12	PA5/A5/MTIOC6B/ GTIOC0A-C/TIOCB1/PO21/ RSPCKA-B/ET0_LINKSTA	PA5/A5/MTIOC6B/TIOCB1/ PO21/ GTIOC0A/RSPCKA-B/ ET0_LINKSTA/ CAT0_LINKSTA/ LCD_DATA3-B	PA5/A5/MTIOC6B/TIOCB1/ PO21/ GTIOC0A/RSPCKA-B/ ET0_LINKSTA/ LCD_DATA3-B
J13	VSS	VSS	VSS
J14	PA7/A7/TIOCB2/PO23/ MISOA-B/ET0_WOL	PA7/A7/TIOCB2/PO23/ MISOA-B/ET0_WOL/ LCD_DATA1-B	PA7/A7/TIOCB2/PO23/ MISOA-B/ET0_WOL/ LCD_DATA1-B
J15	PA6/A6/MTIC5V/MTCLKB/ GTETRG-C/TIOCA2/TMCI3/ PO22/POE10#/CTS5#/RTS5#/SS5#/MOSIA-B/ ET0_EXOUT	PA6/A6/MTIC5V/MTCLKB/ TIOCA2/TMCI3/PO22/ POE10#/GTETRGB/CTS5#/RTS5#/SS5#/MOSIA-B/ ET0_EXOUT/ CATRESTOUT/ LCD_DATA2-B	PA6/A6/MTIC5V/MTCLKB/ TIOCA2/TMCI3/PO22/ POE10#/GTETRGB/CTS5#/RTS5#/SS5#/MOSIA-B/ ET0_EXOUT/ LCD_DATA2-B
K1	P33/EDREQ1/MTIOC0D/ TIOCD0/TMRI3/PO11/ POE4#/POE11#/RXD6/ RXD0/SMISO6/SMISO0/ SSCL6/SSCL0/CRX0/ PCKO/IRQ3-DS	P33/EDREQ1/MTIOC0D/ TIOCD0/TMRI3/PO11/ POE4#/POE11#/RXD6/ SMISO6/SSCL6/RXD0/ SMISO0/SSCL0/CRX0/ PCKO/IRQ3-DS/ DSMCLK0	P33/EDREQ1/MTIOC0D/ TIOCD0/TMRI3/PO11/ POE4#/POE11#/RXD6/ SMISO6/SSCL6/RXD0/ SMISO0/SSCL0/CRX0/ PCKO/IRQ3-DS
K2	P32/MTIOC0C/TIOCC0/ TMO3/PO10/RTCOUT/ RTCIC2/POE0#/POE10#/TXD6/TXD0/SMOSI6/ SMOSI0/SSDA6/SSDA0/ CTX0/USB0_VBUSEN/ VSYNC/IRQ2-DS	P32/MTIOC0C/TIOCC0/ TMO3/PO10/RTCIC2/ RTCOUT/POE0#/POE10#/TXD6/SMOSI6/SSDA6/ TXD0/SMOSI0/SSDA0/ CTX0/USB0_VBUSEN/ VSYNC/IRQ2-DS	P32/MTIOC0C/TIOCC0/ TMO3/PO10/RTCIC2/ RTCOUT/POE0#/POE10#/TXD6/SMOSI6/SSDA6/ TXD0/SMOSI0/SSDA0/ CTX0/USB0_VBUSEN/ VSYNC/IRQ2-DS
K3	TDI/PF2/RXD1/SMISO1/ SSCL1	TDI/PF2/RXD1/SMISO1/ SSCL1/CATI2CCLK	TDI/PF2/RXD1/SMISO1/ SSCL1
K4	TCK/PF1/SCK1	TCK/PF1/SCK1	TCK/PF1/SCK1
K12	PB2/A10/TIOCC3/TCLKC/ PO26/CTS4#/RTS4#/CTS6#/RTS6#/SS4#/SS6#/ET0_RX_CLK/REF50CK0	PB2/A10/TIOCC3/TCLKC/ PO26/CTS4#/RTS4#/SS4#/CTS6#/RTS6#/SS6#/ET0_RX_CLK/REF50CK0/ CAT0_RX_CLK/ LCD_TCON2-B	PB2/A10/TIOCC3/TCLKC/ PO26/CTS4#/RTS4#/SS4#/CTS6#/RTS6#/SS6#/ET0_RX_CLK/REF50CK0/ LCD_TCON2-B
K13	P71/A18/CS1#/ET0_MDIO	P71/A18/CS1#/ET0_MDIO/ CAT0_MDIO/PMGI0_MDIO/ DSMCLK3	P71/A18/CS1#/ET0_MDIO/ PMGI0_MDIO
K14	VCC	VCC	VCC
K15	PB0/A8/MTIC5W/TIOCA3/ PO24/RXD4/RXD6/SMISO4/ SMISO6/SSCL4/SSCL6/ ET0_ERXD1/RMII0_RXD1/ IRQ12	PB0/A8/MTIC5W/TIOCA3/ PO24/RXD4/SMISO4/ SSCL4/RXD6/SMISO6/ SSCL6/ET0_ERXD1/ RMII0_RXD1/ CAT0_ERXD1/ LCD_DATA0-B/IRQ12	PB0/A8/MTIC5W/TIOCA3/ PO24/RXD4/SMISO4/ SSCL4/RXD6/SMISO6/ SSCL6/ET0_ERXD1/ RMII0_RXD1/ LCD_DATA0-B/IRQ12

176-Pin LFBGA	RX71M	RX72M	RX72N
L1	P31/MTIOC4D/TMCI2/PO9/ RTCIC1/CTS1#/RTS1#/SS1#/ET1_MDC/SSLB0-A/ IRQ1-DS	P31/MTIOC4D/TMCI2/PO9/ RTCIC1/CTS1#/RTS1#/SS1#/SSLB0-A/ET1_MDC/ PMGI1_MDC /IRQ1-DS	P31/MTIOC4D/TMCI2/PO9/ RTCIC1/CTS1#/RTS1#/SS1#/SSLB0-A/ET1_MDC/ PMGI1_MDC /IRQ1-DS
L2	P30/MTIOC4B/TMRI3/PO8/ RTCIC0/POE8#/RXD1/ SMISO1/SSCL1/ET1_MDIO/ MISOB-A/IRQ0-DS	P30/MTIOC4B/TMRI3/PO8/ RTCIC0/POE8#/RXD1/ SMISO1/SSCL1/MISOB-A/ ET1_MDIO/ PMGI1_MDIO / IRQ0-DS	P30/MTIOC4B/TMRI3/PO8/ RTCIC0/POE8#/RXD1/ SMISO1/SSCL1/MISOB-A/ ET1_MDIO/ PMGI1_MDIO / IRQ0-DS
L3	TDO/PF0/TXD1/SMOSI1/ SSDA1	TDO/PF0/TXD1/SMOSI1/ SSDA1/ CATI2CDATA	TDO/PF0/TXD1/SMOSI1/ SSDA1
L4	P25/CS5#/EDACK1/ MTIOC4C/MTCLKB/TIOCA4/ PO5/RXD3/SMISO3/SSCL3/ SSIDATA1/HSYNC/ ADTRG0#	CLKOUT /P25/CS5#/EDACK1/MTIOC4C/ MTCLKB/TIOCA4/PO5/ RXD3/SMISO3/SSCL3/ SSIDATA1/ SDHI_CD / HSYNC/ADTRG0#	CLKOUT /P25/CS5#/EDACK1/MTIOC4C/ MTCLKB/TIOCA4/PO5/ RXD3/SMISO3/SSCL3/ SSIDATA1/ SDHI_CD / HSYNC/ADTRG0#
L12	PB6/A14/MTIOC3D/TIOCA5/ PO30/RXD9/ET0_ETXD1/ RMII0_TXD1	PB6/A14/MTIOC3D/TIOCA5/ PO30/RXD9/ SMISO9_SSCL9 / SMISO11_SSCL11_RXD11 / ET0_ETXD1/RMII0_TXD1/ CAT0_ETXD1	PB6/A14/MTIOC3D/TIOCA5/ PO30/RXD9/ SMISO9_SSCL9 / SMISO11_SSCL11_RXD11 / ET0_ETXD1/RMII0_TXD1
L13	PB3/A11/MTIOC0A/ MTIOC4A/TIOCD3/TCLKD/ TMO0/PO27/POE11#/SCK4/ SCK6/ET0_RX_ER/ RMII0_RX_ER	PB3/A11/MTIOC0A/ MTIOC4A/TIOCD3/TCLKD/ TMO0/PO27/POE11#/SCK4/ SCK6/ET0_RX_ER/ RMII0_RX_ER/ CAT0_RX_ER / LCD_TCON1-B	PB3/A11/MTIOC0A/ MTIOC4A/TIOCD3/TCLKD/ TMO0/PO27/POE11#/SCK4/ SCK6/ET0_RX_ER/ RMII0_RX_ER/ LCD_TCON1-B
L14	PB1/A9/MTIOC0C/ MTIOC4C/TIOCB3/TMCI0/ PO25/TXD4/TXD6/SMOSI4/ SMOSI6/SSDA4/SSDA6/ ET0_ERXD0/RMII0_RXD0/ IRQ4-DS	PB1/A9/MTIOC0C/ MTIOC4C/TIOCB3/TMCI0/ PO25/TXD4/SMOSI4/ SSDA4/TXD6/SMOSI6/ SSDA6/ET0_ERXD0/ RMII0_RXD0/ CAT0_ERXD0 / LCD_TCON3-B /IRQ4-DS	PB1/A9/MTIOC0C/ MTIOC4C/TIOCB3/TMCI0/ PO25/TXD4/SMOSI4/ SSDA4/TXD6/SMOSI6/ SSDA6/ET0_ERXD0/ RMII0_RXD0/ LCD_TCON3-B /IRQ4-DS
L15	P72/A19/CS2#/ET0_MDC	P72/A19/CS2#/ET0_MDC/ CAT0_MDC / PMGI0_MDC / LCD_DATA23-A / DSMDAT3	P72/A19/CS2#/ET0_MDC/ PMGI0_MDC / LCD_DATA23-A
M1	P27/CS7#/MTIOC2B/TMCI3/ PO7/SCK1/ET1_WOL/ RSPCKB-A	P27/CS7#/MTIOC2B/TMCI3/ PO7/SCK1/RSPCKB-A/ ET1_WOL/ CATIRQ	P27/CS7#/MTIOC2B/TMCI3/ PO7/SCK1/RSPCKB-A/ ET1_WOL
M2	P26/CS6#/MTIOC2A/TMO1/ PO6/TXD1/CTS3#/RTS3#/SMOSI1/SS3#/SSDA1/ ET1_EXOUT/MOSIB-A	P26/CS6#/MTIOC2A/TMO1/ PO6/TXD1/SMOSI1/SSDA1/ CTS3#/RTS3#/SS3#/MOSIB-A/ET1_EXOUT/ CATLINKACT1	P26/CS6#/MTIOC2A/TMO1/ PO6/TXD1/SMOSI1/SSDA1/ CTS3#/RTS3#/SS3#/MOSIB-A/ET1_EXOUT
M3	P24/CS4#/EDREQ1/ MTIOC4A/MTCLKA/TIOCB4/ TMRI1/PO4/SCK3/ USB0_VBUSEN/ SSISCK1 / PIXCLK	P24/CS4#/EDREQ1/ MTIOC4A/MTCLKA/TIOCB4/ TMRI1/PO4/SCK3/ USB0_VBUSEN/ SSIBCK1 / SDHI_WP /PIXCLK	P24/CS4#/EDREQ1/ MTIOC4A/MTCLKA/TIOCB4/ TMRI1/PO4/SCK3/ USB0_VBUSEN/ SSIBCK1 / SDHI_WP /PIXCLK

176-Pin LFBGA	RX71M	RX72M	RX72N
M4	P86/MTIOC4D/ GTIOC2B-B/ TIOCA0/RXD10/PIXD1	P86/MTIOC4D/TIOCA0/ GTIOC2B/SMISO10/ SSCL10/RXD10/ CATLINKACT0/PIXD1	P86/MTIOC4D/TIOCA0/ GTIOC2B/SMISO10/ SSCL10/RXD10/PIXD1
M5	VCC_USB	CLKOUT25M/PJ2/TXD8/ SMOSI8/SSDA8/SSLC3-B/ LCD_TCON2-A	CLKOUT25M/PJ2/TXD8/ SMOSI8/SSDA8/SSLC3-B/ LCD_TCON2-A
M6	AVCC_USBA	PJ1/MTIOC6A/RXD8/ SMISO8/SSCL8/SSLC2-B/ EPLSOUT1/CATSYNC1/ LCD_TCON3-A	PJ1/MTIOC6A/RXD8/ SMISO8/SSCL8/SSLC2-B/ EPLSOUT1/LCD_TCON3-A
M7	USBA_RREF	P85/MTIOC6C/TIOCC0/ LCD_DATA1-A	P85/MTIOC6C/TIOCC0/ LCD_DATA1-A
M8	VCC_USBA	P55/D0[A0/D0]/EDREQ0/ WAIT#/MTIOC4D/TMO3/ TXD7/SMOSI7/SSDA7/ MISOC-B/CRX1/ ET0_EXOUT/ LCD_DATA5-A/IRQ10	P55/D0[A0/D0]/EDREQ0/ WAIT#/MTIOC4D/TMO3/ TXD7/SMOSI7/SSDA7/ MISOC-B/CRX1/ ET0_EXOUT/ LCD_DATA5-A/IRQ10
M9	P50/WR0#/WR#/TXD2/ SMOSI2/SSDA2/SSLB1-A	P50/WR0#/WR#/TXD2/ SMOSI2/SSDA2/SSLB1-A/ CATLEDERR	P50/WR0#/WR#/TXD2/ SMOSI2/SSDA2/SSLB1-A
M10	PC5/A21/CS2#/WAIT#/MTIOC3B/MTCLKD/ GTIOC1A-D/TMRI2/PO29/ SCK8/RSPCKA-A/RTS8#/ET0_ETXD2/MMC_D5-A	PC5/D3[A3/D3]/A21/CS2#/WAIT#/MTIOC3B/MTCLKD/TMRI2/PO29/ GTIOC1A/ SCK8/RTS8#/SCK10/RSPCKA-A/ET0_ETXD2/ CAT0_ETXD2/MMC_D5-A/LCD_DATA11-A	PC5/D3[A3/D3]/A21/CS2#/WAIT#/MTIOC3B/MTCLKD/TMRI2/PO29/ GTIOC1A/ SCK8/RTS8#/SCK10/RSPCKA-A/ET0_ETXD2/MMC_D5-A/ LCD_DATA11-A
M11	P81/EDACK0/MTIOC3D/ GTIOC0B-D/PO27/RXD10/ ET0_ETXD0/RMII0_RXD0/ MMC_D3-A/ SDHI_CD-A/ QIO3-A	P81/EDACK0/MTIOC3D/PO27/ GTIOC0B/SMISO10/ SSCL10/RXD10/ ET0_ETXD0/RMII0_RXD0/ CAT0_ETXD0/CATI2CCLK/ QIO3-A/ SDHI_CD/ MMC_D3-A/ LCD_DATA13-A	P81/EDACK0/MTIOC3D/PO27/ GTIOC0B/SMISO10/ SSCL10/RXD10/ ET0_ETXD0/RMII0_RXD0/ QIO3-A/ SDHI_CD/ MMC_D3-A/ LCD_DATA13-A
M12	P77/CS7#/PO23/TXD11/ ET0_RX_ER/RMII0_RX_ER/ MMC_CLK-A/SDHI_CLK-A/ QSPCLK-A	P77/CS7#/PO23/ SMOSI11/ SSDA11/TXD11/ ET0_RX_ER/RMII0_RX_ER/ CAT0_RX_ER/QSPCLK-A/ SDHI_CLK-A/MMC_CLK-A/ LCD_DATA17-A	P77/CS7#/PO23/ SMOSI11/ SSDA11/TXD11/ ET0_RX_ER/RMII0_RX_ER/ QSPCLK-A/SDHI_CLK-A/ MMC_CLK-A/ LCD_DATA17-A
M13	PB7/A15/MTIOC3B/TIOCB5/ PO31/TXD9/ET0_CRS/ RMII0_CRS_DV	PB7/A15/MTIOC3B/TIOCB5/ PO31/TXD9/ SMOSI9/ SSDA9/SMOSI11/SSDA11/ TXD11/ET0_CRS/ RMII0_CRS_DV/ CAT0_RX_DV	PB7/A15/MTIOC3B/TIOCB5/ PO31/TXD9/ SMOSI9/ SSDA9/SMOSI11/SSDA11/ TXD11/ET0_CRS/ RMII0_CRS_DV
M14	PB5/A13/MTIOC2A/ MTIOC1B/TIOCB4/TMRI1/ PO29/POE4#/SCK9/RTS9#/ET0_ETXD0/RMII0_RXD0	PB5/A13/MTIOC2A/ MTIOC1B/TIOCB4/TMRI1/ PO29/POE4#/SCK9/RTS9#/SCK11/ET0_ETXD0/ RMII0_RXD0/ CAT0_ETXD0/ LCD_CLK-B	PB5/A13/MTIOC2A/ MTIOC1B/TIOCB4/TMRI1/ PO29/POE4#/SCK9/RTS9#/SCK11/ET0_ETXD0/ RMII0_RXD0/ LCD_CLK-B

176-Pin LFBGA	RX71M	RX72M	RX72N
M15	PB4/A12/TIOCA4/PO28/ CTS9#/ET0_TX_EN/ RMII0_TXD_EN	PB4/A12/TIOCA4/PO28/ CTS9#/SS9#/SS11#/CTS11#/RTS11#/ET0_TX_EN/ RMII0_TXD_EN/CAT0_TX_EN/ LCD_TCON0-B	PB4/A12/TIOCA4/PO28/ CTS9#/SS9#/SS11#/CTS11#/RTS11#/ET0_TX_EN/ RMII0_TXD_EN/LCD_TCON0-B
N1	VCC	VCC	VCC
N2	P23/EDACK0/MTIOC3D/ MTCLKD/GTIOC0A-B/ TIOCD3/PO3/TXD3/CTS0#/RTS0#/SMOSI3/SS0#/SSDA3/SSISCK0/PIXD7	P23/EDACK0/MTIOC3D/ MTCLKD/TIOCD3/PO3/GTIOC0A/TXD3/SMOSI3/ SSDA3/CTS0#/RTS0#/SS0#/CTX1/SSIBCK0/SDHI_D1-C/ PIXD7	P23/EDACK0/MTIOC3D/ MTCLKD/TIOCD3/PO3/GTIOC0A/TXD3/SMOSI3/ SSDA3/CTS0#/RTS0#/SS0#/CTX1/SSIBCK0/SDHI_D1-C/ PIXD7
N3	P22/EDREQ0/MTIOC3B/ MTCLKC/GTIOC1A-B/ TIOCC3/TMO0/PO2/SCK0/ USB0_OVRCURB/ USBA_OVRCURB/ AUDIO_MCLK/PIXD6	P22/EDREQ0/MTIOC3B/ MTCLKC/TIOCC3/TMO0/ PO2/GTIOC1A/SCK0/ USB0_OVRCURB/ AUDIO_CLK/SDHI_D0-C/ PIXD6	P22/EDREQ0/MTIOC3B/ MTCLKC/TIOCC3/TMO0/ PO2/GTIOC1A/SCK0/ USB0_OVRCURB/ AUDIO_CLK/SDHI_D0-C/ PIXD6
N4	P15/MTIOC0B/MTCLKB/ GTETRG-B/TIOCB2/TCLKB/ TMCI2/PO13/RXD1/SCK3/ SMISO1/SSCL1/CRX1-DS/ USBA_VBUSEN/SSIWS1/ PIXD0/IRQ5	P15/MTIOC0B/MTCLKB/ TIOCB2/TCLKB/TMCI2/ PO13/GTETRGA/RXD1/ SMISO1/SSCL1/SCK3/ CRX1-DS/SSILRCK1/ CATLEDRUN/PIXD0/IRQ5	P15/MTIOC0B/MTCLKB/ TIOCB2/TCLKB/TMCI2/ PO13/GTETRGA/RXD1/ SMISO1/SSCL1/SCK3/ CRX1-DS/SSILRCK1/PIXD0/ IRQ5
N5	P12/WR3#/BC3#/MTIC5U/ TMCI1/RXD2/SMISO2/ SSCL2/SCL0[FM+]/IRQ2	P12/WR3#/BC3#/MTIC5U/ TMCI1/GTADSM0/RXD2/ SMISO2/SSCL2/SCL0[FM+]/LCD_TCON1-A/IRQ2	P12/WR3#/BC3#/MTIC5U/ TMCI1/GTADSM0/RXD2/ SMISO2/SSCL2/SCL0[FM+]/LCD_TCON1-A/IRQ2
N6	VSS_USB	PJ0/MTIOC6B/SCK8/ SSLC1-B/EPLSOUT0/ CATSYNC0/LCD_DATA0-A	PJ0/MTIOC6B/SCK8/ SSLC1-B/EPLSOUT0/ LCD_DATA0-A
N7	VSS2_USBA	P84/MTIOC6D/ ET1_LINKSTA/ CAT1_LINKSTA/ LCD_DATA2-A	P84/MTIOC6D/ ET1_LINKSTA/ LCD_DATA2-A
N8	VSS1_USBA	P54/D1[A1/D1]/EDACK0/ ALE/MTIOC4B/TMCI1/ CTS2#/RTS2#/SS2#/MOSIC-B/CTX1/ ET0_LINKSTA/ CAT0_LINKSTA/ LCD_DATA6-A	P54/D1[A1/D1]/EDACK0/ ALE/MTIOC4B/TMCI1/ CTS2#/RTS2#/SS2#/MOSIC-B/CTX1/ ET0_LINKSTA/ LCD_DATA6-A
N9	P51/WR1#/BC1#/WAIT#/SCK2/SSLB2-A	P51/WR1#/BC1#/WAIT#/SCK2/SSLB2-A	P51/WR1#/BC1#/WAIT#/SCK2/SSLB2-A
N10	UB/PC7/A23/CS0#/MTIOC3A/MTCLKB/GTIOC3A-D/TMO2/TOC0/ PO31/CACREF/TXD8/MISOA-A/ET0_COL/MMC_D7-A/IRQ14	UB/PC7/A23/CS0#/MTIOC3A/MTCLKB/TMO2/ PO31/TOC0/CACREF/GTIOC3A/TXD8/SMOSI8/ SSDA8/SMOSI10/SSDA10/TXD10/MISOA-A/ET0_COL/MMC_D7-A/LCD_DATA9-A/ IRQ14	UB/PC7/A23/CS0#/MTIOC3A/MTCLKB/TMO2/ PO31/TOC0/CACREF/GTIOC3A/TXD8/SMOSI8/ SSDA8/SMOSI10/SSDA10/TXD10/MISOA-A/ET0_COL/MMC_D7-A/LCD_DATA9-A/IRQ14

176-Pin LFBGA	RX71M	RX72M	RX72N
N11	P82/EDREQ1/MTIOC4A/ GTIOC2A-D /PO28/TXD10/ ET0_ETXD1/RMII0_TXD1/ MMC_D4-A	P82/EDREQ1/MTIOC4A/ PO28/ GTIOC2A / SMOSI10 / SSDA10 /TXD10/ ET0_ETXD1/RMII0_TXD1/ CAT0_ETXD1 / CATI2CDATA / MMC_D4-A/ LCD_DATA12-A	P82/EDREQ1/MTIOC4A/ PO28/ GTIOC2A / SMOSI10 / SSDA10 /TXD10/ ET0_ETXD1/ RMII0_TXD1/MMC_D4-A/ LCD_DATA12-A
N12	PC3/A19/MTIOC4D/ GTIOC1B-D /TCLKB/PO24/ TXD5/SMOSI5/SSDA5/ ET0_TX_ER/MMC_D0-A/ SDHI_D0-A/QIO0-A/QMO-A	PC3/A19/MTIOC4D/TCLKB/ PO24/ GTIOC1B /TXD5/ SMOSI5/SSDA5/ ET0_TX_ER/QMO-A/ QIO0-A/SDHI_D0-A/ MMC_D0-A/ LCD_DATA16-A	PC3/A19/MTIOC4D/TCLKB/ PO24/ GTIOC1B /TXD5/ SMOSI5/SSDA5/ ET0_TX_ER/QMO-A/ QIO0-A/SDHI_D0-A/ MMC_D0-A/ LCD_DATA16-A
N13	PC0/A16/MTIOC3C/TCLKC/ PO17/CTS5#/RTS5#/SS5#/ SSLA1-A/ET0_ERXD3/IRQ14	PC0/A16/MTIOC3C/TCLKC/ PO17/CTS5#/RTS5#/SS5#/ SSLA1-A/ET0_ERXD3/ CAT0_ERXD3 /IRQ14	PC0/A16/MTIOC3C/TCLKC/ PO17/CTS5#/RTS5#/SS5#/ SSLA1-A/ET0_ERXD3/ IRQ14
N14	P73/CS3#/PO16/ET0_WOL	P73/CS3#/PO16/ET0_WOL/ LCD_EXTCLK-A	P73/CS3#/PO16/ET0_WOL/ LCD_EXTCLK-A
N15	VSS	VSS	VSS
P1	VSS	VSS	VSS
P2	P17/MTIOC3A/MTIOC3B/ MTIOC4B/ GTIOC0B-B / TIOCB0/TCLKD/TMO1/ PO15/POE8#/SCK1/TXD3/ SMOSI3/SSDA3/SDA2-DS/ SSITXD0/PIXD3/IRQ7/ ADTRG1#	P17/MTIOC3A/MTIOC3B/ MTIOC4B/TIOCB0/TCLKD/ TMO1/PO15/POE8#// GTIOC0B /SCK1/TXD3/ SMOSI3/SSDA3/SDA2-DS/ SSITXD0/ EPLSOUT0 / CATSYNC0 / SDHI_D3-C / PIXD3/IRQ7/ADTRG1#	P17/MTIOC3A/MTIOC3B/ MTIOC4B/TIOCB0/TCLKD/ TMO1/PO15/POE8#// GTIOC0B /SCK1/TXD3/ SMOSI3/SSDA3/SDA2-DS/ SSITXD0/ EPLSOUT0 / SDHI_D3-C /PIXD3/IRQ7/ ADTRG1#
P3	P87/MTIOC4C/ GTIOC1B-B / TIOCA2/TXD10/PIXD2	P87/MTIOC4C/TIOCA2/ GTIOC1B / SMOSI10 / SSDA10 /TXD10/ EPLSOUT1 / CATSYNC1 / SDHI_D2-C / PIXD2	P87/MTIOC4C/TIOCA2/ GTIOC1B / SMOSI10 / SSDA10 /TXD10/ EPLSOUT1 / SDHI_D2-C /PIXD2
P4	P14/MTIOC3A/MTCLKA/ TIOCB5/TCLKA/TMRI2/ PO15/CTS1#/RTS1#/SS1#/ CTX1/USB0_OVRCURA/ IRQ4	P14/MTIOC3A/MTCLKA/ TIOCB5/TCLKA/TMRI2/ PO15/ GTETRGD /CTS1#// RTS1#/SS1#/CTX1/ USB0_OVRCURA/ LCD_CLK-A /IRQ4	P14/MTIOC3A/MTCLKA/ TIOCB5/TCLKA/TMRI2/ PO15/ GTETRGD /CTS1#// RTS1#/SS1#/CTX1/ USB0_OVRCURA/ LCD_CLK-A /IRQ4
P5	USB0_DP	VCC_USB	VCC_USB
P6	AVSS_USBA	VSS_USB	VSS_USB
P7	USBA_DM	P57/RXD7/SMISO7/SSCL7 / SSLC0-B/ LCD_DATA3-A	P57/RXD7/SMISO7/SSCL7 / SSLC0-B/ LCD_DATA3-A
P8	P10/ALE/MTIC5W/TMRI3/ USBA_OVRCURA /IRQ0	P10/ALE/MTIC5W/TMRI3/ IRQ0	P10/ALE/MTIC5W/TMRI3/ IRQ0
P9	P52/RD#/RXD2/SMISO2/ SSCL2/SSLB3-A	P52/RD#/RXD2/SMISO2/ SSCL2/SSLB3-A/ CATLEDSTER	P52/RD#/RXD2/SMISO2/ SSCL2/SSLB3-A
P10	P83/EDACK1/MTIOC4C/ GTIOC0A-D /CTS10#// ET0_CRS/RMII0_CRS_DV/ SCK10	P83/EDACK1/MTIOC4C/ GTIOC0A /SCK10/ SS10# / CTS10#/ET0_CRS/ RMII0_CRS_DV/ CAT0_RX_DV / LCD_DATA8-A /DSMCLK1	P83/EDACK1/MTIOC4C/ GTIOC0A /SCK10/ SS10# / CTS10#/ET0_CRS/ RMII0_CRS_DV/ LCD_DATA8-A

176-Pin LFBGA	RX71M	RX72M	RX72N
P11	PC6/A22/CS1#/MTIOC3C/ MTCLKA/ GTIOC3B-D / TMCI2/TIC0/PO30/RXD8/ MOSIA-A/ET0_ETXD3/ MMC_D6-A/IRQ13	PC6/D2[A2/D2]/A22/CS1#/ MTIOC3C/MTCLKA/TMC12/ PO30/TIC0/ GTIOC3B /RXD8/ SMISO8/SSCL8/SMISO10 / SSCL10/RXD10/MOSIA-A / ET0_ETXD3/ CAT0_ETXD3 / CATLATCH1 /MMC_D6-A/ LCD_DATA10-A /IRQ13	PC6/D2[A2/D2]/A22/CS1#/ MTIOC3C/MTCLKA/TMC12/ PO30/TIC0/ GTIOC3B /RXD8/ SMISO8/SSCL8/SMISO10 / SSCL10/RXD10/MOSIA-A / ET0_ETXD3/MMC_D6-A/ LCD_DATA10-A /IRQ13
P12	PC4/A20/CS3#/MTIOC3D/ MTCLKC/ GTETRG-D / TMCI1/PO25/POE0#/SCK5/ CTS8#/SSLA0-A/ ET0_TX_CLK/MMC_D1-A/ SDHI_D1-A/QIO1-A/QMI-A	PC4/A20/CS3#/MTIOC3D/ MTCLKC/TMC11/PO25/ POE0#/GTETRG/C/SCK5/ CTS8#/SS8#/SS10#/ CTS10#/RTS10# /SSLA0-A/ ET0_TX_CLK/ CAT0_TX_CLK/CATSYNC0 / QMI-A/QIO1-A/SDHI_D1-A/ MMC_D1-A/ LCD_DATA15-A	PC4/A20/CS3#/MTIOC3D/ MTCLKC/TMC11/PO25/ POE0#/GTETRG/C/SCK5/ CTS8#/SS8#/SS10#/ CTS10#/RTS10# / SSLA0-A/ET0_TX_CLK/ QMI-A/QIO1-A/SDHI_D1-A/ MMC_D1-A/ LCD_DATA15-A
P13	PC2/A18/MTIOC4B/ GTIOC2B-D /TCLKA/PO21/ RXD5/SMISO5/SSCL5/ SSLA3-A/ET0_RX_DV/ MMC_CD-A/SDHI_D3-A	PC2/A18/MTIOC4B/TCLKA/ PO21/ GTIOC2B /RXD5/ SMISO5/SSCL5/SSLA3-A/ ET0_RX_DV/ CAT0_RX_DV / SDHI_D3-A/MMC_CD-A/ LCD_DATA19-A	PC2/A18/MTIOC4B/TCLKA/ PO21/ GTIOC2B /RXD5/ SMISO5/SSCL5/SSLA3-A/ ET0_RX_DV/ SDHI_D3-A/MMC_CD-A/ LCD_DATA19-A
P14	P75/CS5#/PO20/SCK11/ RTS11#/ET0_ERXD0/ RMII0_RXD0/MMC_RES#-A/ SDHI_D2-A	P75/CS5#/PO20/SCK11/ RTS11#/ET0_ERXD0/ RMII0_RXD0/ CAT0_ERXD0 / SDHI_D2-A/MMC_RES#-A/ LCD_DATA20-A / DSMDAT2	P75/CS5#/PO20/SCK11/ RTS11#/ET0_ERXD0/ RMII0_RXD0/SDHI_D2-A/ MMC_RES#-A/ LCD_DATA20-A
P15	VCC	VCC	VCC
R1	P21/MTIOC1B/MTIOC4A/ GTIOC2A-B /TIOCA3/TMC10/ PO1/RXD0/SMISO0/SSCL0/ USB0_EXICEN/ USBA_EXICEN / SSIWS0 / PIXD5/IRQ9	P21/MTIOC1B/MTIOC4A/ TIOCA3/TMC10/PO1/ GTIOC2A /RXD0/SMISO0/ SSCL0/ SCL1 / USB0_EXICEN/ SSILRCK0 / SDHI_CLK-C /PIXD5/IRQ9	P21/MTIOC1B/MTIOC4A/ TIOCA3/TMC10/PO1/ GTIOC2A /RXD0/SMISO0/ SSCL0/ SCL1 / USB0_EXICEN/ SSILRCK0 / SDHI_CLK-C /PIXD5/IRQ9
R2	P20/MTIOC1A/TIOCB3/ TMRI0/PO0/TXD0/SMOSI0/ SSDA0/USB0_ID/ USBA_ID / SSIRXD0/PIXD4/IRQ8	P20/MTIOC1A/TIOCB3/ TMRI0/PO0/TXD0/SMOSI0/ SSDA0/ SDA1 /USB0_ID/ SSIRXD0/ SDHI_CMD-C / PIXD4/IRQ8	P20/MTIOC1A/TIOCB3/ TMRI0/PO0/TXD0/SMOSI0/ SSDA0/ SDA1 /USB0_ID/ SSIRXD0/ SDHI_CMD-C / PIXD4/IRQ8
R3	P16/MTIOC3C/MTIOC3D/ TIOCB1/TCLKC/TMO2/ PO14/RTCOUT/TXD1/RXD3/ SMOSI1/SMISO3/SSDA1/ SSCL3/SCL2-DS/ USB0_VBUS/ USB0_VBUSEN/ USB0_OVRCURB/IRQ6/ ADTRG0#	P16/MTIOC3C/MTIOC3D/ TIOCB1/TCLKC/TMO2/ PO14/RTCOUT/TXD1/ SMOSI1/SSDA1/RXD3/ SMISO3/SSCL3/SCL2-DS/ USB0_VBUSEN/ USB0_VBUS/ USB0_OVRCURB/IRQ6/ ADTRG0#	P16/MTIOC3C/MTIOC3D/ TIOCB1/TCLKC/TMO2/ PO14/RTCOUT/TXD1/ SMOSI1/SSDA1/RXD3/ SMISO3/SSCL3/ SCL2-DS/USB0_VBUSEN/ USB0_VBUS/ USB0_OVRCURB/IRQ6/ ADTRG0#
R4	P13/WR2#/BC2#/MTIOC0B/ TIOCA5/TMO3/PO13/TXD2/ SMOSI2/SSDA2/SDA0[FM+]/ IRQ3/ADTRG1#	P13/WR2#/BC2#/MTIOC0B/ TIOCA5/TMO3/PO13/ GTADSM1 /TXD2/SMOSI2/ SSDA2/SDA0[FM+]/ LCD_TCON0-A /IRQ3/ ADTRG1#	P13/WR2#/BC2#/MTIOC0B/ TIOCA5/TMO3/PO13/ GTADSM1 /TXD2/SMOSI2/ SSDA2/SDA0[FM+]/ LCD_TCON0-A /IRQ3/ ADTRG1#

176-Pin LFBGA	RX71M	RX72M	RX72N
R5	USB0_DM	USB0_DM	USB0_DM
R6	PVSS_USBA	USB0_DP	USB0_DP
R7	USBA_DP	CLKOUT25M/P56/EDACK1/ MTIOC3C/TIOCA1/SCK7/ RSPCKC-B/LCD_DATA4-A/ DSMDAT1	CLKOUT25M/P56/EDACK1/ MTIOC3C/TIOCA1/SCK7/ RSPCKC-B/LCD_DATA4-A
R8	P11/MTIC5V/TMCI3/SCK2/ USBA_VBUS/ USBA_VBUSEN/IRQ1	P11/MTIC5V/TMCI3/SCK2/ EPLSOUT1/CATSYNC1/ LCD_DATA7-A/IRQ1	P11/MTIC5V/TMCI3/SCK2/ EPLSOUT1/LCD_DATA7-A/ IRQ1
R9	P53*1/BCLK	P53*1/BCLK	P53*1/BCLK
R10	VSS	VSS	VSS
R11	VCC	VCC	VCC
R12	P80/EDREQ0/MTIOC3B/ PO26/SCK10/RTS10#/ ET0_TX_EN/ RMII0_RXD_EN/MMC_D2-A/ SDHI_WP-A/QIO2-A	P80/EDREQ0/MTIOC3B/ PO26/SCK10/RTS10#/ ET0_TX_EN/ RMII0_RXD_EN/ CAT0_TX_EN/CATLATCH0/ QIO2-A/ SDHI_WP/ MMC_D2-A/ LCD_DATA14-A	P80/EDREQ0/MTIOC3B/ PO26/SCK10/RTS10#/ ET0_TX_EN/ RMII0_RXD_EN/QIO2-A/ SDHI_WP/MMC_D2-A/ LCD_DATA14-A
R13	P76/CS6#/PO22/RXD11/ ET0_RX_CLK/REF50CK0/ MMC_CMD-A/SDHI_CMD-A/ QSSL-A	P76/CS6#/PO22/ SMISO11/ SSCL11 /RXD11/ ET0_RX_CLK/REF50CK0/ CAT0_RX_CLK/ QSSL-A/SDHI_CMD-A/ MMC_CMD-A/ LCD_DATA18-A	P76/CS6#/PO22/ SMISO11/ SSCL11 /RXD11/ ET0_RX_CLK/ REF50CK0/QSSL-A/ SDHI_CMD-A/MMC_CMD-A/ LCD_DATA18-A
R14	P74/A20/CS4#/PO19/ CTS11#/ET0_ERXD1/ RMII0_RXD1	P74/A20/CS4#/PO19/ SS11# / CTS11#/ET0_ERXD1/ RMII0_RXD1/ CAT0_ERXD1/ LCD_DATA21-A/DSMCLK2	P74/A20/CS4#/PO19/ SS11# / CTS11#/ET0_ERXD1/ RMII0_RXD1/ LCD_DATA21-A
R15	PC1/A17/MTIOC3A/TCLKD/ PO18/SCK5/SSLA2-A/ ET0_ERXD2/IRQ12	PC1/A17/MTIOC3A/TCLKD/ PO18/SCK5/SSLA2-A/ ET0_ERXD2/ CAT0_ERXD2/ LCD_DATA22-A/IRQ12	PC1/A17/MTIOC3A/TCLKD/ PO18/SCK5/SSLA2-A/ ET0_ERXD2/ LCD_DATA22-A/IRQ12

Note: 1. P53, which is multiplexed as the BCLK pin, cannot be used as an I/O port when the external bus is enabled.

3.2 176-Pin LFQFP Package

Table 3.2 is a comparative listing of the pin functions of 176-pin LFQFP package products.

Table 3.2 Comparative Listing of 176-Pin LFQFP Package Pin Functions

176-Pin LFQFP	RX71M	RX72M	RX72N
1	AVSS0	AVSS0	AVSS0
2	P05/IRQ13/DA1	P05/ SSILRCK1 /IRQ13/DA1	P05/ SSILRCK1 /IRQ13/DA1
3	AVCC1	AVCC1	AVCC1
4	P03/IRQ11/DA0	P03/ SSIDATA1 /IRQ11/DA0	P03/ SSIDATA1 /IRQ11/DA0
5	AVSS1	AVSS1	AVSS1
6	P02/TMCI1/SCK6/IRQ10/ AN120	P02/TMCI1/SCK6/ SSIBCK1 / CATLEDSTER /IRQ10/AN120	P02/TMCI1/SCK6/ SSIBCK1 / IRQ10/AN120
7	P01/TMCI0/RXD6/SMISO6/ SSCL6/IRQ9/AN119	P01/TMCI0/RXD6/SMISO6/ SSCL6/ SSIBCK0 / CATLEDER /IRQ9/AN119	P01/TMCI0/RXD6/SMISO6/ SSCL6/ SSIBCK0 /IRQ9/ AN119
8	P00/TMRI0/TXD6/SMOSI6/ SSDA6/IRQ8/AN118	P00/TMRI0/TXD6/SMOSI6/ SSDA6/ AUDIO_CLK / CATLATCH1 /IRQ8/AN118	P00/TMRI0/TXD6/SMOSI6/ SSDA6/ AUDIO_CLK /IRQ8/ AN118
9	PF5/IRQ4	PF5/ WAIT# / SSILRCK0 / CATLATCH0 /IRQ4	PF5/ WAIT# / SSILRCK0 /IRQ4
10	EMLE	EMLE	EMLE
11	PJ5/POE8#/CTS2#/RTS2#/SS2#	PJ5/POE8#/CTS2#/RTS2#/SS2#/ SSIRXD0 / EPLSOUT0 / CATSYNC0	PJ5/POE8#/CTS2#/RTS2#/SS2#/ SSIRXD0 / EPLSOUT0
12	VSS	VSS	VSS
13	PJ3/EDACK1/MTIOC3C/ ET0_EXOUT/CTS6#/RTS6#/CTS0#/RTS0#/SS6#/SS0#	PJ3/EDACK1/MTIOC3C/ CTS6#/RTS6#/SS6#/CTS0#/RTS0#/SS0#/ SSITXD0 / ET0_EXOUT/ CATRESTOUT	PJ3/EDACK1/MTIOC3C/ CTS6#/RTS6#/SS6#/CTS0#/RTS0#/SS0#/ SSITXD0 / ET0_EXOUT
14	VCL	VCL	VCL
15	VBATT	VBATT	VBATT
16	NC	NC	NC
17	TRST#/PF4	TRST#/PF4	TRST#/PF4
18	MD/FINED	MD/FINED	MD/FINED
19	XCIN	XCIN	XCIN
20	XCOUT	XCOUT	XCOUT
21	RES#	RES#	RES#
22	XTAL/P37	XTAL/P37	XTAL/P37
23	VSS	VSS	VSS
24	EXTAL/P36	EXTAL/P36	EXTAL/P36
25	VCC	VCC	VCC
26	UPSEL/P35/NMI	UPSEL/P35/NMI	UPSEL/P35/NMI
27	P34/MTIOC0A/TMCI3/PO12/ POE10#/SCK6/SCK0/ ET0_LINKSTA/IRQ4	P34/MTIOC0A/TMCI3/PO12/ POE10#/SCK6/SCK0/ ET0_LINKSTA/ CAT0_LINKSTA /IRQ4/ DSMDATO	P34/MTIOC0A/TMCI3/PO12/ POE10#/SCK6/SCK0/ ET0_LINKSTA/IRQ4

176-Pin LFQFP	RX71M	RX72M	RX72N
28	P33/EDREQ1/MTIOC0D/ TIOCD0/TMRI3/PO11/ POE4#/POE11#/RXD6/ RXD0/SMISO6/SMISO0/ SSCL6/SSCL0/CRX0/PCKO/ IRQ3-DS	P33/EDREQ1/MTIOC0D/ TIOCD0/TMRI3/PO11/ POE4#/POE11#/RXD6/ SMISO6/SSCL6/RXD0/ SMISO0/SSCL0/CRX0/ PCKO/IRQ3-DS/ DSMCLK0	P33/EDREQ1/MTIOC0D/ TIOCD0/TMRI3/PO11/ POE4#/POE11#/RXD6/ SMISO6/SSCL6/RXD0/ SMISO0/SSCL0/CRX0/ PCKO/IRQ3-DS
29	P32/MTIOC0C/TIOCC0/ TMO3/PO10/RTCOUT/ RTCIC2/POE0#/POE10#// TXD6/TXD0/SMOSI6/ SMOSI0/SSDA6/SSDA0/ CTX0/USB0_VBUSEN/ VSYNC/IRQ2-DS	P32/MTIOC0C/TIOCC0/ TMO3/PO10/RTCIC2/ RTCOUT/POE0#/POE10#// TXD6/SMOSI6/SSDA6/ TXD0/SMOSI0/SSDA0/ CTX0/USB0_VBUSEN/ VSYNC/IRQ2-DS	P32/MTIOC0C/TIOCC0/ TMO3/PO10/RTCIC2/ RTCOUT/POE0#/POE10#// TXD6/SMOSI6/SSDA6/ TXD0/SMOSI0/SSDA0/ CTX0/USB0_VBUSEN/ VSYNC/IRQ2-DS
30	TMS/PF3	TMS/PF3	TMS/PF3
31	TDI/PF2/RXD1/SMISO1/ SSCL1	TDI/PF2/RXD1/SMISO1/ SSCL1/CATI2CCLK	TDI/PF2/RXD1/SMISO1/ SSCL1
32	P31/MTIOC4D/TMC12/PO9/ RTCIC1/CTS1#/RTS1#// SS1#/ET1_MDC/SSLB0-A/ IRQ1-DS	P31/MTIOC4D/TMC12/PO9/ RTCIC1/CTS1#/RTS1#// SS1#/SSLB0-A/ET1_MDC/ PMGI1_MDC /IRQ1-DS	P31/MTIOC4D/TMC12/PO9/ RTCIC1/CTS1#/RTS1#// SS1#/SSLB0-A/ET1_MDC/ PMGI1_MDC /IRQ1-DS
33	P30/MTIOC4B/TMRI3/PO8/ RTCIC0/POE8#/RXD1/ SMISO1/SSCL1/ET1_MDIO/ MISOB-A/IRQ0-DS	P30/MTIOC4B/TMRI3/PO8/ RTCIC0/POE8#/RXD1/ SMISO1/SSCL1/MISOB-A/ ET1_MDIO/ PMGI1_MDIO / IRQ0-DS	P30/MTIOC4B/TMRI3/PO8/ RTCIC0/POE8#/RXD1/ SMISO1/SSCL1/MISOB-A/ ET1_MDIO/ PMGI1_MDIO / IRQ0-DS
34	TCK/PF1/SCK1	TCK/PF1/SCK1	TCK/PF1/SCK1
35	TDO/PF0/TXD1/SMOSI1/ SSDA1	TDO/PF0/TXD1/SMOSI1/ SSDA1/CATI2CDATA	TDO/PF0/TXD1/SMOSI1/ SSDA1
36	P27/CS7#/MTIOC2B/TMC13/ PO7/SCK1/ET1_WOL/ RSPCKB-A	P27/CS7#/MTIOC2B/TMC13/ PO7/SCK1/RSPCKB-A/ ET1_WOL/ CATIRQ	P27/CS7#/MTIOC2B/TMC13/ PO7/SCK1/RSPCKB-A/ ET1_WOL
37	P26/CS6#/MTIOC2A/TMO1/ PO6/TXD1/CTS3#/RTS3#// SMOSI1/SS3#/SSDA1/ ET1_EXOUT/MOSIB-A	P26/CS6#/MTIOC2A/TMO1/ PO6/TXD1/SMOSI1/SSDA1/ CTS3#/RTS3#/SS3#// MOSIB-A/ET1_EXOUT/ CATLINKACT1	P26/CS6#/MTIOC2A/TMO1/ PO6/TXD1/SMOSI1/SSDA1/ CTS3#/RTS3#/SS3#// MOSIB-A/ET1_EXOUT
38	P25/CS5#/EDACK1/ MTIOC4C/MTCLKB/TIOCA4/ PO5/RXD3/SMISO3/SSCL3/ SSIDATA1/H SYNC/ ADTRG0#	CLKOUT /P25/CS5#// EDACK1/MTIOC4C/ MTCLKB/TIOCA4/PO5/ RXD3/SMISO3/SSCL3/SSID ATA1/ SDHI_CD /H SYNC/ ADTRG0#	CLKOUT /P25/CS5#// EDACK1/MTIOC4C/ MTCLKB/TIOCA4/PO5/ RXD3/SMISO3/SSCL3/ SSIDATA1/ SDHI_CD / H SYNC/ADTRG0#
39	VCC	VCC	VCC
40	P24/CS4#/EDREQ1/ MTIOC4A/MTCLKA/TIOCB4/ TMRI1/PO4/SCK3/ USB0_VBUSEN/ SSISCK1 / PIXCLK	P24/CS4#/EDREQ1/ MTIOC4A/MTCLKA/TIOCB4/ TMRI1/PO4/SCK3/ USB0_VBUSEN/ SSIBCK1 / SDHI_WP /PIXCLK	P24/CS4#/EDREQ1/ MTIOC4A/MTCLKA/TIOCB4/ TMRI1/PO4/SCK3/ USB0_VBUSEN/ SSIBCK1 / SDHI_WP /PIXCLK
41	VSS	VSS	VSS

176-Pin LFQFP	RX71M	RX72M	RX72N
42	P23/EDACK0/MTIOC3D/ MTCLKD/ GTIOC0A-B/ TIOCD3/PO3/TXD3/CTS0#/RTS0#/SMOSI3/SS0#/SSDA3/ SSISCK0/PIXD7	P23/EDACK0/MTIOC3D/ MTCLKD/TIOCD3/PO3/ GTIOC0A/TXD3/SMOSI3/ SSDA3/CTS0#/RTS0#/SS0#/ CTX1/SSIBCK0/SDHI_D1-C/ PIXD7	P23/EDACK0/MTIOC3D/ MTCLKD/TIOCD3/PO3/ GTIOC0A/TXD3/SMOSI3/ SSDA3/CTS0#/RTS0#/SS0#/ CTX1/SSIBCK0/SDHI_D1-C/ PIXD7
43	P22/EDREQ0/MTIOC3B/ MTCLKC/ GTIOC1A-B/ TIOCC3/TMO0/PO2/SCK0/ USB0_OVRCURB/ USBA_OVRCURB/ AUDIO_MCLK/PIXD6	P22/EDREQ0/MTIOC3B/ MTCLKC/TIOCC3/TMO0/ PO2/ GTIOC1A/SCK0/ USB0_OVRCURB/ AUDIO_CLK/ SDHI_D0-C/ PIXD6	P22/EDREQ0/MTIOC3B/ MTCLKC/TIOCC3/TMO0/ PO2/ GTIOC1A/SCK0/ USB0_OVRCURB/ AUDIO_CLK/ SDHI_D0-C/ PIXD6
44	P21/MTIOC1B/MTIOC4A/ GTIOC2A-B/TIOCA3/TMC10/ PO1/RXD0/SMISO0/SSCL0/ USB0_EXICEN/ USBA_EXICEN/SSIWS0/ PIXD5/IRQ9	P21/MTIOC1B/MTIOC4A/ TIOCA3/TMC10/PO1/ GTIOC2A/RXD0/SMISO0/ SSCL0/ SCL1/ USB0_EXICEN/ SSIWRCK0/ SDHI_CLK-C/PIXD5/IRQ9	P21/MTIOC1B/MTIOC4A/ TIOCA3/TMC10/PO1/ GTIOC2A/RXD0/SMISO0/ SSCL0/ SCL1/ USB0_EXICEN/ SSIWRCK0/SDHI_CLK-C/ PIXD5/IRQ9
45	P20/MTIOC1A/TIOCB3/ TMRI0/PO0/TXD0/SMOSI0/ SSDA0/USB0_ID/ USBA_ID/ SSIRXD0/PIXD4/IRQ8	P20/MTIOC1A/TIOCB3/ TMRI0/PO0/TXD0/SMOSI0/ SSDA0/ SDA1/USB0_ID/ SSIRXD0/ SDHI_CMD-C/ PIXD4/IRQ8	P20/MTIOC1A/TIOCB3/ TMRI0/PO0/TXD0/SMOSI0/ SSDA0/ SDA1/USB0_ID/ SSIRXD0/ SDHI_CMD-C/ PIXD4/IRQ8
46	P17/MTIOC3A/MTIOC3B/ MTIOC4B/ GTIOC0B-B/ TIOCB0/TCLKD/TMO1/ PO15/POE8#/SCK1/TXD3/ SMOSI3/SSDA3/SDA2-DS/ SSITXD0/PIXD3/IRQ7/ ADTRG1#	P17/MTIOC3A/MTIOC3B/ MTIOC4B/TIOCB0/TCLKD/ TMO1/PO15/POE8#/ GTIOC0B/SCK1/TXD3/ SMOSI3/SSDA3/SDA2-DS/ SSITXD0/ EPLSOUT0/ CATSYNC0/SDHI_D3-C/ PIXD3/IRQ7/ADTRG1#	P17/MTIOC3A/MTIOC3B/ MTIOC4B/TIOCB0/TCLKD/ TMO1/PO15/POE8#/ GTIOC0B/SCK1/TXD3/ SMOSI3/SSDA3/SDA2-DS/ SSITXD0/ EPLSOUT0/ SDHI_D3-C/PIXD3/IRQ7/ ADTRG1#
47	P87/MTIOC4C/ GTIOC1B-B/ TIOCA2/TXD10/PIXD2	P87/MTIOC4C/TIOCA2/ GTIOC1B/SMOSI10/ SSDA10/TXD10/EPLSOUT1/ CATSYNC1/ SDHI_D2-C/ PIXD2	P87/MTIOC4C/TIOCA2/ GTIOC1B/SMOSI10/ SSDA10/TXD10/EPLSOUT1/ SDHI_D2-C/PIXD2
48	P16/MTIOC3C/MTIOC3D/ TIOCB1/TCLKC/TMO2/ PO14/RTCOUT/TXD1/RXD3/ SMOSI1/SMISO3/SSDA1/ SSCL3/SCL2-DS/ USB0_VBUS/ USB0_VBUSEN/ USB0_OVRCURB/IRQ6/ ADTRG0#	P16/MTIOC3C/MTIOC3D/ TIOCB1/TCLKC/TMO2/ PO14/RTCOUT/TXD1/ SMOSI1/SSDA1/RXD3/ SMISO3/SSCL3/SCL2-DS/ USB0_VBUSEN/ USB0_VBUS/ USB0_OVRCURB/IRQ6/ ADTRG0#	P16/MTIOC3C/MTIOC3D/ TIOCB1/TCLKC/TMO2/ PO14/RTCOUT/TXD1/ SMOSI1/SSDA1/RXD3/ SMISO3/SSCL3/SCL2-DS/ USB0_VBUSEN/ USB0_VBUS/ USB0_OVRCURB/IRQ6/ ADTRG0#
49	P86/MTIOC4D/ GTIOC2B-B/ TIOCA0/RXD10/PIXD1	P86/MTIOC4D/TIOCA0/ GTIOC2B/SMISO10/ SSCL10/RXD10/ CATLINKACT0/PIXD1	P86/MTIOC4D/TIOCA0/ GTIOC2B/SMISO10/ SSCL10/RXD10/PIXD1

176-Pin LFQFP	RX71M	RX72M	RX72N
50	P15/MTIOC0B/MTCLKB/ GTETRG-B /TIOCB2/TCLKB/ TMCI2/PO13/RXD1/SCK3/ SMISO1/SSCL1/CRX1-DS/ USBA_VBUSEN / SSIWS1 / PIXD0/IRQ5	P15/MTIOC0B/MTCLKB/ TIOCB2/TCLKB/TMC12/ PO13/ GTETRGA /RXD1/ SMISO1/SSCL1/SCK3/ CRX1-DS/ SSILRCK1 / CATLEDRUN /PIXD0/IRQ5	P15/MTIOC0B/MTCLKB/ TIOCB2/TCLKB/TMC12/ PO13/ GTETRGA /RXD1/ SMISO1/SSCL1/SCK3/ CRX1-DS/ SSILRCK1 /PIXD0/IRQ5
51	P14/MTIOC3A/MTCLKA/ TIOCB5/TCLKA/TMRI2/ PO15/CTS1#/RTS1#/SS1#/ CTX1/USB0_OVRCURA/ IRQ4	P14/MTIOC3A/MTCLKA/ TIOCB5/TCLKA/TMRI2/ PO15/ GTETRGD /CTS1#/ RTS1#/SS1#/CTX1/ USB0_OVRCURA/ LCD_CLK-A /IRQ4	P14/MTIOC3A/MTCLKA/ TIOCB5/TCLKA/TMRI2/ PO15/ GTETRGD /CTS1#/ RTS1#/SS1#/CTX1/ USB0_OVRCURA/ LCD_CLK-A /IRQ4
52	P13/WR2#/BC2#/MTIOC0B/ TIOCA5/TMO3/PO13/TXD2/ SMOSI2/SSDA2/SDA0[FM+]/ IRQ3/ADTRG1#	P13/WR2#/BC2#/MTIOC0B/ TIOCA5/TMO3/PO13/ GTADSM1 /TXD2/SMOSI2/ SSDA2/SDA0[FM+]/ LCD_TCON0-A /IRQ3/ ADTRG1#	P13/WR2#/BC2#/MTIOC0B/ TIOCA5/TMO3/PO13/ GTADSM1 /TXD2/SMOSI2/ SSDA2/SDA0[FM+]/ LCD_TCON0-A /IRQ3/ ADTRG1#
53	P12/WR3#/BC3#/MTIC5U/ TMCI1/RXD2/SMISO2/ SSCL2/SCL0[FM+]/IRQ2	P12/WR3#/BC3#/MTIC5U/ TMCI1/ GTADSM0 /RXD2/ SMISO2/SSCL2/SCL0[FM+]/ LCD_TCON1-A /IRQ2	P12/WR3#/BC3#/MTIC5U/ TMCI1/ GTADSM0 /RXD2/ SMISO2/SSCL2/SCL0[FM+]/ LCD_TCON1-A /IRQ2
54	VCC_USB	VCC_USB	VCC_USB
55	USB0_DM	USB0_DM	USB0_DM
56	USB0_DP	USB0_DP	USB0_DP
57	VSS_USB	VSS_USB	VSS_USB
58	AVCC_USBA	CLKOUT25M/PJ2/TXD8/ SMOSI8/SSDA8/SSLC3-B/ LCD_TCON2-A	CLKOUT25M/PJ2/TXD8/ SMOSI8/SSDA8/SSLC3-B/ LCD_TCON2-A
59	USBA_RREF	PJ1/MTIOC6A/RXD8/ SMISO8/SSCL8/SSLC2-B/ EPLSOUT1/CATSYNC1/ LCD_TCON3-A	PJ1/MTIOC6A/RXD8/ SMISO8/SSCL8/SSLC2-B/ EPLSOUT1/ LCD_TCON3-A
60	AVSS_USBA	PJ0/MTIOC6B/SCK8/ SSLC1-B/EPLSOUT0/ CATSYNC0/LCD_DATA0-A	PJ0/MTIOC6B/SCK8/ SSLC1-B/EPLSOUT0/ LCD_DATA0-A
61	PVSS_USBA	P85/MTIOC6C/TIOCC0/ LCD_DATA1-A	P85/MTIOC6C/TIOCC0/ LCD_DATA1-A
62	VSS2_USBA	P84/MTIOC6D/ ET1_LINKSTA/ CAT1_LINKSTA/ LCD_DATA2-A	P84/MTIOC6D/ ET1_LINKSTA/ LCD_DATA2-A
63	USBA_DM	P57/RXD7/SMISO7/SSCL7/ SSLC0-B/LCD_DATA3-A	P57/RXD7/SMISO7/SSCL7/ SSLC0-B/LCD_DATA3-A
64	USBA_DP	CLKOUT25M/P56/EDACK1/ MTIOC3C/TIOCA1/SCK7/ RSPCKC-B/LCD_DATA4-A/ DSMDAT1	CLKOUT25M/P56/EDACK1/ MTIOC3C/TIOCA1/SCK7/ RSPCKC-B/LCD_DATA4-A
65	VSS1_USBA	P55/D0[A0/D0]/EDREQ0/ WAIT#/MTIOC4D/TMO3/ TXD7/SMOSI7/SSDA7/ MISOC-B/CRX1/ ET0_EXOUT/ LCD_DATA5-A /IRQ10	P55/D0[A0/D0]/EDREQ0/ WAIT#/MTIOC4D/TMO3/ TXD7/SMOSI7/SSDA7/ MISOC-B/CRX1/ ET0_EXOUT/ LCD_DATA5-A /IRQ10

176-Pin LFQFP	RX71M	RX72M	RX72N
66	VCC_USBA	P54/D1[A1/D1]/EDACK0/ ALE/MTIOC4B/TMC11/ CTS2#/RTS2#/SS2#/ MOSIC-B/CTX1/ ET0_LINKSTA/ CAT0_LINKSTA/ LCD_DATA6-A	P54/D1[A1/D1]/EDACK0/ ALE/MTIOC4B/TMC11/ CTS2#/RTS2#/SS2#/ MOSIC-B/CTX1/ ET0_LINKSTA/ LCD_DATA6-A
67	P11/MTIC5V/TMC13/SCK2/ USBA_VBUS/ USBA_VBUSEN/IRQ1	P11/MTIC5V/TMC13/SCK2/ EPLSOUT1/CATSYNC1/ LCD_DATA7-A/IRQ1	P11/MTIC5V/TMC13/SCK2/ EPLSOUT1/LCD_DATA7-A/ IRQ1
68	P10/ALE/MTIC5W/TMRI3/ USBA_OVRCURA/IRQ0	P10/ALE/MTIC5W/TMRI3/I RQ0	P10/ALE/MTIC5W/TMRI3/ IRQ0
69	P53*1/BCLK	P53*1/BCLK	P53*1/BCLK
70	P52/RD#/RXD2/SMISO2/ SSCL2/SSLB3-A	P52/RD#/RXD2/SMISO2/ SSCL2/SSLB3-A/ CATLEDSTER	P52/RD#/RXD2/SMISO2/ SSCL2/SSLB3-A
71	P51/WR1#/BC1#/WAIT#/SCK2/SSLB2-A	P51/WR1#/BC1#/WAIT#/SCK2/SSLB2-A	P51/WR1#/BC1#/WAIT#/SCK2/SSLB2-A
72	P50/WR0#/WR#/TXD2/ SMOSI2/SSDA2/SSLB1-A	P50/WR0#/WR#/TXD2/ SMOSI2/SSDA2/SSLB1-A/ CATLEDERR	P50/WR0#/WR#/TXD2/ SMOSI2/SSDA2/SSLB1-A
73	VSS	VSS	VSS
74	P83/EDACK1/MTIOC4C/ GTIOC0A-D/CTS10#/ET0_CRS/RMII0_CRS_DV/SCK10	P83/EDACK1/MTIOC4C/ GTIOC0A/SCK10/SS10#/CTS10#/ET0_CRS/RMII0_CRS_DV/ CAT0_RX_DV/LCD_DATA8-A/DSMCLK1	P83/EDACK1/MTIOC4C/ GTIOC0A/SCK10/SS10#/CTS10#/ET0_CRS/RMII0_CRS_DV/ LCD_DATA8-A
75	VCC	VCC	VCC
76	UB/PC7/A23/CS0#/MTIOC3A/MTCLKB/ GTIOC3A-D/TMO2/TOC0/ PO31/CACREF/TXD8/ MISOA-A/ET0_COL/ MMC_D7-A/IRQ14	UB/PC7/A23/CS0#/MTIOC3A/MTCLKB/TMO2/ PO31/TOC0/CACREF/GTIOC3A/TXD8/SMOSI8/ SSDA8/SMOSI10/SSDA10/TXD10/MISOA-A/ET0_COL/ MMC_D7-A/LCD_DATA9-A/IRQ14	UB/PC7/A23/CS0#/MTIOC3A/MTCLKB/TMO2/ PO31/TOC0/CACREF/GTIOC3A/TXD8/SMOSI8/ SSDA8/SMOSI10/SSDA10/TXD10/MISOA-A/ET0_COL/ MMC_D7-A/LCD_DATA9-A/IRQ14
77	PC6/A22/CS1#/MTIOC3C/MTCLKA/ GTIOC3B-D/TMC12/TIC0/PO30/RXD8/ MOSIA-A/ET0_ETXD3/ MMC_D6-A/IRQ13	PC6/D2[A2/D2]/A22/CS1#/MTIOC3C/MTCLKA/TMC12/ PO30/TIC0/GTIOC3B/RXD8/SMISO8/SSCL8/SMISO10/ SSCL10/RXD10/MOSIA-A/ET0_ETXD3/CAT0_ETXD3/ CATLATCH1/MMC_D6-A/LCD_DATA10-A/IRQ13	PC6/D2[A2/D2]/A22/CS1#/MTIOC3C/MTCLKA/TMC12/ PO30/TIC0/GTIOC3B/RXD8/SMISO8/SSCL8/SMISO10/ SSCL10/RXD10/MOSIA-A/ET0_ETXD3/MMC_D6-A/ LCD_DATA10-A/IRQ13
78	PC5/A21/CS2#/WAIT#/MTIOC3B/MTCLKD/ GTIOC1A-D/TMRI2/PO29/ SCK8/RSPCKA-A/RTS8#/ET0_ETXD2/MMC_D5-A	PC5/D3[A3/D3]/A21/CS2#/WAIT#/MTIOC3B/MTCLKD/ TMRI2/PO29/GTIOC1A/SCK8/RTS8#/SCK10/RSPCKA-A/ET0_ETXD2/ CAT0_ETXD2/MMC_D5-A/LCD_DATA11-A	PC5/D3[A3/D3]/A21/CS2#/WAIT#/MTIOC3B/MTCLKD/ TMRI2/PO29/GTIOC1A/SCK8/RTS8#/SCK10/RSPCKA-A/ET0_ETXD2/ MMC_D5-A/LCD_DATA11-A

176-Pin LFQFP	RX71M	RX72M	RX72N
79	P82/EDREQ1/MTIOC4A/ GTIOC2A-D /PO28/TXD10/ ET0_ETXD1/RMII0_TXD1/ MMC_D4-A	P82/EDREQ1/MTIOC4A/ PO28/ GTIOC2A / SMOSI10 / SSDA10 /TXD10/ ET0_ETXD1/RMII0_TXD1/ CAT0_ETXD1 / CATI2CDATA / MMC_D4-A/ LCD_DATA12-A	P82/EDREQ1/MTIOC4A/ PO28/ GTIOC2A / SMOSI10 / SSDA10 /TXD10/ ET0_ETXD1/RMII0_TXD1/ MMC_D4-A/ LCD_DATA12-A
80	P81/EDACK0/MTIOC3D/ GTIOC0B-D /PO27/RXD10/ ET0_ETXD0/RMII0_TXD0/ MMC_D3-A/ SDHI_CD-A / QIO3-A	P81/EDACK0/MTIOC3D/ PO27/ GTIOC0B / SMISO10 / SSCL10 /RXD10/ ET0_ETXD0/RMII0_TXD0/ CAT0_ETXD0 / CATI2CCLK / QIO3-A/ SDHI_CD / MMC_D3-A/ LCD_DATA13-A	P81/EDACK0/MTIOC3D/ PO27/ GTIOC0B / SMISO10 / SSCL10 /RXD10/ ET0_ETXD0/RMII0_TXD0/ QIO3-A/ SDHI_CD / MMC_D3-A/ LCD_DATA13-A
81	P80/EDREQ0/MTIOC3B/ PO26/SCK10/RTS10#/ ET0_TX_EN/ RMII0_TXD_EN/MMC_D2-A/ SDHI_WP-A /QIO2-A	P80/EDREQ0/MTIOC3B/ PO26/SCK10/RTS10#/ ET0_TX_EN/ RMII0_TXD_EN/ CAT0_TX_EN / CATLATCH0 / QIO2-A/ SDHI_WP / MMC_D2-A/ LCD_DATA14-A	P80/EDREQ0/MTIOC3B/ PO26/SCK10/RTS10#/ ET0_TX_EN/ RMII0_TXD_EN/QIO2-A/ SDHI_WP /MMC_D2-A/ LCD_DATA14-A
82	PC4/A20/CS3#/MTIOC3D/ MTCLKC/ GTETRG-D / TMCI1/PO25/POE0#/SCK5/ CTS8#/SSLA0-A/ ET0_TX_CLK/MMC_D1-A/ SDHI_D1-A/QIO1-A/QMI-A	PC4/A20/CS3#/MTIOC3D/ MTCLKC/TMCI1/PO25/ POE0#/ GTETRGC /SCK5/ CTS8#/ SS8# / SS10# / CTS10# /RTS10#/SSLA0-A/ ET0_TX_CLK/ CAT0_TX_CLK / CATSYNC0 / QMI-A/QIO1-A/SDHI_D1-A/ MMC_D1-A/ LCD_DATA15-A	PC4/A20/CS3#/MTIOC3D/ MTCLKC/TMCI1/PO25/ POE0#/ GTETRGC /SCK5/ CTS8#/ SS8# / SS10# / CTS10# /RTS10#/SSLA0-A/ ET0_TX_CLK/QMI-A/ QIO1-A/SDHI_D1-A/ MMC_D1-A/ LCD_DATA15-A
83	PC3/A19/MTIOC4D/ GTIOC1B-D /TCLKB/PO24/ TXD5/SMOSI5/SSDA5/ ET0_RX_ER/MMC_D0-A/ SDHI_D0-A/QIO0-A/QMO-A	PC3/A19/MTIOC4D/TCLKB/ PO24/ GTIOC1B /TXD5/ SMOSI5/SSDA5/ ET0_RX_ER/QMO-A/ QIO0-A/SDHI_D0-A/ MMC_D0-A/ LCD_DATA16-A	PC3/A19/MTIOC4D/TCLKB/ PO24/ GTIOC1B /TXD5/ SMOSI5/SSDA5/ ET0_RX_ER/QMO-A/ QIO0-A/SDHI_D0-A/ MMC_D0-A/ LCD_DATA16-A
84	P77/CS7#/PO23/TXD11/ ET0_RX_ER/RMII0_RX_ER/ MMC_CLK-A/SDHI_CLK-A/ QSPCLK-A	P77/CS7#/PO23/ SMOSI11 / SSDA11 /TXD11/ ET0_RX_ER/RMII0_RX_ER/ CAT0_RX_ER /QSPCLK-A/ SDHI_CLK-A/MMC_CLK-A/ LCD_DATA17-A	P77/CS7#/PO23/ SMOSI11 / SSDA11 /TXD11/ ET0_RX_ER/RMII0_RX_ER/ QSPCLK-A/SDHI_CLK-A/ MMC_CLK-A/ LCD_DATA17-A
85	P76/CS6#/PO22/RXD11/ ET0_RX_CLK/REF50CK0/ MMC_CMD-A/SDHI_CMD-A/ QSSL-A	P76/CS6#/PO22/ SMISO11 / SSCL11 /RXD11/ ET0_RX_CLK/REF50CK0/ CAT0_RX_CLK /QSSL-A/ SDHI_CMD-A/MMC_CMD-A/ LCD_DATA18-A	P76/CS6#/PO22/ SMISO11 / SSCL11 /RXD11/ ET0_RX_CLK/REF50CK0/ QSSL-A/SDHI_CMD-A/ MMC_CMD-A/ LCD_DATA18-A
86	PC2/A18/MTIOC4B/ GTIOC2B-D /TCLKA/PO21/ RXD5/SMISO5/SSCL5/ SSLA3-A/ET0_RX_DV/ MMC_CD-A/SDHI_D3-A	PC2/A18/MTIOC4B/TCLKA/ PO21/ GTIOC2B /RXD5/ SMISO5/SSCL5/SSLA3-A/ ET0_RX_DV/ CAT0_RX_DV / SDHI_D3-A/MMC_CD-A/ LCD_DATA19-A	PC2/A18/MTIOC4B/TCLKA/ PO21/ GTIOC2B /RXD5/ SMISO5/SSCL5/SSLA3-A/ ET0_RX_DV/SDHI_D3-A/ MMC_CD-A/ LCD_DATA19-A

176-Pin LFQFP	RX71M	RX72M	RX72N
87	P75/CS5#/PO20/SCK11/ RTS11#/ET0_ERXD0/ RMII0_RXD0/MMC_RES#-A/ SDHI_D2-A	P75/CS5#/PO20/SCK11/ RTS11#/ET0_ERXD0/ RMII0_RXD0/ CAT0_ERXD0/ SDHI_D2-A/MMC_RES#-A/ LCD_DATA20-A/DSMDAT2	P75/CS5#/PO20/SCK11/ RTS11#/ET0_ERXD0/ RMII0_RXD0/SDHI_D2-A/ MMC_RES#-A/ LCD_DATA20-A
88	P74/A20/CS4#/PO19/ CTS11#/ET0_ERXD1/ RMII0_RXD1	P74/A20/CS4#/PO19/ SS11#/ CTS11#/ET0_ERXD1/ RMII0_RXD1/ CAT0_ERXD1/ LCD_DATA21-A/DSMCLK2	P74/A20/CS4#/PO19/ SS11#/ CTS11#/ET0_ERXD1/ RMII0_RXD1/ LCD_DATA21-A
89	PC1/A17/MTIOC3A/TCLKD/ PO18/SCK5/SSLA2-A/ ET0_ERXD2/IRQ12	PC1/A17/MTIOC3A/TCLKD/ PO18/SCK5/SSLA2-A/ ET0_ERXD2/ CAT0_ERXD2/ LCD_DATA22-A/IRQ12	PC1/A17/MTIOC3A/TCLKD/ PO18/SCK5/SSLA2-A/ ET0_ERXD2/ LCD_DATA22-A/IRQ12
90	VCC	VCC	VCC
91	PC0/A16/MTIOC3C/TCLKC/ PO17/CTS5#/RTS5#/SS5#/ SSLA1-A/ET0_ERXD3/ IRQ14	PC0/A16/MTIOC3C/TCLKC/ PO17/CTS5#/RTS5#/SS5#/ SSLA1-A/ET0_ERXD3/ CAT0_ERXD3/IRQ14	PC0/A16/MTIOC3C/TCLKC/ PO17/CTS5#/RTS5#/SS5#/ SSLA1-A/ET0_ERXD3/ IRQ14
92	VSS	VSS	VSS
93	P73/CS3#/PO16/ET0_WOL	P73/CS3#/PO16/ET0_WOL/ LCD_EXTCLK-A	P73/CS3#/PO16/ET0_WOL/ LCD_EXTCLK-A
94	PB7/A15/MTIOC3B/TIOCB5/ PO31/TXD9/ET0_CRS/ RMII0_CRS_DV	PB7/A15/MTIOC3B/TIOCB5/ PO31/TXD9/ SMOSI9/ SSDA9/SMOSI11/SSDA11/ TXD11/ET0_CRS/ RMII0_CRS_DV/ CAT0_RX_DV	PB7/A15/MTIOC3B/TIOCB5/ PO31/TXD9/ SMOSI9/ SSDA9/SMOSI11/SSDA11/ TXD11/ET0_CRS/ RMII0_CRS_DV
95	PB6/A14/MTIOC3D/TIOCA5/ PO30/RXD9/ET0_ETXD1/ RMII0_TXD1	PB6/A14/MTIOC3D/TIOCA5/ PO30/RXD9/ SMISO9/ SSCL9/SMISO11/SSCL11/ RXD11/ET0_ETXD1/ RMII0_TXD1/ CAT0_ETXD1	PB6/A14/MTIOC3D/TIOCA5/ PO30/RXD9/ SMISO9/ SSCL9/SMISO11/SSCL11/ RXD11/ET0_ETXD1/ RMII0_TXD1
96	PB5/A13/MTIOC2A/ MTIOC1B/TIOCB4/TMRI1/ PO29/POE4#/SCK9/RTS9#/ ET0_ETXD0/RMII0_TXD0	PB5/A13/MTIOC2A/ MTIOC1B/TIOCB4/TMRI1/ PO29/POE4#/SCK9/RTS9#/ SCK11/ET0_ETXD0/ RMII0_TXD0/ CAT0_ETXD0/ LCD_CLK-B	PB5/A13/MTIOC2A/ MTIOC1B/TIOCB4/TMRI1/ PO29/POE4#/SCK9/RTS9#/ SCK11/ET0_ETXD0/ RMII0_TXD0/ LCD_CLK-B
97	PB4/A12/TIOCA4/PO28/ CTS9#/ET0_TX_EN/ RMII0_TXD_EN	PB4/A12/TIOCA4/PO28/ CTS9#/ SS9#/SS11#/ CTS11#/RTS11#/ ET0_TX_EN/ RMII0_TXD_EN/ CAT0_TX_EN/ LCD_TCON0-B	PB4/A12/TIOCA4/PO28/ CTS9#/ SS9#/SS11#/ CTS11#/RTS11#/ ET0_TX_EN/ RMII0_TXD_EN/ LCD_TCON0-B
98	PB3/A11/MTIOC0A/ MTIOC4A/TIOCD3/TCLKD/ TMO0/PO27/POE11#/SCK4/ SCK6/ET0_RX_ER/ RMII0_RX_ER	PB3/A11/MTIOC0A/ MTIOC4A/TIOCD3/TCLKD/ TMO0/PO27/POE11#/SCK4/ SCK6/ET0_RX_ER/ RMII0_RX_ER/ CAT0_RX_ER/ LCD_TCON1-B	PB3/A11/MTIOC0A/ MTIOC4A/TIOCD3/TCLKD/ TMO0/PO27/POE11#/SCK4/ SCK6/ET0_RX_ER/ RMII0_RX_ER/ LCD_TCON1-B

176-Pin LFQFP	RX71M	RX72M	RX72N
99	PB2/A10/TIOCC3/TCLKC/ PO26/CTS4#/RTS4#/CTS6#/RTS6#/SS4#/SS6#/ET0_RX_CLK/REF50CK0	PB2/A10/TIOCC3/TCLKC/ PO26/CTS4#/RTS4#/SS4#/CTS6#/RTS6#/SS6#/ET0_RX_CLK/REF50CK0/ CAT0_RX_CLK/LCD_TCON2-B	PB2/A10/TIOCC3/TCLKC/ PO26/CTS4#/RTS4#/SS4#/CTS6#/RTS6#/SS6#/ET0_RX_CLK/REF50CK0/ LCD_TCON2-B
100	PB1/A9/MTIOC0C/ MTIOC4C/TIOCB3/TMCI0/ PO25/TXD4/TXD6/SMOSI4/ SMOSI6/SSDA4/SSDA6/ ET0_ERXD0/RMII0_RXD0/ IRQ4-DS	PB1/A9/MTIOC0C/ MTIOC4C/TIOCB3/TMCI0/ PO25/TXD4/SMOSI4/ SSDA4/TXD6/SMOSI6/ SSDA6/ET0_ERXD0/ RMII0_RXD0/ CAT0_ERXD0/LCD_TCON3-B/IRQ4-DS	PB1/A9/MTIOC0C/ MTIOC4C/TIOCB3/TMCI0/ PO25/TXD4/SMOSI4/ SSDA4/TXD6/SMOSI6/ SSDA6/ET0_ERXD0/ RMII0_RXD0/ LCD_TCON3-B/IRQ4-DS
101	P72/A19/CS2#/ET0_MDC	P72/A19/CS2#/ET0_MDC/ CAT0_MDC/PMGI0_MDC/LCD_DATA23-A/DSMDAT3	P72/A19/CS2#/ET0_MDC/ PMGI0_MDC/LCD_DATA23-A
102	P71/A18/CS1#/ET0_MDIO	P71/A18/CS1#/ET0_MDIO/ CAT0_MDIO/PMGI0_MDIO/DSMCLK3	P71/A18/CS1#/ET0_MDIO/ PMGI0_MDIO
103	VCC	VCC	VCC
104	PB0/A8/MTIC5W/TIOCA3/ PO24/RXD4/RXD6/SMISO4/ SMISO6/SSCL4/SSCL6/ ET0_ERXD1/RMII0_RXD1/ IRQ12	PB0/A8/MTIC5W/TIOCA3/ PO24/RXD4/SMISO4/ SSCL4/RXD6/SMISO6/ SSCL6/ET0_ERXD1/ RMII0_RXD1/ CAT0_ERXD1/LCD_DATA0-B/IRQ12	PB0/A8/MTIC5W/TIOCA3/ PO24/RXD4/SMISO4/ SSCL4/RXD6/SMISO6/ SSCL6/ET0_ERXD1/ RMII0_RXD1/ LCD_DATA0-B/IRQ12
105	VSS	VSS	VSS
106	PA7/A7/TIOCB2/PO23/ MISOA-B/ET0_WOL	PA7/A7/TIOCB2/PO23/ MISOA-B/ET0_WOL/ LCD_DATA1-B	PA7/A7/TIOCB2/PO23/ MISOA-B/ET0_WOL/ LCD_DATA1-B
107	PA6/A6/MTIC5V/MTCLKB/ GTETRG-C/TIOCA2/TMCI3/PO22/POE10#/CTS5#/RTS5#/SS5#/MOSIA-B/ET0_EXOUT	PA6/A6/MTIC5V/MTCLKB/ TIOCA2/TMCI3/PO22/ POE10#/ GTETRGB/CTS5#/RTS5#/SS5#/MOSIA-B/ET0_EXOUT/CATRESTOUT/LCD_DATA2-B	PA6/A6/MTIC5V/MTCLKB/ TIOCA2/TMCI3/PO22/ POE10#/ GTETRGB/CTS5#/RTS5#/SS5#/MOSIA-B/ET0_EXOUT/LCD_DATA2-B
108	PA5/A5/MTIOC6B/ GTIOC0A-C/TIOCB1/PO21/RSPCKA-B/ET0_LINKSTA	PA5/A5/MTIOC6B/TIOCB1/ PO21/ GTIOC0A/RSPCKA-B/ET0_LINKSTA/CAT0_LINKSTA/LCD_DATA3-B	PA5/A5/MTIOC6B/TIOCB1/ PO21/ GTIOC0A/RSPCKA-B/ET0_LINKSTA/CAT0_LINKSTA/LCD_DATA3-B
109	PA4/A4/MTIC5U/MTCLKA/ TIOCA1/TMRI0/PO20/TXD5/ SMOSI5/SSDA5/SSLA0-B/ ET0_MDC/IRQ5-DS	PA4/A4/MTIC5U/MTCLKA/ TIOCA1/TMRI0/PO20/TXD5/ SMOSI5/SSDA5/SSLA0-B/ ET0_MDC/ CAT0_MDC/CATIRQ/PMGI0_MDC/LCD_DATA4-B/IRQ5-DS	PA4/A4/MTIC5U/MTCLKA/ TIOCA1/TMRI0/PO20/TXD5/ SMOSI5/SSDA5/SSLA0-B/ ET0_MDC/ PMGI0_MDC/LCD_DATA4-B/IRQ5-DS
110	PA3/A3/MTIOC0D/MTCLKD/ TIOCD0/TCLKB/PO19/ RXD5/SMISO5/SSCL5/ ET0_MDIO/IRQ6-DS	PA3/A3/MTIOC0D/MTCLKD/ TIOCD0/TCLKB/PO19/ RXD5/SMISO5/SSCL5/ ET0_MDIO/ CAT0_MDIO/PMGI0_MDIO/LCD_DATA5-B/IRQ6-DS	PA3/A3/MTIOC0D/MTCLKD/ TIOCD0/TCLKB/PO19/ RXD5/SMISO5/SSCL5/ ET0_MDIO/ PMGI0_MDIO/LCD_DATA5-B/IRQ6-DS

176-Pin LFQFP	RX71M	RX72M	RX72N
111	TRDATA3/PG7/D31/ ET1_TX_ER	TRDATA3/PG7/D31/ ET1_TX_ER	TRDATA3/PG7/D31/ ET1_TX_ER
112	PA2/A2/MTIOC7A/ GTIOC1A-C /PO18/RXD5/ SMISO5/SSCL5/SSLA3-B	PA2/A2/MTIOC7A/PO18/ GTIOC1A /RXD5/SMISO5/ SSCL5/SSLA3-B/ CATLINKACT1 / LCD_DATA6-B	PA2/A2/MTIOC7A/PO18/ GTIOC1A /RXD5/SMISO5/ SSCL5/SSLA3-B/ LCD_DATA6-B
113	TRDATA2/PG6/D30/ ET1_ETXD3	TRDATA2/PG6/D30/ ET1_ETXD3/ CAT1_ETXD3	TRDATA2/PG6/D30/ ET1_ETXD3
114	PA1/A1/DQM3/MTIOC0B/ MTCLKC/MTIOC7B/ GTIOC2A-C /TIOCB0/PO17/ SCK5/SSLA2-B/ET0_WOL/ IRQ11	PA1/DQM3/A1/MTIOC0B/ MTCLKC/MTIOC7B/TIOCB0/ PO17/ GTIOC2A /SCK5/ SSLA2-B/ET0_WOL/ LCD_DATA7-B /IRQ11	PA1/DQM3/A1/MTIOC0B/ MTCLKC/MTIOC7B/TIOCB0/ PO17/ GTIOC2A /SCK5/ SSLA2-B/ET0_WOL/ LCD_DATA7-B /IRQ11
115	VCC	VCC	VCC
116	TRCLK/PG5/D29/ ET1_ETXD2	TRCLK/PG5/D29/ ET1_ETXD2/ CAT1_ETXD2	TRCLK/PG5/D29/ ET1_ETXD2
117	VSS	VSS	VSS
118	PA0/A0/BC0#/DQM2/ MTIOC4A/MTIOC6D/ GTIOC0B-C /TIOCA0/ CACREF/PO16/SSLA1-B/ ET0_TX_EN/RMII0_TXD_EN	PA0/DQM2/BC0#/A0/ MTIOC4A/MTIOC6D/ TIOCA0/PO16/CACREF/ GTIOC0B /SSLA1-B/ ET0_TX_EN/ RMII0_TXD_EN/ CAT0_TX_EN / CATLEDRUN / LCD_DATA8-B	PA0/DQM2/BC0#/A0/ MTIOC4A/MTIOC6D/ TIOCA0/PO16/CACREF/ GTIOC0B /SSLA1-B/ ET0_TX_EN/ RMII0_TXD_EN/ LCD_DATA8-B
119	TRSYNC/PG4/D28/ ET1_ETXD1/RMII1_TXD1	TRSYNC/PG4/D28/ ET1_ETXD1/RMII1_TXD1/ CAT1_ETXD1	TRSYNC/PG4/D28/ ET1_ETXD1/RMII1_TXD1
120	P67/CS7#/DQM1/MTIOC7C/ GTIOC1B-C /CRX2/IRQ15	P67/DQM1/CS7#/MTIOC7C/ GTIOC1B /CRX2/ EPLSOUT1 / CATSYNC1 /IRQ15	P67/DQM1/CS7#/MTIOC7C/ GTIOC1B /CRX2/ EPLSOUT1 / IRQ15
121	TRDATA1/PG3/D27/ ET1_ETXD0/RMII1_TXD0	TRDATA1/PG3/D27/ ET1_ETXD0/RMII1_TXD0/ CAT1_ETXD0	TRDATA1/PG3/D27/ ET1_ETXD0/RMII1_TXD0
122	P66/CS6#/DQM0/MTIOC7D/ GTIOC2B-C /CTX2	P66/DQM0/CS6#/MTIOC7D/ GTIOC2B /CTX2	P66/DQM0/CS6#/MTIOC7D/ GTIOC2B /CTX2
123	TRDATA0/PG2/D26/ ET1_TX_CLK	TRDATA0/PG2/D26/ ET1_TX_CLK/ CAT1_TX_CLK	TRDATA0/PG2/D26/ ET1_TX_CLK
124	P65/CS5#/CKE	P65/CKE/CS5#	P65/CKE/CS5#
125	PE7/D15[A15/D15]/ MTIOC6A/ GTIOC3A-E / TOC1/MISOB-B/ MMC_RES#-B/ SDHI_WP -B/ IRQ7/AN105	PE7/D15[A15/D15]/ D7[A7/D7] /MTIOC6A/TOC1/ GTIOC3A /MISOB-B/ SDHI_WP /MMC_RES#-B/ LCD_DATA9-B /IRQ7/AN105	PE7/D15[A15/D15]/ D7[A7/D7] /MTIOC6A/TOC1/ GTIOC3A /MISOB-B/ SDHI_WP /MMC_RES#-B/ LCD_DATA9-B /IRQ7/AN105
126	PE6/D14[A14/D14]/ MTIOC6C/ GTIOC3B-E /TIC1/ MOSIB-B/MMC_CD-B/ SDHI_CD -B/IRQ6/AN104	PE6/D14[A14/D14]/ D6[A6/D6] /MTIOC6C/TIC1/ GTIOC3B /MOSIB-B/ SDHI_CD /MMC_CD-B/ LCD_DATA10-B /IRQ6/ AN104	PE6/D14[A14/D14]/ D6[A6/D6] /MTIOC6C/TIC1/ GTIOC3B /MOSIB-B/ SDHI_CD /MMC_CD-B/ LCD_DATA10-B /IRQ6/ AN104
127	VCC	VCC	VCC
128	P70/SDCLK	P70/SDCLK/ CATLINKACT0	P70/SDCLK

176-Pin LFQFP	RX71M	RX72M	RX72N
129	VSS	VSS	VSS
130	PE5/D13[A13/D13]/ MTIOC4C/MTIOC2B/ GTIOC0A-A/ET0_RX_CLK/ REF50CK0/RSPCKB-B/ IRQ5/AN103	PE5/D13[A13/D13]/ D5[A5/D5] /MTIOC4C/ MTIOC2B/ GTIOC0A/ RSPCKB-B/ET0_RX_CLK/ REF50CK0/ CAT0_RX_CLK/ LCD_DATA11-B/ IRQ5/AN103	PE5/D13[A13/D13]/ D5[A5/D5] /MTIOC4C/ MTIOC2B/ GTIOC0A/ RSPCKB-B/ET0_RX_CLK/ REF50CK0/ LCD_DATA11-B/ IRQ5/AN103
131	PE4/D12[A12/D12]/ MTIOC4D/MTIOC1A/ GTIOC1A-A/PO28/ ET0_ERXD2/SSLB0-B/ AN102	PE4/D12[A12/D12]/ D4[A4/D4] /MTIOC4D/ MTIOC1A/PO28/ GTIOC1A/ SSLB0-B/ET0_ERXD2/ CAT0_ERXD2/ LCD_DATA12-B/ AN102	PE4/D12[A12/D12]/ D4[A4/D4] /MTIOC4D/ MTIOC1A/PO28/ GTIOC1A/ SSLB0-B/ET0_ERXD2/ LCD_DATA12-B/ AN102
132	PE3/D11[A11/D11]/ MTIOC4B/ GTIOC2A-A/ PO26/POE8#/TOC3/ CTS12#/RTS12#/SS12#/ ET0_ERXD3/MMC_D7-B/ AN101	PE3/D11[A11/D11]/ D3[A3/D3] /MTIOC4B/PO26/ TOC3/POE8#/ GTIOC2A/ CTS12#/RTS12#/SS12#/ ET0_ERXD3/ CAT0_ERXD3/ MMC_D7-B/ LCD_DATA13-B/ AN101	PE3/D11[A11/D11]/ D3[A3/D3] /MTIOC4B/PO26/ TOC3/POE8#/ GTIOC2A/ CTS12#/RTS12#/SS12#/ ET0_ERXD3/MMC_D7-B/ LCD_DATA13-B/ AN101
133	PE2/D10[A10/D10]/ MTIOC4A/ GTIOC0B-A/ PO23/TIC3/RXD12/ SMISO12/SSCL12/RDXD12/ SSLB3-B/MMC_D6-B/ IRQ7-DS/AN100	PE2/D10[A10/D10]/ D2[A2/D2] /MTIOC4A/PO23/ TIC3/ GTIOC0B/RXD12/ SMISO12/SSCL12/RDXD12/ SSLB3-B/MMC_D6-B/ LCD_DATA14-B/ IRQ7-DS/ AN100	PE2/D10[A10/D10]/ D2[A2/D2] /MTIOC4A/PO23/ TIC3/ GTIOC0B/RXD12/ SMISO12/SSCL12/RDXD12/ SSLB3-B/MMC_D6-B/ LCD_DATA14-B/ IRQ7-DS/ AN100
134	PE1/D9[A9/D9]/MTIOC4C/ MTIOC3B/ GTIOC1B-A/ PO18/TXD12/SMOSI12/ SSDA12/TXDX12/SIOX12/ SSLB2-B/MMC_D5-B/ANEX1	PE1/D9[A9/D9]/ D1[A1/D1] / MTIOC4C/MTIOC3B/PO18/ GTIOC1B/TXD12/SMOSI12/ SSDA12/TXDX12/SIOX12/ SSLB2-B/MMC_D5-B/ LCD_DATA15-B/ ANEX1	PE1/D9[A9/D9]/ D1[A1/D1] / MTIOC4C/MTIOC3B/PO18/ GTIOC1B/TXD12/SMOSI12/ SSDA12/TXDX12/SIOX12/ SSLB2-B/MMC_D5-B/ LCD_DATA15-B/ ANEX1
135	PE0/D8[A8/D8]/MTIOC3D/ GTIOC2B-A/SCK12/ SSLB1-B/MMC_D4-B/ANEX0	PE0/D8[A8/D8]/ D0[A0/D0] / MTIOC3D/ GTIOC2B/SCK12/ SSLB1-B/MMC_D4-B/ LCD_DATA16-B/ ANEX0	PE0/D8[A8/D8]/ D0[A0/D0] / MTIOC3D/ GTIOC2B/SCK12/ SSLB1-B/MMC_D4-B/ LCD_DATA16-B/ ANEX0
136	P64/CS4#/WE#	P64/WE#/ D3[A3/D3] /CS4#/ ET1_ETXD0/RMII1_TXD0/ CAT1_ETXD0	P64/WE#/ D3[A3/D3] /CS4#/ ET1_ETXD0/RMII1_TXD0
137	P63/CS3#/CAS#	P63/CAS#/ D2[A2/D2] /CS3#/ ET1_ETXD1/RMII1_TXD1/ CAT1_ETXD1	P63/CAS#/ D2[A2/D2] /CS3#/ ET1_ETXD1/RMII1_TXD1
138	P62/CS2#/RAS#	P62/RAS#/ D1[A1/D1] /CS2#/ ET1_ERXD0/RMII1_RXD0/ CAT1_ERXD0	P62/RAS#/ D1[A1/D1] /CS2#/ ET1_ERXD0/RMII1_RXD0
139	P61/CS1#/SDCS#	P61/SDCS#/ D0[A0/D0] / CS1#/ ET1_ERXD1/ RMII1_RXD1/CAT1_ERXD1	P61/SDCS#/ D0[A0/D0] / CS1#/ ET1_ERXD1/ RMII1_RXD1
140	VSS	VSS	VSS
141	P60/CS0#/ET1_TX_EN/ RMII1_TXD_EN	P60/CS0#/ET1_TX_EN/ RMII1_TXD_EN/ CAT1_TX_EN	P60/CS0#/ET1_TX_EN/ RMII1_TXD_EN
142	VCC	VCC	VCC

176-Pin LFQFP	RX71M	RX72M	RX72N
143	PD7/D7[A7/D7]/MTIC5U/ POE0#/MMC_D1-B/ SDHI_D1-B/QIO1-B/QMI-B/ IRQ7/AN107	PD7/D7[A7/D7]/MTIC5U/ POE0#/SSLC3-A/ ET1_RX_ER/RMII1_RX_ER/ CAT1_RX_ER/QMI-B/ QIO1-B/SDHI_D1-B/ MMC_D1-B/ LCD_DATA17-B/ IRQ7/AN107	PD7/D7[A7/D7]/MTIC5U/ POE0#/SSLC3-A/ ET1_RX_ER/RMII1_RX_ER/ QMI-B/QIO1-B/SDHI_D1-B/ MMC_D1-B/ LCD_DATA17-B/ IRQ7/AN107
144	PG1/D25/ET1_RX_ER/ RMII1_RX_ER	TRDATA7 /PG1/D25/ ET1_RX_ER/RMII1_RX_ER/ CAT1_RX_ER	TRDATA7 /PG1/D25/ ET1_RX_ER/RMII1_RX_ER
145	PD6/D6[A6/D6]/MTIC5V/ MTIOC8A/POE4#/MMC_D0-B/SDHI_D0-B/QIO0-B/QMO-B/IRQ6/AN106	PD6/D6[A6/D6]/MTIC5V/ MTIOC8A/POE4#/SSLC2-A/ ET1_RX_CLK/REF50CK1/ CAT1_RX_CLK/QMO-B/ QIO0-B/SDHI_D0-B/ MMC_D0-B/ LCD_DATA18-B/ IRQ6/AN106	PD6/D6[A6/D6]/MTIC5V/ MTIOC8A/POE4#/SSLC2-A/ ET1_RX_CLK/REF50CK1/ QMO-B/QIO0-B/SDHI_D0-B/ MMC_D0-B/ LCD_DATA18-B/ IRQ6/AN106
146	PG0/D24/ET1_RX_CLK/ REF50CK1	TRDATA6 /PG0/D24/ ET1_RX_CLK/REF50CK1/ CAT1_RX_CLK	TRDATA6 /PG0/D24/ ET1_RX_CLK/REF50CK1
147	PD5/D5[A5/D5]/MTIC5W/ MTIOC8C/POE10#/MMC_CLK-B/SDHI_CLK-B/QSPCLK-B/IRQ5/AN113	PD5/D5[A5/D5]/MTIC5W/ MTIOC8C/MTCLKA/ POE10#/SSLC1-A/ ET1_MDC/PMGI1_MDC/ QSPCLK-B/SDHI_CLK-B/ MMC_CLK-B/ LCD_DATA19-B/IRQ5/ AN113	PD5/D5[A5/D5]/MTIC5W/ MTIOC8C/MTCLKA/ POE10#/SSLC1-A/ ET1_MDC/PMGI1_MDC/ QSPCLK-B/SDHI_CLK-B/ MMC_CLK-B/ LCD_DATA19-B/IRQ5/ AN113
148	PD4/D4[A4/D4]/MTIOC8B/ POE11#/MMC_CMD-B/SDHI_CMD-B/QSSL-B/IRQ4/AN112	PD4/D4[A4/D4]/MTIOC8B/ POE11#/SSLC0-A/ ET1_MDIO/PMGI1_MDIO/ QSSL-B/SDHI_CMD-B/ MMC_CMD-B/ LCD_DATA20-B/IRQ4/AN112	PD4/D4[A4/D4]/MTIOC8B/ POE11#/SSLC0-A/ ET1_MDIO/PMGI1_MDIO/ QSSL-B/SDHI_CMD-B/ MMC_CMD-B/ LCD_DATA20-B/IRQ4/AN112
149	P97/A23/D23/ET1_ERXD3	TRSYNC1 /P97/D23/A23/ ET1_ERXD3/ CAT1_ERXD3	TRSYNC1 /P97/D23/A23/ ET1_ERXD3
150	PD3/D3[A3/D3]/MTIOC8D/ GTIOC0A-E/POE8#/TOC2/ MMC_D3-B/SDHI_D3-B/QIO3-B/IRQ3/AN111	PD3/D3[A3/D3]/MTIOC8D/ TOC2/POE8#/GTIOC0A/ RSPCKC-A/ET1_WOL/ QIO3-B/SDHI_D3-B/ MMC_D3-B/ LCD_DATA21-B/ IRQ3/AN111	PD3/D3[A3/D3]/MTIOC8D/ TOC2/POE8#/GTIOC0A/ RSPCKC-A/ET1_WOL/ QIO3-B/SDHI_D3-B/ MMC_D3-B/ LCD_DATA21-B/ IRQ3/AN111
151	VSS	VSS	VSS
152	P96/A22/D22/ET1_ERXD2	TRDATA5 /P96/D22/A22/ ET1_ERXD2/ CAT1_ERXD2	TRDATA5 /P96/D22/A22/ ET1_ERXD2
153	VCC	VCC	VCC
154	PD2/D2[A2/D2]/MTIOC4D/ GTIOC0B-E/TIC2/CRX0/ MMC_D2-B/SDHI_D2-B/QIO2_B/IRQ2/AN110	PD2/D2[A2/D2]/MTIOC4D/ TIC2/GTIOC0B/MISOC-A/ CRX0/ ET1_EXOUT/QIO2-B/ SDHI_D2-B/MMC_D2-B/ LCD_DATA22-B/IRQ2/AN110	PD2/D2[A2/D2]/MTIOC4D/ TIC2/GTIOC0B/MISOC-A/ CRX0/ ET1_EXOUT/QIO2-B/ SDHI_D2-B/MMC_D2-B/ LCD_DATA22-B/IRQ2/AN110
155	P95/A21/D21/ET1_ERXD1/RMII1_RXD1	TRDATA4 /P95/D21/A21/ ET1_ERXD1/RMII1_RXD1/ CAT1_ERXD1	TRDATA4 /P95/D21/A21/ ET1_ERXD1/RMII1_RXD1

176-Pin LFQFP	RX71M	RX72M	RX72N
156	PD1/D1[A1/D1]/MTIOC4B/ GTIOC1A-E /POE0#/CTX0/ IRQ1/AN109	PD1/D1[A1/D1]/MTIOC4B/ POE0#/ GTIOC1A/MOSIC-A / CTX0/ LCD_DATA23-B /IRQ1/ AN109	PD1/D1[A1/D1]/MTIOC4B/ POE0#/ GTIOC1A/MOSIC-A / CTX0/ LCD_DATA23-B /IRQ1/ AN109
157	P94/A20/D20/ET1_ERXD0/ RMII1_RXD0	P94/D20/A20/ET1_ERXD0/ RMII1_RXD0/ CAT1_ERXD0	P94/D20/A20/ET1_ERXD0/ RMII1_RXD0
158	PD0/D0[A0/D0]/ GTIOC1B-E / POE4#/IRQ0/AN108	PD0/D0[A0/D0]/POE4#/ GTIOC1B/LCD_EXTCLK-B / IRQ0/AN108	PD0/D0[A0/D0]/POE4#/ GTIOC1B/LCD_EXTCLK-B / IRQ0/AN108
159	P93/A19/D19/POE0#/ ET1_LINKSTA/CTS7#/ RTS7#/SS7#/AN117	P93/D19/A19/POE0#/CTS7#/ RTS7#/SS7#/ET1_LINKSTA/ CAT1_LINKSTA /AN117/ DSMDAT4	P93/D19/A19/POE0#/CTS7#/ RTS7#/SS7#/ET1_LINKSTA/ AN117
160	P92/A18/D18/POE4#/ ET1_CRS/RMII1_CRS_DV/ RXD7/SMISO7/SSCL7/ AN116	P92/D18/A18/POE4#/RXD7/ SMISO7/SSCL7/ET1_CRS/ RMII1_CRS_DV/ CAT1_RX_DV /AN116/ DSMCLK4	P92/D18/A18/POE4#/RXD7/ SMISO7/SSCL7/ET1_CRS/ RMII1_CRS_DV/AN116
161	P91/A17/D17/ET1_COL/ SCK7/AN115	P91/D17/A17/SCK7/ ET1_COL/AN115/ DSMDAT5	P91/D17/A17/SCK7/ ET1_COL/AN115
162	VSS	VSS	VSS
163	P90/A16/D16/ET1_RX_DV/ TXD7/SMOSI7/SSDA7/ AN114	P90/D16/A16/TXD7/SMOSI7/ SSDA7/ET1_RX_DV/ CAT1_RX_DV /AN114/ DSMCLK5	P90/D16/A16/TXD7/SMOSI7/ SSDA7/ET1_RX_DV/AN114
164	VCC	VCC	VCC
165	P47/IRQ15-DS/AN007	P47/IRQ15-DS/AN007	P47/IRQ15-DS/AN007
166	P46/IRQ14-DS/AN006	P46/IRQ14-DS/AN006	P46/IRQ14-DS/AN006
167	P45/IRQ13-DS/AN005	P45/IRQ13-DS/AN005	P45/IRQ13-DS/AN005
168	P44/IRQ12-DS/AN004	P44/IRQ12-DS/AN004	P44/IRQ12-DS/AN004
169	P43/IRQ11-DS/AN003	P43/IRQ11-DS/AN003	P43/IRQ11-DS/AN003
170	P42/IRQ10-DS/AN002	P42/IRQ10-DS/AN002	P42/IRQ10-DS/AN002
171	P41/IRQ9-DS/AN001	P41/IRQ9-DS/AN001	P41/IRQ9-DS/AN001
172	VREFL0	VREFL0	VREFL0
173	P40/IRQ8-DS/AN000	P40/IRQ8-DS/AN000	P40/IRQ8-DS/AN000
174	VREFH0	VREFH0	VREFH0
175	AVCC0	AVCC0	AVCC0
176	P07/IRQ15/ADTRG0#	P07/IRQ15/ADTRG0#	P07/IRQ15/ADTRG0#

Note: 1. P53, which is multiplexed as the BCLK pin, cannot be used as an I/O port when the external bus is enabled.

3.3 145-Pin TFLGA Package

Table 3.3 is a comparative listing of the pin functions of 145-pin TFLGA package products. Note that the RX72M Group has no product versions with a 145-pin package.

Table 3.3 Comparative Listing of 145-pin TFLGA Package Pin Functions

145-Pin TFLGA	RX71M	RX72N
A1	AVSS0	AVSS0
A2	P07/IRQ15/ADTRG0#	P07/IRQ15/ADTRG0#
A3	P40/IRQ8-DS/AN000	P40/IRQ8-DS/AN000
A4	P42/IRQ10-DS/AN002	P42/IRQ10-DS/AN002
A5	P45/IRQ13-DS/AN005	P45/IRQ13-DS/AN005
A6	P90/A16/TXD7/SMOSI7/SSDA7/AN114	P90/A16/TXD7/SMOSI7/SSDA7/AN114
A7	P92/A18/POE4#/RXD7/SMISO7/SSCL7/ AN116	P92/A18/POE4#/RXD7/SMISO7/SSCL7/ RMII1_CRS_DV /AN116
A8	PD2/D2[A2/D2]/MTIOC4D/ GTIOC0B-E /TIC2/ CRX0/MMC_D2-B/SDHI_D2-B/QIO2-B/ IRQ2/AN110	PD2/D2[A2/D2]/MTIOC4D/TIC2/ GTIOC0B / MISOC-A /CRX0/ ET1_EXOUT /QIO2-B/ SDHI_D2-B/MMC_D2-B/ LCD_DATA22-B / IRQ2/AN110
A9	PD6/D6[A6/D6]/MTIC5V/MTIOC8A/POE4#/ MMC_D0-B/SDHI_D0-B/QIO0-B/QMO-B/ IRQ6/AN106	PD6/D6[A6/D6]/MTIC5V/MTIOC8A/POE4#/ SSLC2-A / REF50CK1 /QMO-B/QIO0-B/ SDHI_D0-B/MMC_D0-B/ LCD_DATA18-B / IRQ6/AN106
A10	VSS	VSS
A11	P62/CS2#/RAS#	P62/RAS#/D1[A1/D1]/CS2#/RMII1_RXD0
A12	PE1/D9[A9/D9]/MTIOC4C/MTIOC3B/ GTIOC1B-A /PO18/TXD12/SMOSI12/ SSDA12/TXDX12/SIOX12/SSLB2-B/ MMC_D5-B/ANEX1	PE1/D9[A9/D9]/D1[A1/D1]/MTIOC4C/ MTIOC3B/PO18/ GTIOC1B /TXD12/ SMOSI12/SSDA12/TXDX12/SIOX12/ SSLB2-B/MMC_D5-B/ LCD_DATA15-B / ANEX1
A13	PE3/D11[A11/D11]/MTIOC4B/ GTIOC2A-A / PO26/POE8#/TOC3/CTS12#/RTS12#/ SS12#/ET0_ERXD3/MMC_D7-B/AN101	PE3/D11[A11/D11]/D3[A3/D3]/MTIOC4B/ PO26/TOC3/POE8#/ GTIOC2A /CTS12#/ RTS12#/SS12#/ET0_ERXD3/MMC_D7-B/ LCD_DATA13-B /AN101
B1	AVCC1	AVCC1
B2	AVCC0	AVCC0
B3	P05/IRQ13/DA1	P05/ SSILRCK1 /IRQ13/DA1
B4	VREFL0	VREFL0
B5	P43/IRQ11-DS/AN003	P43/IRQ11-DS/AN003
B6	P47/IRQ15-DS/AN007	P47/IRQ15-DS/AN007
B7	P91/A17/SCK7/AN115	P91/A17/SCK7/AN115
B8	PD0/D0[A0/D0]/ GTIOC1B-E /POE4#/IRQ0/ AN108	PD0/D0[A0/D0]/POE4#/ GTIOC1B / LCD_EXTCLK-B /IRQ0/AN108
B9	PD4/D4[A4/D4]/MTIOC8B/POE11#/ MMC_CMD-B/SDHI_CMD-B/QSSL-B/IRQ4/ AN112	PD4/D4[A4/D4]/MTIOC8B/POE11#/ SSLC0-A / ET1_MDIO / PMGI1_MDIO / QSSL-B/SDHI_CMD-B/MMC_CMD-B/ LCD_DATA20-B /IRQ4/AN112
B10	VCC	VCC
B11	P61/CS1#/SDCS#	P61/SDCS#/D0[A0/D0]/CS1#/RMII1_RXD1

145-Pin TFLGA	RX71M	RX72N
B12	PE2/D10[A10/D10]/MTIOC4A/ GTIOC0B-A / PO23/TIC3/RXD12/SMISO12/SSCL12/ RXDX12/SSLB3-B/MMC_D6-B/IRQ7-DS/ AN100	PE2/D10[A10/D10]/ D2[A2/D2] /MTIOC4A/PO23/TIC3/ GTIOC0B /RXD12/SMISO12/SSCL12/RXDX12/SSLB3-B/MMC_D6-B/ LCD_DATA14-B /IRQ7-DS/AN100
B13	PE4/D12[A12/D12]/MTIOC4D/MTIOC1A/ GTIOC1A-A /PO28/ET0_ERXD2/SSLB0-B/ AN102	PE4/D12[A12/D12]/ D4[A4/D4] /MTIOC4D/MTIOC1A/PO28/ GTIOC1A /SSLB0-B/ET0_ERXD2/ LCD_DATA12-B /AN102
C1	AVSS1	AVSS1
C2	P02/TMCI1/SCK6/IRQ10/AN120	P02/TMCI1/SCK6/ SSIBCK1 /IRQ10/AN120
C3	VREFH0	VREFH0
C4	P41/IRQ9-DS/AN001	P41/IRQ9-DS/AN001
C5	P46/IRQ14-DS/AN006	P46/IRQ14-DS/AN006
C6	VSS	VSS
C7	PD1/D1[A1/D1]/MTIOC4B/ GTIOC1A-E / POE0#/CTX0/IRQ1/AN109	PD1/D1[A1/D1]/MTIOC4B/POE0#/ GTIOC1A / MOSIC-A /CTX0/ LCD_DATA23-B /IRQ1/ AN109
C8	PD3/D3[A3/D3]/MTIOC8D/ GTIOC0A-E / POE8#/TOC2/MMC_D3-B/SDHI_D3-B/ QIO3-B/IRQ3/AN111	PD3/D3[A3/D3]/MTIOC8D/TOC2/POE8#/ GTIOC0A / RSPCKC-A / ET1_WOL /QIO3-B/ SDHI_D3-B/MMC_D3-B/ LCD_DATA21-B / IRQ3/AN111
C9	PD7/D7[A7/D7]/MTIC5U/POE0#/MMC_D1-B/ SDHI_D1-B/QIO1-B/QMI-B/IRQ7/AN107	PD7/D7[A7/D7]/MTIC5U/POE0#/ SSLC3-A / RMII1_RX_ER /QMI-B/QIO1-B/SDHI_D1-B/ MMC_D1-B/ LCD_DATA17-B /IRQ7/AN107
C10	P63/CS3#/CAS#	P63/CAS#/ D2[A2/D2] /CS3#/ RMII1_TXD1
C11	PE0/D8[A8/D8]/MTIOC3D/ GTIOC2B-A / SCK12/SSLB1-B/MMC_D4-B/ANEX0	PE0/D8[A8/D8]/ D0[A0/D0] /MTIOC3D/ GTIOC2B /SCK12/SSLB1-B/MMC_D4-B/ LCD_DATA16-B /ANEX0
C12	P70/SDCLK	P70/SDCLK
C13	VSS	VSS
D1	P00/TMRI0/TXD6/SMOSI6/SSDA6/IRQ8/ AN118	P00/TMRI0/TXD6/SMOSI6/SSDA6/ AUDIO_CLK /IRQ8/AN118
D2	PF5/IRQ4	PF5/ WAIT# / SSILRCK0 /IRQ4
D3	P03/IRQ11/DA0	P03/ SSIDATA1 /IRQ11/DA0
D4	P01/TMCI0/RXD6/SMISO6/SSCL6/IRQ9/ AN119	P01/TMCI0/RXD6/SMISO6/SSCL6/ SSIBCK0 / IRQ9/AN119
D5	VCC	VCC
D6	P93/A19/POE0#/CTS7#/RTS7#/SS7#/AN117	P93/A19/POE0#/CTS7#/RTS7#/SS7#/ ET1_LINKSTA /AN117
D7	PD5/D5[A5/D5]/MTIC5W/MTIOC8C/ POE10#/MMC_CLK-B/SDHI_CLK-B/ QSPCLK-B/IRQ5/AN113	PD5/D5[A5/D5]/MTIC5W/MTIOC8C/ MTCLKA /POE10#/ SSLC1-A / ET1_MDC / PMGI1_MDC /QSPCLK-B/SDHI_CLK-B/ MMC_CLK-B/ LCD_DATA19-B /IRQ5/AN113
D8	P60/CS0#	P60/CS0#/ RMII1_TXD_EN
D9	P64/CS4#/WE#	P64/WE#/ D3[A3/D3] /CS4#/ RMII1_TXD0
D10	PE7/D15[A15/D15]/MTIOC6A/ GTIOC3A-E / TOC1/MISOB-B/MMC_RES#-B/ SDHI_WP-B / IRQ7/AN105	PE7/D15[A15/D15]/ D7[A7/D7] /MTIOC6A/ TOC1/ GTIOC3A /MISOB-B/ SDHI_WP / MMC_RES#-B/ LCD_DATA9-B /IRQ7/AN105
D11	VCC	VCC

145-Pin TFLGA	RX71M	RX72N
D12	PE5/D13[A13/D13]/MTIOC4C/MTIOC2B/ GTIOC0A-A /ET0_RX_CLK/REF50CK0/ RSPCKB-B/IRQ5/AN103	PE5/D13[A13/D13]/ D5[A5/D5] /MTIOC4C/ MTIOC2B/ GTIOC0A /RSPCKB-B/ ET0_RX_CLK/REF50CK0/ LCD_DATA11-B / IRQ5/AN103
D13	PE6/D14[A14/D14]/MTIOC6C/ GTIOC3B-E / TIC1/MOSIB-B/MMC_CD-B/ SDHI_CD-B / IRQ6/AN104	PE6/D14[A14/D14]/ D6[A6/D6] /MTIOC6C/ TIC1/ GTIOC3B /MOSIB-B/ SDHI_CD / MMC_CD-B/ LCD_DATA10-B /IRQ6/AN104
E1	VSS	VSS
E2	VCL	VCL
E3	PJ5/POE8#/CTS2#/RTS2#/SS2#	PJ5/POE8#/CTS2#/RTS2#/SS2#/ SSIRXD0 / EPLSOUT0
E4	EMLE	EMLE
E5	P44/IRQ12-DS/AN004	P44/IRQ12-DS/AN004
E10	PA0/A0/BC0#/MTIOC4A/MTIOC6D/ GTIOC0B-C /TIOCA0/CACREF/PO16/ SSLA1-B/ET0_TX_EN/RMII0_TXD_EN	PA0/BC0#/A0/MTIOC4A/MTIOC6D/TIOCA0/ PO16/CACREF/ GTIOC0B /SSLA1-B/ ET0_TX_EN/RMII0_TXD_EN/ LCD_DATA8-B
E11	P66/CS6#/DQM0/MTIOC7D/ GTIOC2B-C / CTX2	P66/DQM0/CS6#/MTIOC7D/ GTIOC2B /CTX2
E12	P65/CS5#/CKE	P65/CKE/CS5#
E13	P67/CS7#/DQM1/MTIOC7C/ GTIOC1B-C / CRX2/IRQ15	P67/DQM1/CS7#/MTIOC7C/ GTIOC1B / CRX2/ EPLSOUT1 /IRQ15
F1	XCIN	XCIN
F2	XCOUT	XCOUT
F3	PJ3/EDACK1/MTIOC3C/ET0_EXOUT/ CTS6#/RTS6#/CTS0#/RTS0#/SS6#/SS0#	PJ3/EDACK1/MTIOC3C/CTS6#/RTS6#/ SS6#/CTS0#/RTS0#/SS0#/ SSITXD0 / ET0_EXOUT
F4	VBATT	VBATT
F10	PA3/A3/MTIOC0D/MTCLKD/TIOCD0/TCLKB/ PO19/RXD5/SMISO5/SSCL5/ET0_MDIO/ IRQ6-DS	PA3/A3/MTIOC0D/MTCLKD/TIOCD0/TCLKB/ PO19/RXD5/SMISO5/SSCL5/ET0_MDIO/ PMGI0_MDIO / LCD_DATA5-B /IRQ6-DS
F11	VSS	VSS
F12	PA1/A1/MTIOC0B/MTCLKC/MTIOC7B/ GTIOC2A-C /TIOCB0/PO17/SCK5/SSLA2-B/ ET0_WOL/IRQ11	PA1/A1/MTIOC0B/MTCLKC/MTIOC7B/ TIOCB0/PO17/ GTIOC2A /SCK5/SSLA2-B/ ET0_WOL/ LCD_DATA7-B /IRQ11
F13	PA2/A2/MTIOC7A/ GTIOC1A-C /PO18/RXD5/ SMISO5/SSCL5/SSLA3-B	PA2/A2/MTIOC7A/PO18/ GTIOC1A /RXD5/ SMISO5/SSCL5/SSLA3-B/ LCD_DATA6-B
G1	XTAL/P37	XTAL/P37
G2	RES	RES#
G3	MD/FINED	MD/FINED
G4	BSCANP	BSCANP
G10	PA5/A5/MTIOC6B/TIOCB1/ GTIOC0A-C / PO21/RSPCKA-B/ET0_LINKSTA	PA5/A5/MTIOC6B/TIOCB1/PO21/ GTIOC0A / RSPCKA-B/ET0_LINKSTA/ LCD_DATA3-B
G11	PA6/A6/MTIC5V/MTCLKB/ GTETRG-C / TIOCA2/TMC13/PO22/POE10#/CTS5#/ RTS5#/SS5#/MOSIA-B/ET0_EXOUT	PA6/A6/MTIC5V/MTCLKB/TIOCA2/TMC13/ PO22/POE10#/ GTETRGB /CTS5#/RTS5#/ SS5#/MOSIA-B/ET0_EXOUT/ LCD_DATA2-B
G12	VCC	VCC
G13	PA4/A4/MTIC5U/MTCLKA/TIOCA1/TMRI0/ PO20/TXD5/SMOSI5/SSDA5/SSLA0-B/ ET0_MDC/IRQ5-DS	PA4/A4/MTIC5U/MTCLKA/TIOCA1/TMRI0/ PO20/TXD5/SMOSI5/SSDA5/SSLA0-B/ ET0_MDC/ PMGI0_MDC / LCD_DATA4-B / IRQ5-DS
H1	EXTAL/P36	EXTAL/P36
H2	VCC	VCC

145-Pin TFLGA	RX71M	RX72N
H3	VSS	VSS
H4	UPSEL/P35/NMI	UPSEL/P35/NMI
H10	P72/A19/CS2#/ET0_MDC	P72/A19/CS2#/ET0_MDC/ PMGI0_MDC
H11	P71/A18/CS1#/ET0_MDIO	P71/A18/CS1#/ET0_MDIO/ PMGI0_MDIO
H12	PB0/A8/MTIC5W/TIOCA3/PO24/RXD4/ RXD6/SMISO4/SMISO6/SSCL4/SSCL6/ ET0_ERXD1/RMII0_RXD1/IRQ12	PB0/A8/MTIC5W/TIOCA3/PO24/RXD4/ SMISO4/SSCL4/RXD6/SMISO6/SSCL6/ ET0_ERXD1/RMII0_RXD1/ LCD_DATA0-B / IRQ12
H13	PA7/A7/TIOCB2/PO23/MISOA-B/ET0_WOL	PA7/A7/TIOCB2/PO23/MISOA-B/ET0_WOL/ LCD_DATA1-B
J1	TRST#/P34/MTIOC0A/TMC13/PO12/ POE10#/SCK6/SCK0/ET0_LINKSTA/IRQ4	TRST#/P34/MTIOC0A/TMC13/PO12/ POE10#/SCK6/SCK0/ET0_LINKSTA/IRQ4
J2	P33/EDREQ1/MTIOC0D/TIOCD0/TMRI3/ PO11/POE4#/POE11#/RXD6/RXD0/ SMISO6/SMISO0/SSCL6/SSCL0/CRX0/ PCK0/IRQ3-DS	P33/EDREQ1/MTIOC0D/TIOCD0/TMRI3/ PO11/POE4#/POE11#/RXD6/SMISO6/ SSCL6/RXD0/SMISO0/SSCL0/CRX0/PCK0/ IRQ3-DS
J3	P32/MTIOC0C/TIOCC0/TMO3/PO10/ RTCON/RTCC2/POE0#/POE10#/TXD6/ TXD0/SMOSI6/SMOSI0/SSDA6/SSDA0/ CTX0/USB0_VBUSEN/VSYNC/IRQ2-DS	P32/MTIOC0C/TIOCC0/TMO3/PO10/ RTCC2/RTCON/POE0#/POE10#/TXD6/ SMOSI6/SSDA6/TXD0/SMOSI0/SSDA0/ CTX0/USB0_VBUSEN/VSYNC/IRQ2-DS
J4	TDI/P30/MTIOC4B/TMRI3/PO8/RTCC0/ POE8#/RXD1/SMISO1/SSCL1/MISOB-A/ IRQ0-DS	TDI/P30/MTIOC4B/TMRI3/PO8/RTCC0/ POE8#/RXD1/SMISO1/SSCL1/MISOB-A/ ET1_MDIO/PMGI1_MDIO /IRQ0-DS
J10	PB3/A11/MTIOC0A/MTIOC4A/TIOCD3/ TCLKD/TMO0/PO27/POE11#/SCK4/SCK6/ ET0_RX_ER/RMII0_RX_ER	PB3/A11/MTIOC0A/MTIOC4A/TIOCD3/ TCLKD/TMO0/PO27/POE11#/SCK4/SCK6/ ET0_RX_ER/RMII0_RX_ER/ LCD_TCON1-B
J11	PB4/A12/TIOCA4/PO28/CTS9#/ET0_TX_EN/RMII0_RXD_EN	PB4/A12/TIOCA4/PO28/CTS9#/SS9#/SS11#/CTS11#/RTS11#/ET0_TX_EN/RMII0_RXD_EN/ LCD_TCON0-B
J12	PB2/A10/TIOCC3/TCLKC/PO26/CTS4#/RTS4#/CTS6#/RTS6#/SS4#/SS6#/ET0_RX_CLK/REF50CK0	PB2/A10/TIOCC3/TCLKC/PO26/CTS4#/RTS4#/SS4#/CTS6#/RTS6#/SS6#/ET0_RX_CLK/REF50CK0/ LCD_TCON2-B
J13	PB1/A9/MTIOC0C/MTIOC4C/TIOCB3/TMC10/PO25/TXD4/TXD6/SMOSI4/SMOSI6/SSDA4/SSDA6/ET0_ERXD0/RMII0_RXD0/IRQ4-DS	PB1/A9/MTIOC0C/MTIOC4C/TIOCB3/TMC10/PO25/TXD4/SMOSI4/SSDA4/TXD6/SMOSI6/SSDA6/ET0_ERXD0/RMII0_RXD0/ LCD_TCON3-B /IRQ4-DS
K1	TCK/P27/CS7#/MTIOC2B/TMC13/PO7/SCK1/RSPCKB-A	TCK/P27/CS7#/MTIOC2B/TMC13/PO7/SCK1/RSPCKB-A/ ET1_WOL
K2	TDO/P26/CS6#/MTIOC2A/TMO1/PO6/TXD1/CTS3#/RTS3#/SMOSI1/SS3#/SSDA1/MOSIB-A	TDO/P26/CS6#/MTIOC2A/TMO1/PO6/TXD1/SMOSI1/SSDA1/CTS3#/RTS3#/SS3#/MOSIB-A/ ET1_EXOUT
K3	TMS/P31/MTIOC4D/TMC12/PO9/RTCC1/CTS1#/RTS1#/SS1#/SSLB0-A/IRQ1-DS	TMS/P31/MTIOC4D/TMC12/PO9/RTCC1/CTS1#/RTS1#/SS1#/SSLB0-A/ ET1_MDC/PMGI1_MDC /IRQ1-DS
K4	P15/MTIOC0B/MTCLKB/ GTETRG-B /TIOCB2/TCLKB/TMC12/PO13/RXD1/SCK3/SMISO1/SSCL1/CRX1-DS/ SSIWS1 /PIXD0/IRQ5	P15/MTIOC0B/MTCLKB/TIOCB2/TCLKB/TMC12/PO13/ GTETRGA /RXD1/SMISO1/SSCL1/SCK3/CRX1-DS/ SSIWRCK1 /PIXD0/IRQ5
K5	TRDATA2/P54/ALE/EDACK0/MTIOC4B/TMC11/CTS2#/RTS2#/SS2#/CTX1/ET0_LINKSTA	TRDATA2/P54/ALE/ D1[A1/D1] /EDACK0/MTIOC4B/TMC11/CTS2#/RTS2#/SS2#/CTX1/ET0_LINKSTA
K6	P53*1/BCLK	P53*1/BCLK
K7	P51/WR1#/BC1#/WAIT#/SCK2/SSLB2-A	P51/WR1#/BC1#/WAIT#/SCK2/SSLB2-A

145-Pin TFLGA	RX71M	RX72N
K8	VCC	VCC
K9	TRDATA0/P80/EDREQ0/MTIOC3B/PO26/ SCK10/RTS10#/ET0_TX_EN/ RMII0_TXD_EN/MMC_D2-A/ SDHI_WP-A / QIO2-A	TRDATA0/P80/EDREQ0/MTIOC3B/PO26/ SCK10/RTS10#/ET0_TX_EN/ RMII0_TXD_EN/QIO2-A/ SDHI_WP / MMC_D2-A
K10	P76/CS6#/PO22/RXD11/ET0_RX_CLK/ REF50CK0/MMC_CMD-A/ SDHI_CMD-A / QSSL-A	TRDATA6 /P76/CS6#/PO22/ SMISO11 / SSCL11 /RXD11/ET0_RX_CLK/REF50CK0/ QSSL-A/ SDHI_CMD-A /MMC_CMD-A
K11	PB7/A15/MTIOC3B/TIOCB5/PO31/TXD9/ ET0_CRS/RMII0_CRS_DV	PB7/A15/MTIOC3B/TIOCB5/PO31/TXD9/ SMOSI9 / SSDA9 / SMOSI11 / SSDA11 / TXD11 / ET0_CRS/RMII0_CRS_DV
K12	PB6/A14/MTIOC3D/TIOCA5/PO30/RXD9/ ET0_ETXD1/RMII0_TXD1	PB6/A14/MTIOC3D/TIOCA5/PO30/RXD9/ SMISO9 / SSCL9 / SMISO11 / SSCL11 / RXD11 / ET0_ETXD1/RMII0_TXD1
K13	PB5/A13/MTIOC2A/MTIOC1B/TIOCB4/ TMRI1/PO29/POE4#/SCK9/RTS9#// ET0_ETXD0/RMII0_TXD0	PB5/A13/MTIOC2A/MTIOC1B/TIOCB4/ TMRI1/PO29/POE4#/SCK9/RTS9#// SCK11 / ET0_ETXD0/RMII0_TXD0/ LCD_CLK-B
L1	P25/CS5#/EDACK1/MTIOC4C/MTCLKB/ TIOCA4/PO5/RXD3/SMISO3/SSCL3/ SSIDATA1/HSYNC/ADTRG0#	CLKOUT /P25/CS5#/EDACK1/MTIOC4C/ MTCLKB/TIOCA4/PO5/RXD3/SMISO3/ SSCL3/SSIDATA1/ SDHI_CD /HSYNC/ ADTRG0#
L2	P23/EDACK0/MTIOC3D/MTCLKD/ GTIOC0A-B /TIOCD3/PO3/TXD3/CTS0#// RTS0#/SMOSI3/SS0#/SSDA3/ SSISCK0 / PIXD7	P23/EDACK0/MTIOC3D/MTCLKD/TIOCD3/ PO3/ GTIOC0A /TXD3/SMOSI3/SSDA3/ CTS0#/RTS0#/SS0#/CTX1/ SSIBCK0 / SDHI_D1-C /PIXD7
L3	P16/MTIOC3C/MTIOC3D/TIOCB1/TCLKC/ TMO2/PO14/RTCOUT/TXD1/RXD3/ SMOSI1/SMISO3/SSDA1/SSCL3/SCL2-DS/ USB0_VBUS/USB0_VBUSEN/ USB0_OVRCURB/IRQ6/ADTRG0#	P16/MTIOC3C/MTIOC3D/TIOCB1/TCLKC/ TMO2/PO14/RTCOUT/TXD1/SMOSI1/ SSDA1/RXD3/SMISO3/SSCL3/SCL2-DS/ USB0_VBUSEN/USB0_VBUS/ USB0_OVRCURB/IRQ6/ADTRG0#
L4	P24/CS4#/EDREQ1/MTIOC4A/MTCLKA/ TIOCB4/TMRI1/PO4/SCK3/USB0_VBUSEN/ SSISCK1 /PIXCLK	P24/CS4#/EDREQ1/MTIOC4A/MTCLKA/ TIOCB4/TMRI1/PO4/SCK3/USB0_VBUSEN/ SSIBCK1 / SDHI_WP /PIXCLK
L5	P13/MTIOC0B/TIOCA5/TMO3/PO13/TXD2/ SMOSI2/SSDA2/SDA0[FM+]/IRQ3/ ADTRG1#	P13/MTIOC0B/TIOCA5/TMO3/PO13/ GTADSM1 /TXD2/SMOSI2/SSDA2/ SDA0[FM+]/IRQ3/ADTRG1#
L6	P56/EDACK1/MTIOC3C/TIOCA1	CLKOUT25M /P56/EDACK1/MTIOC3C/ TIOCA1/ SCK7
L7	P52/RD#/RxD2/SMISO2/SSCL2/SSLB3-A	P52/RD#/RxD2/SMISO2/SSCL2/SSLB3-A
L8	TRCLK/P83/EDACK1/MTIOC4C/ GTIOC0A-D /CTS10#/ET0_CRS/ RMII0_CRS_DV/SCK10	TRCLK/P83/EDACK1/MTIOC4C/ GTIOC0A / SCK10/ SS10# /CTS10#/ET0_CRS/ RMII0_CRS_DV
L9	PC5/A21/CS2#/WAIT#/MTIOC3B/MTCLKD/ GTIOC1A-D /TMRI2/PO29/SCK8/RSPCKA-A/ RTS8#/ET0_ETXD2/MMC_D5-A	PC5/ D3[A3/D3] /A21/CS2#/WAIT#/MTIOC3B/ MTCLKD/TMRI2/PO29/ GTIOC1A /SCK8/ RTS8#/SCK10/RSPCKA-A/ET0_ETXD2/ MMC_D5-A
L10	PC4/A20/CS3#/MTIOC3D/MTCLKC/ GTETRG-D /TMCI1/PO25/POE0#/SCK5/ CTS8#/SSLA0-A/ET0_TX_CLK/MMC_D1-A/ SDHI_D1-A/QIO1-A/QMI-A	PC4/A20/CS3#/MTIOC3D/MTCLKC/ TMCI1/PO25/POE0#/GTETRG C /SCK5/ CTS8#/SS8#/SS10#/CTS10#/RTS10#/ SSLA0-A/ET0_TX_CLK/QMI-A/QIO1-A/ SDHI_D1-A/MMC_D1-A
L11	PC2/A18/MTIOC4B/ GTIOC2B-D /TCLKA/ PO21/RXD5/SMISO5/SSCL5/SSLA3-A/ ET0_RX_DV/MMC_CD-A/SDHI_D3-A	PC2/A18/MTIOC4B/TCLKA/PO21/ GTIOC2B / RXD5/SMISO5/SSCL5/SSLA3-A/ ET0_RX_DV/SDHI_D3-A/MMC_CD-A

145-Pin TFLGA	RX71M	RX72N
L12	P73/CS3#/PO16/ET0_WOL	TRDATA4/P73/CS3#/PO16/ET0_WOL
L13	VSS	VSS
M1	P22/EDREQ0/MTIOC3B/MTCLKC/ GTIOC1A-B /TIOCC3/TMO0/PO2/SCK0/ USB0_OVRCURB/AUDIO_MCLK/PIXD6	P22/EDREQ0/MTIOC3B/MTCLKC/TIOCC3/ TMO0/PO2/ GTIOC1A /SCK0/ USB0_OVRCURB/AUDIO_CLK/ SDHI_D0-C / PIXD6
M2	P17/MTIOC3A/MTIOC3B/MTIOC4B/ GTIOC0B-B /TIOCB0/TCLKD/TMO1/PO15/ POE8#/SCK1/TXD3/SMOSI3/SSDA3/ SDA2-DS/SSITXD0/PIXD3/IRQ7/ADTRG1#	P17/MTIOC3A/MTIOC3B/MTIOC4B/ TIOCB0/TCLKD/TMO1/PO15/POE8#// GTIOC0B /SCK1/TXD3/SMOSI3/SSDA3/ SDA2-DS/SSITXD0/ EPLSOUT0/SDHI_D3-C / PIXD3/IRQ7/ADTRG1#
M3	P86/MTIOC4D/ GTIOC2B-B /TIOCA0/RXD10/ PIXD1	P86/MTIOC4D/TIOCA0/ GTIOC2B / SMISO10 / SSCL10 /RXD10/PIXD1
M4	P12/TMC1/_RXD2/SMISO2/SSCL2/ SCL0[FM+]/IRQ2	P12/TMC1/ GTADSM0 /RXD2/SMISO2/ SSCL2/SCL0[FM+]/IRQ2
M5	VCC_USB	VCC_USB
M6	VSS_USB	VSS_USB
M7	P50/WR0#/WR#/TXD2/SMOSI2/SSDA2/ SSLB1-A	P50/WR0#/WR#/TXD2/SMOSI2/SSDA2/ SSLB1-A
M8	PC6/A22/CS1#/MTIOC3C/MTCLKA/ GTIOC3B-D /TMC1/PO30/RXD8/ MOSIA-A/ET0_ETXD3/MMC_D6-A/IRQ13	PC6/ D2[A2/D2] /A22/CS1#/MTIOC3C/ MTCLKA/TMC1/PO30/TIC0/ GTIOC3B / RxD8/ SMISO8/SSCL8 / SMISO10/SSCL10 / RxD10 /MOSIA-A/ET0_ETXD3/MMC_D6-A/ IRQ13
M9	TRDATA1/P81/EDACK0/MTIOC3D/ GTIOC0B-D /PO27/RXD10/ET0_ETXD0/ RMII0_TXD0/MMC_D3-A/ SDHI_CD-A / QIO3-A	TRDATA1/P81/EDACK0/MTIOC3D/PO27/ GTIOC0B / SMISO10/SSCL10 /RXD10/ ET0_ETXD0/RMII0_TXD0/QIO3-A/ SDHI_CD /MMC_D3-A
M10	P77/CS7#/PO23/TXD11/ET0_RX_ER/ RMII0_RX_ER/MMC_CLK-A/SDHI_CLK-A/ QSPCLK-A	TRDATA7/P77/CS7#/PO23/ SMOSI11 / SSDA11 /TXD11/ET0_RX_ER/ RMII0_RX_ER/QSPCLK-A/SDHI_CLK-A/ MMC_CLK-A
M11	PC0/A16/MTIOC3C/TCLKC/PO17/CTS5#/ RTS5#/SS5#/SSLA1-A/ET0_ERXD3/IRQ14	PC0/A16/MTIOC3C/TCLKC/PO17/CTS5#/ RTS5#/SS5#/SSLA1-A/ET0_ERXD3/IRQ14
M12	PC1/A17/MTIOC3A/TCLKD/PO18/SCK5/ SSLA2-A/ET0_ERXD2/IRQ12	PC1/A17/MTIOC3A/TCLKD/PO18/SCK5/ SSLA2-A/ET0_ERXD2/IRQ12
M13	VCC	VCC
N1	P21/MTIOC1B/MTIOC4A/ GTIOC2A-B / TIOCA3/TMC1/PO1/RXD0/SMISO0/SSCL0/ USB0_EXICEN/ SSIWS0 /PIXD5/IRQ9	P21/MTIOC1B/MTIOC4A/TIOCA3/TMC1/ PO1/ GTIOC2A /RxD0/SMISO0/SSCL0/ SCL1 /USB0_EXICEN/ SSILRCK0 / SDHI_CLK-C /PIXD5/IRQ9
N2	P20/MTIOC1A/TIOCB3/TMRI0/PO0/TXD0/ SMOSI0/SSDA0/USB0_ID/SSIRXD0/PIXD4/ IRQ8	P20/MTIOC1A/TIOCB3/TMRI0/PO0/TXD0/ SMOSI0/SSDA0/ SDA1 /USB0_ID/SSIRXD0/ SDHI_CMD-C /PIXD4/IRQ8
N3	P87/MTIOC4C/ GTIOC1B-B /TIOCA2/TXD10/ PIXD2	P87/MTIOC4C/TIOCA2/ GTIOC1B / SMOSI10 / SSDA10 /TXD10/ EPLSOUT1/SDHI_D2-C / PIXD2
N4	P14/MTIOC3A/MTCLKA/TIOCB5/TCLKA/ TMRI2/PO15/CTS1#/RTS1#/SS1#/CTX1/ USB0_OVRCURA/IRQ4	P14/MTIOC3A/MTCLKA/TIOCB5/TCLKA/ TMRI2/PO15/ GTETRGD /CTS1#/RTS1#// SS1#/CTX1/USB0_OVRCURA/IRQ4
N5	USB0_DM	USB0_DM
N6	USB0_DP	USB0_DP

145-Pin TFLGA	RX71M	RX72N
N7	TRDATA3/P55/WAIT#/EDREQ0/MTIOC4D/ TMO3/CRX1/ET0_EXOUT/IRQ10	TRDATA3/P55/ D0[A0/D0] /WAIT#/EDREQ0/ MTIOC4D/TMO3/ TXD7/SMOSI7/SSDA7 / CRX1/ET0_EXOUT/IRQ10
N8	VSS	VSS
N9	UB/PC7/A23/CS0#/MTIOC3A/MTCLKB/ GTIOC3A-D /TMO2/TOC0/PO31/CACREF/ TXD8/MISOA-A/ET0_COL/MMC_D7-A/ IRQ14	UB/PC7/A23/CS0#/MTIOC3A/MTCLKB/ TMO2/PO31/TOC0/CACREF/ GTIOC3A / TXD8/ SMOSI8/SSDA8/SMOSI10/SSDA10 / TXD10 /MISOA-A/ET0_COL/MMC_D7-A/ IRQ14
N10	TRSYNC/P82/EDREQ1/MTIOC4A/ GTIOC2A-D /PO28/TXD10/ET0_ETXD1/ RMII0_TXD1/MMC_D4-A	TRSYNC/P82/EDREQ1/MTIOC4A/PO28/ GTIOC2A / SMOSI10/SSDA10 /TXD10/ ET0_ETXD1/RMII0_TXD1/MMC_D4-A
N11	PC3/A19/MTIOC4D/ GTIOC1B-D /TCLKB/ PO24/TXD5/SMOSI5/SSDA5/ET0_TX_ER/ MMC_D0-A/SDHI_D0-A/QIO0-A/QMO-A	PC3/A19/MTIOC4D/TCLKB/PO24/ GTIOC1B / TXD5/SMOSI5/SSDA5/ET0_TX_ER/QMO-A/ QIO0-A/SDHI_D0-A/MMC_D0-A
N12	P75/CS5#/PO20/SCK11/RTS11#/ ET0_ERXD0/RMII0_RXD0/MMC_RES#-A/ SDHI_D2-A	TRSYNC1 /P75/CS5#/PO20/SCK11/RTS11#/ ET0_ERXD0/RMII0_RXD0/SDHI_D2-A/ MMC_RES#-A
N13	P74/A20/CS4#/PO19/CTS11#/ET0_ERXD1/ RMII0_RXD1	TRDATA5 /P74/A20/CS4#/PO19/ SS11# / CTS11#/ET0_ERXD1/RMII0_RXD1

Note: 1. P53, which is multiplexed as the BCLK pin, cannot be used as an I/O port when the external bus is enabled.

3.4 144-Pin LFQFP Package

Table 3.4 is a comparative listing of the pin functions of 144-pin LFQFP package products.

Table 3.4 Comparative Listing of 144-pin LFQFP Package Pin Functions

144-Pin LFQFP	RX71M	RX72M	RX72N
1	AVSS0	AVSS0	AVSS0
2	P05/IRQ13/DA1	P05/ SSILRCK1 /IRQ13/DA1	P05/ SSILRCK1 /IRQ13/DA1
3	AVCC1	AVCC1	AVCC1
4	P03/IRQ11/DA0	P03/ SSIDATA1 /IRQ11/DA0	P03/ SSIDATA1 /IRQ11/DA0
5	AVSS1	AVSS1	AVSS1
6	P02/TMCI1/SCK6/IRQ10/ AN120	P02/TMCI1/SCK6/ SSIBCK1 / CATLEDSTER /IRQ10/ AN120	P02/TMCI1/SCK6/ SSIBCK1 / IRQ10/AN120
7	P01/TMCI0/RXD6/SMISO6/ SCL6/IRQ9/AN119	P01/TMCI0/RXD6/SMISO6/ SSCL6 / SSIBCK0 / CATLEDERR /IRQ9/AN119	P01/TMCI0/RXD6/SMISO6/ SSCL6 / SSIBCK0 /IRQ9/ AN119
8	P00/TMRI0/TXD6/SMOSI6/ SSDA6/IRQ8/AN118	P00/TMRI0/TXD6/SMOSI6/ SSDA6 / AUDIO_CLK / CATLATCH1 /IRQ8/AN118	P00/TMRI0/TXD6/SMOSI6/ SSDA6 / AUDIO_CLK /IRQ8/ AN118
9	PF5/IRQ4	EMLE	PF5/WAIT#/SSILRCK0/IRQ4
10	EMLE	VSS	EMLE
11	PJ5/POE8#/CTS2#/RTS2#/ SS2#	PJ3/ EDACK1 /MTIOC3C/ CTS6# / RTS6# / SS6# / CTS0# / RTS0# / SS0# / SSITXD0 / ET0_EXOUT / CATRESTOUT	PJ5/POE8#/CTS2#/RTS2#/ SS2#/SSIRXD0/EPLSOUT0
12	VSS	VCL	VSS
13	PJ3/ EDACK1 /MTIOC3C/ ET0_EXOUT / CTS6# / RTS6# / CTS0# / RTS0# / SS6# / SS0#	VBATT	PJ3/ EDACK1 /MTIOC3C/ CTS6# / RTS6# / SS6# / CTS0# / RTS0# / SS0# / SSITXD0 / ET0_EXOUT
14	VCL	MD/FINED	VCL
15	VBATT	XCIN	VBATT
16	MD/FINED	XCOUT	MD/FINED
17	XCIN	RES#	XCIN
18	XCOUT	XTAL/P37	XCOUT
19	RES#	VSS	RES#
20	XTAL/P37	EXTAL/P36	XTAL/P37
21	VSS	VCC	VSS
22	EXTAL/P36	UPSEL/P35/NMI	EXTAL/P36
23	VCC	TRST#/P34/MTIOC0A/ TMCI3/PO12/POE10#/SCK6/ SCK0/ ET0_LINKSTA / CAT0_LINKSTA /IRQ4/ DSMDATO	VCC
24	UPSEL/P35/NMI	P33/ EDREQ1 /MTIOC0D/ TIOC0D/TMRI3/PO11/ POE4#/POE11#/RXD6/ SMISO6/SSCL6/RXD0/ SMISO0/SSCL0/CRX0/ PCK0/IRQ3_DS/DSMCLK0	UPSEL/P35/NMI

144-Pin LFQFP	RX71M	RX72M	RX72N
25	TRST#/P34/MTIOC0A/ TMC13/PO12/POE10#/SCK6/ SCK0/ET0_LINKSTA/IRQ4	P32/MTIOC0C/TIOCC0/ TMO3/PO10/RTCIC2/ RTCOUT/POE0#/POE10#/TXD6/SMOSI6/SSDA6/ TXD0/SMISO0/SSDA0/ CTX0/USB0_VBUSEN/ VSYNC/IRQ2_DS	TRST#/P34/MTIOC0A/ TMC13/PO12/POE10#/SCK6/ SCK0/ET0_LINKSTA/IRQ4
26	P33/EDREQ1/MTIOC0D/ TIOCD0/TMRI3/PO11/ POE4#/POE11#/RXD6/ RXD0/SMISO6/SMISO0/ SSCL6/SSCL0/CRX0/PCKO/ IRQ3-DS	TMS/P31/MTIOC4D/TMC12/ PO9/RTCIC1/CTS1#/RTS1#/SS1#/SSLB0-A/ ET1_MDC/PMGI1_MDC/ IRQ1_DS	P33/EDREQ1/MTIOC0D/ TIOCD0/TMRI3/PO11/ POE4#/POE11#/RXD6/ SMISO6/SSCL6/RXD0/ SMISO0/SSCL0/CRX0/ PCKO/IRQ3-DS
27	P32/MTIOC0C/TIOCC0/ TMO3/PO10/RTCOUT/ RTCIC2/POE0#/POE10#/TXD6/TXD0/SMOSI6/ SMISO0/SSDA6/SSDA0/ CTX0/USB0_VBUSEN/ VSYNC/IRQ2-DS	TDI/P30/MTIOC4B/TMRI3/ PO8/RTCIC0/POE8#/RXD1/ SMISO1/SSCL1/MISOB-A/ ET1_MDIO/PMGI1_MDIO/ IRQ0_DS	P32/MTIOC0C/TIOCC0/ TMO3/PO10/RTCIC2/ RTCOUT/POE0#/POE10#/TXD6/SMOSI6/SSDA6/ TXD0/SMISO0/SSDA0/ CTX0/USB0_VBUSEN/ VSYNC/IRQ2-DS
28	TMS/P31/MTIOC4D/TMC12/ PO9/RTCIC1/CTS1#/RTS1#/SS1#/SSLB0-A/IRQ1-DS	TCK/P27/CS7#/MTIOC2B/ TMC13/PO7/SCK1/ RSPCKBA/ET1_WOL/ CATIRQ	TMS/P31/MTIOC4D/TMC12/ PO9/RTCIC1/CTS1#/RTS1#/SS1#/SSLB0-A/ET1_MDC/ PMGI1_MDC/IRQ1-DS
29	TDI/P30/MTIOC4B/TMRI3/ PO8/RTCIC0/POE8#/RXD1/ SMISO1/SSCL1/MISOB-A/ IRQ0-DS	TDO/P26/CS6#/MTIOC2A/ TMO1/PO6/TXD1/SMOSI1/ SSDA1/CTS3#/RTS3#/SS3#/MOSIB-A/ET1_EXOUT/ CATLINKACT1	TDI/P30/MTIOC4B/TMRI3/ PO8/RTCIC0/POE8#/RXD1/ SMISO1/SSCL1/MISOB-A/ ET1_MDIO/PMGI1_MDIO/ IRQ0-DS
30	TCK/P27/CS7#/MTIOC2B/ TMC13/PO7/SCK1/ RSPCKB-A	CLKOUT/P25/CS5#/EDACK1/MTIOC4C/ MTCLKB/TIOCA4/PO5/ RXD3/SMISO3/SSCL3/ SSIDATA1/SDHI_CD/ Hsync/ADTRG0#	TCK/P27/CS7#/MTIOC2B/ TMC13/PO7/SCK1/ RSPCKB-A/ET1_WOL
31	TDO/P26/CS6#/MTIOC2A/ TMO1/PO6/TXD1/CTS3#/RTS3#/SMOSI1/SS3#/SSDA1/MOSIB-A	P24/CS4#/EDREQ1/MTIOC4A/MTCLKA/TIOCB4/ TMRI1/PO4/SCK3/USB0_VBUSEN/SSIBCK1/ SDHI_WP/PIXCLK	TDO/P26/CS6#/MTIOC2A/ TMO1/PO6/TXD1/SMOSI1/ SSDA1/CTS3#/RTS3#/SS3#/MOSIB-A/ET1_EXOUT
32	P25/CS5#/EDACK1/MTIOC4C/MTCLKB/TIOCA4/PO5/RXD3/SMISO3/SSCL3/ SSIDATA1/Hsync/ADTRG0#	P23/EDACK0/MTIOC3D/ MTCLKD/TIOCD3/PO3/ GTIOC0A/TXD3/SMOSI3/ SSDA3/CTS0#/RTS0#/SS0#/CTX1/SSIBCK0/SDHI_D1C/ PIXD7	CLKOUT/P25/CS5#/EDACK1/MTIOC4C/ MTCLKB/TIOCA4/PO5/ RXD3/SMISO3/SSCL3/ SSIDATA1/SDHI_CD/ Hsync/ADTRG0#
33	P24/CS4#/EDREQ1/MTIOC4A/MTCLKA/TIOCB4/ TMRI1/PO4/SCK3/USB0_VBUSEN/SSISCK1/ PIXCLK	P22/EDREQ0/MTIOC3B/ MTCLKC/TIOCC3/TMO0/ PO2/GTIOC1A/SCK0/ USB0_OVRCURB/AUDIO_CLK/SDHI_D0C/ PIXD6	P24/CS4#/EDREQ1/MTIOC4A/MTCLKA/TIOCB4/ TMRI1/PO4/SCK3/ USB0_VBUSEN/SSIBCK1/ SDHI_WP/PIXCLK

144-Pin LFQFP	RX71M	RX72M	RX72N
34	P23/EDACK0/MTIOC3D/ MTCLKD/GTIOC0A-B/ TIOCD3/PO3/TXD3/CTS0#/ RTS0#/SMOSI3/SS0#/ SSDA3/SSISCK0/PIXD7	P21/MTIOC1B/MTIOC4A/ TIOCA3/TMC10/PO1/ GTIOC2A/RXD0/SMISO0/ SSCL0/SCL1/ USB0_EXICEN/SSIWRCK0/ SDHI_CLK-C/ PIXD5/IRQ9	P23/EDACK0/MTIOC3D/ MTCLKD/TIOCD3/PO3/ GTIOC0A/TXD3/SMOSI3/ SSDA3/CTS0#/RTS0#/SS0#/ CTX1/SSIBCK0/SDHI_D1-C/ PIXD7
35	P22/EDREQ0/MTIOC3B/ MTCLKC/GTIOC1A-B/ TIOCC3/TMO0/PO2/SCK0/ USB0_OVRCURB/ AUDIO_MCLK/PIXD6	P20/MTIOC1A/TIOCB3/ TMRI0/PO0/TXD0/SMOSI0/ SSDA0/SDA1/USB0_ID/ SSIRXD0/SDHI_CMD-C/ PIXD4/IRQ8	P22/EDREQ0/MTIOC3B/ MTCLKC/TIOCC3/TMO0/ PO2/GTIOC1A/SCK0/ USB0_OVRCURB/ AUDIO_CLK/SDHI_D0-C/ PIXD6
36	P21/MTIOC1B/MTIOC4A/ GTIOC2A-B/TIOCA3/TMC10/ PO1/RXD0/SMISO0/SSCL0/ USB0_EXICEN/SSIWS0/ PIXD5/IRQ9	P17/MTIOC3A/MTIOC3B/ MTIOC4B/TIOCB0/TCLKD/ TMO1/PO15/POE8#/ GTIOC0B/SCK1/TXD3/ SMOSI3/SSDA3/SDA2_DS/ SSITXD0/EPLSOUT0/ CATSYNC0/SDHI_D3C/ PIXD3/IRQ7/ADTRG1#	P21/MTIOC1B/MTIOC4A/ TIOCA3/TMC10/PO1/ GTIOC2A/RXD0/SMISO0/ SSCL0/SCL1/ USB0_EXICEN/SSIWRCK0/ SDHI_CLK-C/ PIXD5/IRQ9
37	P20/MTIOC1A/TIOCB3/ TMRI0/PO0/TXD0/SMOSI0/ SSDA0/USB0_ID/SSIRXD0/ PIXD4/IRQ8	P87/MTIOC4C/TIOCA2/ GTIOC1B/SMOSI10/ SSDA10/TXD10/EPLSOUT1/ CATSYNC1/SDHI_D2C/ PIXD2	P20/MTIOC1A/TIOCB3/ TMRI0/PO0/TXD0/SMOSI0/ SSDA0/SDA1/USB0_ID/ SSIRXD0/SDHI_CMD-C/ PIXD4/IRQ8
38	P17/MTIOC3A/MTIOC3B/ MTIOC4B/GTIOC0B-B/ TIOCB0/TCLKD/TMO1/ PO15/POE8#/SCK1/TXD3/ SMOSI3/SSDA3/SDA2-DS/ SSITXD0/PIXD3/IRQ7/ ADTRG1#	P16/MTIOC3C/MTIOC3D/ TIOCB1/TCLKC/TMO2/ PO14/RTCOUT/TXD1/ SMOSI1/SSDA1/RXD3/ SMOSI3/ SSCL3/SCL2_DS/ USB0_VBUSEN/ USB0_VBUS/ USB0_OVRCURB/IRQ6/ ADTRG0#	P17/MTIOC3A/MTIOC3B/ MTIOC4B/TIOCB0/TCLKD/ TMO1/PO15/POE8#/ GTIOC0B/SCK1/TXD3/ SMOSI3/SSDA3/SDA2-DS/ SSITXD0/EPLSOUT0/ SDHI_D3-C/PIXD3/IRQ7/ ADTRG1#
39	P87/MTIOC4C/GTIOC1B-B/ TIOCA2/TXD10/PIXD2	P86/MTIOC4D/TIOCA0/ GTIOC2B/SMOSI10/ SSCL10/RXD10/ CATLINKACT0/PIXD1	P87/MTIOC4C/TIOCA2/ GTIOC1B/SMOSI10/ SSDA10/TXD10/EPLSOUT1/ SDHI_D2-C/PIXD2
40	P16/MTIOC3C/MTIOC3D/ TIOCB1/TCLKC/TMO2/ PO14/RTCOUT/TXD1/RXD3/ SMOSI1/SMOSI3/SSDA1/ SSCL3/SCL2-DS/ USB0_VBUS/ USB0_VBUSEN/ USB0_OVRCURB/IRQ6/ ADTRG0#	P15/MTIOC0B/MTCLKB/ TIOCB2/TCLKB/TMC12/ PO13/GTETRGA/RXD1/ SMOSI1/SSCL1/SCK3/ CRX1_DS/SSIWRCK1/ CATLEDRUN/ PIXD0/IRQ5	P16/MTIOC3C/MTIOC3D/ TIOCB1/TCLKC/TMO2/ PO14/RTCOUT/TXD1/ SMOSI1/SSDA1/RXD3/ SMOSI3/ SSCL3/SCL2-DS/ USB0_VBUSEN/ USB0_VBUS/ USB0_OVRCURB/IRQ6/ ADTRG0#
41	P86/MTIOC4D/GTIOC2B-B/ TIOCA0/RXD10/PIXD1	P13/MTIOC0B/TIOCA5/ TMO3/PO13/GTADSM1/ TXD2/SMOSI2/SSDA2/ SDA0[FM+]/IRQ3/ADTRG1#	P86/MTIOC4D/TIOCA0/ GTIOC2B/SMOSI10/ SSCL10/RXD10/PIXD1

144-Pin LFQFP	RX71M	RX72M	RX72N
42	P15/MTIOC0B/MTCLKB/ GTETRG-B/TIOCB2/ TCLKB/TMC12/PO13/ RXD1/SCK3/SMISO1/ SSCL1/CRX1-DS/SSIWS1/ PIXD0/IRQ5	P14/MTIOC3A/MTCLKA/ TIOCB5/TCLKA/TMRI2/ PO15/GTETRGD/CTS1#/RTS1#/SS1#/CTX1/ USB0_OVRCURA/IRQ4	P15/MTIOC0B/MTCLKB/ TIOCB2/TCLKB/TMC12/ PO13/GTETRGA/RXD1/ SMISO1/SSCL1/SCK3/ CRX1-DS/SSLRCK1/PIXD0/ IRQ5
43	P14/MTIOC3A/MTCLKA/ TIOCB5/TCLKA/TMRI2/ PO15/CTS1#/RTS1#/SS1#/CTX1/ USB0_OVRCURA/IRQ4	P12/TMC1/GTADSM0/ RXD2/SMISO2/SSCL2/ SCL0[FM+]/IRQ2	P14/MTIOC3A/MTCLKA/ TIOCB5/TCLKA/TMRI2/ PO15/GTETRGD/CTS1#/RTS1#/SS1#/CTX1/ USB0_OVRCURA/IRQ4
44	P13/MTIOC0B/TIOCA5/ TMO3/PO13/TXD2/SMOSI2/ SSDA2/SDA0[FM+]/IRQ3/ADTRG1#	VCC_USB	P13/MTIOC0B/TIOCA5/ TMO3/PO13/GTADSM1/ TXD2/SMOSI2/SSDA2/ SDA0[FM+]/IRQ3/ADTRG1#
45	P12/TMC1/RXD2/SMISO2/ SSCL2/SCL0[FM+]/IRQ2	USB0_DM	P12/TMC1/GTADSM0/ RXD2/SMISO2/SSCL2/ SCL0[FM+]/IRQ2
46	VCC_USB	USB0_DP	VCC_USB
47	USB0_DM	VSS_USB	USB0_DM
48	USB0_DP	CLKOUT25M/PJ2/TXD8/ SMOSI8/SSDA8	USB0_DP
49	VSS_USB	CLKOUT25M/P56/EDACK1/ MTIOC3C/TIOCA1/SCK7/ DSMDAT1	VSS_USB
50	P56/EDACK1/MTIOC3C/ TIOCA1	TRDATA3/P55/D0[A0/D0]/ WAIT#/EDREQ0/MTIOC4D/ TMO3/TXD7/SMOSI7/ SSDA7/CRX1/ET0_EXOUT/ IRQ10	CLKOUT25M/P56/EDACK1/ MTIOC3C/TIOCA1/SCK7
51	TRDATA3/P55/WAIT#/EDREQ0/MTIOC4D/TMO3/ CRX1/ET0_EXOUT/IRQ10	TRDATA2/P54/ALE/ D1[A1/D1]/EDACK0/ MTIOC4B/TMC1/CTS2#/RTS2#/SS2#/CTX1/ ET0_LINKSTA/CAT0_LINKSTA	TRDATA3/P55/D0[A0/D0]/ WAIT#/EDREQ0/MTIOC4D/ TMO3/TXD7/SMOSI7/ SSDA7/CRX1/ET0_EXOUT/ IRQ10
52	TRDATA2/P54/ALE/ DACK0/MTIOC4B/TMC11/CTS2#/RTS2#/SS2#/CTX1/ ET0_LINKSTA	P53 ^{*1} /BCLK	TRDATA2/P54/ALE/ D1[A1/D1]/EDACK0/ MTIOC4B/TMC11/CTS2#/RTS2#/SS2#/CTX1/ ET0_LINKSTA
53	P53 ^{*1} /BCLK	P52/RD#/RXD2/SMISO2/ SSCL2/SSLB3-A/CATLEDSTER	P53 ^{*1} /BCLK
54	P52/RD#/RXD2/SMISO2/ SSCL2/SSLB3-A	P51/WR1#/BC1#/WAIT#/SCK2/SSLB2-A	P52/RD#/RXD2/SMISO2/ SSCL2/SSLB3-A
55	P51/WR1#/BC1#/WAIT#/SCK2/SSLB2-A	P50/WR0#/WR#/TXD2/ SMOSI2/SSDA2/SSLB1-A/CATLEDERR	P51/WR1#/BC1#/WAIT#/SCK2/SSLB2-A
56	P50/WR0#/WR#/TXD2/ SMOSI2/SSDA2/SSLB1-A	VSS	P50/WR0#/WR#/TXD2/ SMOSI2/SSDA2/SSLB1-A

144-Pin LFQFP	RX71M	RX72M	RX72N
57	VSS	TRCLK/P83/EDACK1/ MTIOC4C/GTIOC0A/SCK10/ SS10#/CTS10#/ET0_CRS/ RMII0_CRS_DV/ CAT0_RX_DV/DSMCLK1	VSS
58	TRCLK/P83/EDACK1/ MTIOC4C/GTIOC0A-D/ CTS10#/ET0_CRS/ RMII0_CRS_DV/SCK10	VCC	TRCLK/P83/EDACK1/ MTIOC4C/GTIOC0A/SCK10/ SS10#/CTS10#/ET0_CRS/ RMII0_CRS_DV
59	VCC	UB/PC7/A23/CS0#/ MTIOC3A/MTCLKB/TMO2/ PO31/TOC0/CACREF/ GTIOC3A/TXD8/SMOSI8/ SSDA8/SMOSI10/SSDA10/ TXD10/MISOA-A/ ET0_COL/MMC_D7-A/ IRQ14	VCC
60	UB/PC7/A23/CS0#/ MTIOC3A/MTCLKB/ GTIOC3A-D/TMO2/ TOC0/PO31/CACREF/TXD8/ MISOA-A/ET0_COL/ MMC_D7-A/IRQ14	PC6/D2[A2/D2]/A22/CS1#/ MTIOC3C/MTCLKA/TMC12/ PO30/TIC0/GTIOC3B/RXD8/ SMISO8/SSCL8/SMISO10/ SSCL10/RXD10/MOSIA-A/ ET0_ETXD3/CAT0_ETXD3/ CATLATCH1/MMC_D6-A/ IRQ13	UB/PC7/A23/CS0#/ MTIOC3A/MTCLKB/TMO2/ PO31/TOC0/CACREF/ GTIOC3A/TXD8/SMOSI8/ SSDA8/SMOSI10/SSDA10/ TXD10/MISOA-A/ ET0_COL/MMC_D7-A/ IRQ14
61	PC6/A22/CS1#/MTIOC3C/ MTCLKA/GTIOC3B-D/ TMC12/TIC0/PO30/RXD8/ MOSIA-A/ET0_ETXD3/ MMC_D6-A/IRQ13	PC5/D3[A3/D3]/A21/CS2#/ WAIT#/MTIOC3B/MTCLKD/ TMRI2/PO29/GTIOC1A/ SCK8/RTS8#/SCK10/ RSPCKAA/ET0_ETXD2/ CAT0_ETXD2/MMC_D5-A	PC6/D2[A2/D2]/A22/CS1#/ MTIOC3C/MTCLKA/TMC12/ PO30/TIC0/GTIOC3B/RXD8/ SMISO8/SSCL8/SMISO10/ SSCL10/RXD10/MOSIA-A/ ET0_ETXD3/MMC_D6-A/ IRQ13
62	PC5/A21/CS2#/WAIT#/ MTIOC3B/MTCLKD/ GTIOC1A-D/TMRI2/PO29/ SCK8/RSPCKAA/ TS8#/ET0_ETXD2/ MMC_D5-A	TRSYNC/P82/EDREQ1/ MTIOC4A/PO28/GTIOC2A/ SMOSI10/SSDA10/TXD10/ ET0_ETXD1/RMII0_TXD1/ CAT0_ETXD1/ CAT12CDATA/MMC_D4-A	PC5/D3[A3/D3]/A21/CS2#/ WAIT#/MTIOC3B/MTCLKD/ TMRI2/PO29/GTIOC1A/ SCK8/RTS8#/SCK10/ RSPCKAA/ET0_ETXD2/ MMC_D5-A
63	TRSYNC/P82/EDREQ1/ MTIOC4A/GTIOC2A-D/ PO28/TXD10/ET0_ETXD1/ RMII0_TXD1/MMC_D4-A	TRDATA1/P81/EDACK0/ MTIOC3D/PO27/GTIOC0B/ SMISO10/SSCL10/RXD10/ ET0_ETXD0/RMII0_TXD0/ CAT0_ETXD0/CAT12CCLK/ QIO3-A/SDHI_CD/ MMC_D3-A	TRSYNC/P82/EDREQ1/ MTIOC4A/PO28/GTIOC2A/ SMOSI10/SSDA10/TXD10/ ET0_ETXD1/RMII0_TXD1/ MMC_D4-A
64	TRDATA1/P81/EDACK0/ MTIOC3D/GTIOC0B-D/ PO27/RXD10/ET0_ETXD0/ RMII0_TXD0/MMC_D3-A/ SDHI_CD-A/QIO3-A	TRDATA0/P80/EDREQ0/ MTIOC3B/PO26/SCK10/ RTS10#/ET0_TX_EN/ RMII0_TXD_EN/ CAT0_TX_EN/CATLATCH0/ QIO2-A/SDHI_WP/ MMC_D2-A	TRDATA1/P81/EDACK0/ MTIOC3D/PO27/GTIOC0B/ SMISO10/SSCL10/RXD10/ ET0_ETXD0/RMII0_TXD0/ QIO3-A/SDHI_CD/ MMC_D3-A

144-Pin LFQFP	RX71M	RX72M	RX72N
65	TRDATA0/P80/EDREQ0/ MTIOC3B/PO26/SCK10/ RTS10#/ET0_TX_EN/ RMII0_RXD_EN/ MMC_D2-A/SDHI_WP-A/ QIO2-A	PC4/A20/CS3#/MTIOC3D/ MTCLKC/TMCI1/PO25/ POE0#/GTETRGC/SCK5/ SS8#/CTS8#/SS10#/ CTS10#/RTS10#/SSLA0-A/ ET0_TX_CLK/ CAT0_RX_CLK/CATSYNC0/ QMI-A/QIO1-A/SDHI_D1A/ MMC_D1-A	TRDATA0/P80/EDREQ0/ MTIOC3B/PO26/SCK10/ RTS10#/ET0_TX_EN/ RMII0_RXD_EN/QIO2-A/ SDHI_WP/MMC_D2-A
66	PC4/A20/CS3#/MTIOC3D/ MTCLKC/GTETRG-D/ TMCI1/PO25/POE0#/SCK5/ CTS8#/SSLA0-A/ ET0_TX_CLK/MMC_D1-A/ SDHI_D1-A/QIO1-A/QMI-A	PC3/A19/MTIOC4D/TCLKB/ PO24/GTIOC1B/TXD5/ SMOSI5/SSDA5/ ET0_RX_ER/QMO-A/ QIO0-A/SDHI_D0A/ MMC_D0-A	PC4/A20/CS3#/MTIOC3D/ MTCLKC/TMCI1/PO25/ POE0#/GTETRGC/SCK5/ CTS8#/SS8#/SS10#/ CTS10#/RTS10#/SSLA0-A/ ET0_RX_CLK/QMI-A/ QIO1-A/SDHI_D1-A/ MMC_D1-A
67	PC3/A19/MTIOC4D/ GTIOC1B-D/TCLKB/PO24/ TXD5/SMOSI5/SSDA5/ ET0_RX_ER/MMC_D0-A/ SDHI_D0-A/QIO0-A/QMO-A	TRDATA7/P77/CS7#/PO23/ SMOSI11/SSDA11/TXD11/ ET0_RX_ER/RMII0_RX_ER/ CAT0_RX_ER/QSPCLK-A/ SDHI_CLK-A/MMC_CLK-A	PC3/A19/MTIOC4D/TCLKB/ PO24/GTIOC1B/TXD5/ SMOSI5/SSDA5/ ET0_RX_ER/QMO-A/ QIO0-A/SDHI_D0-A/ MMC_D0-A
68	P77/CS7#/PO23/TXD11/ ET0_RX_ER/RMII0_RX_ER/ MMC_CLK-A/SDHI_CLK-A/ QSPCLK-A	TRDATA6/P76/CS6#/PO22/ SMISO11/SSCL11/RXD11/ ET0_RX_CLK/REF50CK0/ CAT0_RX_CLK/QSSL-A/ SDHI_CMD-A/MMC_CMD-A	TRDATA7/P77/CS7#/PO23/ SMOSI11/SSDA11/TXD11/ ET0_RX_ER/RMII0_RX_ER/ QSPCLK-A/SDHI_CLK-A/ MMC_CLK-A
69	P76/CS6#/PO22/RXD11/ ET0_RX_CLK/REF50CK0/ MMC_CMD-A/SDHI_CMD-A/ QSSL-A	PC2/A18/MTIOC4B/TCLKA/ PO21/GTIOC2B/RXD5/ SMISO5/SSCL5/SSLA3-A/ ET0_RX_DV/CAT0_RX_DV/ SDHI_D3-A/MMC_CD-A	TRDATA6/P76/CS6#/PO22/ SMISO11/SSCL11/RXD11/ ET0_RX_CLK/REF50CK0/ QSSL-A/SDHI_CMD-A/ MMC_CMD-A
70	PC2/A18/MTIOC4B/ GTIOC2B-D/TCLKA/PO21/ RXD5/SMISO5/SSCL5/ SSLA3-A/ET0_RX_DV/ MMC_CD-A/SDHI_D3-A	TRSYNC1/P75/CS5#/PO20/ SCK11/RTS11#/ ET0_ERXD0/RMII0_RXD0/ CAT0_ERXD0/SDHI_D2-A/ MMC_RES#-A/DSMDAT2	PC2/A18/MTIOC4B/TCLKA/ PO21/GTIOC2B/RXD5/ SMISO5/SSCL5/SSLA3-A/ ET0_RX_DV/SDHI_D3-A/ MMC_CD-A
71	P75/CS5#/PO20/SCK11/ RTS11#/ET0_ERXD0/ RMII0_RXD0/MMC_RES#-A/ SDHI_D2-A	TRDATA5/P74/A20/CS4#/ PO19/SS11#/CTS11#/ ET0_ERXD1/RMII0_RXD1/ CAT0_ERXD1/DSMCLK2	TRSYNC1/P75/CS5#/PO20/ SCK11/RTS11#/ ET0_ERXD0/RMII0_RXD0/ SDHI_D2-A/MMC_RES#-A
72	P74/A20/CS4#/PO19/ CTS11#/ET0_ERXD1/ RMII0_RXD1	PC1/A17/MTIOC3A/TCLKD/ PO18/SCK5/SSLA2-A/ ET0_ERXD2/CAT0_ERXD2/ IRQ12	TRDATA5/P74/A20/CS4#/ PO19/SS11#/CTS11#/ ET0_ERXD1/RMII0_RXD1
73	PC1/A17/MTIOC3A/TCLKD/ PO18/SCK5/SSLA2-A/ ET0_ERXD2/IRQ12	VCC	PC1/A17/MTIOC3A/TCLKD/ PO18/SCK5/SSLA2-A/ ET0_ERXD2/IRQ12
74	VCC	PC0/A16/MTIOC3C/TCLKC/ PO17/CTS5#/RTS5#/SS5#/ SSLA1-A/ET0_ERXD3/ CAT0_ERXD3/IRQ14	VCC

144-Pin LFQFP	RX71M	RX72M	RX72N
75	PC0/A16/MTIOC3C/TCLKC/ PO17/CTS5#/RTS5#/SS5#/ SSLA1-A/ET0_ERXD3/ IRQ14	VSS	PC0/A16/MTIOC3C/TCLKC/ PO17/CTS5#/RTS5#/SS5#/ SSLA1-A/ET0_ERXD3/ IRQ14
76	VSS	TRDATA4/P73/CS3#/PO16/ ET0_WOL	VSS
77	P73/CS3#/PO16/ET0_WOL	PB7/A15/MTIOC3B/TIOCB5/ PO31/TXD9/SMOSI9/ SSDA9/SMOSI11/SSDA11/ TXD11/ET0_CRS/ RMII0_CRS_DV/ CAT0_RX_DV	TRDATA4/P73/CS3#/PO16/ ET0_WOL
78	PB7/A15/MTIOC3B/TIOCB5/ PO31/TXD9/ET0_CRS/ RMII0_CRS_DV	PB6/A14/MTIOC3D/TIOCA5/ PO30/RXD9/SMISO9/ SSCL9/SMISO11/SSCL11/ RXD11/ET0_ETXD1/ RMII0_TXD1/CAT0_ETXD1	PB7/A15/MTIOC3B/TIOCB5/ PO31/TXD9/SMOSI9/ SSDA9/SMOSI11/SSDA11/ TXD11/ET0_CRS/ RMII0_CRS_DV
79	PB6/A14/MTIOC3D/TIOCA5/ PO30/RXD9/ET0_ETXD1/ RMII0_TXD1	PB5/A13/MTIOC2A/ MTIOC1B/TIOCB4/TMRI1/ PO29/POE4#/SCK9/RTS9#/ SCK11/ET0_ETXD0/ RMII0_TXD0/CAT0_ETXD0/ LCD_CLK-B	PB6/A14/MTIOC3D/TIOCA5/ PO30/RXD9/SMISO9/ SSCL9/SMISO11/SSCL11/ RXD11/ET0_ETXD1/ RMII0_TXD1
80	PB5/A13/MTIOC2A/ MTIOC1B/TIOCB4/TMRI1/ PO29/POE4#/SCK9/RTS9#/ ET0_ETXD0/RMII0_TXD0	PB4/A12/TIOCA4/PO28/ SS9#/CTS9#/SS11#/ CTS11#/RTS11#/ ET0_TX_EN/ RMII0_TXD_EN/ CAT0_TXEN/LCD_TCON0-B	PB5/A13/MTIOC2A/ MTIOC1B/TIOCB4/TMRI1/ PO29/POE4#/SCK9/RTS9#/ SCK11/ET0_ETXD0/ RMII0_TXD0/LCD_CLK-B
81	PB4/A12/TIOCA4/PO28/ CTS9#/ET0_TX_EN/ RMII0_TXD_EN	PB3/A11/MTIOC0A/ MTIOC4A/TIOCD3/TCLKD/ TMO0/PO27/POE11#/SCK4/ SCK6/ET0_RX_ER/ RMII0_RX_ER/ CAT0_RX_ER/ LCD_TCON1-B	PB4/A12/TIOCA4/PO28/ CTS9#/SS9#/SS11#/ CTS11#/RTS11#/ ET0_TX_EN/ RMII0_TXD_EN/ CD_TCON0-B
82	PB3/A11/MTIOC0A/ MTIOC4A/TIOCD3/TCLKD/ TMO0/PO27/POE11#/SCK4/ SCK6/ET0_RX_ER/ RMII0_RX_ER	PB2/A10/TIOCC3/TCLKC/ PO26/CTS4#/RTS4#/SS4#/ CTS6#/RTS6#/SS6#/ ET0_RX_CLK/REF50CK0/ CAT0_RX_CLK/ LCD_TCON2-B	PB3/A11/MTIOC0A/ MTIOC4A/TIOCD3/TCLKD/ TMO0/PO27/POE11#/SCK4/ SCK6/ET0_RX_ER/ RMII0_RX_ER/ LCD_TCON1-B
83	PB2/A10/TIOCC3/TCLKC/ PO26/CTS4#/RTS4#/CTS6#/ RTS6#/SS4#/SS6#/ ET0_RX_CLK/REF50CK0	PB1/A9/MTIOC0C/ MTIOC4C/TIOCB3/TMC10/ PO25/TXD4/SMOSI4/ SSDA4/TXD6/SMOSI6/ SSDA6/ET0_ERXD0/ RMII0_RXD0/CAT0_ERXD0/ LCD_TCON3-B/IRQ4_DS	PB2/A10/TIOCC3/TCLKC/ PO26/CTS4#/RTS4#/SS4#/ CTS6#/RTS6#/SS6#/ ET0_RX_CLK/REF50CK0/ LCD_TCON2-B

144-Pin LFQFP	RX71M	RX72M	RX72N
84	PB1/A9/MTIOC0C/ MTIOC4C/TIOCB3/TMC10/ PO25/TXD4/TXD6/SMOSI4/ SMOSI6/SSDA4/SSDA6/ ET0_ERXD0/RMII0_RXD0/ IRQ4-DS	PB0/A8/MTIC5W/TIOCA3/ PO24/RXD4/SMISO4/ SSCL4/RXD6/SMISO6/ SSCL6/ET0_ERXD1/ RMII0_RXD1/CAT0_ERXD1/ LCD_DATA0-B/IRQ12	PB1/A9/MTIOC0C/ MTIOC4C/TIOCB3/TMC10/ PO25/TXD4/SMOSI4/ SSDA4/TXD6/SMOSI6/ SSDA6/ET0_ERXD0/ RMII0_RXD0/ LCD_TCON3-B/IRQ4-DS
85	P72/A19/CS2#/ET0_MDC	PA7/A7/TIOCB2/PO23/ MISOA-B/ET0_WOL/ LCD_DATA1-B	P72/A19/CS2#/ET0_MDC/ PMGI0_MDC
86	P71/A18/CS1#/ET0_MDIO	PA6/A6/MTIC5V/MTCLKB/ TIOCA2/TMC13/PO22/ POE10#/GTETRGB/CTS5#/ RTS5#/SS5#/MOSIA-B/ ET0_EXOUT/ CATRESTOUT/ LCD_DATA2-B	P71/A18/CS1#/ET0_MDIO/ PMGI0_MDIO
87	PB0/A8/MTIC5W/TIOCA3/ PO24/RXD4/RXD6/SMISO4/ SMISO6/SSCL4/SSCL6/ ET0_ERXD1/RMII0_RXD1/ IRQ12	PA5/A5/MTIOC6B/TIOCB1/ PO21/GTIOC0A/RSPCKAB/ ET0_LINKSTA/ CAT0_LINKSTA/ LCD_DATA3-B	PB0/A8/MTIC5W/TIOCA3/ PO24/RXD4/SMISO4/ SSCL4/RXD6/SMISO6/ SSCL6/ET0_ERXD1/ RMII0_RXD1/ LCD_DATA0-B/RQ12
88	PA7/A7/TIOCB2/PO23/ MISOA-B/ET0_WOL	VCC	PA7/A7/TIOCB2/PO23/ MISOA-B/ET0_WOL/ LCD_DATA1-B
89	PA6/A6/MTIC5V/MTCLKB/ GTETRG-C/TIOCA2/TMC13/ PO22/POE10#/CTS5#/ RTS5#/SS5#/MOSIA-B/ ET0_EXOUT	PA4/A4/MTIC5U/MTCLKA/ TIOCA1/TMRI0/PO20/TXD5/ SMOSI5/SSDA5/SSLA0-B/ ET0_MDC/CAT0_MDC/ CATIRQ/PMGI0_MDC/ LCD_DATA4-B/IRQ5_DS	PA6/A6/MTIC5V/MTCLKB/ TIOCA2/TMC13/PO22/ POE10#/GTETRGB/CTS5#/ RTS5#/SS5#/MOSIA-B/ ET0_EXOUT/LCD_DATA2-B
90	PA5/A5/MTIOC6B/TIOCB1/ GTIOC0A-C/PO21/ RSPCKA-B/ET0_LINKSTA	VSS	PA5/A5/MTIOC6B/TIOCB1/ PO21/GTIOC0A/RSPCKA-B/ ET0_LINKSTA/ LCD_DATA3-B
91	VCC	PA3/A3/MTIOC0D/MTCLKD/ TIOCD0/TCLKB/PO19/ RXD5/SMISO5/SSCL5/ ET0_MDIO/CAT0_MDIO/ PMGI0_MDIO/ LCD_DATA5-B/IRQ6_DS	VCC
92	PA4/A4/MTIC5U/MTCLKA/ TIOCA1/TMRI0/PO20/TXD5/ SMOSI5/SSDA5/SSLA0-B/ ET0_MDC/IRQ5-DS	PG7/ET1_TX_ER	PA4/A4/MTIC5U/MTCLKA/ TIOCA1/TMRI0/PO20/TXD5/ SMOSI5/SSDA5/SSLA0-B/ ET0_MDC/PMGI0_MDC/ LCD_DATA4-B/IRQ5-DS
93	VSS	PA2/A2/MTIOC7A/PO18/ GTIOC1A/RXD5/SMISO5/ SSCL5/SSLA3-B/ CATLINKACT1/ LCD_DATA6-B	VSS

144-Pin LFQFP	RX71M	RX72M	RX72N
94	PA3/A3/MTIOC0D/MTCLKD/ TIOCD0/TCLKB/PO19/ RXD5/SMISO5/SSCL5/ ET0_MDIO/IRQ6-DS	PG6/ET1_ETXD3/ CAT1_ETXD3	PA3/A3/MTIOC0D/MTCLKD/ TIOCD0/TCLKB/PO19/ RXD5/SMISO5/SSCL5/ ET0_MDIO/PMGI0_MDIO/ LCD_DATA5-B/IRQ6-DS
95	PA2/A2/MTIOC7A/ GTIOC1A-C/PO18/RXD5/ SMISO5/SSCL5/SSLA3-B	PA1/A1/MTIOC0B/MTCLKC/ MTIOC7B/TIOCB0/PO17/ GTIOC2A/SCK5/SSLA2-B/ ET0_WOL/LCD_DATA7-B/ IRQ11	PA2/A2/MTIOC7A/PO18/ GTIOC1A/RXD5/SMISO5/ SSCL5/SSLA3-B/ LCD_DATA6-B
96	PA1/A1/MTIOC0B/MTCLKC/ MTIOC7B/GTIOC2A-C/ TIOCB0/PO17/SCK5/ SSLA2-B/ET0_WOL/IRQ11	PG5/ET1_ETXD2/ CAT1_ETXD2	PA1/A1/MTIOC0B/MTCLKC/ MTIOC7B/TIOCB0/PO17/ GTIOC2A/SCK5/SSLA2-B/ ET0_WOL/LCD_DATA7-B/ IRQ11
97	PA0/A0/BC0#/MTIOC4A/ MTIOC6D/GTIOC0B-C/ TIOCA0/CACREF/PO16/ SSLA1-B/ET0_TX_EN/ RMII0_TXD_EN	PA0/BC0#/A0/MTIOC4A/ MTIOC6D/TIOCA0/PO16/ CACREF/GTIOC0B/ SSLA1-B/ET0_TX_EN/ RMII0_TXD_EN/ CAT0_TX_EN/CATLEDRUN/ LCD_DATA8-B	PA0/BC0#/A0/MTIOC4A/ MTIOC6D/TIOCA0/PO16/ CACREF/GTIOC0B/ SSLA1-B/ET0_TX_EN/ RMII0_TXD_EN/ LCD_DATA8-B
98	P67/CS7#/DQM1/MTIOC7C/ GTIOC1B-C/CRX2/IRQ15	P67/CS7#/MTIOC7C/ GTIOC1B/CRX2/ EPLSOUT1/CATSYNC1/ IRQ15	P67/DQM1/CS7#/MTIOC7C/ GTIOC1B/CRX2/ EPLSOUT1/IRQ15
99	P66/CS6#/DQM0/MTIOC7D/ GTIOC2B-C/CTX2	P66/CS6#/MTIOC7D/ GTIOC2B/CTX2	P66/DQM0/CS6#/MTIOC7D/ GTIOC2B/CTX2
100	P65/CS5#/CKE	PG2/ET1_TX_CLK/ CAT1_TX_CLK	P65/CKE/CS5#
101	PE7/D15[A15/D15]/ MTIOC6A/GTIOC3A-E/ TOC1/MISOB-B/ MMC_RES#-B/SDHI_WP-B/ IRQ7/AN105	P65/CS5#	PE7/D15[A15/D15]/ D7[A7/D7]/MTIOC6A/TOC1/ GTIOC3A/MISOB-B/ SDHI_WP/MMC_RES#-B/ CD_DATA9-B/IRQ7/AN105
102	PE6/D14[A14/D14]/ MTIOC6C/GTIOC3B-E/ TIC1/MOSIB-B/MMC_CD-B/ SDHI_CD-B/IRQ6/AN104	PE7/D15[A15/D15]/ D7[A7/D7]/MTIOC6A/TOC1/ GTIOC3A/MISOB-B/ SDHI_WP/MMC_RES#-B/ LCD_DATA9-B/IRQ7/AN105	PE6/D14[A14/D14]/ D6[A6/D6]/MTIOC6C/TIC1/ GTIOC3B/MOSIB-B/ SDHI_CD/MMC_CD-B/ LCD_DATA10-B/IRQ6/ AN104
103	VCC	PE6/D14[A14/D14]/ D6[A6/D6]/MTIOC6C/TIC1/ GTIOC3B/MOSIB-B/ SDHI_CD/MMC_CD-B/ LCD_DATA10-B/IRQ6/ AN104	VCC
104	P70/SDCLK	VCC	P70/SDCLK
105	VSS	VSS	VSS

144-Pin LFQFP	RX71M	RX72M	RX72N
106	PE5/D13[A13/D13]/ MTIOC4C/MTIOC2B/ GTIOC0A-A/ET0_RX_CLK/ REF50CK0/ RSPCKB-B/ IRQ5/AN103	PE5/D13[A13/D13]/ D5[A5/D5] /MTIOC4C/ MTIOC2B/ GTIOC0A/ RSPCKB-B/ET0_RX_CLK/ REF50CK0/ CAT0_RX_CLK/ LCD_DATA11-B/IRQ5/ AN103	PE5/D13[A13/D13]/ D5[A5/D5] /MTIOC4C/ MTIOC2B/ GTIOC0A/ RSPCKB-B/ ET0_RX_CLK/REF50CK0/ LCD_DATA11-B/IRQ5/ AN103
107	PE4/D12[A12/D12]/ MTIOC4D/MTIOC1A/ GTIOC1A-A/PO28/ ET0_ERXD2/SSLB0-B/ AN102	PE4/D12[A12/D12]/ D4[A4/D4] /MTIOC4D/ MTIOC1A/PO28/ GTIOC1A/ SSLB0-B/ET0_ERXD2/ CAT0_ERXD2/ LCD_DATA12-B/AN102	PE4/D12[A12/D12]/ D4[A4/D4] /MTIOC4D/ MTIOC1A/PO28/ GTIOC1A/ SSLB0-B/ET0_ERXD2/ LCD_DATA12-B/AN102
108	PE3/D11[A11/D11]/ MTIOC4B/ GTIOC2A-A/ PO26/POE8#/TOC3/ CTS12#/RTS12#/SS12#/ ET0_ERXD3/MMC_D7-B/ AN101	PE3/D11[A11/D11]/ D3[A3/D3] /MTIOC4B/PO26/ TOC3/POE8#/ GTIOC2A/ CTS12#/RTS12#/SS12#/ ET0_ERXD3/ CAT0_ERXD3/ MMC_D7-B/ LCD_DATA13-B/AN101	PE3/D11[A11/D11]/ D3[A3/D3] /MTIOC4B/PO26/ TOC3/POE8#/ GTIOC2A/ CTS12#/RTS12#/SS12#/ ET0_ERXD3/MMC_D7-B/ LCD_DATA13-B/AN101
109	PE2/D10[A10/D10]/ MTIOC4A/ GTIOC0B-A/ PO23/TIC3/RXD12/ SMISO12/SSCL12/RXDX12/ SSLB3-B/MMC_D6-B/ IRQ7-DS/AN100	PE2/D10[A10/D10]/ D2[A2/D2] /MTIOC4A/PO23/ TIC3/ GTIOC0B/RXD12/ SMISO12/SSCL12/RXDX12/ SSLB3-B/MMC_D6-B/ LCD_DATA14-B/IRQ7_DS/ AN100	PE2/D10[A10/D10]/ D2[A2/D2] /MTIOC4A/PO23/ TIC3/ GTIOC0B/RXD12/ SMISO12/SSCL12/RXDX12/ SSLB3-B/MMC_D6-B/ LCD_DATA14-B/IRQ7-DS/ AN100
110	PE1/D9[A9/D9]/MTIOC4C/ MTIOC3B/ GTIOC1B-A/ PO18/TXD12/SMOSI12/ SSDA12/TXDX12/SIOX12/ SSLB2-B/MMC_D5-B/ ANEX1	PE1/D9[A9/D9]/ D1[A1/D1] / MTIOC4C/MTIOC3B/PO18/ GTIOC1B/TXD12/SMOSI12/ SSDA12/TXDX12/SIOX12/ SSLB2-B/MMC_D5-B/ LCD_DATA15-B/ANEX1	PE1/D9[A9/D9]/ D1[A1/D1] / MTIOC4C/MTIOC3B/PO18/ GTIOC1B/TXD12/SMOSI12/ SSDA12/TXDX12/SIOX12/ SSLB2-B/MMC_D5-B/ LCD_DATA15-B/ANEX1
111	PE0/D8[A8/D8]/MTIOC3D/ GTIOC2B-A/SCK12/ SSLB1-B/MMC_D4-B/ ANEX0	PE0/D8[A8/D8]/ D0[A0/D0] / MTIOC3D/ GTIOC2B/SCK12/ SSLB1-B/MMC_D4-B/ LCD_DATA16-B/ANEX0	PE0/D8[A8/D8]/ D0[A0/D0] / MTIOC3D/ GTIOC2B/SCK12/ SSLB1-B/MMC_D4-B/ LCD_DATA16-B/ANEX0
112	P64/CS4#/WE#	P64/ D3[A3/D3] /CS4#/ ET1_ETXD0/RMII1_TXD0/ CAT1_ETXD0	P64/ WE#/D3[A3/D3] /CS4#/ RMII1_TXD0
113	P63/CS3#/CAS#	P63/ D2[A2/D2] /CS3#/ ET1_ETXD1/RMII1_TXD1/ CAT1_ETXD1	P63/ CAS#/D2[A2/D2] /CS3#/ RMII1_TXD1
114	P62/CS2#/RAS#	P62/ D1[A1/D1] /CS2#/ ET1_ERXD0/RMII1_RXD0/ CAT1_ERXD0	P62/ RAS#/D1[A1/D1] /CS2#/ RMII1_RXD0
115	P61/CS1#/SDCS#	P61/ D0[A0/D0] /CS1#/ ET1_ERXD1/RMII1_RXD1/ CAT1_ERXD1	P61/ SDCS#/D0[A0/D0] / CS1#/ RMII1_RXD1
116	VSS	VSS	VSS
117	P60/CS0#	P60/CS0#/ ET1_TX_EN/ RMII1_TXD_EN/ CAT1_TX_EN	P60/CS0#/ RMII1_TXD_EN
118	VCC	VCC	VCC

144-Pin LFQFP	RX71M	RX72M	RX72N
119	PD7/D7[A7/D7]/MTIC5U/ POE0#/MMC_D1-B/ SDHI_D1-B/QIO1-B/QMI-B/ IRQ7/AN107	PD7/D7[A7/D7]/MTIC5U/ POE0#/SSLC3-A/ ET1_RX_ER/RMII1_RX_ER/ CAT1_RX_ER/QMI-B/ QIO1-B/SDHI_D1-B/ MMC_D1-B/ LCD_DATA17-B/IRQ7/ AN107	PD7/D7[A7/D7]/MTIC5U/ POE0#/SSLC3-A/ RMII1_RX_ER/QMI-B/ QIO1-B/SDHI_D1-B/ MMC_D1-B/ LCD_DATA17-B/IRQ7/ AN107
120	PD6/D6[A6/D6]/MTIC5V/ MTIOC8A/POE4#/MMC_D0-B/SDHI_D0-B/ QIO0-B/QMO-B/IRQ6/AN106	PG1/ET1_RX_ER/ RMII1_RX_ER/ CAT1_RX_ER	PD6/D6[A6/D6]/MTIC5V/ MTIOC8A/POE4#/SSLC2-A/ REF50CK1/QMO-B/QIO0-B/ SDHI_D0-B/MMC_D0-B/ LCD_DATA18-B/IRQ6/ AN106
121	PD5/D5[A5/D5]/MTIC5W/ MTIOC8C/POE10#/MMC_CLK-B/SDHI_CLK-B/ QSPCLK-B/IRQ5/AN113	PD6/D6[A6/D6]/MTIC5V/ MTIOC8A/POE4#/SSLC2-A/ ET1_RX_CLK/REF50CK1/ CAT1_RX_CLK/QMO-B/ QIO0-B/SDHI_D0B/ MMC_D0-B/ LCD_DATA18-B/IRQ6/ AN106	PD5/D5[A5/D5]/MTIC5W/ MTIOC8C/MTCLKA/ POE10#/SSLC1-A/ ET1_MDC/PMGI1_MDC/ QSPCLK-B/SDHI_CLK-B/ MMC_CLK-B/ LCD_DATA19-B/IRQ5/ AN113
122	PD4/D4[A4/D4]/MTIOC8B/ POE11#/MMC_CMD-B/ SDHI_CMD-B/QSSL-B/ IRQ4/AN112	PG0/ET1_RX_CLK/ REF50CK1/CAT1_RX_CLK	PD4/D4[A4/D4]/MTIOC8B/ POE11#/SSLC0-A/ ET1_MDIO/PMGI1_MDIO/ QSSL-B/SDHI_CMD-B/ MMC_CMD-B/ LCD_DATA20-B/IRQ4/ AN112
123	PD3/D3[A3/D3]/MTIOC8D/ GTIOC0A-E/POE8#/TOC2/ MMC_D3-B/SDHI_D3-B/ QIO3-B/IRQ3/AN111	PD5/D5[A5/D5]/MTIC5W/ MTCLKA/MTIOC8C/ POE10#/SSLC1-A/ ET1_MDC/PMGI1_MDC/ QSPCLK-B/SDHI_CLK-B/ MMC_CLK-B/ LCD_DATA19-B/IRQ5/ AN113	PD3/D3[A3/D3]/MTIOC8D/ TOC2/POE8#/GTIOC0A/ RSPCKC-A/ET1_WOL/ QIO3-B/SDHI_D3-B/ MMC_D3-B/ LCD_DATA21-B/IRQ3/ AN111
124	PD2/D2[A2/D2]/MTIOC4D/ GTIOC0B-E/TIC2/CRX0/ MMC_D2-B/SDHI_D2-B/ QIO2-B/IRQ2/AN110	PD4/D4[A4/D4]/MTIOC8B/ POE11#/SSLC0-A/ ET1_MDIO/PMGI1_MDIO/ QSSL-B/SDHI_CMD-B/ MMC_CMD-B/ LCD_DATA20-B/IRQ4/ AN112	PD2/D2[A2/D2]/MTIOC4D/ TIC2/GTIOC0B/MISOC-A/ CRX0/ET1_EXOUT/QIO2-B/ SDHI_D2-B/MMC_D2-B/ LCD_DATA22-B/IRQ2/ AN110
125	PD1/D1[A1/D1]/MTIOC4B/ GTIOC1A-E/POE0#/CTX0/ IRQ1/AN109	P97/A23/ET1_ERXD3/ CAT1_ERXD3	PD1/D1[A1/D1]/MTIOC4B/ POE0#/GTIOC1A/MOSIC-A/ CTX0/LCD_DATA23-B/ IRQ1/AN109
126	PD0/D0[A0/D0]/GTIOC1B-E/ POE4#/IRQ0/AN108	PD3/D3[A3/D3]/MTIOC8D/ TOC2/POE8#/GTIOC0A/ RSPCKCA/ET1_WOL/ QIO3-B/SDHI_D3B/ MMC_D3-B/ LCD_DATA21-B/IRQ3/ AN111	PD0/D0[A0/D0]/POE4#/GTIOC1B/LCD_EXTCLK-B/ IRQ0/AN108

144-Pin LFQFP	RX71M	RX72M	RX72N
127	P93/A19/POE0#/CTS7#/RTS7#/SS7#/AN117	P96/A22/ET1_RXD2/CAT1_RXD2	P93/A19/POE0#/CTS7#/RTS7#/SS7#/ET1_LINKSTA/AN117
128	P92/A18/POE4#/RXD7/SMISO7/SSCL7/AN116	PD2/D2[A2/D2]/MTIOC4D/TIC2/GTIOC0B/MISOC-A/CRX0/ET1_EXOUT/QIO2-B/SDHI_D2B/MMC_D2-B/LCD_DATA22-B/IRQ2/AN110	P92/A18/POE4#/RXD7/SMISO7/SSCL7/RMII1_CRS_DV/AN116
129	P91/A17/SCK7/AN115	PD1/D1[A1/D1]/MTIOC4B/POE0#/GTIOC1A/MOSIC-A/CTX0/LCD_DATA23-B/IRQ1/AN109	P91/A17/SCK7/AN115
130	VSS	PD0/D0[A0/D0]/POE4#/GTIOC1B/LCD_EXTCLK-B/IRQ0/AN108	VSS
131	P90/A16/TXD7/SMOSI7/SSDA7/AN114	P93/A19/POE0#/CTS7#/RTS7#/SS7#/ET1_LINKSTA/CAT1_LINKSTA/AN117	P90/A16/TXD7/SMOSI7/SSDA7/AN114
132	VCC	P92/A18/POE4#/RXD7/SMISO7/SSCL7/ET1_CRS/RMII1_CRS_DV/CAT1_RX_DV/AN116	VCC
133	P47/IRQ15-DS/AN007	P91/A17/SCK7/ET1_COL/AN115	P47/IRQ15-DS/AN007
134	P46/IRQ14-DS/AN006	VSS	P46/IRQ14-DS/AN006
135	P45/IRQ13-DS/AN005	P90/A16/TXD7/SMOSI7/SSDA7/ET1_RX_DV/CAT1_RX_DV/AN114	P45/IRQ13-DS/AN005
136	P44/IRQ12-DS/AN004	VCC	P44/IRQ12-DS/AN004
137	P43/IRQ11-DS/AN003	P44/IRQ12_DS/AN004	P43/IRQ11-DS/AN003
138	P42/IRQ10-DS/AN002	P43/IRQ11_DS/AN003	P42/IRQ10-DS/AN002
139	P41/IRQ9-DS/AN001	P42/IRQ10_DS/AN002	P41/IRQ9-DS/AN001
140	VREFL0	P41/IRQ9_DS/AN001	VREFL0
141	P40/IRQ8-DS/AN000	VREFL0	P40/IRQ8-DS/AN000
142	VREFH0	P40/IRQ8_DS/AN000	VREFH0
143	AVCC0	VREFH0	AVCC0
144	P07/IRQ15/ADTRG0#	AVCC0	P07/IRQ15/ADTRG0#

Note: 1. P53, which is multiplexed as the BCLK pin, cannot be used as an I/O port when the external bus is enabled.

3.5 100-Pin LFQFP Package

Table 3.5 is a comparative listing of the pin functions of 100-Pin LFQFP package products.

Table 3.5 Comparative Listing of 100-Pin LFQFP Package Pin Functions

100-Pin LFQFP	RX71M	RX72M	RX72N
1	AVCC1	AVSS0	AVCC1
2	EMLE	AVCC1	EMLE
3	AVSS1	AVSS1	AVSS1
4	PJ3/EDACK1/MTIOC3C/ ET0_EXOUT/CTS6#/RTS6#/CTS0#/RTS0#/SS6#/SS0#	P00/TMRI0/TXD6/SMOSI6/ SSDA6/AUDIO_CLK/ CATLATCH1/IRQ8/AN118	PJ3/EDACK1/MTIOC3C/ CTS6#/RTS6#/SS6#/CTS0#/RTS0#/SS0#/SSITXDO/ ET0_EXOUT
5	VCL	EMLE	VCL
6	VBATT	VCL	VBATT
7	MD/FINED	VBATT	MD/FINED
8	XCIN	MD/FINED	XCIN
9	XCOUT	XCIN	XCOUT
10	RES#	XCOUT	RES#
11	XTAL/P37	RES#	XTAL/P37
12	VSS	XTAL/P37	VSS
13	EXTAL/P36	VSS	EXTAL/P36
14	VCC	EXTAL/P36	VCC
15	UPSEL/P35/NMI	VCC	UPSEL/P35/NMI
16	TRST#/P34/MTIOC0A/ TMCI3/PO12/POE10#/SCK6/ SCK0/ET0_LINKSTA/IRQ4	UPSEL/P35/NMI	TRST#/P34/MTIOC0A/ TMCI3/PO12/POE10#/SCK6/ SCK0/ET0_LINKSTA/IRQ4
17	P33/EDREQ1/MTIOC0D/ TIOCD0/TMRI3/PO11/ POE4#/POE11#/RXD6/ RXD0/SMISO6/SMISO0/ SSCL6/SSCL0/CRX0/ IRQ3-DS	TRST#/P34/MTIOC0A/ TMCI3/PO12/POE10#/SCK6/ SCK0/ET0_LINKSTA/ CAT0_LINKSTA/IRQ4	P33/EDREQ1/MTIOC0D/ TIOCD0/TMRI3/PO11/ POE4#/POE11#/RXD6/ SMISO6/SSCL6/RXD0/ SMISO0/SSCL0/CRX0/ IRQ3-DS
18	P32/MTIOC0C/TIOCC0/ TMO3/PO10/RTCOUT/ RTCIC2/POE0#/POE10#/TXD6/TXD0/SMOSI6/ SMOSI0/SSDA6/SSDA0/ CTX0/USB0_VBUSEN/ IRQ2-DS	P33/MTIOC0D/TIOCD0/ TMCI3/PO11/POE4#/POE11#/RXD6/SMISO6/ SSCL6/RXD0/SMISO0/ SSCL0/CRX0/IRQ3_DS	P32/MTIOC0C/TIOCC0/ TMO3/PO10/RTCIC2/ RTCOUT/POE0#/POE10#/TXD6/SMOSI6/SSDA6/ TXD0/SMOSI0/SSDA0/ CTX0/USB0_VBUSEN/ IRQ2-DS
19	TMS/P31/MTIOC4D/TMCI2/ PO9/RTCIC1/CTS1#/RTS1#/SS1#/SSLB0-A/IRQ1-DS	P32/MTIOC0C/TIOCC0/ TMO3/PO10/RTCIC2/ RTCOUT/POE0#/POE10#/TXD6/SMOSI6/SSDA6/ TXD0/SMOSI0/SSDA0/ CTX0/USB0_VBUSEN/ IRQ2_DS	TMS/P31/MTIOC4D/TMCI2/ PO9/RTCIC1/CTS1#/RTS1#/SS1#/SSLB0-A/IRQ1-DS
20	TDI/P30/MTIOC4B/TMRI3/ PO8/RTCIC0/POE8#/RXD1/ SMISO1/SSCL1/MISOB-A/ IRQ0-DS	TMS/P31/MTIOC4D/TMCI2/ PO9/RTCIC1/CTS1#/RTS1#/SS1#/SSLB0-A/ET1_MDC/ PMGI1_MDC/IRQ1_DS	TDI/P30/MTIOC4B/TMRI3/ PO8/RTCIC0/POE8#/RXD1/ SMISO1/SSCL1/MISOB-A/ IRQ0-DS

100-Pin LFQFP	RX71M	RX72M	RX72N
21	TCK/P27/CS7#/MTIOC2B/ TMC13/PO7/SCK1/ RSPCKB-A	TDI/P30/MTIOC4B/TMRI3/ PO8/RTCIC0/POE8#/RXD1/ SMISO1/SSCL1/MISOB-A/ ET1_MDIO/PMGI1_MDIO/ IRQ0_DS	TCK/P27/CS7#/MTIOC2B/ TMC13/PO7/SCK1/ RSPCKB-A
22	TDO/P26/CS6#/MTIOC2A/ TMO1/PO6/TXD1/CTS3#// RTS3#/SMOSI1/SS3#// SSDA1/MOSIB-A	TCK/P27/MTIOC2B/TMC13/ PO7/SCK1/RSPCKB-A/ ET1_WOL/CATIRQ	TDO/P26/CS6#/MTIOC2A/ TMO1/PO6/TXD1/SMOSI1/ SSDA1/CTS3#/RTS3#/SS3#// MOSIB-A
23	P25/CS5#/EDACK1/ MTIOC4C/MTCLKB/TIOCA4/ PO5/RXD3/SMISO3/SSCL3/ SSIDATA1/ADTRG0#	TDO/P26/MTIOC2A/TMO1/ PO6/TXD1/SMOSI1/SSDA1/ CTS3#/RTS3#/SS3#// MOSIB-A/ET1_EXOUT/ CATLINKACT1	CLKOUT/P25/CS5#// EDACK1/MTIOC4C/ MTCLKB/TIOCA4/PO5/ RXD3/SMISO3/SSCL3/ SSIDATA1/ADTRG0#
24	P24/CS4#/EDREQ1/ MTIOC4A/MTCLKA/TIOCB4/ TMRI1/PO4/SCK3/ USB0_VBUSEN/SSISCK1	CLKOUT/P25/MTIOC4C/ MTCLKB/TIOCA4/PO5/ RXD3/SMISO3/SSCL3/ SSIDATA1/ADTRG0#	P24/CS4#/EDREQ1/ MTIOC4A/MTCLKA/TIOCB4/ TMRI1/PO4/SCK3/ USB0_VBUSEN/SSIBCK1
25	P23/EDACK0/MTIOC3D/ MTCLKD/GTIOC0A-B/ TIOCD3/PO3/TXD3/CTS0#// RTS0#/SMOSI3/SS0#// SSDA3/SSISCK0	P24/MTIOC4A/MTCLKA/ TIOCB4/TMRI1/PO4/SCK3/ USB0_VBUSEN/SSIBCK1	P23/EDACK0/MTIOC3D/ MTCLKD/TIOCD3/PO3/ GTIOC0A/TXD3/SMOSI3/ SSDA3/CTS0#/RTS0#/SS0#// CTX1/SSIBCK0
26	P22/EDREQ0/MTIOC3B/ MTCLKC/GTIOC1A-B/ TIOCC3/TMO0/PO2/SCK0/ USB0_OVRCURB/ AUDIO_MCLK	P23/MTIOC3D/MTCLKD/ TIOCD3/PO3/GTIOC0A/ TXD3/SMOSI3/SSDA3/ CTS0#/RTS0#/SS0#/CTX1/ SSIBCK0	P22/EDREQ0/MTIOC3B/ MTCLKC/TIOCC3/TMO0/ PO2/GTIOC1A/SCK0/ USB0_OVRCURB/ AUDIO_CLK
27	P21/MTIOC1B/MTIOC4A/ GTIOC2A-B/TIOCA3/TMC10/ PO1/RXD0/SMISO0/SSCL0/ USB0_EXICEN/SSIWS0/ IRQ9	P21/MTIOC1B/MTIOC4A/ TIOCA3/TMC10/PO1/ GTIOC2A/RXD0/SMISO0/ SSCL0/SCL1/ USB0_EXICEN/SSILRCK0/ IRQ9	P21/MTIOC1B/MTIOC4A/ TIOCA3/TMC10/PO1/ GTIOC2A/RXD0/SMISO0/ SSCL0/USB0_EXICEN/ SSILRCK0/SCL1/IRQ9
28	P20/MTIOC1A/TIOCB3/ TMRI0/PO0/TXD0/SMOSI0/ SSDA0/USB0_ID/SSIRXD0/ IRQ8	P20/MTIOC1A/TIOCB3/ TMRI0/PO0/TXD0/SMOSI0/ SSDA0/SDA1/USB0_ID/ SSIRXD0/IRQ8	P20/MTIOC1A/TIOCB3/ TMRI0/PO0/TXD0/SMOSI0/ SSDA0/USB0_ID/SSIRXD0/ SDA1/IRQ8
29	P17/MTIOC3A/MTIOC3B/ MTIOC4B/GTIOC0B-B/ TIOCB0/TCLKD/TMO1/ PO15/POE8#/SCK1/TXD3/ SMOSI3/SSDA3/SDA2-DS/ SSITXD0/IRQ7/ADTRG1#	P17/MTIOC3A/MTIOC3B/ MTIOC4B/TIOCB0/TCLKD/ TMO1/PO15/POE8#// GTIOC0B/SCK1/TXD3/ SMOSI3/SSDA3/SDA2_DS/ SSITXD0/EPLSOUT0/ CATSYNC0/IRQ7/ADTRG1#	P17/MTIOC3A/MTIOC3B/ MTIOC4B/TIOCB0/TCLKD/ TMO1/PO15/POE8#// GTIOC0B/SCK1/TXD3/ SMOSI3/SSDA3/SDA2-DS/ SSITXD0/EPLSOUT0/IRQ7/ ADTRG1#
30	P16/MTIOC3C/MTIOC3D/ TIOCB1/TCLKC/TMO2/ PO14/RTCOUT/TXD1/RXD3/ SMOSI1/SMISO3/SSDA1/ SSCL3/SCL2-DS/ USB0_VBUS/ USB0_VBUSEN/ USB0_OVRCURB/IRQ6/ ADTRG0#	P87/MTIOC4C/TIOCA2/ GTIOC1B/SMOSI10/ SSDA10/TXD10/EPLSOUT1/ CATSYNC1	P16/MTIOC3C/MTIOC3D/ TIOCB1/TCLKC/TMO2/ PO14/RTCOUT/TXD1/ SMOSI1/SSDA1/RXD3/ SMISO3/SSCL3/SCL2-DS/ USB0_VBUSEN/ USB0_VBUS/ USB0_OVRCURB/IRQ6/ ADTRG0#

100-Pin LFQFP	RX71M	RX72M	RX72N
31	P15/MTIOC0B/MTCLKB/ GTETRG-B/TIOCB2/TCLKB/ TMCI2/PO13/RXD1/SCK3/ SMISO1/SSCL1/CRX1-DS/ SSIWS1/IRQ5	P16/MTIOC3C/MTIOC3D/ TIOCB1/TCLKC/TMO2/ PO14/RTCOOUT/TXD1/ SMOSI1/SSDA1/RXD3/ SMISO3/SSCL3/SCL2_DS/ USB0_VBUSEN/ USB0_VBUS/ USB0_OVRCURB/IRQ6/ ADTRG0#	P15/MTIOC0B/MTCLKB/ TIOCB2/TCLKB/TMC12/ PO13/GTETRGA/ RxD1/SMISO1/SSCL1/ SCK3/CRX1-DS/ SSILRCK1/IRQ5
32	P14/MTIOC3A/MTCLKA/ TIOCB5/TCLKA/TMRI2/ PO15/CTS1#/RTS1#/SS1#/ CTX1/USB0_OVRCURA/ IRQ4	P86/MTIOC4D/TIOCA0/ GTIOC2B/SMISO10/ SSCL10/RXD10/ CATLINKACT0	P14/MTIOC3A/MTCLKA/ TIOCB5/TCLKA/TMRI2/ PO15/GTETRGD/CTS1#/ RTS1#/ SS1#/CTX1/ USB0_OVRCURA/IRQ4
33	P13/MTIOC0B/TIOCA5/ TMO3/PO13/TXD2/SMOSI2/ SSDA2/SDA0[FM+]/IRQ3/ ADTRG1#	P15/MTIOC0B/MTCLKB/ TIOCB2/TCLKB/TMC12/ PO13/GTETRGA/RXD1/ SMISO1/ SSCL1/SCK3/ CRX1_DS/SSILRCK1/ CATLEDRUN/ IRQ5	P13/MTIOC0B/TIOCA5/ TMO3/PO13/GTADSM1/ TXD2/SMOSI2/SSDA2/ SDA0[FM+]/IRQ3/ADTRG1#
34	P12/TMCI1/RXD2/SMISO2/ SSCL2/SCL0[FM+]/IRQ2	P14/MTIOC3A/MTCLKA/ TIOCB5/TCLKA/TMRI2/ PO15/GTETRGD/CTS1#/ RTS1#/ SS1#/CTX1/ USB0_OVRCURA/IRQ4	P12/TMCI1/GTADSM0/ RxD2/SMISO2/SSCL2/ SCL0[FM+]/ IRQ2
35	VCC_USB	VCC_USB	VCC_USB
36	USB0_DM	USB0_DM	USB0_DM
37	USB0_DP	USB0_DP	USB0_DP
38	VSS_USB	VSS_USB	VSS_USB
39	P55/WAIT#/EDREQ0/ MTIOC4D/TMO3/CRX1/ ET0_EXOUT/IRQ10	CLKOUT25M/P56/MTIOC3C/ TIOCA1/SCK7	P55/D0[A0/D0]/WAIT#/ EDREQ0/MTIOC4D/TMO3/ CRX1/ET0_EXOUT/IRQ10
40	P54/ALE/EDACK0/ MTIOC4B/TMC1/CTS2#/ RTS2#/SS2#/CTX1/ ET0_LINKSTA	P51/SCK2/SSLB2-A	P54/ALE/D1[A1/D1]/ EDACK0/MTIOC4B/TMC1/ CTS2#/ RTS2#/SS2#/CTX1/ ET0_LINKSTA
41	P53 ^{*1} /BCLK	P52/RXD2/SMISO2/SSCL2/ SSLB3-A/CATLEDSTER	P53 ^{*1} /BCLK
42	P52/RD#/RXD2/SMISO2/ SSCL2/SSLB3-A	P50/TXD2/SMOSI2/SSDA2/ SSLB1-A/CATLEDERR	P52/RD#/RXD2/SMISO2/ SSCL2/SSLB3-A
43	P51/WR1#/BC1#/WAIT#/ SCK2/SSLB2-A	VSS	P51/WR1#/BC1#/WAIT#/ SCK2/SSLB2-A
44	P50/WR0#/WR#/TXD2/ SMOSI2/SSDA2/SSLB1-A	VCC	P50/WR0#/WR#/TXD2/ SMOSI2/SSDA2/SSLB1-A
45	UB/PC7/A23/CS0#/ MTIOC3A/MTCLKB/ GTIOC3A-D/TMO2/TOC0/ PO31/CACREF/TXD8/ MISOA-A/ET0_COL/IRQ14	UB/PC7/MTIOC3A/MTCLKB/ TMO2/PO31/CACREF/ GTIOC3A/TXD8/SMOSI8/ SSDA8/SMOSI10/SSDA10/ TXD10/ET0_COL/IRQ14	UB/PC7/A23/CS0#/ MTIOC3A/MTCLKB/TMO2/ PO31/TOC0/CACREF/ GTIOC3A/TXD8/SMOSI8/ SSDA8/SMOSI10/SSDA10/ TXD10/MISOA-A/ ET0_COL/IRQ14

100-Pin LFQFP	RX71M	RX72M	RX72N
46	PC6/A22/CS1#/MTIOC3C/ MTCLKA/GTIOC3B-D/ TMCI2/TIC0/PO30/RXD8/ MOSIA-A/ET0_ETXD3/ IRQ13	PC6/MTIOC3C/MTCLKA/ TMCI2/PO30/ GTIOC3B/ RxD8/ SMISO8/SSCL8/ SMISO10/SSCL10/RXD10/ ET0_ETXD3/CAT0_ETXD3/ CATLATCH1/IRQ13	PC6/D2[A2/D2]/A22/CS1#/ MTIOC3C/MTCLKA/TMCI2/ PO30/ TIC0/GTIOC3B/RXD8/ SMISO8/SSCL8/SMISO10/ SSCL10/RXD10/MOSIA-A/ ET0_ETXD3/IRQ13
47	PC5/A21/CS2#/WAIT#/ MTIOC3B/MTCLKD/ GTIOC1A-D/TMRI2/PO29/ SCK8/RSPCKA-A/RTS8#/ ET0_ETXD2	PC5/MTIOC3B/MTCLKD/ TMRI2/PO29/ GTIOC1A/ SCK8/RTS8#/SCK10/ ET0_ETXD2/CAT0_ETXD2	PC5/D3[A3/D3]/A21/CS2#/ WAIT#/MTIOC3B/MTCLKD/ TMRI2/PO29/ GTIOC1A/ SCK8/RTS8#/SCK10/ RSPCKA-A/ET0_ETXD2
48	PC4/A20/CS3#/MTIOC3D/ MTCLKC/GTETRG-D/ TMC1/PO25/POE0#/SCK5/ CTS8#/SSLA0-A/ ET0_TX_CLK	P82/MTIOC4A/PO28/ GTIOC2A/SMOSI10/ SSDA10/TXD10/ ET0_ETXD1/RMII0_TXD1/ CAT0_ETXD1/CATI2CDATA	PC4/A20/CS3#/MTIOC3D/ MTCLKC/TMC1/PO25/ POE0#/GTETRG/SCK5/ CTS8#/SS8#/SS10#/ CTS10#/RTS10#/SSLA0-A/ ET0_TX_CLK
49	PC3/A19/MTIOC4D/ GTIOC1B-D/TCLKB/ PO24/TXD5/SMOSI5/ SSDA5/ET0_TX_ER	P81/MTIOC3D/PO27/ GTIOC0B/SMISO10/ SSCL10/RXD10/ ET0_ETXD0/RMII0_TXD0/ CAT0_ETXD0/CATI2CCLK	PC3/A19/MTIOC4D/TCLKB/ PO24/GTIOC1B/TXD5/ SMOSI5/SSDA5/ ET0_TX_ER
50	PC2/A18/MTIOC4B/ GTIOC2B-D/TCLKA/PO21/ RxD5/SMISO5/SSCL5/ SSLA3-A/ET0_RX_DV	P80/MTIOC3B/PO26/SCK10/ RTS10#/ET0_TX_EN/ RMII0_TXD_EN/ CAT0_TX_EN/CATLATCH0	PC2/A18/MTIOC4B/TCLKA/ PO21/GTIOC2B/RXD5/ SMISO5/SSCL5/SSLA3-A/ ET0_RX_DV
51	PC1/A17/MTIOC3A/TCLKD/ PO18/SCK5/SSLA2-A/ ET0_ERXD2/IRQ12	PC4/MTIOC3D/MTCLKC/ TMC1/PO25/POE0#/ GTETRG/SCK5/SS8#/ CTS8#/SS10#/CTS10#/ RTS10#/ET0_TX_CLK/ CAT0_TX_CLK/CATSYNC0	PC1/A17/MTIOC3A/TCLKD/ PO18/SCK5/SSLA2-A/ ET0_ERXD2/IRQ12
52	PC0/A16/MTIOC3C/TCLKC/ PO17/CTS5#/RTS5#/SS5#/ SSLA1-A/ET0_ERXD3/ IRQ14	PC2/MTIOC4B/TCLKA/ PO21/GTIOC2B/RXD5/ SMISO5/SSCL5/ ET0_RX_DV/CAT0_RX_DV	PC0/A16/MTIOC3C/TCLKC/ PO17/CTS5#/RTS5#/SS5#/ SSLA1-A/ET0_ERXD3/ IRQ14
53	PB7/A15/MTIOC3B/TIOCB5/ PO31/TXD9/ET0_CRS/ RMII0_CRS_DV	PB7/MTIOC3B/TIOCB5/ PO31/TXD9/ SMOSI9/ SSDA9/SMOSI11/SSDA11/ TXD11/ET0_CRS/ RMII0_CRS_DV/ CAT0_RX_DV	PB7/A15/MTIOC3B/TIOCB5/ PO31/TXD9/ SMOSI9/ SSDA9/SMOSI11/SSDA11/ TXD11/ET0_CRS/ RMII0_CRS_DV
54	PB6/A14/MTIOC3D/TIOCA5/ PO30/RXD9/ET0_ETXD1/ RMII0_TXD1	PB6/MTIOC3D/TIOCA5/ PO30/RXD9/ SMISO9/ SSCL9/SMISO11/SSCL11/ RXD11/ET0_ETXD1/ RMII0_TXD1/CAT0_ETXD1	PB6/A14/MTIOC3D/TIOCA5/ PO30/RXD9/ SMISO9/ SSCL9/SMISO11/SSCL11/ RXD11/ET0_ETXD1/ RMII0_TXD1
55	PB5/A13/MTIOC2A/ MTIOC1B/TIOCB4/TMRI1/ PO29/POE4#/SCK9/RTS9#/ ET0_ETXD0/RMII0_TXD0	PB5/MTIOC2A/MTIOC1B/ TIOCB4/TMRI1/PO29/ POE4#/SCK9/RTS9#/ SCK11/ET0_ETXD0/ RMII0_TXD0/CAT0_ETXD0	PB5/A13/MTIOC2A/ MTIOC1B/TIOCB4/TMRI1/ PO29/POE4#/SCK9/RTS9#/ SCK11/ET0_ETXD0/ RMII0_TXD0/LCD_CLK-B

100-Pin LFQFP	RX71M	RX72M	RX72N
56	PB4/A12/TIOCA4/PO28/ CTS9#/ET0_TX_EN/ RMII0_TXD_EN	PB4/TIOCA4/PO28/SS9#/ CTS9#/SS11#/CTS11#/ RTS11#/ET0_TX_EN/ RMII0_TXD_EN/ CAT0_TX_EN	PB4/A12/TIOCA4/PO28/ CTS9#/SS9#/SS11#/ CTS11#/RTS11#/ ET0_TX_EN/ RMII0_TXD_EN/ LCD_TCON0-B
57	PB3/A11/MTIOC0A/ MTIOC4A/TIODE3/TCLKD/ TMO0/PO27/POE11#/SCK6/ ET0_RX_ER/RMII0_RX_ER	PB3/MTIOC0A/MTIOC4A/ TIODE3/TCLKD/TMO0/ PO27/POE11#/SCK4/SCK6/ ET0_RX_ER/RMII0_RX_ER/ CAT0_RX_ER	PB3/A11/MTIOC0A/ MTIOC4A/TIODE3/TCLKD/ TMO0/PO27/POE11#/SCK6/ ET0_RX_ER/RMII0_RX_ER/ LCD_TCON1-B
58	PB2/A10/TIOCC3/TCLKC/ PO26/CTS6#/RTS6#/SS6#/ ET0_RX_CLK/REF50CK0	PB1/MTIOC0C/MTIOC4C/ TIOCB3/TMC10/PO25/TXD4/ SMOS14/SSDA4/TXD6/ SMOS16/SSDA6/ ET0_ERXD0/RMII0_RXD0/ CAT0_ERXD0/IRQ4_DS	PB2/A10/TIOCC3/TCLKC/ PO26/CTS6#/RTS6#/SS6#/ ET0_RX_CLK/REF50CK0/ LCD_TCON2-B
59	PB1/A9/MTIOC0C/ MTIOC4C/TIOCB3/TMC10/ PO25/TXD6/SMOS16/ SSDA6/ET0_ERXD0/ RMII0_RXD0/IRQ4-DS	PB0/MTIC5W/TIOCA3/ PO24/RXD4/SMISO4/ SSCL4/RXD6/SMISO6/ SSCL6/ET0_ERXD1/ RMII0_RXD1/CAT0_ERXD1/ IRQ12	PB1/A9/MTIOC0C/ MTIOC4C/TIOCB3/TMC10/ PO25/TXD6/SMOS16/ SSDA6/ET0_ERXD0/ RMII0_RXD0/ LCD_TCON3-B/IRQ4-DS
60	VCC	PA6/MTIC5V/MTCLKB/ TIOCA2/TMC13/PO22/ POE10#/GTETRGB/CTS5#/ RTS5#/SS5#/ET0_EXOUT/ CATRESTOUT	VCC
61	PB0/A8/MTIC5W/TIOCA3/ PO24/RXD6/SMISO6/ SSCL6/ET0_ERXD1/ RMII0_RXD1/IRQ12	VCC	PB0/A8/MTIC5W/TIOCA3/ PO24/RXD6/SMISO6/ SSCL6/ET0_ERXD1/ RMII0_RXD1/ LCD_DATA0-B/IRQ12
62	VSS	PA4/MTIC5U/MTCLKA/ TIOCA1/TMRI0/PO20/TXD5/ SMOS15/SSDA5/ET0_MDC/ CAT0_MDC/CATIRQ/ PMGI0_MDC/IRQ5_DS	VSS
63	PA7/A7/TIOCB2/PO23/ MISOA-B/ET0_WOL	VSS	PA7/A7/TIOCB2/PO23/ MISOA-B/ET0_WOL/ LCD_DATA1-B
64	PA6/A6/MTIC5V/MTCLKB/ GTETRG-C/TIOCA2/TMC13/ PO22/POE10#/CTS5#/ RTS5#/SS5#/MOSIA-B/ ET0_EXOUT	PA3/MTIOC0D/MTCLKD/ TIODE0/TCLKB/PO19/ RXD5/SMISO5/SSCL5/ ET0_MDIO/CAT0_MDIO/ PMGI0_MDIO/IRQ6_DS	PA6/A6/MTIC5V/MTCLKB/ TIOCA2/TMC13/PO22/ POE10#/GTETRGB/CTS5#/ RTS5#/SS5#/MOSIA-B/ ET0_EXOUT/LCD_DATA2-B
65	PA5/A5/MTIOC6B/TIOCB1/ GTIOC0A-C/PO21/ RSPCKA-B/ET0_LINKSTA	PA2/MTIOC7A/PO18/ GTIOC1A/RXD5/SMISO5/ SSCL5/CATLINKACT1	PA5/A5/MTIOC6B/TIOCB1/ PO21/GTIOC0A/RSPCKA-B/ ET0_LINKSTA/ LCD_DATA3-B

100-Pin LFQFP	RX71M	RX72M	RX72N
66	PA4/A4/MTIC5U/MTCLKA/ TIOCA1/TMRI0/PO20/TXD5/ SMOSI5/SSDA5/SSLA0-B/ ET0_MDC/IRQ5-DS	PG6/ET1_ETXD3/ CAT1_ETXD3	PA4/A4/MTIC5U/MTCLKA/ TIOCA1/TMRI0/PO20/TXD5/ SMOSI5/SSDA5/SSLA0-B/ ET0_MDC/PMGI0_MDC/ LCD_DATA4-B/IRQ5-DS
67	PA3/A3/MTIOC0D/MTCLKD/ TIOCD0/TCLKB/PO19/ RXD5/SMISO5/SSCL5/ ET0_MDIO/IRQ6-DS	PA1/MTIOC0B/MTCLKC/ MTIOC7B/TIOCB0/PO17/ GTIOC2A/SCK5/ET0_WOL/ IRQ11	PA3/A3/MTIOC0D/MTCLKD/ TIOCD0/TCLKB/PO19/ RXD5/SMISO5/SSCL5/ ET0_MDIO/PMGI0_MDIO/ LCD_DATA5-B/IRQ6-DS
68	PA2/A2/MTIOC7A/ GTIOC1A-C/PO18/RXD5/ SMISO5/SSCL5/SSLA3-B	PG5/ET1_ETXD2/ CAT1_ETXD2	PA2/A2/MTIOC7A/PO18/ GTIOC1A/RXD5/SMISO5/ SSCL5/SSLA3-B/ LCD_DATA6-B
69	PA1/A1/MTIOC0B/MTCLKC/ MTIOC7B/GTIOC2A-C/ TIOCB0/PO17/SCK5/ SSLA2-B/ET0_WOL/IRQ11	PA0/MTIOC4A/MTIOC6D/ TIOCA0/PO16/CACREF/ GTIOC0B/ET0_TX_EN/ RMIIO_TXD_EN/ CAT0_TX_EN/CATLEDRUN	PA1/A1/MTIOC0B/MTCLKC/ MTIOC7B/TIOCB0/PO17/ GTIOC2A/SCK5/SSLA2-B/ ET0_WOL/LCD_DATA7-B/ IRQ11
70	PA0/A0/BC0#/MTIOC4A/ MTIOC6D/GTIOC0B-C/ TIOCA0/CACREF/PO16/ SSLA1-B/ET0_TX_EN/ RMIIO_TXD_EN	P67/MTIOC7C/GTIOC1B/ CRX2/EPLSOUT1/ CATSYNC1/IRQ15	PA0/BC0#/A0/MTIOC4A/ MTIOC6D/TIOCA0/PO16/ CACREF/GTIOC0B/ SSLA1-B/ET0_TX_EN/ RMIIO_TXD_EN/ LCD_DATA8-B
71	PE7/D15[A15/D15]/ MTIOC6A/GTIOC3A-E/ TOC1/MISOB-B/ MMC_RES#-B/SDHI_WP-B/ IRQ7/AN105	P66/MTIOC7D/GTIOC2B/ CTX2	PE7/D15[A15/D15]/ D7[A7/D7]/MTIOC6A/TOC1/ GTIOC3A/MISOB-B/ SDHI_WP/MMC_RES#-B/ LCD_DATA9-B/IRQ7/AN105
72	PE6/D14[A14/D14]/ MTIOC6C/GTIOC3B-E/ TIC1/MOSIB-B/MMC_CD-B/ SDHI_CD-B/IRQ6/AN104	PG2/ET1_TX_CLK/ CAT1_TX_CLK	PE6/D14[A14/D14]/ D6[A6/D6]/MTIOC6C/TIC1/ GTIOC3B/MOSIB-B/ SDHI_CD/MMC_CD-B/ LCD_DATA10-B/IRQ6/ AN104
73	PE5/D13[A13/D13]/ MTIOC4C/MTIOC2B/ GTIOC0A-A/ET0_RX_CLK/ REF50CK0/RSPCKB-B/ IRQ5/AN103	PE5/MTIOC4C/MTIOC2B/ GTIOC0A/ET0_RX_CLK/ REF50CK0/CAT0_RX_CLK/ IRQ5/AN103	PE5/D13[A13/D13]/ D5[A5/D5]/MTIOC4C/ MTIOC2B/GTIOC0A/ RSPCKB-B/ET0_RX_CLK/ REF50CK0/ LCD_DATA11-B/IRQ5/ AN103
74	PE4/D12[A12/D12]/ MTIOC4D/MTIOC1A/ GTIOC1A-A/PO28/ ET0_ERXD2/SSLB0-B/ AN102	PE4/MTIOC4D/MTIOC1A/ PO28/GTIOC1A/ ET0_ERXD2/CAT0_ERXD2/ AN102	PE4/D12[A12/D12]/ D4[A4/D4]/MTIOC4D/ MTIOC1A/PO28/GTIOC1A/ SSLB0-B/ET0_ERXD2/ LCD_DATA12-B/AN102
75	PE3/D11[A11/D11]/ MTIOC4B/GTIOC2A-A/ PO26/POE8#/TOC3/ CTS12#/RTS12#/SS12#/ ET0_ERXD3/MMC_D7-B/ AN101	PE3/MTIOC4B/PO26/ POE8#/GTIOC2A/ ET0_ERXD3/CAT0_ERXD3/ AN101	PE3/D11[A11/D11]/ D3[A3/D3]/MTIOC4B/PO26/ TOC3/POE8#/GTIOC2A/ CTS12#/RTS12#/SS12#/ ET0_ERXD3/MMC_D7-B/ LCD_DATA13-B/AN101

100-Pin LFQFP	RX71M	RX72M	RX72N
76	PE2/D10[A10/D10]/ MTIOC4A/GTIOC0B-A/ PO23/TIC3/RXD12/ SMISO12/SSCL12/RXDX12/ SSLB3-B/MMC_D6-B/ IRQ7-DS/AN100	P64/ET1_ETXD0/ RMII1_TXD0/CAT1_ETXD0	PE2/D10[A10/D10]/ D2[A2/D2]/MTIOC4A/PO23/ TIC3/GTIOC0B/RXD12/ SMISO12/SSCL12/RXDX12/ SSLB3-B/MMC_D6-B/ LCD_DATA14-B/IRQ7-DS/ AN100
77	PE1/D9[A9/D9]/MTIOC4C/ MTIOC3B/GTIOC1B-A/ PO18/TXD12/SMOSI12/ SSDA12/TXDX12/SIOX12/ SSLB2-B/MMC_D5-B/ ANEX1	P63/ET1_ETXD1/ RMII1_TXD1/CAT1_ETXD1	PE1/D9[A9/D9]/D1[A1/D1]/ MTIOC4C/MTIOC3B/PO18/ GTIOC1B/TXD12/SMOSI12/ SSDA12/TXDX12/SIOX12/ SSLB2-B/MMC_D5-B/ LCD_DATA15-B/ANEX1
78	PE0/D8[A8/D8]/MTIOC3D/ GTIOC2B-A/SCK12/ SSLB1-B/MMC_D4-B/ ANEX0	P62/ET1_ERXD0/ RMII1_RXD0/CAT1_ERXD0	PE0/D8[A8/D8]/D0[A0/D0]/ MTIOC3D/GTIOC2B/SCK12/ SSLB1-B/MMC_D4-B/ LCD_DATA16-B/ANEX0
79	PD7/D7[A7/D7]/MTIC5U/ POE0#/MMC_D1-B/ SDHI_D1-B/QIO1-B/QMI-B/ IRQ7/AN107	P61/ET1_ERXD1/ RMII1_RXD1/CAT1_ERXD1	PD7/D7[A7/D7]/MTIC5U/ POE0#/SSLC3-A/QMI-B/ QIO1-B/SDHI_D1-B/ MMC_D1-B/ LCD_DATA17-B/IRQ7/ AN107
80	PD6/D6[A6/D6]/MTIC5V/ MTIOC8A/POE4#/ MMC_D0-B/SDHI_D0-B/ QIO0-B/QMO-B/IRQ6/AN106	VSS	PD6/D6[A6/D6]/MTIC5V/ MTIOC8A/POE4#/SSLC2-A/ QMO-B/QIO0-B/SDHI_D0-B/ MMC_D0-B/ LCD_DATA18-B/IRQ6/ AN106
81	PD5/D5[A5/D5]/MTIC5W/ MTIOC8C/POE10#/ MMC_CLK-B/SDHI_CLK-B/ QSPCLK-B/IRQ5/AN113	P60/ET1_TX_EN/ RMII1_TXD_EN/ CAT1_TX_EN	PD5/D5[A5/D5]/MTIC5W/ MTIOC8C/MTCLKA/ POE10#/SSLC1-A/ QSPCLK-B/SDHI_CLK-B/ MMC_CLK-B/ LCD_DATA19-B/IRQ5/ AN113
82	PD4/D4[A4/D4]/MTIOC8B/ POE11#/MMC_CMD-B/ SDHI_CMD-B/QSSL-B/ IRQ4/AN112	VCC	PD4/D4[A4/D4]/MTIOC8B/ POE11#/SSLC0-A/QSSL-B/ SDHI_CMD-B/MMC_CMD-B/ LCD_DATA20-B/IRQ4/ AN112
83	PD3/D3[A3/D3]/MTIOC8D/ GTIOC0A-E/POE8#/TOC2/ MMC_D3-B/SDHI_D3-B/ QIO3-B/IRQ3/AN111	PD7/MTIC5U/POE0#/ ET1_RX_ER/RMII1_RX_ER/ CAT1_RX_ER/IRQ7/AN107	PD3/D3[A3/D3]/MTIOC8D/ TOC2/POE8#/GTIOC0A/ RSPCKC-A/QIO3-B/ SDHI_D3-B/MMC_D3-B/ LCD_DATA21-B/IRQ3/ AN111
84	PD2/D2[A2/D2]/MTIOC4D/ GTIOC0B-E/TIC2/CRX0/ MMC_D2-B/SDHI_D2-B/ QIO2-B/IRQ2/ AN110	PD6/MTIC5V/MTIOC8A/ POE4#/ET1_RX_CLK/ REF50CK1/CAT1_RX_CLK/ IRQ6/AN106	PD2/D2[A2/D2]/MTIOC4D/ TIC2/GTIOC0B/MISOC-A/ CRX0/QIO2-B/SDHI_D2-B/ MMC_D2-B/ LCD_DATA22-B/IRQ2/ AN110

100-Pin LFQFP	RX71M	RX72M	RX72N
85	PD1/D1[A1/D1]/MTIOC4B/ GTIOC1A-E/POE0#/CTX0/ IRQ1/AN109	P97/ET1_ERXD3/ CAT1_ERXD3	PD1/D1[A1/D1]/MTIOC4B/ POE0#/GTIOC1A/MOSIC-A/ CTX0/LCD_DATA23-B/IRQ1/ AN109
86	PD0/D0[A0/D0]/GTIOC1B-E/ POE4#/IRQ0/AN108	P96/ET1_ERXD2/ CAT1_ERXD2	PD0/D0[A0/D0]/POE4#/ GTIOC1B/LCD_EXTCLK-B/ IRQ0/AN108
87	P47/IRQ15-DS/AN007	PD2/MTIOC4D/GTIOC0B/ CRX0/ET1_EXOUT/IRQ2/ AN110	P47/IRQ15-DS/AN007
88	P46/IRQ14-DS/AN006	PD1/MTIOC4B/POE0#/ GTIOC1A/CTX0/IRQ1/ AN109	P46/IRQ14-DS/AN006
89	P45/IRQ13-DS/AN005	P93/POE0#/CTS7#/RTS7#/ SS7#/ET1_LINKSTA/ CAT1_LINKSTA/AN117	P45/IRQ13-DS/AN005
90	P44/IRQ12-DS/AN004	P92/POE4#/RXD7/SMIS07/ SSCL7/ET1_CRS/ RMII1_CRS_DV/ CAT1_RX_DV/AN116	P44/IRQ12-DS/AN004
91	P43/IRQ11-DS/AN003	P91/SCK7/ET1_COL/AN115	P43/IRQ11-DS/AN003
92	P42/IRQ10-DS/AN002	VSS	P42/IRQ10-DS/AN002
93	P41/IRQ9-DS/AN001	P90/TXD7/SMOSI7/SSDA7/ ET1_RX_DV/CAT1_RX_DV/ AN114	P41/IRQ9-DS/AN001
94	VREFL0	VCC	VREFL0
95	P40/IRQ8-DS/AN000	P42/IRQ10_DS/AN002	P40/IRQ8-DS/AN000
96	VREFH0	P41/IRQ9_DS/AN001	VREFH0
97	AVCC0	VREFL0	AVCC0
98	P07/IRQ15/ADTRG0#	P40/IRQ8_DS/AN000	P07/IRQ15/ADTRG0#
99	AVSS0	VREFH0	AVSS0
100	P05/IRQ13/DA1	AVCC0	P05/SSILRCK1/IRQ13/DA1

Note: 1. P53, which is multiplexed as the BCLK pin, cannot be used as an I/O port when the external bus is enabled.

4. Important Information when Migrating Between MCUs

This section provides the important information regarding differences between the RX71M Group and the RX72M/RX72N Group. 4.1 Notes on Pin Design describes notes regarding the hardware and 4.2 Notes on Functional Design describes notes regarding the software.

4.1 Notes on Pin Design

4.1.1 Transitioning to Boot Mode (FINE Interface)

On the RX72M/RX72N Group it is possible to transition to boot mode (FINE interface) by first resetting the MCU by driving the MD pin low-level and then switching to high-level within 20 to 100 msec.

Refer to the description of operating modes in RX72M Group, RX72N Group User's Manual: Hardware, referenced in section 5, Reference Documents, for details.

4.1.2 Inserting Decoupling Capacitors between AVCC and AVSS Pins

To prevent destruction of the RX72M/RX72N Group's analog input pins (AN000 to AN007 and AN100 to AN120) by abnormal voltage such as an excessive surge, insert capacitors between AVCC_n and AVSS_n, and connect a protective circuit to protect the analog input pins (AN000 to AN007 and AN100 to AN120).

Refer to the description of noise prevention with the 12-bit A/D converter in RX72M Group, RX72N Group User's Manual: Hardware, referenced in section 5, Reference Documents, for details.

4.2 Notes on Functional Design

This section presents software-related considerations regarding function settings that differ between the RX71M Group and the RX72M/RX72N Group.

For differences between modules and functions, refer to 2, Comparative Overview of Specifications. For further information, refer to the User's Manual: Hardware of each MCU group, listed in 5, Reference Documents.

4.2.1 Running RAM Self-Diagnostics on Save Register Banks

On the RX72M/RX72N Group the save register banks are configured in the RAM. The save register banks are buffered, so writing to a bank with the SAVE instruction and then reading from the same bank with the RSTR instruction immediately afterwards may result in data being read from the buffer rather than from the RAM memory cells. When running RAM self-diagnostics on a save register bank, follow the steps below to ensure that the previously written data is read from the RAM rather than from the buffer.

- (1) Use the SAVE instruction to write data to the bank on which self-diagnostics will be run.
- (2) Use the SAVE instruction to write data to a bank other than that written to in step (1).
- (3) Use the RSTR instruction to read data from the bank written to in step (1).

4.2.2 User Boot Mode

UB code A, UB code B, and user boot mode are all implemented on the RX71M Group but not on the RX72M/RX72N Group.

By using the startup program protection function on the RX72M/RX72N Group it is possible to program and erase the user area of the flash memory with an interface of your choice, as an alternative to user boot mode.

Refer to the description of the flash memory startup program protection function in RX72M Group, RX72N Group User's Manual: Hardware, referenced in section 5, Reference Documents, for details.

4.2.3 Flash Access Window Setting Register (FAW)

Once it is cleared to 0, the access window protect bit (FSPR) in the flash access window setting register (FAW) of the RX72M/RX72N Group cannot be reset to 1.

Refer to the description of the option-setting memory flash access window setting register in RX72M Group, RX72N Group User's Manual: Hardware, referenced in section 5, Reference Documents, for details.

4.2.4 Clock Frequency Settings

The RX71M Group and the RX72M/RX72N Group have different limits on clock frequency settings. Refer to Table 4.1 for details.

Table 4.1 Comparison of Limits on Clock Frequency Settings

Item	RX71M	RX72M/RX72N
Clock frequency setting limits	$ICLK \geq BCLK$ $PCLKA \geq PCLKB$ $PCLKB \geq PCLKC$ $PCLKB \geq PCLKD$	$ICLK \geq BCLK$ $PCLKA \geq PCLKB$ $PCLKB \geq PCLKC$ $PCLKB \geq PCLKD$
Clock frequency ratio limits	$ICLK:FCLK = N:1$ or $1:N$ $ICLK:PCLKA = N:1$ or $1:N$ $ICLK:PCLKB = N:1$ or $1:N$ $ICLK:PCLKC = N:1$ or $1:N$ $ICLK:PCLKD = N:1$ or $1:N$	$ICLK:FCLK = N:1$ or $1:N$ $ICLK:PCLKA = N:1$ or $1:N$ $ICLK:PCLKB = N:1$ or $1:N$ $ICLK:PCLKC = N:1$ or $1:N$ $ICLK:PCLKD = N:1$ or $1:N$ $ICLK:BCLK = N:1$

4.2.5 Using a Low CL Crystal Oscillator

When connecting an on-chip debugging emulator to the FINED pin of the RX71M Group, set the RCR3.RTCDV[2:0] bits to 110b (drive capacity for standard CL) even when using a low CL oscillator.

On the RX72M/RX72N Group, set the RCR3.RTCDV[2:0] bits to 001b (drive capacity for low CL) and debug at room temperature.

4.2.6 Note on Changing the ICLK Frequency

To change the ICLK frequency on the RX72M/RX72N Group from less than 70 MHz to 70 MHz or higher such that the ratio of the frequency after the change to that before the change is greater than four, start by setting the frequency to one quarter of the intended frequency, wait 3 μ s, and then change it to the intended frequency.

To change the ICLK frequency from 70 MHz or higher to less than 70 MHz such that the ratio of frequency after the change to that before the change becomes less than one quarter, start by setting the frequency to one quarter of the frequency before the change, wait 3 μ s, and then change it to the intended frequency.

4.2.7 Ethernet Controller

On the RX71M Group the EPTPCn.SYSR.INFABT flag may be set to 1 when a frame receive error occurs or a residual-bit frame is received, regardless of whether the EPTPC is in use.

On the RX72M/RX72N Group the value of the PTPCn.SYSR.INFABT flag does not change if the SYNFP0 or SYNFP1 module is bypassed, even if a frame receive error occurs or a residual-bit frame is received. Enabling or bypassing use of the SYNFP0 or SYNFP1 module is controlled by the setting of the SYNFP bypass register (SYBYPSCR). Nevertheless, if the SYNFP0 or SYNFP1 module is used, the EPTPCn.SYSR.INFABT bit may be set to 1 as on the RX71M Group.

4.2.8 Resetting the Ethernet Controller

On the RX72M/RX72N Group the procedure for resetting the Ethernet controller differs depending on whether or not the EPTPC is used. For details, refer to RX72M Group, RX72N Group User's Manual: Hardware, listed in 5, Reference Documents.

Refer to the instructions for resetting the Ethernet controller in the description of the Ethernet controller in RX72M Group, RX72N Group User's Manual: Hardware, referenced in section 5, Reference Documents, for details.

4.2.9 Releasing PTP Controller for Ethernet Controller from Module Stop State

The procedure for canceling the module stop state when using the EPTPC on the RX72M/RX72N Group is described below. Make sure that no other processing takes place while performing these steps.

- (1) Clear to 0 the MSTPB13, MSTPB14, and MSTPB15 bits in the MSTPCR register.
- (2) Clear to 0 the BYPASS0 and BYPASS1 bits in the SYBYPSCR register.
- (3) Wait 3 μ s.

Note: The above procedure will activate all functions. Make settings for individual bits as necessary.

4.2.10 Transitioning ETHERC, EPTPC, and EDMAC Modules to Module Stop State

The procedure for transitioning the ETHERC, EPTPC, and EDMAC modules to the module stop on the RX72M/RX72N Group is described below. Make sure that no other processing takes place while performing these steps.

- (1) Reset the ETHERC, EPTPC, and EDMAC modules.
- (2) Set to 1 the BYPASS0 and BYPASS1 bits in the SYBYPSCR register.
- (3) Set to 1 the MSTPB13, MSTPB14, and MSTPB15 bits in the MSTPCR register.
- (4) Wait 3 μ s.

4.2.11 Note on ETHERC and EDMAC Software Reset

On the RX72M/RX72N Group, the data stored in the register range from 0000 0000h to 0000 001Fh is destroyed if the EDMR.SWR bit is set to 1 while the EDMAC is operating. Do not use the register range from 0000 0000h to 0000 001Fh when using the Ethernet controller.

4.2.12 Eliminating I²C Bus Interface Noise

The RX71M Group has integrated analog noise filters on the SCL and SDA lines, but the RX72M/RX72N Group has no integrated analog noise filters.

4.2.13 A/D Conversion Start Bit

On the RX72M/RX72N Group, when the single-scan continuous function is used (ADGSPCR.GBRP bit = 1) with group priority control operation mode enabled (ADCSR.ADCS[1:0] bits = 01b and ADGSPCR.PGS bit = 1), the value of the ADST bit remains 1.

4.2.14 Compare Function Limitations

On the RX72M/RX72N Group the compare function of the 12-bit A/D converter is subject to the following limitations:

- (1) If temperature sensor or internal reference voltage is selected for window A, window B operation is prohibited.
- (2) If temperature sensor or internal reference voltage is selected for window B, window A operation is prohibited.
- (3) Window A and window B must not be set to the same channel.
- (4) Make settings such that the high-side reference value is greater than or equal to the low-side reference value.

4.2.15 Initial Setting Procedure for Output Buffer Amplifier

To use the output buffer amplifier with the 12-bit D/A converter of the RX72M/RX72N Group, follow the steps below to enable amplifier output.

- (1) Confirm that both the DACR.DAE and DACR.DAOEn bits are cleared to 0.
- (2) Write 0000h to the DADRn register.
- (3) Set the DAASWCR.DAASWn bit to 1.
- (4) Set the DAAMPCR.DAAMPn bit to 1.
- (5) Set the DACR.DAE bit or the DACR.DAOEn bit to 1. The output buffer amplifier is activated.
- (6) After waiting a minimum of 3 µs, clear the DAASWCR.DAASWn bit to 0.
- (7) Write the value to be converted to the DADRn register.

Note that clearing the DACR.DAE and DACR.DAOEn bits to 0 while the output buffer amplifier is operating will cause it to enter the stopped state. To use the output buffer amplifier again, it is necessary to redo steps (1) to (7).

4.2.16 ROM Cache

The RX72M/RX72N Group has an 8 KB ROM cache, but it is not operational immediately after a reset is canceled.

To use the ROM cache, set the ROMCE.ROMCEN bit to 1.

4.2.17 FCU Firmware Transfer

On the RX71M Group it was necessary to store FCU firmware in the FCURAM in order to use the flash sequencer, but this processing is not required on the RX72M/RX72N Group.

4.2.18 Initialization of the Port Direction Register (PDR)

Initialization of the PDR registers differs even when using RX72M/RX72N Group or RX71M Group products with the same pin count.

5. Reference Documents

User's Manual: Hardware

RX71M Group User's Manual: Hardware, Rev. 1.10 (R01UH0493EJ0110)
(The latest version can be downloaded from the Renesas Electronics website.)

RX64M Group, RX71M Group Flash Memory User's Manual: Hardware Interface,
Rev. 1.20 (R01UH0435EJ0120)

(The latest version can be downloaded from the Renesas Electronics website.)

RX72M Group User's Manual: Hardware, Rev. 1.11 (R01UH0804EJ0111)

(The latest version can be downloaded from the Renesas Electronics website.)

RX72N Group User's Manual: Hardware, Rev. 1.11 (R01UH0824EJ0111)

(The latest version can be downloaded from the Renesas Electronics website.)

Application Note

Design Guide for Migration between RX Family: Differences in Package External form (R01AN4591EJ)
(The latest version can be downloaded from the Renesas Electronics website.)

Technical Update/Technical News

(The latest information can be downloaded from the Renesas Electronics website.)

Related Technical Updates

This application note reflects the content of the following technical updates:

- TN-RX*-A0147B/E
- TN-RX*-A187A/E
- TN-RX*-A192A/E
- TN-RX*-A193A/E
- TN-RX*-A195A/E
- TN-RX*-A203A/E
- TN-RX*-A207A/E
- TN-RX*-A208A/E
- TN-RX*-A209A/E
- TN-RX*-A210A/E
- TN-RX*-A212A/E
- TN-RX*-A0215A/E
- TN-RX*-A0227A/E
- TN-RX*-A0232A/E
- TN-RX*-A0233A/E

Revision History

Rev.	Date	Description	
		Page	Summary
1.00	Aug. 01, 2019	—	First edition issued
1.10	Oct. 15, 2019	—	2.19 USB 2.0 FS Host/Function Module deleted
	All	RX72N Group added	
	4	1. Table 1.1 Comparison of Built-In Functions of RX72M/RX72N Group and RX71M Group modified	
	18	2.5 Table 2.10 Comparison of Clock Generation Circuit Registers modified	
	22	2.7 Table 2.14 Comparison of Procedures for Entering and Exiting Low Power Consumption Modes and Operating States in Each Mode modified	
	25	2.7 Table 2.15 Comparison of Low Power Consumption Registers modified	
	32	2.10 Table 2.19 Comparison of Interrupt Controller Registers modified	
	48	2.14 Table 2.29 Comparative Overview of I/O Ports of 145- and 144-Pin Products modified	
	49	2.14 Table 2.30 Comparative Overview of I/O Ports of 100-Pin Products added	
	77	2.15 Table 2.32 Comparison of Multi-Function Pin Controller Registers modified	
	111	2.17 Table 2.35 Comparative Overview of General PWM Timers modified	
	113	2.17 Table 2.36 Comparison of General PWM Timer Registers modified	
	124	2.19 Table 2.39 Comparative Overview of Serial Communications Interfaces note modified	
	136	2.23 Table 2.47 Comparative Overview of Serial Sound Interface and Enhanced Serial Sound Interface modified	
	137	2.23 Table 2.48 Comparison of Serial Sound Interface and Enhanced Serial Sound Interface Registers modified	
	140	2.24 Table 2.50 Comparison of SD Host Interface Registers modified	
	141	2.25 Table 2.52 Comparison of Boundary Scan Registers modified	
	147	2.26 Table 2.54 Comparison of 12-Bit A/D Converter Registers modified	
	158	2.30 Table 2.59 Comparative Overview of Flash Memory modified	
	161	2.30 Table 2.60 Comparison of Flash Memory Registers modified	
	164	2.31 Table 2.61 Packages modified	
	189	3.1 Table 3.3 Comparative Listing of 145-pin TFLGA Package Pin Functions added	
	196	3.1 Table 3.4 Comparative Listing of 144-pin LFQFP Package Pin Functions added	
	208	3.1 Table 3.5 Comparative Listing of 100-Pin LFQFP Package Pin Functions added	
	216	4.1.1 Transitioning to Boot Mode (FINE Interface) added 4.2.2 User Boot Mode added	
	217	4.2.3 Flash Access Window Setting Register (FAW) added	
	219	4.2.10 Compare Function Limitations added	

Rev.	Date	Description	
		Page	Summary
1.10	Oct. 15, 2019	219	4.2.11 Initial Setting Procedure for Output Buffer Amplifier added
		219	4.2.13 FCU Firmware Transfer added
1.20	Dec. 7, 2020	4	1 Table 1.1 Comparison of Built-In Functions of RX72M/RX72N Group and RX71M Group revised
		9 to 11	2.3 Table 2.5 to Table 2.7 deleted and Figure 2.1 to Figure 2.3 added
		12	2.4 Figure 2.4 Comparison of Option-Setting Memory Areas added
		28	2.9 Table 2.15 Comparison of Vectors and Table 2.16 Comparison of Instructions for Returning from Exception Handling Routines added
		40	2.13 Table 2.24 Comparison of Event Link Controller Registers revised
		49	2.14 Table 2.30 Comparison of I/O Port Functions added
		52	2.15 Multi-Function Pin Controller: explanatory text added
		52	2.15 Table 2.32 Comparison of Multiplexed Pin Assignments (177-/176-Pin) added
		74	2.15 Table 2.33 Comparison of Multiplexed Pin Assignments (145-/144-Pin and 100-Pin) added
		93 to 121	2.15 Table 2.34 to Table 2.56 added
		121	2.15 Table 2.57 Comparison of Multi-Function Pin Controller Registers revised
		129	2.17 Table 2.61 Comparison of General PWM Timer Registers revised
		137	2.17 Table 2.62 Comparative Listing of GTIOA and GTIOB Bit Settings added
		140	2.19 Table 2.65 Comparative Overview of Serial Communications Interfaces revised
		143	2.19 Table 2.66 Comparative Listing of Serial Communications Interface Channels revised
		163	2.26 Table 2.80 Comparison of 12-Bit A/D Converter Registers revised
		168	2.26 Table 2.81 Comparison of A/D Conversion Start Triggers Set in ADSTRGR Register added
		174	2.30 Table 2.86 Comparative Overview of Flash Memory revised
		177	2.30 Table 2.87 Comparison of Flash Memory Registers revised
		179	2.30 Table 2.88 Comparison of Address Boundaries for Each Command added
		226	4.2.6 Note on Changing the ICLK Frequency added
		227	4.2.11 to 4.2.13 added
		229	5. Reference Documents revised
		230	Related Technical Updates revised
1.30	Mar. 3, 2021	48	2.14 Table 2.28 Comparative Overview of I/O Ports of 145- and 144-Pin Products and Table 2.29 Comparative Overview of I/O Ports of 100-Pin Products modified
		53	2.15 Table 2.32 Comparison of Multiplexed Pin Assignments modified
		95	2.15 Table 2.44 Comparison of PCn Pin Function Control Register (PCnPFS) modified

Rev.	Date	Description	
		Page	Summary
1.30	Mar. 3, 2021	98	2.15 Table 2.45 Comparison of PDn Pin Function Control Register (PDnPFS) modified
		164	2.31 Table 2.88 Packages modified
		196	3.4 Table 3.4 Comparative Listing of 144-Pin LFQFP Package Pin Functions modified
		208	3.5 Table 3.5 Comparative Listing of 100-Pin LFQFP Package Pin Functions modified
		221	5. Reference Documents modified

General Precautions in the Handling of Microprocessing Unit and Microcontroller Unit Products

The following usage notes are applicable to all Microprocessing unit and Microcontroller unit products from Renesas. For detailed usage notes on the products covered by this document, refer to the relevant sections of the document as well as any technical updates that have been issued for the products.

1. Precaution against Electrostatic Discharge (ESD)

A strong electrical field, when exposed to a CMOS device, can cause destruction of the gate oxide and ultimately degrade the device operation. Steps must be taken to stop the generation of static electricity as much as possible, and quickly dissipate it when it occurs. Environmental control must be adequate. When it is dry, a humidifier should be used. This is recommended to avoid using insulators that can easily build up static electricity. Semiconductor devices must be stored and transported in an anti-static container, static shielding bag or conductive material. All test and measurement tools including work benches and floors must be grounded. The operator must also be grounded using a wrist strap. Semiconductor devices must not be touched with bare hands. Similar precautions must be taken for printed circuit boards with mounted semiconductor devices.

2. Processing at power-on

The state of the product is undefined at the time when power is supplied. The states of internal circuits in the LSI are indeterminate and the states of register settings and pins are undefined at the time when power is supplied. In a finished product where the reset signal is applied to the external reset pin, the states of pins are not guaranteed from the time when power is supplied until the reset process is completed. In a similar way, the states of pins in a product that is reset by an on-chip power-on reset function are not guaranteed from the time when power is supplied until the power reaches the level at which resetting is specified.

3. Input of signal during power-off state

Do not input signals or an I/O pull-up power supply while the device is powered off. The current injection that results from input of such a signal or I/O pull-up power supply may cause malfunction and the abnormal current that passes in the device at this time may cause degradation of internal elements. Follow the guideline for input signal during power-off state as described in your product documentation.

4. Handling of unused pins

Handle unused pins in accordance with the directions given under handling of unused pins in the manual. The input pins of CMOS products are generally in the high-impedance state. In operation with an unused pin in the open-circuit state, extra electromagnetic noise is induced in the vicinity of the LSI, an associated shoot-through current flows internally, and malfunctions occur due to the false recognition of the pin state as an input signal become possible.

5. Clock signals

After applying a reset, only release the reset line after the operating clock signal becomes stable. When switching the clock signal during program execution, wait until the target clock signal is stabilized. When the clock signal is generated with an external resonator or from an external oscillator during a reset, ensure that the reset line is only released after full stabilization of the clock signal. Additionally, when switching to a clock signal produced with an external resonator or by an external oscillator while program execution is in progress, wait until the target clock signal is stable.

6. Voltage application waveform at input pin

Waveform distortion due to input noise or a reflected wave may cause malfunction. If the input of the CMOS device stays in the area between V_{IL} (Max.) and V_{IH} (Min.) due to noise, for example, the device may malfunction. Take care to prevent chattering noise from entering the device when the input level is fixed, and also in the transition period when the input level passes through the area between V_{IL} (Max.) and V_{IH} (Min.).

7. Prohibition of access to reserved addresses

Access to reserved addresses is prohibited. The reserved addresses are provided for possible future expansion of functions. Do not access these addresses as the correct operation of the LSI is not guaranteed.

8. Differences between products

Before changing from one product to another, for example to a product with a different part number, confirm that the change will not lead to problems. The characteristics of a microprocessing unit or microcontroller unit products in the same group but having a different part number might differ in terms of internal memory capacity, layout pattern, and other factors, which can affect the ranges of electrical characteristics, such as characteristic values, operating margins, immunity to noise, and amount of radiated noise. When changing to a product with a different part number, implement a system-evaluation test for the given product.

Notice

1. Descriptions of circuits, software and other related information in this document are provided only to illustrate the operation of semiconductor products and application examples. You are fully responsible for the incorporation or any other use of the circuits, software, and information in the design of your product or system. Renesas Electronics disclaims any and all liability for any losses and damages incurred by you or third parties arising from the use of these circuits, software, or information.
 2. Renesas Electronics hereby expressly disclaims any warranties against and liability for infringement or any other claims involving patents, copyrights, or other intellectual property rights of third parties, by or arising from the use of Renesas Electronics products or technical information described in this document, including but not limited to, the product data, drawings, charts, programs, algorithms, and application examples.
 3. No license, express, implied or otherwise, is granted hereby under any patents, copyrights or other intellectual property rights of Renesas Electronics or others.
 4. You shall be responsible for determining what licenses are required from any third parties, and obtaining such licenses for the lawful import, export, manufacture, sales, utilization, distribution or other disposal of any products incorporating Renesas Electronics products, if required.
 5. You shall not alter, modify, copy, or reverse engineer any Renesas Electronics product, whether in whole or in part. Renesas Electronics disclaims any and all liability for any losses or damages incurred by you or third parties arising from such alteration, modification, copying or reverse engineering.
 6. Renesas Electronics products are classified according to the following two quality grades: "Standard" and "High Quality". The intended applications for each Renesas Electronics product depends on the product's quality grade, as indicated below.
 - "Standard": Computers; office equipment; communications equipment; test and measurement equipment; audio and visual equipment; home electronic appliances; machine tools; personal electronic equipment; industrial robots; etc.
 - "High Quality": Transportation equipment (automobiles, trains, ships, etc.); traffic control (traffic lights); large-scale communication equipment; key financial terminal systems; safety control equipment; etc.
- Unless expressly designated as a high reliability product or a product for harsh environments in a Renesas Electronics data sheet or other Renesas Electronics document, Renesas Electronics products are not intended or authorized for use in products or systems that may pose a direct threat to human life or bodily injury (artificial life support devices or systems; surgical implantations; etc.), or may cause serious property damage (space system; undersea repeaters; nuclear power control systems; aircraft control systems; key plant systems; military equipment; etc.). Renesas Electronics disclaims any and all liability for any damages or losses incurred by you or any third parties arising from the use of any Renesas Electronics product that is inconsistent with any Renesas Electronics data sheet, user's manual or other Renesas Electronics document.
7. No semiconductor product is absolutely secure. Notwithstanding any security measures or features that may be implemented in Renesas Electronics hardware or software products, Renesas Electronics shall have absolutely no liability arising out of any vulnerability or security breach, including but not limited to any unauthorized access to or use of a Renesas Electronics product or a system that uses a Renesas Electronics product. **RENESAS ELECTRONICS DOES NOT WARRANT OR GUARANTEE THAT RENESAS ELECTRONICS PRODUCTS, OR ANY SYSTEMS CREATED USING RENESAS ELECTRONICS PRODUCTS WILL BE INVULNERABLE OR FREE FROM CORRUPTION, ATTACK, VIRUSES, INTERFERENCE, HACKING, DATA LOSS OR THEFT, OR OTHER SECURITY INTRUSION ("Vulnerability Issues"). RENESAS ELECTRONICS DISCLAIMS ANY AND ALL RESPONSIBILITY OR LIABILITY ARISING FROM OR RELATED TO ANY VULNERABILITY ISSUES. FURTHERMORE, TO THE EXTENT PERMITTED BY APPLICABLE LAW, RENESAS ELECTRONICS DISCLAIMS ANY AND ALL WARRANTIES, EXPRESS OR IMPLIED, WITH RESPECT TO THIS DOCUMENT AND ANY RELATED OR ACCOMPANYING SOFTWARE OR HARDWARE, INCLUDING BUT NOT LIMITED TO THE IMPLIED WARRANTIES OF MERCHANTABILITY, OR FITNESS FOR A PARTICULAR PURPOSE.**
 8. When using Renesas Electronics products, refer to the latest product information (data sheets, user's manuals, application notes, "General Notes for Handling and Using Semiconductor Devices" in the reliability handbook, etc.), and ensure that usage conditions are within the ranges specified by Renesas Electronics with respect to maximum ratings, operating power supply voltage range, heat dissipation characteristics, installation, etc. Renesas Electronics disclaims any and all liability for any malfunctions, failure or accident arising out of the use of Renesas Electronics products outside of such specified ranges.
 9. Although Renesas Electronics endeavors to improve the quality and reliability of Renesas Electronics products, semiconductor products have specific characteristics, such as the occurrence of failure at a certain rate and malfunctions under certain use conditions. Unless designated as a high reliability product or a product for harsh environments in a Renesas Electronics data sheet or other Renesas Electronics document, Renesas Electronics products are not subject to radiation resistance design. You are responsible for implementing safety measures to guard against the possibility of bodily injury, injury or damage caused by fire, and/or danger to the public in the event of a failure or malfunction of Renesas Electronics products, such as safety design for hardware and software, including but not limited to redundancy, fire control and malfunction prevention, appropriate treatment for aging degradation or any other appropriate measures. Because the evaluation of microcomputer software alone is very difficult and impractical, you are responsible for evaluating the safety of the final products or systems manufactured by you.
 10. Please contact a Renesas Electronics sales office for details as to environmental matters such as the environmental compatibility of each Renesas Electronics product. You are responsible for carefully and sufficiently investigating applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive, and using Renesas Electronics products in compliance with all these applicable laws and regulations. Renesas Electronics disclaims any and all liability for damages or losses occurring as a result of your noncompliance with applicable laws and regulations.
 11. Renesas Electronics products and technologies shall not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable domestic or foreign laws or regulations. You shall comply with any applicable export control laws and regulations promulgated and administered by the governments of any countries asserting jurisdiction over the parties or transactions.
 12. It is the responsibility of the buyer or distributor of Renesas Electronics products, or any other party who distributes, disposes of, or otherwise sells or transfers the product to a third party, to notify such third party in advance of the contents and conditions set forth in this document.
 13. This document shall not be reprinted, reproduced or duplicated in any form, in whole or in part, without prior written consent of Renesas Electronics.
 14. Please contact a Renesas Electronics sales office if you have any questions regarding the information contained in this document or Renesas Electronics products.

(Note1) "Renesas Electronics" as used in this document means Renesas Electronics Corporation and also includes its directly or indirectly controlled subsidiaries.

(Note2) "Renesas Electronics product(s)" means any product developed or manufactured by or for Renesas Electronics.

(Rev.5.0-1 October 2020)

Corporate Headquarters

TOYOSU FORESIA, 3-2-24 Toyosu,
Koto-ku, Tokyo 135-0061, Japan
www.renesas.com

Trademarks

Renesas and the Renesas logo are trademarks of Renesas Electronics Corporation. All trademarks and registered trademarks are the property of their respective owners.

Contact information

For further information on a product, technology, the most up-to-date version of a document, or your nearest sales office, please visit:
www.renesas.com/contact/.