

Notes

Using the PMC Card in A Backplane Environment

The 79PMC438 reference board can also be used with a CPCI adapter card in a backplane environment. When using the PMC card along with the CPCI adapter (79CP438), and a 8 slot backplane, the interrupt assignment changes to the following:


Device #	ID_SEL	Config. Address	CPCI_SLOT #	Assigned Interrupt	GPIO Pin #
15	PCI_AD25	0x8000_7800	SLOT_8	D	11
16	PCI_AD26	0x8000_8000	SLOT_7	C	10
17	PCI_AD27	0x8000_8800	SLOT_6	B	9
18	PCI_AD28	0x8000_9000	SLOT_5	A	8
19	PCI_AD29	0x8000_9800	SLOT_4	D	11
20	PCI_AD30	0x8000_A000	SLOT_3	C	10
21	PCI_AD31	0x8000_A800	SLOT_2	B	9





Figure 1 Interrupt Assignments Used with CPCI Adapter Card


CPCI Adapter Card Schematics

REVISIONS			
DCN	REV	DESCRIPTION	DATE
STGC-0009R01	1.0	INITIAL RELEASE	11-20-02

SHEET	DESCRIPTION
1	TABLE OF CONTENTS
2	CPCI CONNECTOR 1
3	CPCI CONNECTOR 2
4	PMC CONNECTOR 1, 2
5	PMC CONNECTOR 3
6	CPCI TERMINATIONS (STD.)

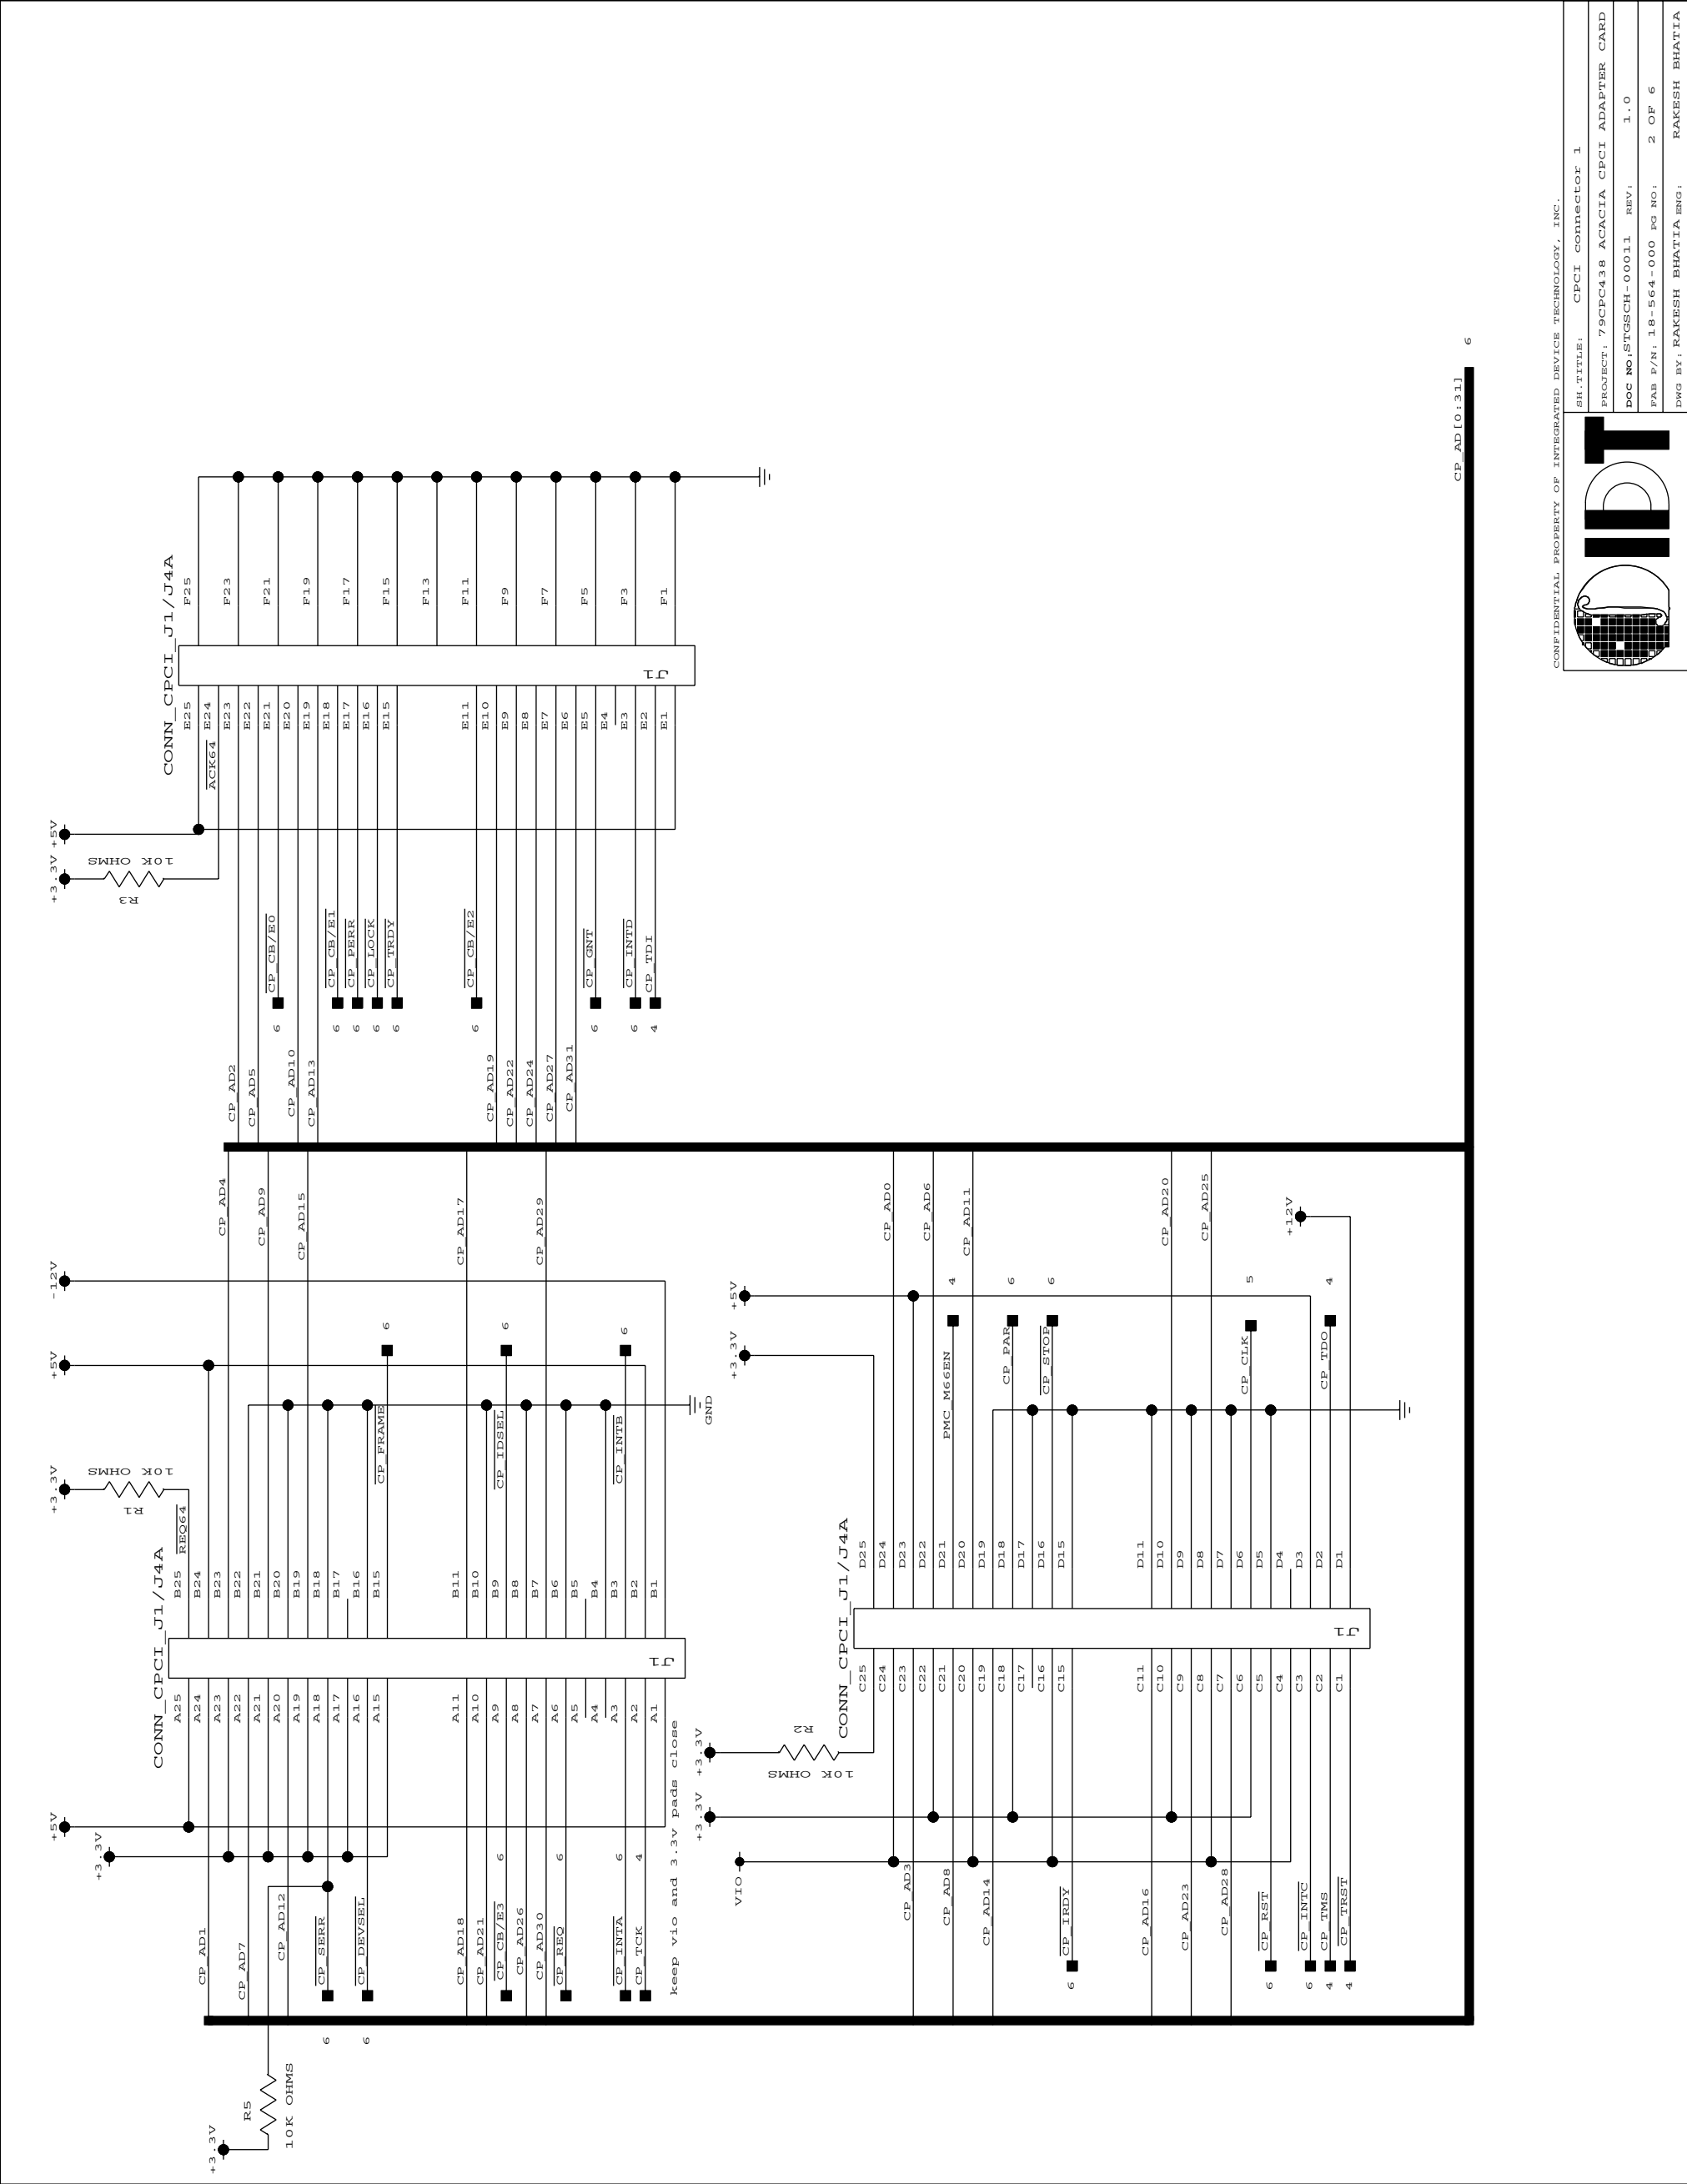

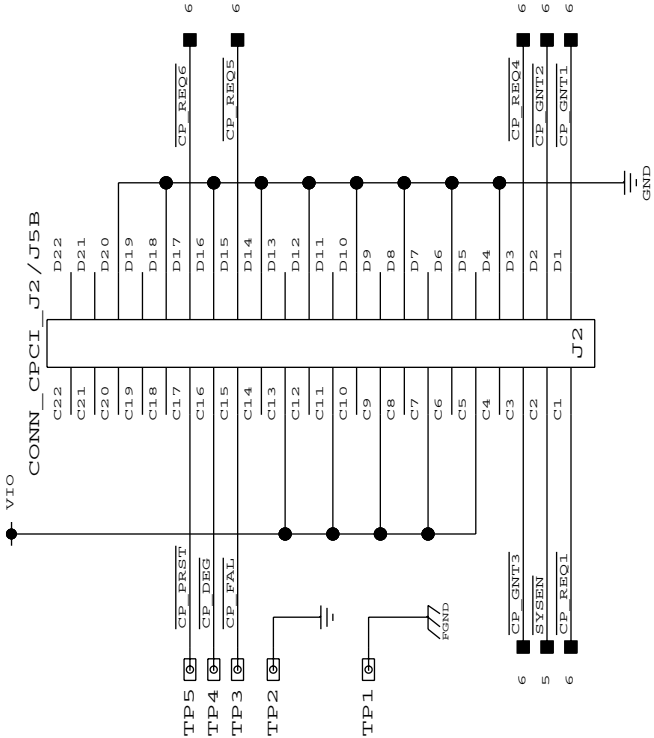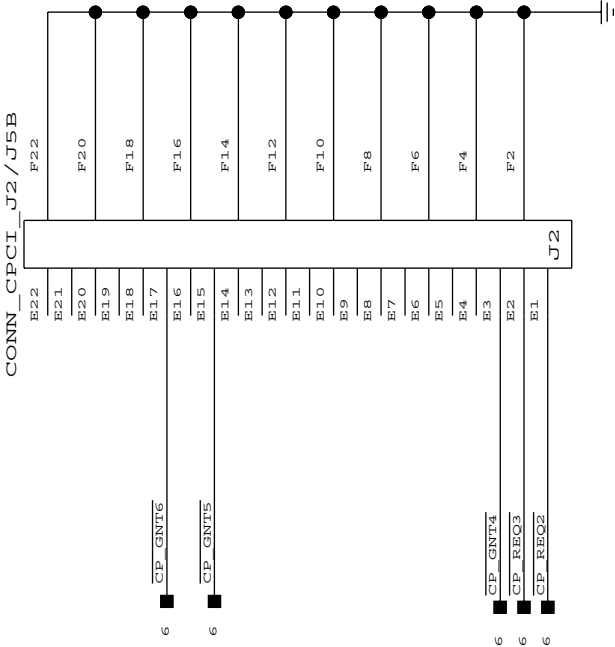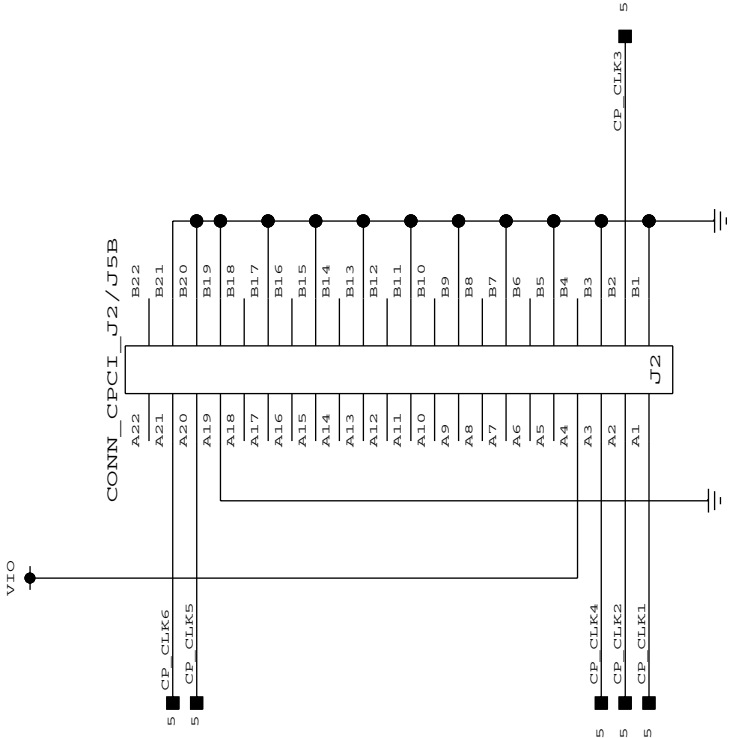

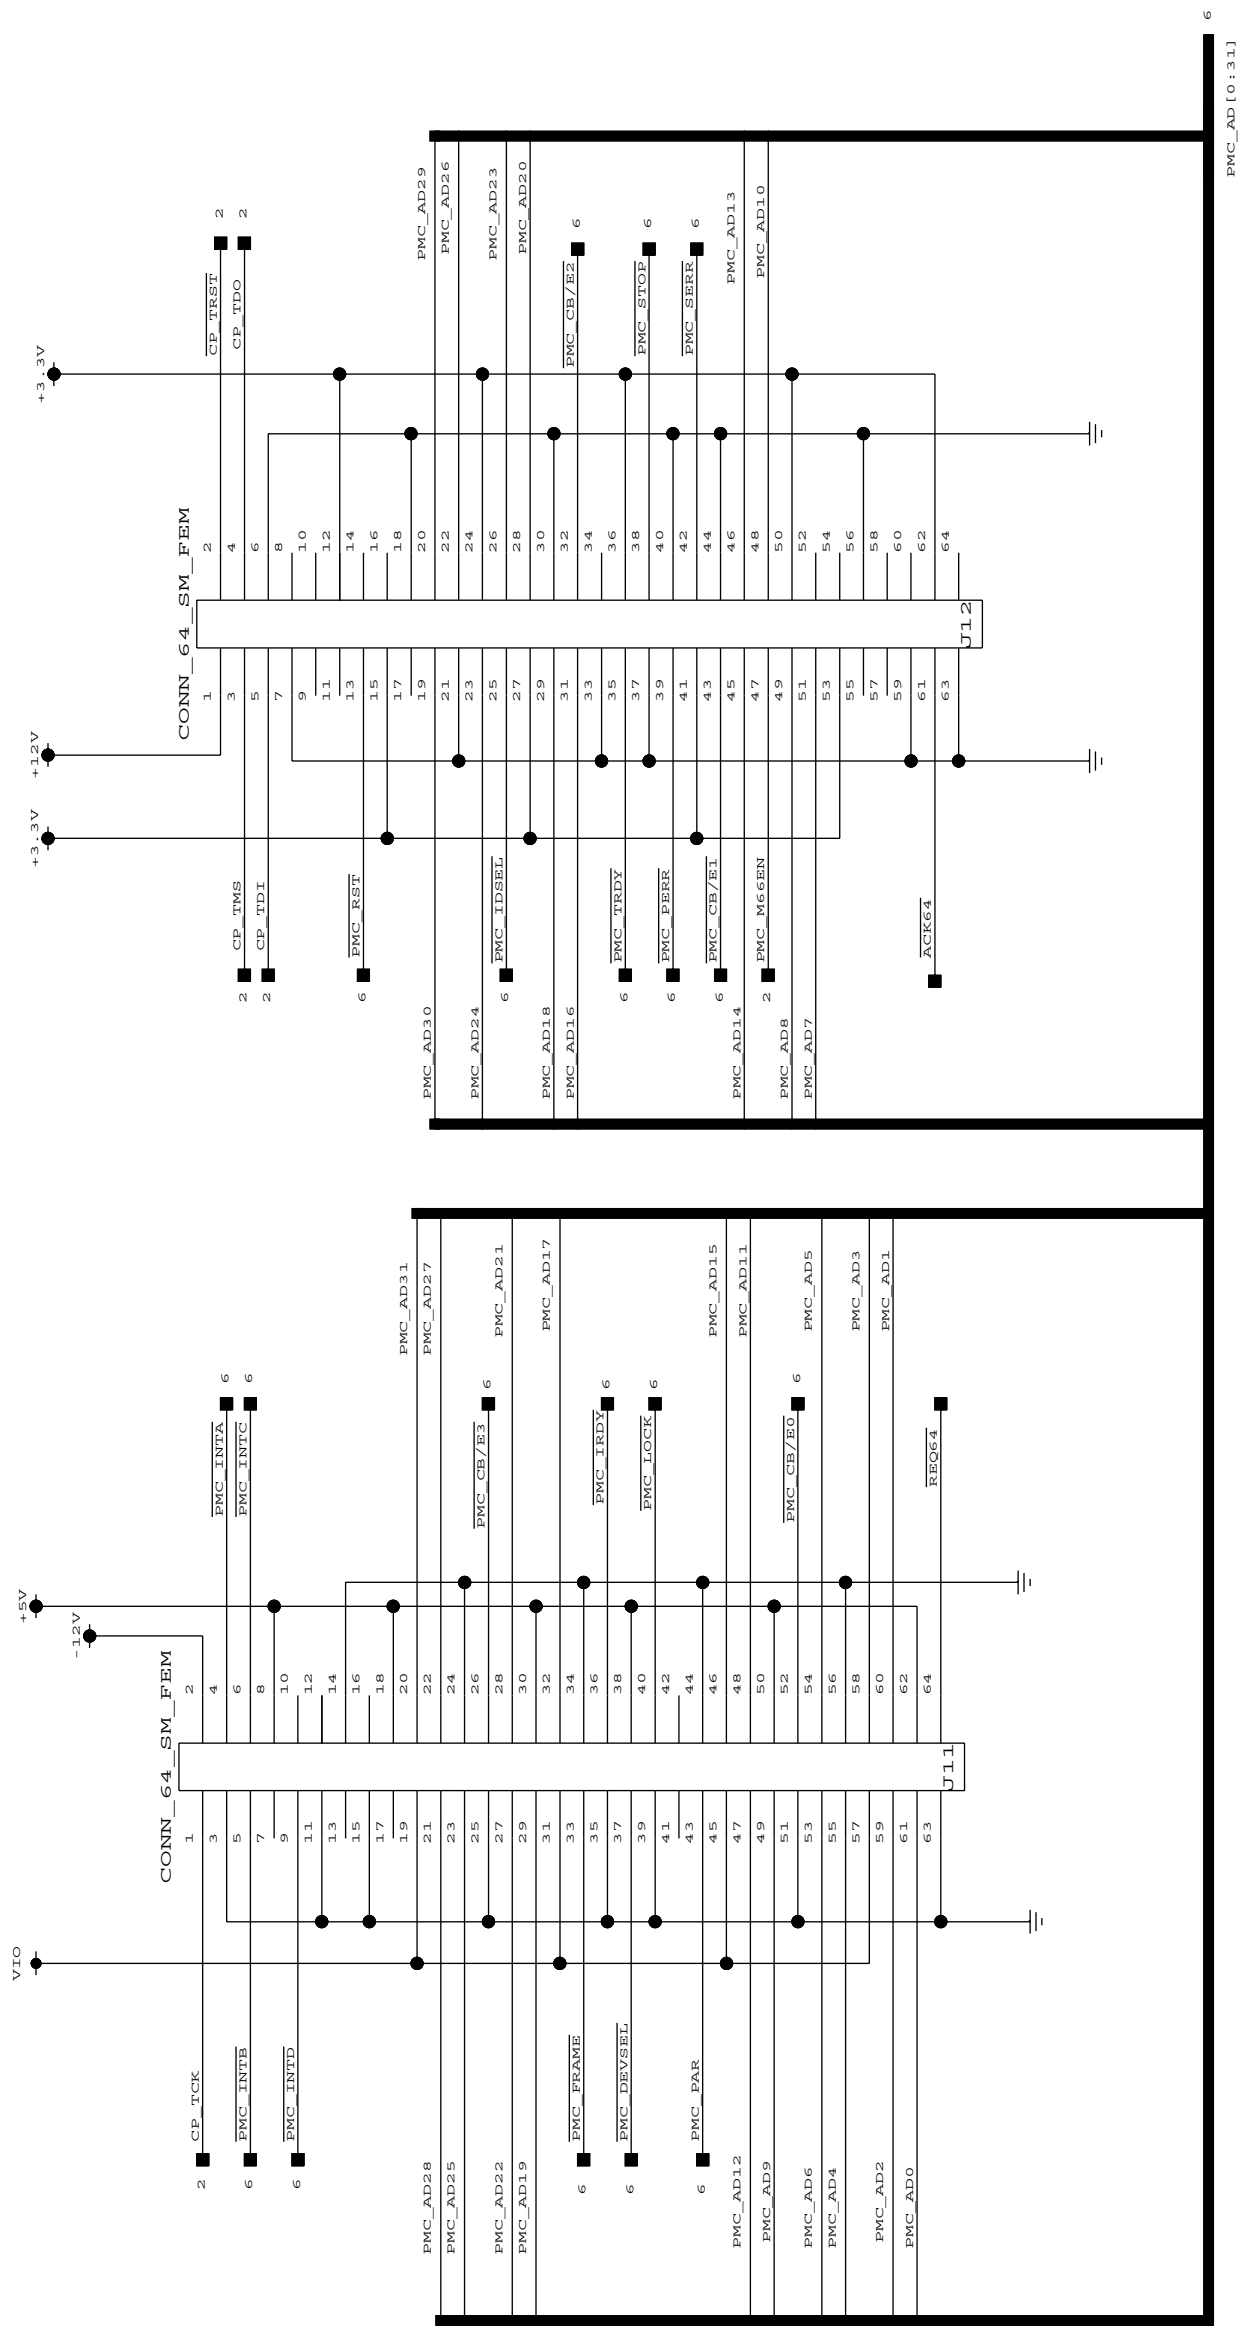


CONN_64_SM_FEM

3	CP_CLK1	1	2
6	P_PCIEQ1	3	4
6	P_PCIGNT1	5	6
3	CP_CLK2	7	8
6	P_PCIEQ2	9	10
6	P_PCIGNT2	11	12
3	CP_CLK3	13	14
6	P_PCIEQ3	15	16
6	P_PCIGNT3	17	18
3	CP_CLK4	19	20
6	P_PCIEQ4	21	22
6	P_PCIGNT4	23	24
3	CP_CLK5	25	26
6	P_PCIEQ5	27	28
6	P_PCIGNT5	29	30
3	CP_CLK6	31	32
6	P_PCIEQ6	33	34
6	P_PCIGNT6	35	36
3	SYSEN	37	38
2	CP_CLK	39	40
6	PMC_REQ	41	42
	PMC_GNT	43	44
		45	46
		47	48
		49	50
		51	52
		53	54
		55	56
		57	58
		59	60
		61	62
		63	64
		J14	

CONFIDENTIAL PROPERTY OF INTEGRATED DEVICE TECHNOLOGY, INC.

SH.TITLE:	PMC CONNECTOR 3
PROJECT:	79PC438 ACACIA CPCI ADAPTER CARD
DOC NO:	STGSCH-00011 REV: 1.0
FAB P/N:	18-564-000 PG NO: 5 OF 6
DWG BY:	RAKESH BHATIA ENG:



10 ohm resistors need to be close to cpci conn

