


- 1) RC networks on logic lines are for dampening.
- 2) Use 0402 package for decoupling caps close to DUT.  
Use 0603 for caps further from DUT
- 3) RF Traces from RF1, RF2, RFC must be the same length.

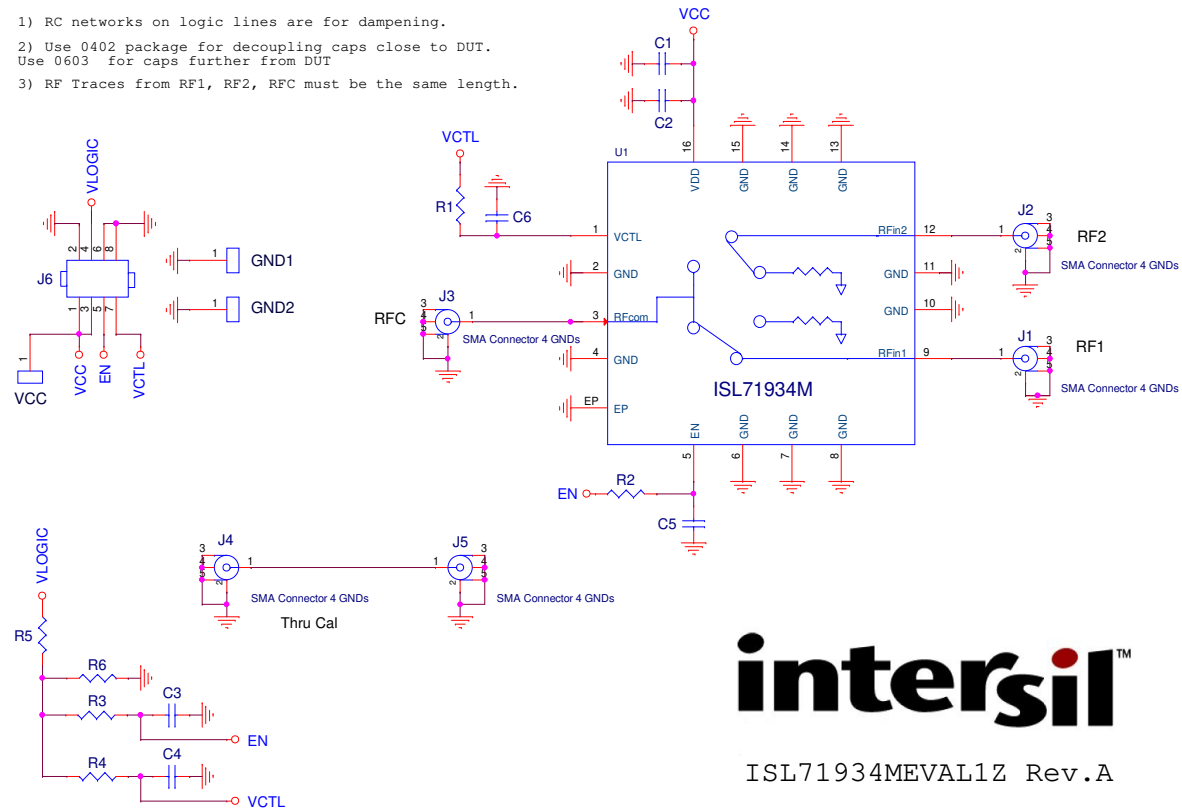

**intersil**<sup>TM</sup>

ISL71934MEVAL1Z Rev.A