

To our customers,

---

## Old Company Name in Catalogs and Other Documents

---

On April 1<sup>st</sup>, 2010, NEC Electronics Corporation merged with Renesas Technology Corporation, and Renesas Electronics Corporation took over all the business of both companies. Therefore, although the old company name remains in this document, it is a valid Renesas Electronics document. We appreciate your understanding.

Renesas Electronics website: <http://www.renesas.com>

April 1<sup>st</sup>, 2010  
Renesas Electronics Corporation

Issued by: Renesas Electronics Corporation (<http://www.renesas.com>)

Send any inquiries to <http://www.renesas.com/inquiry>.

## Notice

1. All information included in this document is current as of the date this document is issued. Such information, however, is subject to change without any prior notice. Before purchasing or using any Renesas Electronics products listed herein, please confirm the latest product information with a Renesas Electronics sales office. Also, please pay regular and careful attention to additional and different information to be disclosed by Renesas Electronics such as that disclosed through our website.
2. Renesas Electronics does not assume any liability for infringement of patents, copyrights, or other intellectual property rights of third parties by or arising from the use of Renesas Electronics products or technical information described in this document. No license, express, implied or otherwise, is granted hereby under any patents, copyrights or other intellectual property rights of Renesas Electronics or others.
3. You should not alter, modify, copy, or otherwise misappropriate any Renesas Electronics product, whether in whole or in part.
4. Descriptions of circuits, software and other related information in this document are provided only to illustrate the operation of semiconductor products and application examples. You are fully responsible for the incorporation of these circuits, software, and information in the design of your equipment. Renesas Electronics assumes no responsibility for any losses incurred by you or third parties arising from the use of these circuits, software, or information.
5. When exporting the products or technology described in this document, you should comply with the applicable export control laws and regulations and follow the procedures required by such laws and regulations. You should not use Renesas Electronics products or the technology described in this document for any purpose relating to military applications or use by the military, including but not limited to the development of weapons of mass destruction. Renesas Electronics products and technology may not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable domestic or foreign laws or regulations.
6. Renesas Electronics has used reasonable care in preparing the information included in this document, but Renesas Electronics does not warrant that such information is error free. Renesas Electronics assumes no liability whatsoever for any damages incurred by you resulting from errors in or omissions from the information included herein.
7. Renesas Electronics products are classified according to the following three quality grades: “Standard”, “High Quality”, and “Specific”. The recommended applications for each Renesas Electronics product depends on the product’s quality grade, as indicated below. You must check the quality grade of each Renesas Electronics product before using it in a particular application. You may not use any Renesas Electronics product for any application categorized as “Specific” without the prior written consent of Renesas Electronics. Further, you may not use any Renesas Electronics product for any application for which it is not intended without the prior written consent of Renesas Electronics. Renesas Electronics shall not be in any way liable for any damages or losses incurred by you or third parties arising from the use of any Renesas Electronics product for an application categorized as “Specific” or for which the product is not intended where you have failed to obtain the prior written consent of Renesas Electronics. The quality grade of each Renesas Electronics product is “Standard” unless otherwise expressly specified in a Renesas Electronics data sheets or data books, etc.
  - “Standard”: Computers; office equipment; communications equipment; test and measurement equipment; audio and visual equipment; home electronic appliances; machine tools; personal electronic equipment; and industrial robots.
  - “High Quality”: Transportation equipment (automobiles, trains, ships, etc.); traffic control systems; anti-disaster systems; anti-crime systems; safety equipment; and medical equipment not specifically designed for life support.
  - “Specific”: Aircraft; aerospace equipment; submersible repeaters; nuclear reactor control systems; medical equipment or systems for life support (e.g. artificial life support devices or systems), surgical implantations, or healthcare intervention (e.g. excision, etc.), and any other applications or purposes that pose a direct threat to human life.
8. You should use the Renesas Electronics products described in this document within the range specified by Renesas Electronics, especially with respect to the maximum rating, operating supply voltage range, movement power voltage range, heat radiation characteristics, installation and other product characteristics. Renesas Electronics shall have no liability for malfunctions or damages arising out of the use of Renesas Electronics products beyond such specified ranges.
9. Although Renesas Electronics endeavors to improve the quality and reliability of its products, semiconductor products have specific characteristics such as the occurrence of failure at a certain rate and malfunctions under certain use conditions. Further, Renesas Electronics products are not subject to radiation resistance design. Please be sure to implement safety measures to guard them against the possibility of physical injury, and injury or damage caused by fire in the event of the failure of a Renesas Electronics product, such as safety design for hardware and software including but not limited to redundancy, fire control and malfunction prevention, appropriate treatment for aging degradation or any other appropriate measures. Because the evaluation of microcomputer software alone is very difficult, please evaluate the safety of the final products or system manufactured by you.
10. Please contact a Renesas Electronics sales office for details as to environmental matters such as the environmental compatibility of each Renesas Electronics product. Please use Renesas Electronics products in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive. Renesas Electronics assumes no liability for damages or losses occurring as a result of your noncompliance with applicable laws and regulations.
11. This document may not be reproduced or duplicated, in any form, in whole or in part, without prior written consent of Renesas Electronics.
12. Please contact a Renesas Electronics sales office if you have any questions regarding the information contained in this document or Renesas Electronics products, or if you have any other inquiries.

(Note 1) “Renesas Electronics” as used in this document means Renesas Electronics Corporation and also includes its majority-owned subsidiaries.

(Note 2) “Renesas Electronics product(s)” means any product developed or manufactured by or for Renesas Electronics.



LASER DIODE  
**NX8300BE-CC, NX8300CE-CC**

1 310 nm InGaAsP MQW-DFB LASER DIODE  
 COAXIAL MODULE FOR 2.5 Gb/s

**Phase-out/Discontinued**

**DESCRIPTION**

The NX8300BE-CC and NX8300CE-CC are 1 310 nm Multiple Quantum Well (MQW) structured Distributed Feed-Back (DFB) laser diode coaxial modules with an internal optical isolator.


These modules are ideal as a light source for Synchronous Digital Hierarchy (SDH) system, STM-16, short-haul S-16.1 and long-haul L-16.1 ITU-T recommendations.

**FEATURES**

- Internal optical isolator
- High-speed response  $t_r = 40 \text{ ps}, t_f = 100 \text{ ps}$
- Peak emission wavelength  $\lambda_p = 1\,310 \text{ nm}$
- Optical output power  $P_f = 2.0 \text{ mW}$
- Wide operating temperature range  $T_c = 0 \text{ to } +75^\circ\text{C}$
- InGaAs monitor PIN-PD
- With SC-UPC connector
- Based on Telcordia reliability


The information in this document is subject to change without notice. Before using this document, please confirm that this is the latest version.  
 Not all devices/types available in every country. Please check with local NEC Compound Semiconductor Devices representative for availability and additional information.

PACKAGE DIMENSIONS (UNIT : mm)

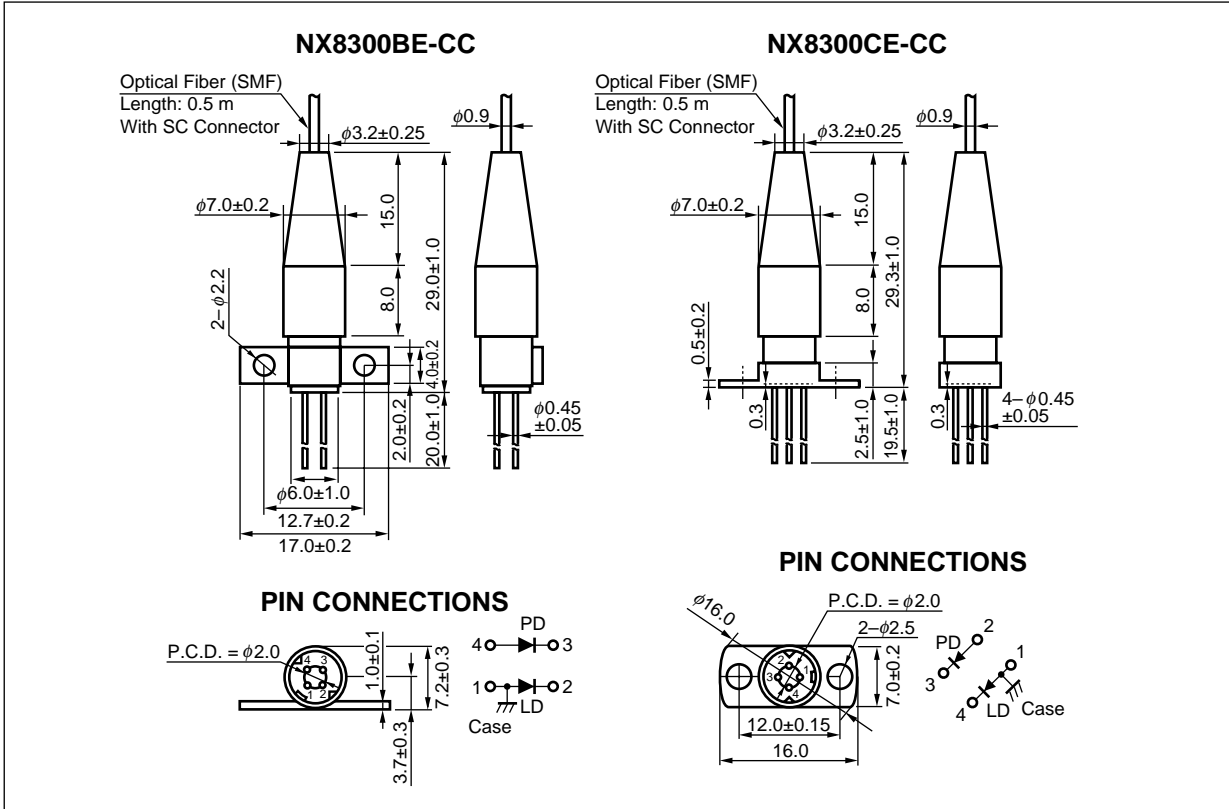

OPTICAL FIBER CHARACTERISTICS

Parameter	Specification	Unit
Mode Field Diameter	9.5±1	μm
Cladding Diameter	125±2	μm
Maximum Cladding Noncircularity	2	%
Maximum Core/Cladding Concentricity	1.6	%
Outer Diameter	0.9±0.1	mm
Cut-off Wavelength	1 100 to 1 270	nm
Minimum Fiber Bending Radius	30	mm
Fiber Length	500±50	mm
Flammability	UL1581 VW-1	

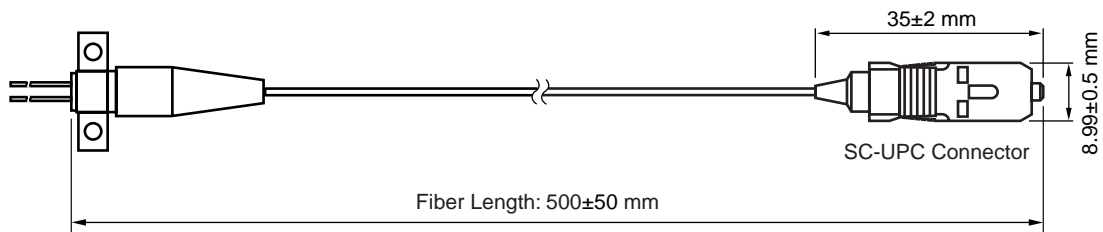

**ORDERING INFORMATION**

Part Number	Flange Type	Available Connector
NX8300BE-CC	Flat Mount Flange	With SC-UPC Connector
NX8300CE-CC	Vertical Mount Flange	

**ABSOLUTE MAXIMUM RATINGS**


Parameter	Symbol	Ratings	Unit
Optical Output Power from Fiber	$P_r$	5	mW
Forward Current of LD	$I_F$	150	mA
Reverse Voltage of LD	$V_R$	2.0	V
Forward Current of PD	$I_F$	2.0	mA
Reverse Voltage of PD	$V_R$	15	V
Operating Case Temperature	$T_c$	0 to +75	°C
Storage Temperature	$T_{stg}$	-40 to +85	°C
Lead Soldering Temperature	$T_{sld}$	260 (10 sec.)	°C
Relative Humidity (noncondensing)	RH	85	%

**ELECTRO-OPTICAL CHARACTERISTICS (T<sub>c</sub> = 0 to +75°C, unless otherwise specified)**

Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Optical Output Power from Fiber	P <sub>f</sub>	CW		2.0		mW
Operating Voltage	V <sub>op</sub>	P <sub>f</sub> = 2.0 mW		1.2	1.6	V
Threshold Current	I <sub>th</sub>	T <sub>c</sub> = 25°C		15	25	mA
					45	
Threshold Output Power	P <sub>th</sub>	I <sub>F</sub> = I <sub>th</sub>			50	μW
Modulation Current	I <sub>mod</sub>	P <sub>f</sub> = 2.0 mW, T <sub>c</sub> = 25°C	11	20	35	mA
		P <sub>f</sub> = 2.0 mW	10		40	
Differential Efficiency	η <sub>d</sub>	P <sub>f</sub> = 2.0 mW, T <sub>c</sub> = 25°C	0.060	0.100	0.150	W/A
		P <sub>f</sub> = 2.0 mW	0.050		0.200	
Temperature Dependence of Differential Efficiency	Δη <sub>d</sub>	$\Delta\eta_d = 10 \log \frac{\eta_d (@ T_c \text{ } ^\circ\text{C})}{\eta_d (@ 25^\circ\text{C})}$	-3	-1.6		dB
Kink (Refer to <b>DEFINITIONS</b> )	kink	P <sub>f</sub> = Up to 2.4 mW			±20	%
Peak Emission Wavelength	λ <sub>p</sub>	P <sub>f</sub> = 2.0 mW	1 285	1 310	1 330	nm
Temperature Dependence of Peak Emission Wavelength	Δλ/ΔT			0.09	0.1	nm/°C
Spectral Width	Δλ	P <sub>f</sub> = 2.0 mW, -20 dB down width		0.1	1.0	nm
Side Mode Suppression Ratio	SMSR	P <sub>f</sub> = 2.0 mW	30	40		dB
Relaxation Oscillation Frequency	f <sub>r</sub>	P <sub>f</sub> = 2.0 mW		8.0		GHz
Rise Time	t <sub>r</sub>	10-90%, P <sub>pk</sub> = 2.0 mW, I <sub>F</sub> = I <sub>th</sub>		40	125	ps
Fall Time	t <sub>f</sub>	90-10%, P <sub>pk</sub> = 2.0 mW, I <sub>F</sub> = I <sub>th</sub>		100	200	ps
Monitor Current	I <sub>m</sub>	V <sub>R</sub> = 5 V, P <sub>f</sub> = 2.0 mW	100	500	1 000	μA
Monitor Dark Current	I <sub>D</sub>	V <sub>R</sub> = 5 V, T <sub>c</sub> = 25°C		0.1	50	nA
		V <sub>R</sub> = 5 V		10	500	
Monitor PD Terminal Capacitance	C <sub>t</sub>	V <sub>R</sub> = 5 V, f = 1 MHz		1.0	20	pF
Linearity (Refer to <b>DEFINITIONS</b> )	LIN <sub>m</sub>	V <sub>R</sub> = 5 V, P <sub>f</sub> = 0.2 to 2.0 mW			10	%
Tracking Error (Refer to <b>DEFINITIONS</b> )	γ	I <sub>m</sub> = const.		0.5	1.0	dB

★ PARAMETER DEFINITIONS


**Kink : kink**

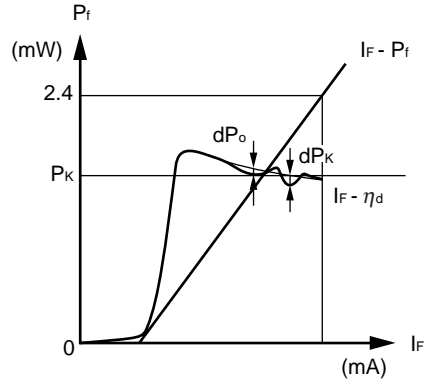

$$\text{kink} = \frac{|dP_K|}{P_K} \times 100 [\%]$$

$dP_K = dP_o \text{ MAX.}$   
 $P_K \leq 2.4 \text{ (mW)}$


**Linearity : LIN<sub>m</sub>**

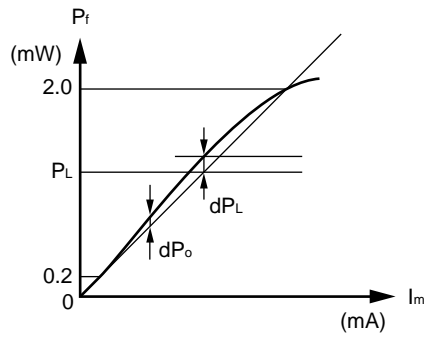

$$\text{LIN}_m = \frac{|dP_L|}{P_L} \times 100 [\%]$$

$dP_L = dP_o \text{ MAX.}$   
 $0.2 < P_L < 2.0 \text{ (mW)}$


**Tracking Error :  $\gamma$**

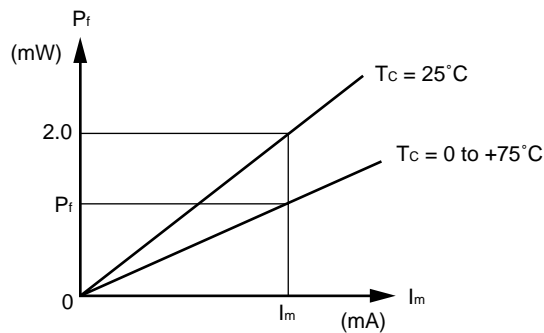


$$\gamma = \left| 10 \log \frac{P_f}{2.0} \right| [\text{dB}]$$

**TYPICAL CHARACTERISTICS ( $T_c = 25^\circ\text{C}$ , unless otherwise specified)**


**OPTICAL OUTPUT POWER FROM FIBER vs. FORWARD CURRENT**

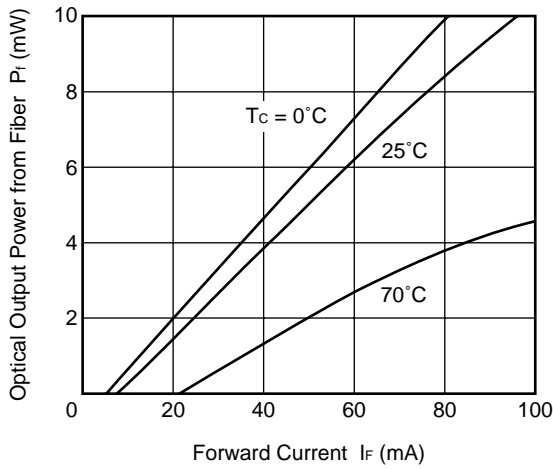


**OPERATING CURRENT AND THRESHOLD CURRENT vs. CASE TEMPERATURE**

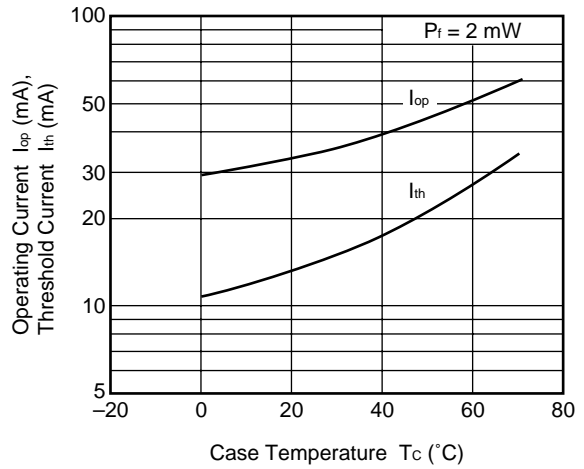


**FREQUENCY RESPONSE ( $S_{21}$ )**

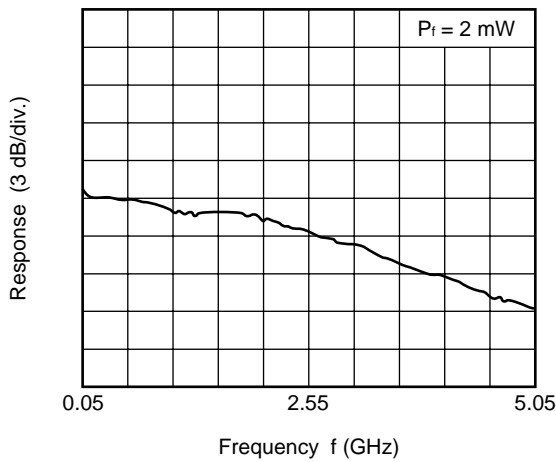


**INPUT RETURN LOSS CHARACTERISTICS ( $S_{11}$ )**

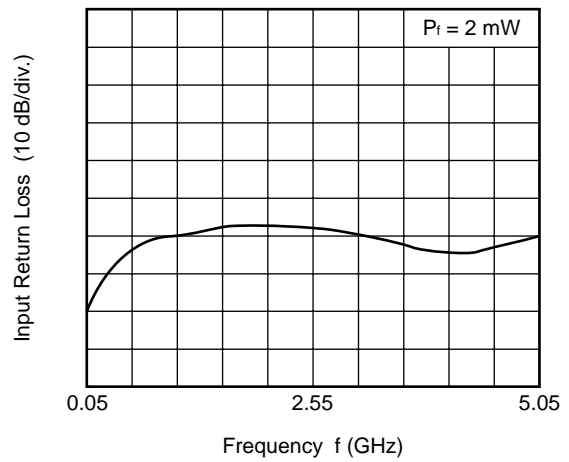

**SPECTRUM**

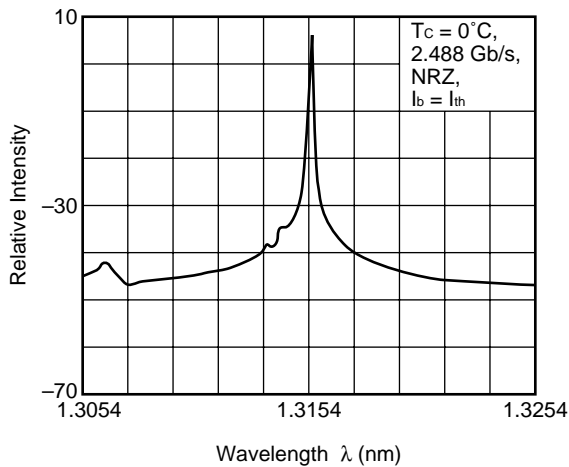


**SPECTRUM**

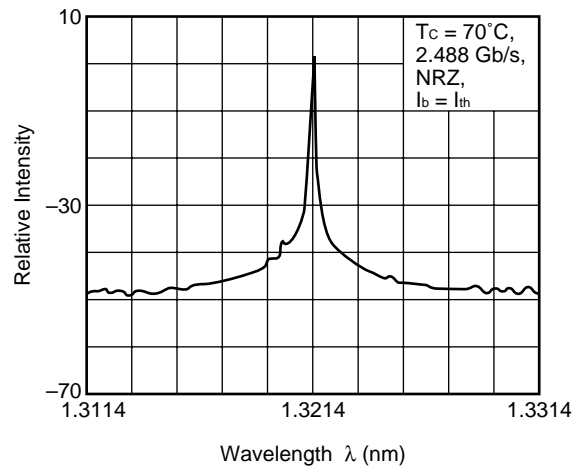




EYE DIAGRAM

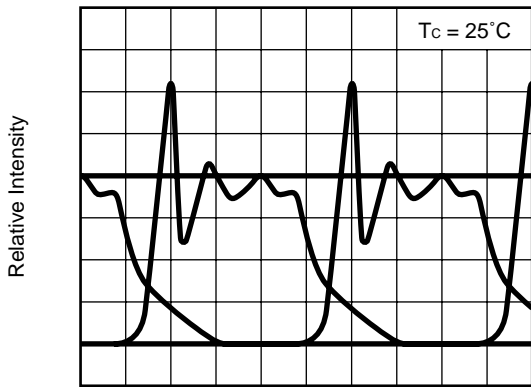


Time Base (100 ps/div.)

EYE DIAGRAM

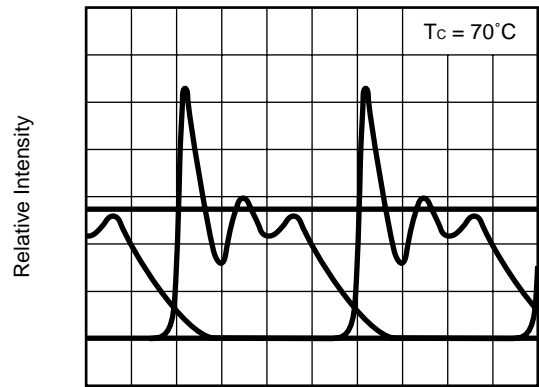

Time Base (100 ps/div.)

ERROR RATE CHARACTERISTICS

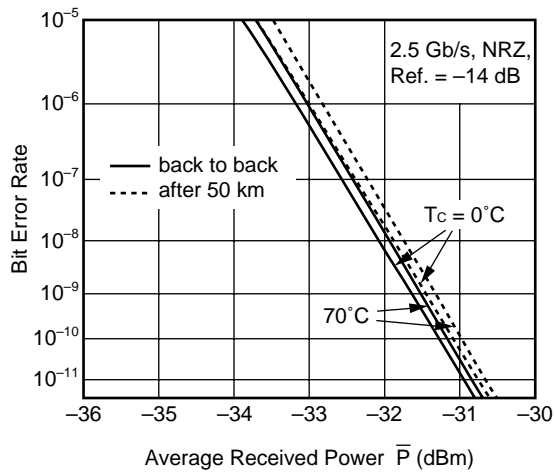

**Remark** The graphs indicate nominal characteristics.

**DFB-LD FAMILY**

Part Number	Absolute Maximum Ratings		Electro-Optical Characteristics (T <sub>C</sub> = 25°C)			Application	Package
	T <sub>C</sub> (°C)	T <sub>stg</sub> (°C)	I <sub>th</sub> (mA)	P <sub>r</sub> (mW)	λ <sub>p</sub> (nm)		
			TYP.	MIN.	TYP.		
NX8300BE-CC NX8300CE-CC	0 to +75	-40 to +85	15	2 <sup>*1</sup>	1 310	2.5 Gb/s: STM-16 (S-16.1, L-16.1)	Coaxial
NX8303BG-CC NX8303CG-CC	-10 to +85	-40 to +85	15	2 <sup>*1</sup>	1 310	622 Mb/s: STM-4 (L-4.1)	Coaxial
★ NX8304BE-CC NX8304CE-CC	-40 to +85	-40 to +85	15	2 <sup>*1</sup>	1 310	For fiberoptic communications	Coaxial
NX8503BG-CC NX8503CG-CC	-10 to +85	-40 to +85	15	2 <sup>*1</sup>	1 550	156 Mb/s: STM-1 (L-1.2, L-1.3)	Coaxial
						622 Mb/s: STM-4 (L-4.2, L-4.3)	
NX8504BE-CC NX8504CE-CC	-10 to +85	-40 to +85	15	2 <sup>*1</sup>	1 550	622 Mb/s: STM-4 (L-4.2, L-4.3)	Coaxial
★ NX8560LJ-CC	-20 to +70	-40 to +85	6	-1 dBm	1 550 <sup>*2</sup>	≤ 10 Gb/s: STM-64	BFY with GPO™
NX8562LB	-20 to +65	-40 to +85	20	20	1 550 <sup>*2</sup>	CW Light Source for external modulator	BFY
NX8563LB	-20 to +65	-40 to +85	20	10	1 550 <sup>*2</sup>	CW Light Source for external modulator	BFY
★ NX8564LE-CC	-20 to +70	-40 to +85	7	-2 dBm <sup>*1</sup>	1 550 <sup>*2</sup>	2.5 Gb/s: STM-16, 360 km EA modulator integrated	BFY
★ NX8565LE-CC	-20 to +70	-40 to +85	7	-2 dBm <sup>*1</sup>	1 550 <sup>*2</sup>	2.5 Gb/s: STM-16, 600 km EA modulator integrated	BFY
★ NX8566LE-CC	-20 to +70	-40 to +85	7	0 dBm	1 550 <sup>*2</sup>	2.5 Gb/s: STM-16, 240 km EA modulator integrated	BFY
NX8570 Series	-20 to +70	-40 to +85	20	20	1 550 <sup>*2</sup>	CW Light Source with λ monitoring PD	BFY
NX8571 Series	-20 to +70	-40 to +85	20	10	1 550 <sup>*2</sup>	CW Light Source with λ monitoring PD	BFY

\*1 TYP.

\*2 Available for DWDM Wavelengths based on ITU-T recommendations

REFERENCE

Document Name	Document No.
Optical semiconductor devices for fiberoptic communications Selection Guide	P12480E
Opto-Electronics Devices Pamphlet	P13623E
Opto-Electronics Devices (CD-ROM)	P12944X
NEC semiconductor device reliability/quality control system *1	C11159E
Quality grades on NEC semiconductor devices *1	C11531E
SEMICONDUCTOR SELECTION GUIDE –Products and Packages– *1	X13769E


\*1 Published by NEC Corporation

GPO is a trademark of Gilbert Engineering Co., Inc.


- **The information in this document is current as of July, 2002. The information is subject to change without notice. For actual design-in, refer to the latest publications of NEC's data sheets or data books, etc., for the most up-to-date specifications of NEC semiconductor products. Not all products and/or types are available in every country. Please check with an NEC sales representative for availability and additional information.**
  - No part of this document may be copied or reproduced in any form or by any means without prior written consent of NEC. NEC assumes no responsibility for any errors that may appear in this document.
  - NEC does not assume any liability for infringement of patents, copyrights or other intellectual property rights of third parties by or arising from the use of NEC semiconductor products listed in this document or any other liability arising from the use of such products. No license, express, implied or otherwise, is granted under any patents, copyrights or other intellectual property rights of NEC or others.
  - Descriptions of circuits, software and other related information in this document are provided for illustrative purposes in semiconductor product operation and application examples. The incorporation of these circuits, software and information in the design of customer's equipment shall be done under the full responsibility of customer. NEC assumes no responsibility for any losses incurred by customers or third parties arising from the use of these circuits, software and information.
  - While NEC endeavours to enhance the quality, reliability and safety of NEC semiconductor products, customers agree and acknowledge that the possibility of defects thereof cannot be eliminated entirely. To minimize risks of damage to property or injury (including death) to persons arising from defects in NEC semiconductor products, customers must incorporate sufficient safety measures in their design, such as redundancy, fire-containment, and anti-failure features.
  - NEC semiconductor products are classified into the following three quality grades:  
 "Standard", "Special" and "Specific". The "Specific" quality grade applies only to semiconductor products developed based on a customer-designated "quality assurance program" for a specific application. The recommended applications of a semiconductor product depend on its quality grade, as indicated below. Customers must check the quality grade of each semiconductor product before using it in a particular application.  
 "Standard": Computers, office equipment, communications equipment, test and measurement equipment, audio and visual equipment, home electronic appliances, machine tools, personal electronic equipment and industrial robots  
 "Special": Transportation equipment (automobiles, trains, ships, etc.), traffic control systems, anti-disaster systems, anti-crime systems, safety equipment and medical equipment (not specifically designed for life support)  
 "Specific": Aircraft, aerospace equipment, submersible repeaters, nuclear reactor control systems, life support systems and medical equipment for life support, etc.
- The quality grade of NEC semiconductor products is "Standard" unless otherwise expressly specified in NEC's data sheets or data books, etc. If customers wish to use NEC semiconductor products in applications not intended by NEC, they must contact an NEC sales representative in advance to determine NEC's willingness to support a given application.
- (Note)
- (1) "NEC" as used in this statement means NEC Corporation, NEC Compound Semiconductor Devices, Ltd. and also includes its majority-owned subsidiaries.
  - (2) "NEC semiconductor products" means any semiconductor product developed or manufactured by or for NEC (as defined above).

M8E 00.4-0110

**SAFETY INFORMATION ON THIS PRODUCT**



**SEMICONDUCTOR LASER**



**AVOID EXPOSURE-Invisible**  
Laser Radiation is emitted from  
this aperture

<p><b>Warning</b> Laser Beam</p>	<p>A laser beam is emitted from this diode during operation. The laser beam, visible or invisible, directly or indirectly, may cause injury to the eye or loss of eyesight.</p> <ul style="list-style-type: none"> <li>• Do not look directly into the laser beam.</li> <li>• Avoid exposure to the laser beam, any reflected or collimated beam.</li> </ul>
<p><b>Caution</b> GaAs Products</p>	<p>The product contains gallium arsenide, GaAs. GaAs vapor and powder are hazardous to human health if inhaled or ingested.</p> <ul style="list-style-type: none"> <li>• Do not destroy or burn the product.</li> <li>• Do not cut or cleave off any part of the product.</li> <li>• Do not crush or chemically dissolve the product.</li> <li>• Do not put the product in the mouth.</li> </ul> <p>Follow related laws and ordinances for disposal. The product should be excluded from general industrial waste or household garbage.</p>
<p><b>Caution</b> Optical Fiber</p>	<p>A glass-fiber is attached on the product. Handle with care.</p> <ul style="list-style-type: none"> <li>• When the fiber is broken or damaged, handle carefully to avoid injury from the damaged part or fragments.</li> </ul>

► **Business issue**

**NEC Compound Semiconductor Devices, Ltd.**

5th Sales Group, Sales Division TEL: +81-3-3798-6372 FAX: +81-3-3798-6783 E-mail: salesinfo@csd-nec.com

**NEC Compound Semiconductor Devices Hong Kong Limited**

Hong Kong Head Office TEL: +852-3107-7303 FAX: +852-3107-7309  
 Taipei Branch Office TEL: +886-2-8712-0478 FAX: +886-2-2545-3859  
 Korea Branch Office TEL: +82-2-528-0301 FAX: +82-2-528-0302

**NEC Electron Devices European Operations** <http://www.nec.de/>

TEL: +49-211-6503-101 FAX: +49-211-6503-487

**California Eastern Laboratories, Inc.** <http://www.cel.com/>

TEL: +1-408-988-3500 FAX: +1-408-988-0279

► **Technical issue**

**NEC Compound Semiconductor Devices, Ltd.** <http://www.csd-nec.com/>

Sales Engineering Group, Sales Division  
 E-mail: techinfo@csd-nec.com FAX: +81-44-435-1918