
Plastic Packages for Integrated Circuits

Package Outline Drawing L20.5.5x4.0

20 LEAD DUAL FLAT NO-LEAD PLASTIC PACKAGE Rev 3, 3/15

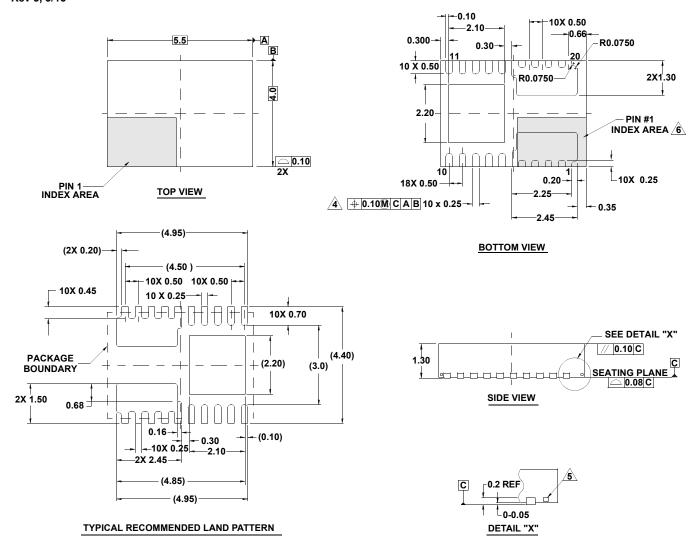

NOTES:

- 1. Dimensions are in millimeters.

 Dimensions in () for Reference Only.
- 2. Dimensioning and tolerancing conform to AMSEY14.5m-1994.
- 3. Unless otherwise specified, tolerance : Decimal \pm 0.05 Angular \pm 2°
- <u>A</u> Dimension applies to the metallized terminal and is measured between 0.015mm and 0.30mm from the terminal tip.
- <u>5.</u> Tiebar shown (if present) is a non-functional feature and may be located on any of the 4 sides (or ends).
- The configuration of the pin #1 identifier is optional, but must be located within the zone indicated. The pin #1 indentifier may be either a mold or mark feature.
- 7. No other electrical connection allowed under backside of X1 or X2 areas.
- Soldering required to PCB for X1 and X2 pads to separate and non-connected metal pads.

