

Package Outline Drawing


M16.15A

16 LEAD SHRINK SMALL OUTLINE PLASTIC PACKAGE (QSOP/SSOP) 0.150" WIDE BODY

Rev 3, 8/12

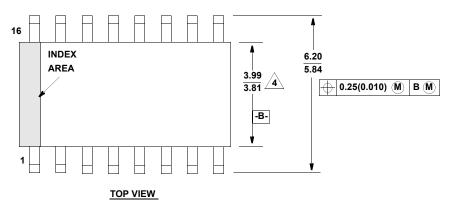

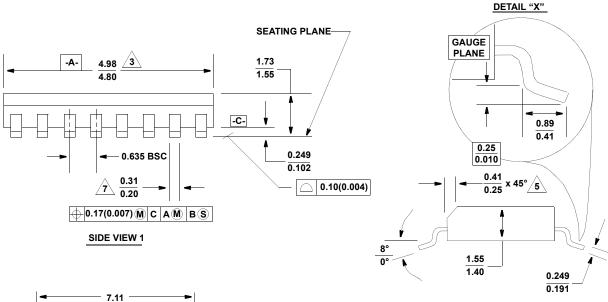



TYPICAL RECOMMENDED LAND PATTERN

3. Package length does not include mold flash, protrusions or gate burrs. Mold flash,

protrusion and gate burrs shall not exceed 0.15mm (0.006 inch) per side.

B. Package width does not include interlead flash or protrusions. Interlead fl

2. Dimensioning and tolerancing per ANSI Y14.5M-1994.

- Package width does not include interlead flash or protrusions. Interlead flash and protrusions shall not exceed 0.25mm (0.010 inch) per side.
- 5. The chamfer on the body is optional. If it is not present, a visual index feature must be located within the crosshatched area.

1. Symbols are defined in the "MO Series Symbol List" in Section 2.2 of Publication Number

SIDE VIEW 2

- 6. Terminal numbers are shown for reference only.
- 7. Lead width does not include dambar protrusion. Allowable dambar protrusion shall be 0.10mm (0.004 inch) total in excess of "B" dimension at maximum material condition.
- 8. Controlling dimension: MILLIMETER.

NOTES: