

## SLG46536-E

GreenPAK Programmable Mixed-Signal Matrix with Extended Temperature Range

The SLG46536-E provides a small, low power component for commonly used Mixed-Signal functions. The user creates their circuit design by programming the one time Non-Volatile Memory (NVM) to configure the interconnect logic, the IO Pins, and the macrocells of the SLG46536-E. This highly versatile device allows a wide variety of Mixed-Signal functions to be designed within a very small, low power single integrated circuit.

### Features

- Three Analog Comparators (ACMP)
- Twenty-six Combination Function Macrocells
  - Three Selectable DFF/LATCH or 2-bit LUTs
  - One Selectable Continuous DFF/LATCH or 3-bit LUT
  - Eleven Selectable DFF/LATCH or 3-bit LUTs
  - One Selectable Pipe Delay or 3-bit LUT
  - One Selectable Programmable Function Generator or 2-bit LUT
  - Five 8-bit Delays/Counters or 3-bit LUTs
  - Two 16-bit Delays/Counters or 4-bit LUTs
  - Two Deglitch Filters with Edge Detectors
- Combinatorial Logic
  - One 4-bit LUT
- Serial Communications
  - I<sup>2</sup>C Protocol Compliant
- Pipe Delay – 16 Stage/3 Output (Part of Combination Function Macrocell)
- Programmable Delay
- Two Oscillators (OSC)
  - Configurable 25 kHz or 2 MHz
  - 25 MHz Oscillator
- Power-On Reset
- 16x8 RAM + OTP User Memory
  - User Defined Initial Values Transferred from OTP
- Logic and Mixed-Signal Circuits
- Highly Versatile Macrocells
- Read Back Protection (Read Lock)
- Power Supply
  - 1.8 V (±5 %) to 5.0 V (±10 %) V<sub>DD</sub>
- Ambient Operating Temperature Range: -40 °C to +105 °C
- RoHS Compliant/Halogen-Free
- Available Package
  - 14-pin STQFN: 2.0 mm x 2.2 mm x 0.55 mm, 0.4 mm pitch

### Applications

- Outdoors Electronics
- Factory Automation
- Servers and Networking Equipment
- Chargers

# Contents

<b>Features</b> .....	<b>1</b>
<b>Applications</b> .....	<b>1</b>
<b>1. Block Diagram</b> .....	<b>8</b>
<b>2. Pin Information</b> .....	<b>9</b>
2.1 Pin Assignments .....	9
2.2 Pin Descriptions .....	9
<b>3. Specifications</b> .....	<b>13</b>
3.1 Absolute Maximum Ratings .....	13
3.2 Electrostatic Discharge Ratings .....	13
3.3 Recommended Operating Conditions .....	13
3.4 Electrical Specifications .....	14
3.4.1 Logic IO Specifications .....	14
3.4.2 I <sup>2</sup> C Pins Electrical Specifications .....	17
3.4.3 Macrocells Current Consumption .....	18
3.4.4 Estimated Typical Delay of Each Macrocell .....	19
3.4.5 Programmable Delay Typical Delays and Widths .....	20
3.4.6 Typical Filter Rejection Pulse Width .....	21
3.4.7 Counter/Delay Specifications .....	21
3.4.8 25 kHz OSC0 Frequency Limits .....	22
3.4.9 25 kHz OSC0 Frequency Error .....	22
3.4.10 2 MHz OSC0 Frequency Limits .....	23
3.4.11 2 MHz OSC0 Frequency Error .....	23
3.4.12 25 MHz OSC1 Frequency Limits .....	24
3.4.13 25 MHz OSC1 Frequency Error .....	24
3.4.14 OSCs Power-On Delay (Normal Mode) .....	25
3.4.15 OSCs Power-On Delay (Fast Start-Up Time Mode) .....	25
3.4.16 ACMP Characteristics .....	26
<b>4. User Programmability</b> .....	<b>33</b>
<b>5. Input/Output Pins</b> .....	<b>34</b>
5.1 Input Modes .....	34
5.2 Output Modes .....	34
5.3 Pull-Up/Down Resistors .....	34
5.4 GPI Structure .....	34
5.4.1 GPI Structure (for Pin 2) .....	34
5.5 Matrix OE IO Structure .....	35
5.5.1 Matrix OE IO Structure (for Pins 5, 11, 12) .....	35
5.5.2 Matrix OE IO Structure (for Pins 6 and 7) .....	36
5.5.3 Matrix OE 4x Drive Structure (for Pin 8) .....	37
5.5.4 Matrix OE 4x Drive Structure (for Pin 10) .....	38
5.6 IO Structure .....	39
5.6.1 IO Structure (for Pins 3, 4, 13 and 14) .....	39
<b>6. Connection Matrix</b> .....	<b>40</b>
6.1 Matrix Input Table .....	41
6.1.1 Matrix Output Table .....	43
6.2 Connection Matrix Virtual Inputs .....	46

6.3	Connection Matrix Virtual Outputs	47
<b>7.</b>	<b>Combination Function Macrocells</b>	<b>48</b>
7.1	2-Bit LUT or D Flip-Flop Macrocells	48
7.1.1	2-Bit LUT or D Flip-Flop Macrocells Used as 2-Bit LUTs	50
7.1.2	Initial Polarity Operations	51
7.2	3-Bit LUT or D Flip-Flop with Set/Reset Macrocells	51
7.2.1	3-Bit LUT or D Flip-Flop Macrocells Used as 3-Bit LUTs	58
7.2.2	Initial Polarity Operations	61
7.3	3-Bit LUT or Pipe Delay Macrocell	62
7.3.1	3-Bit LUT or Pipe Delay Macrocells Used as 3-Bit LUTs	63
7.4	3-Bit LUT or 8-Bit Counter/Delay Macrocells	64
7.4.1	3-Bit LUT or 8-Bit CNT/DLY Block Diagrams	64
7.4.2	3-Bit LUT or Counter/Delay Macrocells Used as 3-Bit LUTs	67
7.5	4-Bit LUT or 16-Bit Counter/Delay Macrocells	68
7.5.1	4-Bit LUT or 16-Bit CNT/DLY Block Diagram	69
7.5.2	4-Bit LUT or 16-Bit Counter/Delay Macrocells Used as 4-Bit LUTs	71
7.6	CNT/DLY/FSM Timing Diagrams	72
7.6.1	Delay Mode (Edge Select: Both, Counter Data: 3) CNT/DLY2 to CNT/DLY6	72
7.6.2	Count Mode (Count Data: 3), Counter Reset (Rising Edge Detect) CNT/DLY2 to CNT/DLY6	72
7.6.3	One-Shot Mode CNT/DLY0 to CNT/DLY6	72
7.6.4	Frequency Detection Mode CNT/DLY0 to CNT/DLY6	73
7.6.5	Edge Detection Mode CNT/DLY2 to CNT/DLY6	75
7.6.6	Delay Mode CNT/DLY0 to CNT/DLY6	76
7.6.7	CNT/FSM Mode CNT/DLY0, CNT/DLY1	77
7.6.8	Difference in Counter Value for Counter, Delay, One-Shot, and Frequency Detect Modes	78
7.7	2-bit LUT or Programmable Pattern Generator	79
7.8	Wake and Sleep Controller	80
<b>8.</b>	<b>Combinatorial Logic</b>	<b>82</b>
<b>9.</b>	<b>Analog Comparators</b>	<b>84</b>
9.1	ACMP0 Block Diagram	85
9.2	ACMP1 Block Diagram	86
9.3	ACMP2 Block Diagram	87
9.4	ACMP Typical Performance	87
<b>10.</b>	<b>Programmable Delay/Edge Detector</b>	<b>91</b>
10.1	Programmable Delay Timing Diagram - Edge Detector Output	91
<b>11.</b>	<b>Additional Logic Function. Deglitch Filter</b>	<b>92</b>
11.1	Deglitch Filter/Edge Detector	92
<b>12.</b>	<b>Voltage Reference</b>	<b>93</b>
12.1	Voltage Reference Overview	93
12.2	$V_{REF}$ Block Diagram	94
12.3	$V_{REF}$ Load Regulation	95
<b>13.</b>	<b>Clocking</b>	<b>97</b>
13.1	OSC General Description	97
13.2	25 kHz/2 MHz and 25 MHz Oscillators	97
13.3	External Clocking	98
13.3.1	Pin 14 Source for 25 kHz/2 MHz Clock	99

13.3.2 Pin 13 Source for 25 MHz Clock	99
13.4 Oscillators Power-On Delay	99
13.5 Oscillators Accuracy	101
13.6 Oscillators Settling Time	104
13.7 Oscillators Current Consumption	106
<b>14. Power-On Reset</b>	<b>111</b>
14.1 General Operation	111
14.2 POR Sequence	112
14.3 Macrocells Output States During POR Sequence	112
14.3.1 Initialization	113
14.3.2 Power-Down	114
<b>15. I<sup>2</sup>C Serial Communications Macrocell</b>	<b>115</b>
15.1 I <sup>2</sup> C Serial Communications Macrocell Overview	115
15.2 I <sup>2</sup> C Serial Communications Device Addressing	115
15.3 I <sup>2</sup> C Serial General Timing	116
15.4 I <sup>2</sup> C Serial Communications Commands	116
15.4.1 Byte Write Command	116
15.4.2 Sequential Write Command	117
15.4.3 Current Address Read Command	117
15.4.4 Random Read Command	118
15.4.5 Sequential Read Command	118
15.4.6 I <sup>2</sup> C Serial Command Address Space	119
15.4.7 I <sup>2</sup> C Serial Command Register Map	119
15.5 I <sup>2</sup> C Serial Command Register Protection	119
15.5.1 Register Read/Write Protection	120
15.5.2 I <sup>2</sup> C Serial Reset Command	122
15.6 I <sup>2</sup> C Additional Options	122
15.6.1 Reading Counter Data via I <sup>2</sup> C	122
15.6.2 User RAM and OTP Memory Array	122
<b>16. Register Definitions</b>	<b>124</b>
16.1 Register Map	124
<b>17. Package Top Marking Definitions</b>	<b>158</b>
17.1 STQFN 14L 2.0 mm x 2.2 mm 0.4P COL Package	158
<b>18. Package Information</b>	<b>159</b>
18.1 Package Outlines for STQFN 14L 2.0 mm x 2.2 mm 0.4P COL Package	159
18.2 STQFN Handling	160
18.3 Soldering Information	160
<b>19. Layout Guidelines</b>	<b>161</b>
19.1 STQFN 14L 2.0 mm x 2.2 mm 0.4P COL Package	161
<b>20. Ordering Information</b>	<b>162</b>
20.1 Tape and Reel Specifications	162
20.2 Carrier Tape Drawing and Dimensions	162
<b>Glossary</b>	<b>163</b>
<b>Revision History</b>	<b>165</b>

## Figures

Figure 1. Block Diagram . . . . .	9
Figure 2. Pin Assignments - STQFN-14 (Top View) . . . . .	10
Figure 3. Steps to Create a Custom GreenPAK Device . . . . .	34
Figure 4. Pin 2 GPI Structure Diagram . . . . .	35
Figure 5. Matrix OE IO Structure Diagram . . . . .	36
Figure 7. Matrix OE IO 4x Drive Structure Diagram . . . . .	38
Figure 8. Matrix OE IO 4x Drive Structure Diagram . . . . .	39
Figure 9. IO Structure Diagram . . . . .	40
Figure 10. Connection Matrix . . . . .	41
Figure 11. Connection Matrix Example . . . . .	41
Figure 12. 2-bit LUT0 or DFF0 . . . . .	49
Figure 13. 2-bit LUT1 or DFF1 . . . . .	50
Figure 14. 2-bit LUT2 or DFF2 . . . . .	50
Figure 15. DFF Polarity Operations . . . . .	52
Figure 16. 3-bit LUT0 or DFF3 with RST/SET . . . . .	53
Figure 17. 3-bit LUT1 or DFF4 with RST/SET . . . . .	53
Figure 18. 3-bit LUT2 or DFF5 with RST/SET . . . . .	54
Figure 19. 3-bit LUT3 or DFF6 with RST/SET . . . . .	54
Figure 20. 3-bit LUT4 or DFF7 with RST/SET . . . . .	55
Figure 21. 3-bit LUT11 or DFF8 with RST/SET . . . . .	55
Figure 22. 3-bit LUT12 or DFF9 with RST/SET . . . . .	56
Figure 23. 3-bit LUT13 or DFF10 with RST/SET . . . . .	56
Figure 24. 3-bit LUT14 or DFF11 with RST/SET . . . . .	57
Figure 25. 3-bit LUT15 or DFF12 with RST/SET . . . . .	57
Figure 26. 3-bit LUT16 or DFF13 with RST/SET . . . . .	58
Figure 27. 3-bit LUT17 or DFF14 with RST/SET . . . . .	58
Figure 28. DFF Polarity Operations with nReset . . . . .	62
Figure 29. DFF Polarity Operations with nSet . . . . .	63
Figure 30. 3-bit LUT10 or Pipe Delay . . . . .	64
Figure 31. 3-bit LUT5 or CNT/DLY2 . . . . .	65
Figure 32. 3-bit LUT6 or CNT/DLY3 . . . . .	66
Figure 33. 3-bit LUT7 or CNT/DLY4 . . . . .	66
Figure 34. 3-bit LUT8 or CNT/DLY5 . . . . .	67
Figure 35. 3-bit LUT9 or CNT/DLY6 . . . . .	67
Figure 36. 4-bit LUT0 or CNT/DLY0 . . . . .	70
Figure 37. 4-bit LUT1 or CNT/DLY1 . . . . .	71
Figure 38. Delay Mode Timing Diagram . . . . .	73
Figure 39. Counter Mode Timing Diagram . . . . .	73
Figure 40. One-Shot Function Timing Diagram . . . . .	74
Figure 41. Frequency Detection Mode Timing Diagram . . . . .	75
Figure 42. Edge Detection Mode Timing Diagram . . . . .	76
Figure 43. Delay Mode Timing Diagram . . . . .	77
Figure 44. CNT/FSM Timing Diagram (Reset Rising Edge Mode, Oscillator is Forced On, UP = 0) for Counter Data = 3 . . . . .	78
Figure 45. CNT/FSM Timing Diagram (Set Rising Edge Mode, Oscillator is Forced On, UP = 0) for Counter Data = 3 . . . . .	78
Figure 46. CNT/FSM Timing Diagram (Reset Rising Edge Mode, Oscillator is Forced On, UP = 1) for Counter Data = 3 . . . . .	78
Figure 47. CNT/FSM Timing Diagram (Set Rising Edge Mode, Oscillator is Forced On, UP = 1) for Counter Data = 3 . . . . .	79
Figure 48. Counter Value, Counter Data = 3 . . . . .	79
Figure 49. 2-bit LUT3 or PGen . . . . .	80
Figure 50. PGen Timing Diagram . . . . .	80
Figure 51. Wake/Sleep Controller . . . . .	81
Figure 52. 4-bit LUT2 . . . . .	83

Figure 53. ACMP0 Block Diagram	.86
Figure 55. ACMP2 Block Diagram	.88
Figure 56. ACMPx Power-On Delay vs. $V_{DD}$ , BG Delay – Any	.88
Figure 57. ACMPx Input Offset Voltage vs. $V_{REF}$ at $V_{DD} = 1.71\text{ V to }5.5\text{ V}$ , $T_A = -40\text{ }^\circ\text{C to }+105\text{ }^\circ\text{C}$	.89
Figure 58. ACMPx Buffer Input Offset Voltage vs. $V_{REF}$ at $V_{DD} = 1.71\text{ V to }5.5\text{ V}$ , $T_A = -40\text{ }^\circ\text{C to }+105\text{ }^\circ\text{C}$	.89
Figure 59. ACMPx Typical Propagation Delay at $T_A = +25\text{ }^\circ\text{C}$ , Gain = 1, Hysteresis = 0, $V_{DD} = 1.71\text{ V to }5.5\text{ V}$ , LPF-Enable	90
Figure 60. ACMPx Typical Propagation Delay at $T_A = +25\text{ }^\circ\text{C}$ , Gain = 1, Hysteresis = 0, $V_{DD} = 1.71\text{ V to }5.5\text{ V}$ , LPF-Disable	90
Figure 61. ACMPx Current Consumption vs. $V_{DD}$ at $V_{IN+}$ Connected to $V_{DD}$ , Internal $V_{REF} = 50\text{ mV}$	.91
Figure 62. Buffered ACMPx Current Consumption vs. $V_{DD}$ at $V_{IN+}$ Connected to $V_{DD}$ , Internal $V_{REF} = 50\text{ mV}$	.91
Figure 63. Programmable Delay	.92
Figure 64. Edge Detector Output	.92
Figure 65. Deglitch Filter/Edge Detector	.93
Figure 66. Voltage Reference Block Diagram	.95
Figure 67. Typical Load Regulation, $V_{REF} = 600\text{ mV}$ , $T_A = -40\text{ }^\circ\text{C to }+105\text{ }^\circ\text{C}$ , Buffer - Enable	.96
Figure 68. Typical Load Regulation, $V_{REF} = 1000\text{ mV}$ , $T_A = -40\text{ }^\circ\text{C to }+105\text{ }^\circ\text{C}$ , Buffer - Enable	.96
Figure 69. Typical Load Regulation, $V_{REF} = 1200\text{ mV}$ , $T_A = -40\text{ }^\circ\text{C to }+105\text{ }^\circ\text{C}$ , Buffer - Enable	.97
Figure 70. 25 kHz/2 MHz OSC0 Block Diagram	.99
Figure 71. 25 MHz OSC1 Block Diagram	.99
Figure 72. Oscillator Startup Diagram	.100
Figure 73. Oscillator Maximum Power-On Delay vs. $V_{DD}$ at $T_A = +25\text{ }^\circ\text{C}$ , OSC0 = 25 kHz	.100
Figure 74. Oscillator Maximum Power-On Delay vs. $V_{DD}$ at $T_A = +25\text{ }^\circ\text{C}$ , OSC0 = 2 MHz	.101
Figure 75. Oscillator Maximum Power-On Delay vs. $V_{DD}$ at $T_A = +25\text{ }^\circ\text{C}$ , OSC1 = 25 MHz	.101
Figure 76. Oscillator Frequency vs. Ambient Temperature, OSC0 = 25 kHz	.102
Figure 77. Oscillator Frequency vs. Ambient Temperature, OSC0 = 2 MHz	.103
Figure 78. Oscillator Frequency vs. Ambient Temperature, OSC1 = 25 MHz	.103
Figure 79. Oscillators Total Error vs. Ambient Temperature	.104
Figure 80. Oscillator0 Settling Time, $V_{DD} = 3.3\text{ V}$ , $T_A = +25\text{ }^\circ\text{C}$ , OSC0 = 25 kHz	.105
Figure 81. Oscillator0 Settling Time, $V_{DD} = 3.3\text{ V}$ , $T_A = +25\text{ }^\circ\text{C}$ , OSC0 = 2 MHz	.105
Figure 82. Oscillator1 Settling Time, $V_{DD} = 3.3\text{ V}$ , $T_A = +25\text{ }^\circ\text{C}$ , OSC2 = 25 MHz	.106
Figure 83. OSC0 (25 kHz) Current Consumption vs. $V_{DD}$ , All Pre-Dividers	.107
Figure 84. OSC0 (2 MHz) Current Consumption vs. $V_{DD}$ , Pre-Divider = 1	.107
Figure 85. OSC0 (2 MHz) Current Consumption vs. $V_{DD}$ , Pre-Divider = 2	.108
Figure 86. OSC0 (2 MHz) Current Consumption vs. $V_{DD}$ , Pre-Divider = 4	.108
Figure 87. OSC0 (2 MHz) Current Consumption vs. $V_{DD}$ , Pre-Divider = 8	.109
Figure 88. OSC1 (25 MHz) Current Consumption vs. $V_{DD}$ , Pre-Divider = 1	.109
Figure 89. OSC1 (25 MHz) Current Consumption vs. $V_{DD}$ , Pre-Divider = 2	.110
Figure 90. OSC1 (25 MHz) Current Consumption vs. $V_{DD}$ , Pre-Divider = 4	.110
Figure 91. OSC1 (25 MHz) Current Consumption vs. $V_{DD}$ , Pre-Divider = 8	.111
Figure 92. POR Sequence	.113
Figure 93. Internal Macrocell States during POR Sequence	.114
Figure 94. Power-Down	.115
Figure 95. Basic Command Structure	.117
Figure 96. I <sup>2</sup> C General Timing Characteristics	.117
Figure 97. Byte Write Command, R/W = 0	.118
Figure 98. Sequential Write Command	.118
Figure 99. Current Address Read Command, R/W = 1	.119
Figure 100. Random Read Command	.119
Figure 101. Sequential Read Command	.119
Figure 102. Register Bank Map	.120
Figure 103. Reset Command Timing	.123

## Tables

Table 1. Pin Description	10
Table 2. Pin Type Definitions	11
Table 3. Functional Pin Description	11
Table 4. Matrix Input Table	42
Table 5. Matrix Output Table	44
Table 6. Connection Matrix Virtual Inputs	47
Table 7. 2-bit LUT0 Truth Table	51
Table 8. 2-bit LUT1 Truth Table	51
Table 9. 2-bit LUT2 Truth Table	51
Table 10. 2-bit LUT Standard Digital Functions	51
Table 11. 3-bit LUT0 Truth Table	59
Table 12. 3-bit LUT1 Truth Table	59
Table 13. 3-bit LUT2 Truth Table	59
Table 14. 3-bit LUT3 Truth Table	59
Table 15. 3-bit LUT4 Truth Table	59
Table 16. 3-bit LUT11 Truth Table	59
Table 17. 3-bit LUT12 Truth Table	60
Table 18. 3-bit LUT13 Truth Table	60
Table 19. 3-bit LUT14 Truth Table	60
Table 20. 3-bit LUT15 Truth Table	60
Table 21. 3-bit LUT16 Truth Table	60
Table 22. 3-bit LUT17 Truth Table	60
Table 23. 3-bit LUT Standard Digital Functions	61
Table 24. 3-bit LUT10 Truth Table	64
Table 25. 3-bit LUT5 Truth Table	68
Table 26. 3-bit LUT6 Truth Table	68
Table 27. 3-bit LUT7 Truth Table	68
Table 28. 3-bit LUT8 Truth Table	68
Table 29. 3-bit LUT9 Truth Table	68
Table 30. 3-bit LUT Standard Digital Functions	69
Table 31. 4-bit LUT0 Truth Table	72
Table 32. 4-bit LUT1 Truth Table	72
Table 33. 4-bit LUT Standard Digital Functions	72
Table 34. 4-bit LUT2 Truth Table	83
Table 35. 4-bit LUT Standard Digital Functions	84
Table 36. $V_{REF}$ Selection Table	94
Table 37. Practical $V_{REF}$ Range of Voltage Reference Macrocell	95
Table 38. Read/Write Protection Options	121
Table 39. RAM Array Table	124
Table 40. Register Map	125

# 1. Block Diagram

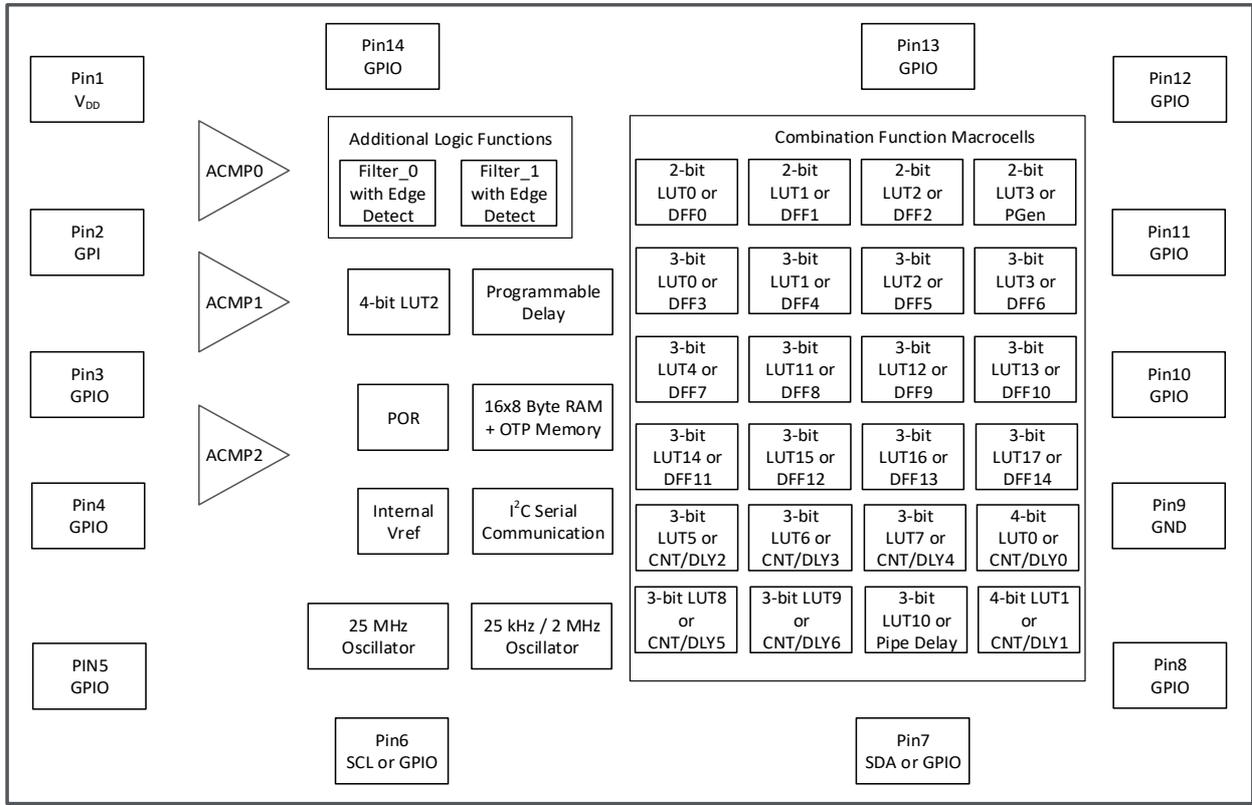


Figure 1. Block Diagram

## 2. Pin Information

### 2.1 Pin Assignments

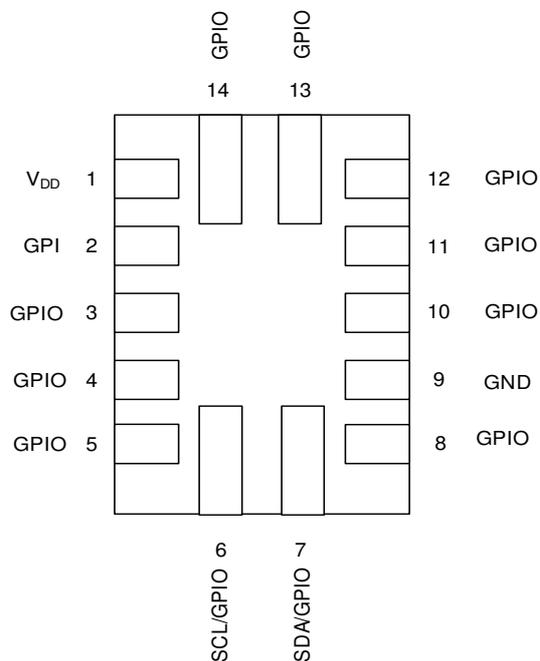


Figure 2. Pin Assignments - STQFN-14 (Top View)

### 2.2 Pin Descriptions

Table 1. Pin Description

Pin Number	Pin Name	Description
1	V <sub>DD</sub>	Power Supply
2	GPI	General Purpose Input
3	GPIO	General Purpose IO
4	GPIO	General Purpose IO or ACMP0 (+)
5	GPIO	General Purpose IO with OE or External V <sub>REF</sub> (ACMP0 IN-)
6	SCL/GPIO	General Purpose IO SCL or GPIOD (NMOS open drain only)
7	SDA/GPIO	General Purpose IO SDA or GPIOD (NMOS open drain only)
8	GPIO	General Purpose IO with OE or ACMP1 (+)
9	GND	Ground
10	GPIO	General Purpose IO External V <sub>REF</sub> (ACMP1 IN-)
11	GND	General Purpose IO with OE
12	GPIO	General Purpose IO with OE
13	GPIO	General Purpose IO
14	GPIO	General Purpose IO or External Clock Input

Table 2. Pin Type Definitions

Pin type	Definition
V <sub>DD</sub>	Power Supply
IO	Input/Output
GND	General Ground

Table 3. Functional Pin Description

STQFN 14L Pin #	Pin Name	Signal Name	Function	Input Options	Output Options
1	V <sub>DD</sub>	V <sub>DD</sub>	Power Supply	--	--
2	GPI	GPI	General Purpose Input	Digital Input without Schmitt Trigger	--
				Digital Input with Schmitt Trigger	--
				Low Voltage Digital Input	--
3	GPIO	GPIO	General Purpose IO	Digital Input without Schmitt Trigger	Push-Pull (1x) (2x)
				Digital Input with Schmitt Trigger	Open-Drain NMOS (1x) (2x)
				Low Voltage Digital Input	Open-Drain PMOS (1x) (2x)
4	GPIO	GPIO	General Purpose IO	Digital Input without Schmitt Trigger	Push-Pull (1x) (2x)
				Digital Input with Schmitt Trigger	Open-Drain NMOS (1x) (2x)
				Low Voltage Digital Input	Open-Drain PMOS (1x) (2x)
		ACMP0+	Analog Comparator 0 Positive Input	Analog	--
5	GPIO	GPIO	General Purpose IO with OE <sup>[1]</sup>	Digital Input without Schmitt Trigger	Push-Pull (1x) (2x)
				Digital Input with Schmitt Trigger	Open-Drain NMOS (1x) (2x)
				Low Voltage Digital Input	--
		EXT_VREF	Analog Comparator 0 Negative Input	Analog	--

Table 3. Functional Pin Description (Cont.)

STQFN 14L Pin #	Pin Name	Signal Name	Function	Input Options	Output Options
6	SCL/GPIO	SCL	I <sup>2</sup> C Serial Clock	Digital Input without Schmitt Trigger	--
				Digital Input with Schmitt Trigger	--
				Low Voltage Digital Input	--
		GPIO	General Purpose IO	Digital Input without Schmitt Trigger	Open-Drain NMOS (1x) (2x)
				Digital Input with Schmitt Trigger	--
				Low Voltage Digital Input	--
7	SDA/GPIO	SDA	General Purpose IO	Digital Input without Schmitt Trigger	--
				Digital Input with Schmitt Trigger	--
				Low Voltage Digital Input	--
		GPIO	General Purpose IO	Digital Input without Schmitt Trigger	Open-Drain NMOS (1x) (2x)
				Digital Input with Schmitt Trigger	--
				Low Voltage Digital Input	--
8	GPIO	GPIO	General Purpose IO with OE [1]	Digital Input without Schmitt Trigger	Push-Pull (1x) (2x)
				Digital Input with Schmitt Trigger	Open-Drain NMOS (1x) (2x) (4x)
				Low Voltage Digital Input	--
		ACMP1+	Analog Comparator 1 Positive Input	Analog	--
9	GND	GND	Ground	--	--
10	GPIO	GPIO	General Purpose IO	Digital Input without Schmitt Trigger	Push-Pull (1x) (2x)
				Digital Input with Schmitt Trigger	Open-Drain NMOS (1x) (2x) (4x)
				Low Voltage Digital Input	Open-Drain PMOS (1x) (2x)
		EXT_V <sub>REF</sub>	Analog Comparator 1 Negative Input	Analog	--
11	GPIO	GPIO	General Purpose IO with OE [1]	Digital Input without Schmitt Trigger	Push-Pull (1x) (2x)
				Digital Input with Schmitt Trigger	--
				Low Voltage Digital Input	--

Table 3. Functional Pin Description (Cont.)

STQFN 14L Pin #	Pin Name	Signal Name	Function	Input Options	Output Options
12	GPIO	GPIO	General Purpose IO with OE [1]	Digital Input without Schmitt Trigger	Push-Pull (1x) (2x)
				Digital Input with Schmitt Trigger	Open-Drain NMOS (1x) (2x)
				Low Voltage Digital Input	--
13	GPIO	GPIO	General Purpose IO	Digital Input without Schmitt Trigger	Push-Pull (1x) (2x)
				Digital Input with Schmitt Trigger	Open-Drain NMOS (1x) (2x)
				Low Voltage Digital Input	Open-Drain PMOS (1x) (2x)
14	GPIO	GPIO	General Purpose IO	Digital Input without Schmitt Trigger	Push-Pull (1x) (2x)
				Digital Input with Schmitt Trigger	Open-Drain NMOS (1x) (2x)
				Low Voltage Digital Input	Open-Drain PMOS (1x) (2x)
<b>[1]</b> General Purpose IO's with OE can be used to implement bidirectional signals under user control via Connection Matrix to OE signal in IO structure.					

### 3. Specifications

#### 3.1 Absolute Maximum Ratings

Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. These are stress ratings only, so functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specification are not implied. Exposure to Absolute Maximum Rating conditions for extended periods may affect device reliability.

Parameter		Min	Max	Unit
Supply voltage on $V_{DD}$ relative to GND		-0.5	7.0	V
Pin Voltage to GND		GND - 0.5	5.5	V
DC Input Voltage	Pins 2, 6, 7	GND - 0.5	up to 7.0	V
	Pins 3, 4, 5, 8, 10, 11, 12, 13, 14		$V_{DD} + 0.5$ , up to 7.0	
$V_{DD}$ DC Current	$T_J = +85\text{ }^\circ\text{C}$	--	45	mA
	$T_J = +105\text{ }^\circ\text{C}$	--	22	mA
GND DC Current	$T_J = +85\text{ }^\circ\text{C}$	--	86	mA
	$T_J = +105\text{ }^\circ\text{C}$	--	41	mA
GPIO DC Current (Through pin)	Push-Pull 1x	--	11	mA
	Push-Pull 2x	--	16	
	OD 1x	--	11	
	OD 2x	--	21	
	OD 4x	--	43	
Current at Input Pin		-1.0	1.0	mA
Storage Temperature Range		-65	+150	$^\circ\text{C}$
Junction Temperature		--	+150	$^\circ\text{C}$
Moisture Sensitivity Level		1		

#### 3.2 Electrostatic Discharge Ratings

Parameter	Value	Unit
ESD Protection (Human Body Model)	2000	V
ESD Protection (Charged Device Model)	1300	V

#### 3.3 Recommended Operating Conditions

Parameter	Condition	Min	Max	Unit
Supply Voltage ( $V_{DD}$ )		1.71	5.5	V
Operating Temperature		-40	+105	$^\circ\text{C}$
Maximal Voltage Applied to any PIN in High Impedance State		--	$V_{DD}$	V
Capacitor Value at $V_{DD}$		0.1	--	$\mu\text{F}$
Analog Input Common Mode Range	Allowable Input Voltage at Analog Pins	-1.2	$V_{DD}$	V

## 3.4 Electrical Specifications

### 3.4.1 Logic IO Specifications

$T_A = -40\text{ }^{\circ}\text{C}$  to  $+105\text{ }^{\circ}\text{C}$ ,  $V_{DD} = 1.71\text{ V}$  to  $5.5\text{ V}$ , unless otherwise noted.

Parameter	Symbol	Condition	Min	Typ	Max	Unit
ACMP Input Voltage Range	$V_{ACMP}$	Positive Input	0	--	$V_{DD}$	V
		Negative Input	0	--	1.2	V
HIGH-Level Input Voltage	$V_{IH}$	Logic Input [1]	$0.7 \times V_{DD}$	--	$V_{DD} + 0.3$	V
		Logic Input with Schmitt Trigger	$0.8 \times V_{DD}$	--	$V_{DD} + 0.3$	V
		Low-Level Logic Input [1]	1.25	--	$V_{DD} + 0.3$	V
LOW-Level Input Voltage	$V_{IL}$	Logic Input [1]	GND - 0.3	--	$0.3 \times V_{DD}$	V
		Logic Input with Schmitt Trigger	GND - 0.3	--	$0.2 \times V_{DD}$	V
		Low-Level Logic Input [1]	GND - 0.3	--	0.5	V
Schmitt Trigger Hysteresis Voltage	$V_{HYS}$	Logic Input with Schmitt Trigger, $V_{DD} = 1.8\text{ V} \pm 5\%$	$0.19 \times V_{DD}$	$0.26 \times V_{DD}$	$0.31 \times V_{DD}$	V
		Logic Input with Schmitt Trigger, $V_{DD} = 3.3\text{ V} \pm 10\%$	$0.16 \times V_{DD}$	$0.21 \times V_{DD}$	$0.26 \times V_{DD}$	V
		Logic Input with Schmitt Trigger, $V_{DD} = 5.0\text{ V} \pm 10\%$	$0.15 \times V_{DD}$	$0.18 \times V_{DD}$	$0.22 \times V_{DD}$	V
Input leakage (Absolute Value)	$I_{LKG}$		--	--	1000	nA
HIGH-Level Output Voltage	$V_{OH}$	Push-Pull, $I_{OH} = 100\text{ }\mu\text{A}$ , 1x Drive, $V_{DD} = 1.8\text{ V} \pm 5\%$	$0.992 \times V_{DD}$	$0.994 \times V_{DD}$	--	V
		Push-Pull, $I_{OH} = 3\text{ mA}$ , 1x Drive, $V_{DD} = 3.3\text{ V} \pm 10\%$	$0.931 \times V_{DD}$	$0.948 \times V_{DD}$	--	V
		Push-Pull, $I_{OH} = 5\text{ mA}$ , 1x Drive, $V_{DD} = 5.0\text{ V} \pm 10\%$	$0.945 \times V_{DD}$	$0.958 \times V_{DD}$	--	V
		PMOS OD, $I_{OH} = 100\text{ }\mu\text{A}$ , 1x Drive, $V_{DD} = 1.8\text{ V} \pm 5\%$	$0.992 \times V_{DD}$	$0.99 \times V_{DD}$	--	V
		PMOS OD, $I_{OH} = 3\text{ mA}$ , 1x Drive, $V_{DD} = 3.3\text{ V} \pm 10\%$	$0.931 \times V_{DD}$	$0.95 \times V_{DD}$	--	V
		PMOS OD, $I_{OH} = 5\text{ mA}$ , 1x Drive, $V_{DD} = 5.0\text{ V} \pm 10\%$	$0.945 \times V_{DD}$	$0.96 \times V_{DD}$	--	V
		Push-Pull, $I_{OH} = 100\text{ }\mu\text{A}$ , 2x Drive, $V_{DD} = 1.8\text{ V} \pm 5\%$	$0.996 \times V_{DD}$	$0.997 \times V_{DD}$	--	V
		Push-Pull, $I_{OH} = 3\text{ mA}$ , 2x Drive, $V_{DD} = 3.3\text{ V} \pm 10\%$	$0.966 \times V_{DD}$	$0.974 \times V_{DD}$	--	V
		Push-Pull, $I_{OH} = 5\text{ mA}$ , 2x Drive, $V_{DD} = 5.0\text{ V} \pm 10\%$	$0.972 \times V_{DD}$	$0.979 \times V_{DD}$	--	V

Parameter	Symbol	Condition	Min	Typ	Max	Unit
HIGH-Level Output Voltage	$V_{OH}$	PMOS OD, $I_{OH} = 100 \mu A$ , 2x Drive, $V_{DD} = 1.8 V \pm 5 \%$	$0.996 \times V_{DD}$	$0.997 \times V_{DD}$	--	V
		PMOS OD, $I_{OH} = 3 mA$ , 2x Drive, $V_{DD} = 3.3 V \pm 10 \%$	$0.966 \times V_{DD}$	$0.974 \times V_{DD}$	--	V
		PMOS OD, $I_{OH} = 5 mA$ , 2x Drive, $V_{DD} = 5.0 V \pm 10 \%$	$0.972 \times V_{DD}$	$0.979 \times V_{DD}$	--	V
LOW-Level Output Voltage	$V_{OL}$	Push-Pull, $I_{OL} = 100 \mu A$ , 1x Drive, $V_{DD} = 1.8 V \pm 5 \%$	--	$0.004 \times V_{DD}$	$0.006 \times V_{DD}$	V
		Push-Pull, $I_{OL} = 3 mA$ , 1x Drive, $V_{DD} = 3.3 V \pm 10 \%$	--	$0.038 \times V_{DD}$	$0.054 \times V_{DD}$	V
		Push-Pull, $I_{OL} = 5 mA$ , 1x Drive, $V_{DD} = 5.0 V \pm 10 \%$	--	$0.033 \times V_{DD}$	$0.046 \times V_{DD}$	V
		Push-Pull, $I_{OL} = 100 \mu A$ , 2x Drive, $V_{DD} = 1.8 V \pm 5 \%$	--	$0.002 \times V_{DD}$	$0.003 \times V_{DD}$	V
		Push-Pull, $I_{OL} = 3 mA$ , 2x Drive, $V_{DD} = 3.3 V \pm 10 \%$	--	$0.019 \times V_{DD}$	$0.026 \times V_{DD}$	V
		Push-Pull, $I_{OL} = 5 mA$ , 2x Drive, $V_{DD} = 5.0 V \pm 10 \%$	--	$0.017 \times V_{DD}$	$0.023 \times V_{DD}$	V
		NMOS Open-Drain, $I_{OL} = 100 \mu A$ , 1x Drive, $V_{DD} = 1.8 V \pm 5 \%$	--	$0.003 \times V_{DD}$	$0.004 \times V_{DD}$	V
		NMOS Open-Drain, $I_{OL} = 3 mA$ , 1x Drive, $V_{DD} = 3.3 V \pm 10 \%$	--	$0.025 \times V_{DD}$	$0.035 \times V_{DD}$	V
		NMOS Open-Drain, $I_{OL} = 5 mA$ , 1x Drive, $V_{DD} = 5.0 V \pm 10 \%$	--	$0.022 \times V_{DD}$	$0.03 \times V_{DD}$	V
		NMOS Open-Drain, $I_{OL} = 100 \mu A$ , 2x Drive, $V_{DD} = 1.8 V \pm 5 \%$	--	$0.002 \times V_{DD}$	$0.002 \times V_{DD}$	V
		NMOS Open-Drain, $I_{OL} = 3 mA$ , 2x Drive, $V_{DD} = 3.3 V \pm 10 \%$	--	$0.013 \times V_{DD}$	$0.018 \times V_{DD}$	V
		NMOS Open-Drain, $I_{OL} = 5 mA$ , 2x Drive, $V_{DD} = 5.0 V \pm 10 \%$	--	$0.011 \times V_{DD}$	$0.015 \times V_{DD}$	V
		Open-Drain NMOS 4x, PINs 8, 10, $I_{OL} = 100 \mu A$ , $V_{DD} = 1.8 V \pm 5 \%$	--	$0.001 \times V_{DD}$	$0.001 \times V_{DD}$	V
		Open-Drain NMOS 4x, PINs 8, 10, $I_{OL} = 3 mA$ , $V_{DD} = 3.3 V \pm 10 \%$	--	$0.007 \times V_{DD}$	$0.009 \times V_{DD}$	V
		Open-Drain NMOS 4x, PINs 8, 10, $I_{OL} = 5 mA$ , $V_{DD} = 5.0 V \pm 10 \%$	--	$0.006 \times V_{DD}$	$0.008 \times V_{DD}$	V

Parameter	Symbol	Condition	Min	Typ	Max	Unit
HIGH-Level Output Pulse Current [2]	I <sub>OH</sub>	Push-Pull, V <sub>OH</sub> = V <sub>DD</sub> - 0.2, 1x Drive, V <sub>DD</sub> = 1.8 V ± 5 %	0.963	1.331	--	mA
		Push-Pull, V <sub>OH</sub> = 2.4 V, 1x Drive, V <sub>DD</sub> = 3.3 V ± 10 %	5.219	12.234	--	mA
		Push-Pull, V <sub>OH</sub> = 2.4 V, 1x Drive, V <sub>DD</sub> = 5.0 V ± 10 %	19.403	32.766	--	mA
		PMOS OD, V <sub>OH</sub> = V <sub>DD</sub> - 0.2, 1x Drive, V <sub>DD</sub> = 1.8 V ± 5 %	0.973	1.331	--	mA
		PMOS OD, V <sub>OH</sub> = 2.4 V, 1x Drive, V <sub>DD</sub> = 3.3 V ± 10 %	5.243	12.234	--	mA
		PMOS OD, V <sub>OH</sub> = 2.4 V, 1x Drive, V <sub>DD</sub> = 5.0 V ± 10 %	19.478	32.771	--	mA
		Push-Pull, V <sub>OH</sub> = V <sub>DD</sub> - 0.2, 2x Drive, V <sub>DD</sub> = 1.8 V ± 5 %	1.902	2.642	--	mA
		Push-Pull, V <sub>OH</sub> = 2.4 V, 2x Drive, V <sub>DD</sub> = 3.3 V ± 10 %	10.29	24.137	--	mA
		Push-Pull, V <sub>OH</sub> = 2.4 V, 2X Drive, V <sub>DD</sub> = 5.0 V ± 10 %	37.967	64.23	--	mA
		PMOS OD, V <sub>OH</sub> = V <sub>DD</sub> - 0.2, 2x Drive, V <sub>DD</sub> = 1.8 V ± 5 %	1.926	3.643	--	mA
		PMOS OD, V <sub>OH</sub> = 2.4 V, 2x Drive, V <sub>DD</sub> = 3.3 V ± 10 %	10.389	24.148	--	mA
		PMOS OD, V <sub>OH</sub> = 2.4 V, 2x Drive, V <sub>DD</sub> = 5.0 V ± 10 %	38.275	64.275	--	mA
LOW-Level Output Pulse Current [2]	I <sub>OL</sub>	Push-Pull, V <sub>OL</sub> = 0.15 V, 1x Drive, V <sub>DD</sub> = 1.8 V ± 5 %	0.92	1.562	--	mA
		Push-Pull, V <sub>OL</sub> = 0.4 V, 1x Drive, V <sub>DD</sub> = 3.3 V ± 10 %	4.769	7.847	--	mA
		Push-Pull, V <sub>OL</sub> = 0.4 V, 1x Drive, V <sub>DD</sub> = 5.0 V ± 10 %	6.364	10.359	--	mA
		Push-Pull, V <sub>OL</sub> = 0.15 V, 2x Drive, V <sub>DD</sub> = 1.8 V ± 5 %	1.83	3.114	--	mA
		Push-Pull, V <sub>OL</sub> = 0.4 V, 2x Drive, V <sub>DD</sub> = 3.3 V ± 10 %	9.537	15.515	--	mA
		Push-Pull, V <sub>OL</sub> = 0.4 V, 2x Drive, V <sub>DD</sub> = 5.0 V ± 10 %	12.669	20.367	--	mA
		NMOS Open-Drain, V <sub>OL</sub> = 0.15 V, 1x Drive, V <sub>DD</sub> = 1.8 V ± 5 %	1.38	2.37	--	mA
		NMOS Open-Drain, V <sub>OL</sub> = 0.4 V, 1x Drive, V <sub>DD</sub> = 3.3 V ± 10 %	7.31	11.873	--	mA
		NMOS Open-Drain, V <sub>OL</sub> = 0.4 V, 1X Drive, V <sub>DD</sub> = 5.0 V ± 10 %	9.825	15.654	--	mA
		NMOS Open-Drain, V <sub>OL</sub> = 0.15 V, 2x Drive, V <sub>DD</sub> = 1.8 V ± 5 %	2.75	4.644	--	mA

Parameter	Symbol	Condition	Min	Typ	Max	Unit
LOW-Level Output Pulse Current [2]	$I_{OL}$	NMOS Open-Drain, $V_{OL} = 0.4$ V, 2x Drive, $V_{DD} = 3.3$ V $\pm$ 10 %	14.472	22.973	--	mA
		NMOS Open-Drain, $V_{OL} = 0.4$ V, 2X Drive, $V_{DD} = 5.0$ V $\pm$ 10 %	17.34	30.033	--	mA
		Open-Drain NMOS 4x, PINs 8, 10, $V_{OL} = 0.15$ V, $V_{DD} = 1.8$ V $\pm$ 5 %	6.897	9.202	--	mA
		Open-Drain NMOS 4x, PINs 8, 10, $V_{OL} = 0.4$ V, $V_{DD} = 3.3$ V $\pm$ 10 %	28.502	45.065	--	mA
		Open-Drain NMOS 4x, PINs 8, 10, $V_{OL} = 0.4$ V, $V_{DD} = 5.0$ V $\pm$ 10 %	37.33	58.499	--	mA
Startup Time	$T_{SU}$	From $V_{DD}$ rising past $PON_{THR}$	0.61	1.311	1.913	ms
Power-On Threshold	$PON_{THR}$	$V_{DD}$ Level Required to Start Up the Chip	0.852	1.553	1.715	V
Power-Off Threshold	$POFF_{THR}$	$V_{DD}$ Level Required to Switch Off the Chip	0.879	1.167	1.405	V
Pull-up or Pull-down Resistance	$R_{PULL}$	1 M $\Omega$ Pull-up: $V_{IN} = GND$ , 1 M $\Omega$ Pull-down: $V_{IN} = V_{DD}$	--	1000	--	k $\Omega$
		100 k $\Omega$ Pull-up: $V_{IN} = GND$ , 100 k $\Omega$ Pull-down: $V_{IN} = V_{DD}$	--	100	--	k $\Omega$
		10 k $\Omega$ Pull-up: $V_{IN} = GND$ , 10 k $\Omega$ Pull-down: $V_{IN} = V_{DD}$	--	10	--	k $\Omega$
Input Capacitance	$C_{IN}$		--	4	--	pF

[1] No hysteresis.  
 [2] DC or average current through any pin should not exceed value given in Absolute Maximum Conditions.

### 3.4.2 I<sup>2</sup>C Pins Electrical Specifications

$T_A = -40$  °C to  $+105$  °C,  $V_{DD} = 1.71$  V to 5.5 V, unless otherwise noted.

Parameter	Symbol	Condition	Fast-Mode		Unit
			Min	Max	
<b>IO Stage</b>					
LOW-level Input Voltage	$V_{IL}$		-0.5	$0.3 \times V_{DD}$	V
HIGH-level Input Voltage	$V_{IH}$		$0.7 \times V_{DD}$	$V_{DD} + 0.5$	V
Hysteresis of Schmitt Trigger Inputs	$V_{HYS}$		$0.05 \times V_{DD}$	--	V
LOW-Level Output Voltage 1	$V_{OL1}$	(Open-Drain) at 3 mA sink current, $V_{DD} > 2$ V	0	0.4	V
LOW-Level Output Voltage 2	$V_{OL2}$	(Open-Drain) at 2 mA sink current, $V_{DD} \leq 2$ V	0	$0.2 \times V_{DD}$	V
LOW-Level Output Current	$I_{OL}$	$V_{OL} = 0.4$ V	3	--	mA
		$V_{OL} = 0.6$ V	6	--	mA
Output Fall Time from $V_{IHmin}$ to $V_{ILmax}$ [1]	$t_{of}$		0.3	250	ns
Pulse Width of Spikes that must be suppressed by the Input Filter	$t_{SP}$	SDA line	0	50	ns
		SCL line	0	20 [1]	

Parameter	Symbol	Condition	Fast-Mode		Unit
			Min	Max	
Input Current Each IO Pin	$I_i$	$0.1 \times V_{DD} < V_i < 0.9 \times V_{DDmax}$	-10	+10	$\mu A$
Capacitance for Each IO Pin	$C_i$		--	10	pF
<b>Timing (see Figure 96 for Diagram)</b>					
Clock Frequency, SCL	$F_{SCL}$		--	400	kHz
Clock Pulse Width Low	$t_{LOW}$		1300	--	ns
Clock Pulse Width High	$t_{HIGH}$		600	--	ns
Data Valid Acknowledge Time	$t_{VD\_ACK}$		--	900	ns
Data Valid Time	$t_{VD\_DAT}$		--	900	ns
Bus Free Time between Stop and Start	$t_{BUF}$		1300	--	ns
Start Hold Time	$t_{HD\_STA}$		600	--	ns
Start Set-up Time	$t_{SU\_STA}$		600	--	ns
Data Hold Time	$t_{HD\_DAT}$		0	--	ns
Data Set-up Time	$t_{SU\_DAT}$		100	--	ns
Inputs Rise Time	$t_R$		--	300	ns
Inputs Fall Time	$t_F$		--	300	ns
Stop Set-up Time	$t_{SU\_STO}$		600	--	ns
Data Out Hold Time	$t_{DH}$		50	--	ns
<p><b>[1]</b> Does not meet standard I<sup>2</sup>C specifications: <math>t_{of} = 20 \times (V_{DD}/5.5 \text{ V})</math> (min), <math>t_{SP} = 50 \text{ ns}</math> (max).  <b>[2]</b> The data is provided for the I<sup>2</sup>C mode in which IO6 and IO7 operate as Open-Drain 1x NMOS, which is the only output mode available for these pins when using I<sup>2</sup>C.</p>					

### 3.4.3 Macrocells Current Consumption

Typical values are at  $T_A = +25 \text{ }^\circ\text{C}$ , unless otherwise specified.

Parameter	Symbol	Note	$V_{DD} = 1.8 \text{ V}$	$V_{DD} = 3.3 \text{ V}$	$V_{DD} = 5.0 \text{ V}$	Unit
Current	$I_{DD}$	Chip Quiescent, $I_{DD}$	0.28	0.52	0.81	$\mu A$
		OSC 2 MHz, pre-divide = 1	32.73	50.92	76.79	
		OSC 2 MHz, pre-divide = 8	19.36	24.90	34.48	
		OSC 25 kHz, pre-divide = 1	5.39	6.11	7.34	
		OSC 25 kHz, pre-divide = 8	5.23	5.79	6.84	
		OSC 25 MHz, pre-divide = 1	76.84	204.45	375.54	
		OSC 25 MHz, pre-divide = 8	68.18	181.65	341.65	
		ACMP (each)	47.22	43.87	51.98	
		ACMP with buffer (each)	62.46	59.52	68.18	
		$V_{REF}$ (each)	43.19	39.78	47.88	
		$V_{REF}$ with buffer (each)	51.88	48.80	57.08	

### 3.4.4 Estimated Typical Delay of Each Macrocell

Typical values are at  $T_A = +25\text{ }^\circ\text{C}$ , unless otherwise noted.

Parameter	Symbol	Note	$V_{DD} = 1.8\text{ V}$		$V_{DD} = 3.3\text{ V}$		$V_{DD} = 5.0\text{ V}$		Unit
			Rising	Falling	Rising	Falling	Rising	Falling	
<b>GPI and GPIO Macrocell</b>									
Propagation Delay	$t_{PD}$	Digital Input to PP 1x	46	48	20	20	14	15	ns
		Digital Input with Schmitt Trigger to PP 1x	45	47	19	20	14	14	
		Low Voltage Digital input to PP 1x	51	468	23	186	18	120	
		Digital input to PMOS output	41	-	18	-	13	-	
		Digital input to NMOS output	-	78	-	29	-	19	
		Output enable from pin, OE Hi-Z to 1	46	-	19	-	14	-	
		Output enable from pin, OE Hi-Z to 0	43	-	19	-	14	-	
Pulse Width	$t_W$	IO with 1x Push-Pull (min transmitted)	20	20	20	20	20	20	ns
<b>Combination Function Macrocell</b>									
Propagation Delay	$t_{PD}$	2-bit LUT (LATCH)	34	34	14	13	10	9	ns
		LATCH (2-bit LUT)	30	32	12	13	9	9	
		3-bit LUT(LATCH)	31	33	13	13	9	9	
		LATCH+nRESET(3-bit LUT)	37	36	15	14	11	10	
		4-bit LUT	29	35	12	13	9	9	
		2-bit LUT	30	32	12	13	9	9	
		3-bit LUT	31	33	13	13	9	9	
		CNT/DLY Logic	60	60	25	25	17	17	
<b>Programmable Delay</b>									
Propagation Delay	$t_{PD}$	P_DLY1C	377	369	167	164	123	121	ns
		P_DLY2C	689	682	309	305	229	226	
		P_DLY3C	1002	995	450	447	334	331	
		P_DLY4C	1311	1303	590	586	438	435	
<b>Pipe Delay</b>									
Propagation Delay	$t_{PD}$	Pipe Delay OUT0	48	42	20	18	14	13	ns
		Pipe Delay OUT1	45	39	19	16	13	12	

Parameter	Symbol	Note	V <sub>DD</sub> = 1.8 V		V <sub>DD</sub> = 3.3 V		V <sub>DD</sub> = 5.0 V		Unit
			Rising	Falling	Rising	Falling	Rising	Falling	
<b>Filter/Edge Detector</b>									
Propagation Delay	t <sub>PD</sub>	Filter 0	225	205	86	80	56	52	ns
		Filter 1	175	156	66	61	43	40	
		Mode: Edge Detect 0, Any Edge Detect	59	63	23	24	16	16	
		Mode: Edge Detect 1, Any Edge Detect	58	62	23	23	16	16	
		Mode: Edge Detect 0, BothEdge Detect	378	366	167	162	123	120	
		Mode: Edge Detect 1, Both Edge Detect	377	364	166	162	122	119	
<b>ACMP</b>									
Propagation Delay	t <sub>PD</sub>	ACMP (5 mV overdrive, IN- = 600 mV)	3000	3000	2000	2000	2000	2000	ns

### 3.4.5 Programmable Delay Typical Delays and Widths

Typical values are at T<sub>A</sub> = +25 °C, unless otherwise specified.

Parameter	Symbol	Note		V <sub>DD</sub> = 1.8 V	V <sub>DD</sub> = 3.3 V	V <sub>DD</sub> = 5.0 V	Unit
Pulse Width	t <sub>w</sub>	Mode: (any) Edge Detect, Edge Detect Output	1-Cell	309	139	103	ns
			2-Cell	621	280	209	
			3-Cell	934	422	314	
			4-Cell	1243	562	418	
Delay Time	t <sub>DLY1</sub>	Mode: (any) Edge Detect, Edge Detect Output	1-Cell	55	22	15	ns
			2-Cell	55	22	15	
			3-Cell	55	22	15	
			4-Cell	55	22	15	
	t <sub>DLY2</sub>	Mode: Both Edge Delay, Edge Detect Output	1-Cell	373	165	122	ns
			2-Cell	685	307	227	
			3-Cell	998	448	332	
			4-Cell	1307	588	437	

### 3.4.6 Typical Filter Rejection Pulse Width

Typical values are at  $T_A = +25\text{ }^\circ\text{C}$ , unless otherwise specified.

Parameter	$V_{DD} = 1.8\text{ V}$	$V_{DD} = 3.3\text{ V}$	$V_{DD} = 5.0\text{ V}$	Unit
Filtered Pulse Width for Filter 0	< 143	< 58	< 37	ns
Filtered Pulse Width for Filter 1	< 97	< 40	< 26	ns

### 3.4.7 Counter/Delay Specifications

Typical values are at  $T_A = +25\text{ }^\circ\text{C}$ , unless otherwise specified.

Parameter	OSC Freq	OSC Power	$V_{DD} = 1.8\text{ V}$	$V_{DD} = 3.3\text{ V}$	$V_{DD} = 5.0\text{ V}$	Unit
Power-On Delay Time	25 kHz	Auto	1.6	1.6	1.6	$\mu\text{s}$
Power-On Delay Time (Fast Start)	25 kHz	Auto	2.1	2.1	2.1	$\mu\text{s}$
Power-On Delay	2 MHz	Auto	0.4	0.2	0.2	$\mu\text{s}$
Power-On Delay Time (Fast Start)	2 MHz	Auto	0.7	0.5	0.4	$\mu\text{s}$
Power-On Delay) Time	25 MHz	Auto	0.01	0.05	0.04	$\mu\text{s}$
Frequency settling time	25 kHz	Auto	19	14	12	$\mu\text{s}$
	2 MHz	Auto	14	14	14	$\mu\text{s}$
Variable (CLK period)	25 kHz	Forced	0-40	0-40	0-40	$\mu\text{s}$
	2 MHz	Forced	0-0.5	0-0.5	0-0.5	$\mu\text{s}$
	25 MHz	Forced	0-0.04	0-0.04	0-0.04	$\mu\text{s}$
Propagation Delay (Non-Delayed Edge)	25 kHz/ 2 MHz	Either	35	14	10	ns

### 3.4.8 25 kHz OSC0 Frequency Limits

Power Supply Range (V <sub>DD</sub> ), V	Temperature Range					
	+25 °C		0 °C to +105 °C		-40 °C to +105 °C	
	Minimum Value, kHz	Maximum Value, kHz	Minimum Value, kHz	Maximum Value, kHz	Minimum Value, kHz	Maximum Value, kHz
1.8 V ±5 %	24.317	25.726	23.576	26.116	23.576	27.219
3.3 V ±10 %	24.495	25.66	23.6	25.934	23.6	26.399
5.0 V ±10 %	24.443	25.698	23.517	25.978	23.517	26.567
2.5 V to 4.5 V	24.493	25.665	23.59	25.942	23.59	26.408
1.71 V to 5.5 V	24.224	25.698	23.484	26.257	23.484	27.225

### 3.4.9 25 kHz OSC0 Frequency Error

Power Supply Range (V <sub>DD</sub> ), V	Temperature Range					
	+25 °C		0 °C to +105 °C		-40 °C to +105 °C	
	Error (% at Minimum)	Error (% at Maximum)	Error (% at Minimum)	Error (% at Maximum)	Error (% at Minimum)	Error (% at Maximum)
1.8 V ±5 %	-2.732	2.904	-10.7	6.92	-10.7	16.832
3.3 V ±10 %	-2.02	2.64	-10.432	4.772	-10.432	9.66
5.0 V ±10 %	-2.228	2.792	-11.064	4.996	-11.064	10.22
2.5 V to 4.5 V	-2.028	2.66	-10.588	4.844	-10.588	9.848
1.71 V to 5.5 V	-3.104	3.872	-11.536	6.904	-11.536	16.728

### 3.4.10 2 MHz OSC0 Frequency Limits

Power Supply Range (V <sub>DD</sub> ), V	Temperature Range					
	+25 °C		0 °C to +105 °C		-40 °C to +105 °C	
	Minimum Value, MHz	Maximum Value, MHz	Minimum Value, MHz	Maximum Value, MHz	Minimum Value, MHz	Maximum Value, MHz
1.8 V ±5 %	1.903	2.098	1.856	2.104	1.856	2.115
3.3 V ±10 %	1.885	2.115	1.839	2.123	1.834	2.132
5.0 V ±10 %	1.858	2.220	1.821	2.230	1.803	2.252
2.5 V to 4.5 V	1.874	2.123	1.835	2.129	1.819	2.137
1.71 V to 5.5 V	1.811	2.249	1.779	2.260	1.623	2.283

### 3.4.11 2 MHz OSC0 Frequency Error

Power Supply Range (V <sub>DD</sub> ), V	Temperature Range					
	+25 °C		0 °C to +105 °C		-40 °C to +105 °C	
	Error (% at Minimum)	Error (% at Maximum)	Error (% at Minimum)	Error (% at Maximum)	Error (% at Minimum)	Error (% at Maximum)
1.8 V ±5 %	-4.85	4.9	-9.15	5.7	-10.35	6.95
3.3 V ±10 %	-5.75	5.75	-9.0	7.05	-11.4	7.65
5.0 V ±10 %	-7.1	11.0	-10.85	12.8	-13.1	14.4
2.5 V to 4.5 V	-6.3	6.15	-9.6	8.0	-13.75	8.2
1.71 V to 5.5 V	-9.45	12.45	-15.45	14.25	-30.5	16.0

### 3.4.12 25 MHz OSC1 Frequency Limits

Power Supply Range ( $V_{DD}$ ), V	Temperature Range					
	+25 °C		0 °C to +105 °C		-40 °C to +105 °C	
	Minimum Value, MHz	Maximum Value, MHz	Minimum Value, MHz	Maximum Value, MHz	Minimum Value, MHz	Maximum Value, MHz
2.5 V $\pm$ 10 %	22.964	26.443	21.759	26.828	21.759	27.327
3.3 V $\pm$ 10 %	24.056	25.824	22.655	26.081	22.655	26.350
5.0 V $\pm$ 10 %	23.860	25.894	22.832	26.215	22.832	26.714
2.5 V to 4.5 V	22.232	25.824	21.386	26.081	21.386	26.350
1.71 V to 5.5 V	14.130	25.824	13.718	26.081	13.028	26.350

### 3.4.13 25 MHz OSC1 Frequency Error

Power Supply Range ( $V_{DD}$ ), V	Temperature Range					
	+25 °C		0 °C to +105 °C		-40 °C to +105 °C	
	Error (% at Minimum)	Error (% at Maximum)	Error (% at Minimum)	Error (% at Maximum)	Error (% at Minimum)	Error (% at Maximum)
2.5 V $\pm$ 10 %	-8.144	5.772	-17.804	8.74	-17.804	13.04
3.3 V $\pm$ 10 %	-3.776	3.296	-14.96	5.904	-14.96	8.556
5.0 V $\pm$ 10 %	-4.56	3.576	-13.408	6.596	-13.408	10.36
2.5 V to 4.5 V	-11.072	3.296	-20.152	5.904	-20.152	8.768
1.71 V to 5.5 V	-43.48	3.296	-51.088	8.892	-53.848	9.988

**Note:** 25 MHz OSC1 performance is not guaranteed at  $V_{DD} < 2.5$  V.

### 3.4.14 OSCs Power-On Delay (Normal Mode)

**Note:** DLY/CNT Counter Data = 100, OSC Power Setting: "Auto Power-On", OSC Clock to Matrix Input: "Enable".

Typical values are at  $T_A = +25\text{ }^\circ\text{C}$ , unless otherwise specified.

Power Supply Range ( $V_{DD}$ ) V	OSC0 2 MHz		OSC0 25 kHz		OSC1	
	Typical Value, ns	Maximum Value, ns	Typical Value, $\mu\text{s}$	Maximum Value, $\mu\text{s}$	Typical Value, ns	Maximum Value, ns
1.71	372.7	407.3	0.40	0.57	71.2	87.3
1.80	349.2	379.5	0.38	0.41	65.0	78.7
1.89	330.3	358.0	0.35	0.41	59.7	71.3
2.30	277.2	298.1	0.29	0.31	43.0	54.0
2.50	262.0	281.9	0.28	0.30	39.6	48.1
2.70	250.2	269.8	0.26	0.30	36.7	43.5
3.00	236.6	256.7	0.25	0.44	33.2	39.8
3.30	226.7	247.4	0.23	0.47	30.4	36.8
3.60	219.0	239.9	0.22	0.46	28.2	34.3
4.20	207.4	229.2	0.37	0.50	25.8	30.6
4.50	202.8	224.5	1.63	1.92	25.0	29.2
5.00	196.3	218.7	1.67	2.05	24.3	27.5
5.50	190.8	213.3	1.69	1.99	23.7	26.8

### 3.4.15 OSCs Power-On Delay (Fast Start-Up Time Mode)

Typical values are at  $T_A = +25\text{ }^\circ\text{C}$ , unless otherwise specified.

Power Supply Range ( $V_{DD}$ ) V	OSC0 2 MHz		OSC0 25 kHz	
	Typical Value, ns	Maximum Value, ns	Typical Value, $\mu\text{s}$	Maximum Value, $\mu\text{s}$
1.71	327.9	360.0	0.68	0.76
1.80	309.9	338.3	0.64	0.64
1.89	295.5	323.1	0.61	0.70
2.30	254.9	278.1	0.53	21.93
2.50	243.1	266.1	3.23	21.88
2.70	234.1	257.1	16.68	21.94
3.00	223.7	246.8	19.25	21.90
3.30	215.7	239.1	19.22	21.77
3.60	209.4	232.9	19.21	21.74
4.20	199.5	223.4	19.17	21.78
4.50	195.5	219.8	19.15	21.69
5.00	189.8	214.6	19.12	21.71
5.50	184.9	209.8	19.05	21.75

### 3.4.16 ACMP Characteristics

$T_A = -40\text{ }^\circ\text{C}$  to  $+105\text{ }^\circ\text{C}$ ,  $V_{DD} = 2.3\text{ V}$  to  $5.5\text{ V}$ , unless otherwise noted.

Parameter	Symbol	Note	Conditions	Min	Typ	Max	Unit
ACMP Input Voltage Range	$V_{ACMP}$	Positive Input	$V_{DD} = 1.8\text{ V} \pm 5\%$	0	--	$V_{DD}$	V
		Negative Input		0	--	1.2	V
		Positive Input	$V_{DD} = 3.3\text{ V} \pm 10\%$	0	--	$V_{DD}$	V
		Negative Input		0	--	1.2	V
		Positive Input	$V_{DD} = 5.0\text{ V} \pm 10\%$	0	--	$V_{DD}$	V
		Negative Input		0	--	1.2	V
ACMP Input Offset Voltage	$V_{offset}$	Low Bandwidth - Enable, $V_{hys} = 0\text{ mV}$ , Gain = 1, $V_{REF} = 50\text{ mV}$ to $1200\text{ mV}$ , $V_{DD} = 1.71\text{ V}$ to $5.5\text{ V}$	$T_A = +25\text{ }^\circ\text{C}$	-10.7	--	8.4	mV
			$T_A = -40\text{ }^\circ\text{C}$ to $+105\text{ }^\circ\text{C}$	-10.6	--	7.0	mV
		Low Bandwidth - Disable, $V_{hys} = 0\text{ mV}$ , Gain = 1, $V_{REF} = 50\text{ mV}$ to $1200\text{ mV}$ , $V_{DD} = 1.71\text{ V}$ to $5.5\text{ V}$	$T_A = +25\text{ }^\circ\text{C}$	-10.2	--	9.1	mV
			$T_A = -40\text{ }^\circ\text{C}$ to $+105\text{ }^\circ\text{C}$	-10.3	--	7.6	mV
ACMP Start Time	$t_{start}$	ACMP Power-On delay, Minimal required wake time for the "Wake and Sleep function", Regulator and Charge Pump set to automatic ON/OFF	$BG = 550\text{ }\mu\text{s}$ , $T_A = +25\text{ }^\circ\text{C}$ $V_{DD} = 1.71\text{ V}$ to $5.5\text{ V}$	--	672.6	909.0	$\mu\text{s}$
			$BG = 550\text{ }\mu\text{s}$ , $T_A = -40\text{ }^\circ\text{C}$ to $+105\text{ }^\circ\text{C}$ $V_{DD} = 1.71\text{ V}$ to $5.5\text{ V}$	--	676.5	1033.8	$\mu\text{s}$
			$BG = 100\text{ }\mu\text{s}$ , $T_A = +25\text{ }^\circ\text{C}$ $V_{DD} = 2.7\text{ V}$ to $5.5\text{ V}$	--	133.2	181.9	$\mu\text{s}$
			$BG = 100\text{ }\mu\text{s}$ , $T_A = -40\text{ }^\circ\text{C}$ to $+105\text{ }^\circ\text{C}$ $V_{DD} = 2.7\text{ V}$ to $5.5\text{ V}$	--	134.7	207.0	$\mu\text{s}$
		ACMP Power-On delay, Minimal required wake time for the "Wake and Sleep function", Regulator and Charge Pump always OFF	$BG = 550\text{ }\mu\text{s}$ , $T_A = +25\text{ }^\circ\text{C}$ $V_{DD} = 3.0\text{ V}$ to $5.5\text{ V}$	--	673.1	909.0	$\mu\text{s}$
			$BG = 550\text{ }\mu\text{s}$ , $T_A = -40\text{ }^\circ\text{C}$ to $+105\text{ }^\circ\text{C}$ $V_{DD} = 3.0\text{ V}$ to $5.5\text{ V}$	--	676.9	1033.8	$\mu\text{s}$
			$BG = 100\text{ }\mu\text{s}$ , $T_A = +25\text{ }^\circ\text{C}$ $V_{DD} = 3.0\text{ V}$ to $5.5\text{ V}$	--	133.0	181.2	$\mu\text{s}$
			$BG = 100\text{ }\mu\text{s}$ , $T_A = -40\text{ }^\circ\text{C}$ to $+105\text{ }^\circ\text{C}$ $V_{DD} = 3.0\text{ V}$ to $5.5\text{ V}$	--	134.4	207.0	$\mu\text{s}$

Parameter	Symbol	Note	Conditions	Min	Typ	Max	Unit		
Built-in Hysteresis	V <sub>HYS</sub>	V <sub>HYS</sub> = 25 mV V <sub>IL</sub> = V <sub>in</sub> - V <sub>HYS</sub> /2 V <sub>IH</sub> = V <sub>in</sub> + V <sub>HYS</sub> /2	LB - Enabled, T <sub>A</sub> = +25 °C	7.32	--	35.5	mV		
			LB - Disabled, T <sub>A</sub> = +25 °C	10.0	--	38.5	mV		
		V <sub>HYS</sub> = 50 mV V <sub>IL</sub> = V <sub>in</sub> - V <sub>HYS</sub> V <sub>IH</sub> = V <sub>HYS</sub>	LB - Enabled, T <sub>A</sub> = +25 °C	42.9	--	57.8	mV		
			LB - Disabled, T <sub>A</sub> = +25 °C	44.2	--	54.3	mV		
		V <sub>HYS</sub> = 200 mV V <sub>IL</sub> = V <sub>in</sub> - V <sub>HYS</sub> V <sub>IH</sub> = V <sub>HYS</sub>	LB - Enabled, T <sub>A</sub> = +25 °C	192.7	--	208.7	mV		
			LB - Disabled, T <sub>A</sub> = +25 °C	193.3	--	204.8	mV		
		V <sub>HYS</sub> = 25 mV V <sub>IL</sub> = V <sub>in</sub> - V <sub>HYS</sub> /2 V <sub>IH</sub> = V <sub>in</sub> + V <sub>HYS</sub> /2	LB - Enabled T <sub>A</sub> = -40 °C to +105 °C	23.745	--	44.435	mV		
			LB - Disabled T <sub>A</sub> = -40 °C to +105 °C	3.691	--	45.604	mV		
		V <sub>HYS</sub> = 50 mV V <sub>IL</sub> = V <sub>in</sub> - V <sub>HYS</sub> V <sub>IH</sub> = V <sub>HYS</sub>	LB - Enabled T <sub>A</sub> = -40 °C to +105 °C	48.408	--	51.004	mV		
			LB - Disabled T <sub>A</sub> = -40 °C to +105 °C	40.130	--	54.622	mV		
		V <sub>HYS</sub> = 200 mV V <sub>IL</sub> = V <sub>in</sub> - V <sub>HYS</sub> V <sub>IH</sub> = V <sub>HYS</sub>	LB - Enabled T <sub>A</sub> = -40 °C to +105 °C	198.131	--	201.066	mV		
			LB - Disabled T <sub>A</sub> = -40 °C to +105 °C	189.278	--	203.599	mV		
		Series Input Resistance	R <sub>sin</sub>	Gain = 1x		--	100.0	--	MΩ
				Gain = 0.5x		--	1.0	--	MΩ
Gain = 0.33x				--	0.8	--	MΩ		
Gain = 0.25x				--	1.0	--	MΩ		
Propagation Delay, Response Time	PROP	Low Bandwidth - Enable, Gain = 1, V <sub>DD</sub> = 1.71 V to 3.3 V, Overdrive = 10 mV, V <sub>REF</sub> = 50 mV	Low to High, T <sub>A</sub> = -40 °C to +105 °C	--	20.14	224.67	μs		
			High to Low, T <sub>A</sub> = -40 °C to +105 °C	--	21.40	228.61	μs		
		Low Bandwidth - Enable, Gain = 1, V <sub>DD</sub> = 1.71 V to 3.3 V, Overdrive = 100 mV, V <sub>REF</sub> = 50 mV	Low to High, T <sub>A</sub> = -40 °C to +105 °C	--	7.11	86.83	μs		
			High to Low, T <sub>A</sub> = -40 °C to +105 °C	--	8.59	98.99	μs		
		Low Bandwidth - Disable, Gain = 1, V <sub>DD</sub> = 1.71 V to 3.3 V, Overdrive = 10 mV, V <sub>REF</sub> = 50 mV	Low to High, T <sub>A</sub> = -40 °C to +105 °C	--	1.14	12.06	μs		
			High to Low, T <sub>A</sub> = -40 °C to +105 °C	--	1.14	4.84	μs		

Parameter	Symbol	Note	Conditions	Min	Typ	Max	Unit
Propagation Delay, Response Time	PROP	Low Bandwidth - Disable, Gain = 1, V <sub>DD</sub> = 1.71 V to 3.3 V, Overdrive = 100 mV, V <sub>REF</sub> = 50 mV	Low to High, T <sub>A</sub> = -40 °C to +105 °C	--	0.46	1.79	μs
			High to Low, T <sub>A</sub> = -40 °C to +105 °C	--	0.55	2.60	μs
		Low Bandwidth - Enable, Gain = 1, V <sub>DD</sub> = 3.3 V to 5.5 V, Overdrive = 10 mV, V <sub>REF</sub> = 50 mV	Low to High, T <sub>A</sub> = -40 °C to +105 °C	--	13.91	84.35	μs
			High to Low, T <sub>A</sub> = -40 °C to +105 °C	--	15.36	90.15	μs
		Low Bandwidth - Enable, Gain = 1, V <sub>DD</sub> = 3.3 V to 5.5 V, Overdrive = 100 mV, V <sub>REF</sub> = 50 mV	Low to High, T <sub>A</sub> = -40 °C to +105 °C	--	4.97	31.60	μs
			High to Low, T <sub>A</sub> = -40 °C to +105 °C	--	5.98	39.68	μs
		Low Bandwidth - Disable, Gain = 1, V <sub>DD</sub> = 3.3 V to 5.5 V, Overdrive = 10 mV, V <sub>REF</sub> = 50 mV	Low to High, T <sub>A</sub> = -40 °C to +105 °C	--	0.91	1.98	μs
			High to Low, T <sub>A</sub> = -40 °C to +105 °C	--	1.01	1.58	μs
		Low Bandwidth - Disable, Gain = 1, V <sub>DD</sub> = 3.3 V to 5.5 V, Overdrive = 100 mV, V <sub>REF</sub> = 50 mV	Low to High, T <sub>A</sub> = -40 °C to +105 °C	--	0.37	1.14	μs
			High to Low, T <sub>A</sub> = -40 °C to +105 °C	--	0.45	0.81	μs
		Low Bandwidth - Enable, Gain = 1, V <sub>DD</sub> = 1.71 V to 3.3 V, Overdrive = 10 mV, V <sub>REF</sub> = 250 mV	Low to High, T <sub>A</sub> = -40 °C to +105 °C	--	20.28	228.06	μs
			High to Low, T <sub>A</sub> = -40 °C to +105 °C	--	21.67	232.39	μs
		Low Bandwidth - Enable, Gain = 1, V <sub>DD</sub> = 1.71 V to 3.3 V, Overdrive = 100 mV, V <sub>REF</sub> = 250 mV	Low to High, T <sub>A</sub> = -40 °C to +105 °C	--	7.19	89.05	μs
			High to Low, T <sub>A</sub> = -40 °C to +105 °C	--	6.39	78.66	μs
		Low Bandwidth - Disable, Gain = 1, V <sub>DD</sub> = 1.71 V to 3.3 V, Overdrive = 10 mV, V <sub>REF</sub> = 250 mV	Low to High, T <sub>A</sub> = -40 °C to +105 °C	--	1.17	2.01	μs
			High to Low, T <sub>A</sub> = -40 °C to +105 °C	--	1.25	2.06	μs
		Low Bandwidth - Disable, Gain = 1, V <sub>DD</sub> = 1.71 V to 3.3 V, Overdrive = 100 mV, V <sub>REF</sub> = 250 mV	Low to High, T <sub>A</sub> = -40 °C to +105 °C	--	0.41	0.68	μs
			High to Low, T <sub>A</sub> = -40 °C to +105 °C	--	0.39	0.75	μs
		Low Bandwidth - Enable, Gain = 1, V <sub>DD</sub> = 3.3 V to 5.5 V, Overdrive = 10 mV, V <sub>REF</sub> = 250 mV	Low to High, T <sub>A</sub> = -40 °C to +105 °C	--	14.19	84.96	μs
			High to Low, T <sub>A</sub> = -40 °C to +105 °C	--	15.66	91.88	μs

Parameter	Symbol	Note	Conditions	Min	Typ	Max	Unit
Propagation Delay, Response Time	PROP	Low Bandwidth - Enable, Gain = 1, V <sub>DD</sub> = 3.3 V to 5.5 V, Overdrive = 100 mV, V <sub>REF</sub> = 250 mV	Low to High, T <sub>A</sub> = -40 °C to +105 °C	--	5.03	32.06	μs
			High to Low, T <sub>A</sub> = -40 °C to +105 °C	--	4.51	30.70	μs
		Low Bandwidth - Disable, Gain = 1, V <sub>DD</sub> = 3.3 V to 5.5 V, Overdrive = 10 mV, V <sub>REF</sub> = 250 mV	Low to High, T <sub>A</sub> = -40 °C to +105 °C	--	1.10	1.82	μs
			High to Low, T <sub>A</sub> = -40 °C to +105 °C	--	1.20	1.94	μs
		Low Bandwidth - Disable, Gain = 1, V <sub>DD</sub> = 3.3 V to 5.5 V, Overdrive = 100 mV, V <sub>REF</sub> = 250 mV	Low to High, T <sub>A</sub> = -40 °C to +105 °C	--	0.35	0.55	μs
			High to Low, T <sub>A</sub> = -40 °C to +105 °C	--	0.33	0.64	μs
		Low Bandwidth - Enable, Gain = 1, V <sub>DD</sub> = 1.71 V to 3.3 V, Overdrive = 10 mV, V <sub>REF</sub> = 600 mV	Low to High, T <sub>A</sub> = -40 °C to +105 °C	--	20.69	232.09	μs
			High to Low, T <sub>A</sub> = -40 °C to +105 °C	--	22.19	241.46	μs
		Low Bandwidth - Enable, Gain = 1, V <sub>DD</sub> = 1.71 V to 3.3 V, Overdrive = 100 mV, V <sub>REF</sub> = 600 mV	Low to High, T <sub>A</sub> = -40 °C to +105 °C	--	7.28	90.29	μs
			High to Low, T <sub>A</sub> = -40 °C to +105 °C	--	6.47	79.76	μs
		Low Bandwidth - Disable, Gain = 1, V <sub>DD</sub> = 1.71 V to 3.3 V, Overdrive = 10 mV, V <sub>REF</sub> = 600 mV	Low to High, T <sub>A</sub> = -40 °C to +105 °C	--	1.40	2.85	μs
			High to Low, T <sub>A</sub> = -40 °C to +105 °C	--	1.45	2.56	μs
		Low Bandwidth - Disable, Gain = 1, V <sub>DD</sub> = 1.71 V to 3.3 V, Overdrive = 100 mV, V <sub>REF</sub> = 600 mV	Low to High, T <sub>A</sub> = -40 °C to +105 °C	--	0.41	0.68	μs
			High to Low, T <sub>A</sub> = -40 °C to +105 °C	--	0.37	0.62	μs
		Low Bandwidth - Enable, Gain = 1, V <sub>DD</sub> = 3.3 V to 5.5 V, Overdrive = 10 mV, V <sub>REF</sub> = 600 mV	Low to High, T <sub>A</sub> = -40 °C to +105 °C	--	14.48	86.02	μs
			High to Low, T <sub>A</sub> = -40 °C to +105 °C	--	16.01	93.69	μs
		Low Bandwidth - Enable, Gain = 1, V <sub>DD</sub> = 3.3 V to 5.5 V, Overdrive = 100 mV, V <sub>REF</sub> = 600 mV	Low to High, T <sub>A</sub> = -40 °C to +105 °C	--	5.09	32.43	μs
			High to Low, T <sub>A</sub> = -40 °C to +105 °C	--	4.57	31.06	μs
		Low Bandwidth - Disable, Gain = 1, V <sub>DD</sub> = 3.3 V to 5.5 V, Overdrive = 10 mV, V <sub>REF</sub> = 600 mV	Low to High, T <sub>A</sub> = -40 °C to +105 °C	--	1.34	2.69	μs
			High to Low, T <sub>A</sub> = -40 °C to +105 °C	--	1.40	2.50	μs

Parameter	Symbol	Note	Conditions	Min	Typ	Max	Unit
Propagation Delay, Response Time	PROP	Low Bandwidth - Disable, Gain = 1, $V_{DD} = 3.3\text{ V to }5.5\text{ V}$ , Overdrive = 100 mV, $V_{REF} = 600\text{ mV}$	Low to High, $T_A = -40\text{ }^\circ\text{C to }+105\text{ }^\circ\text{C}$	--	0.35	0.55	$\mu\text{s}$
			High to Low, $T_A = -40\text{ }^\circ\text{C to }+105\text{ }^\circ\text{C}$	--	0.31	0.50	$\mu\text{s}$
		Low Bandwidth - Enable, Gain = 1, $V_{DD} = 1.71\text{ V to }3.3\text{ V}$ , Overdrive = 10 mV, $V_{REF} = 850\text{ mV}$	Low to High, $T_A = -40\text{ }^\circ\text{C to }+105\text{ }^\circ\text{C}$	--	21.07	237.30	$\mu\text{s}$
			High to Low, $T_A = -40\text{ }^\circ\text{C to }+105\text{ }^\circ\text{C}$	--	22.66	244.72	$\mu\text{s}$
		Low Bandwidth - Enable, Gain = 1, $V_{DD} = 1.71\text{ V to }3.3\text{ V}$ , Overdrive = 100 mV, $V_{REF} = 850\text{ mV}$	Low to High, $T_A = -40\text{ }^\circ\text{C to }+105\text{ }^\circ\text{C}$	--	7.38	91.95	$\mu\text{s}$
			High to Low, $T_A = -40\text{ }^\circ\text{C to }+105\text{ }^\circ\text{C}$	--	6.55	81.25	$\mu\text{s}$
		Low Bandwidth - Disable, Gain = 1, $V_{DD} = 1.71\text{ V to }3.3\text{ V}$ , Overdrive = 10 mV, $V_{REF} = 850\text{ mV}$	Low to High, $T_A = -40\text{ }^\circ\text{C to }+105\text{ }^\circ\text{C}$	--	1.46	2.94	$\mu\text{s}$
			High to Low, $T_A = -40\text{ }^\circ\text{C to }+105\text{ }^\circ\text{C}$	--	1.51	2.89	$\mu\text{s}$
		Low Bandwidth - Disable, Gain = 1, $V_{DD} = 1.71\text{ V to }3.3\text{ V}$ , Overdrive = 100 mV, $V_{REF} = 850\text{ mV}$	Low to High, $T_A = -40\text{ }^\circ\text{C to }+105\text{ }^\circ\text{C}$	--	0.42	0.68	$\mu\text{s}$
			High to Low, $T_A = -40\text{ }^\circ\text{C to }+105\text{ }^\circ\text{C}$	--	0.37	0.59	$\mu\text{s}$
		Low Bandwidth - Enable, Gain = 1, $V_{DD} = 3.3\text{ V to }5.5\text{ V}$ , Overdrive = 10 mV, $V_{REF} = 850\text{ mV}$	Low to High, $T_A = -40\text{ }^\circ\text{C to }+105\text{ }^\circ\text{C}$	--	14.69	87.94	$\mu\text{s}$
			High to Low, $T_A = -40\text{ }^\circ\text{C to }+105\text{ }^\circ\text{C}$	--	16.31	95.65	$\mu\text{s}$
		Low Bandwidth - Enable, Gain = 1, $V_{DD} = 3.3\text{ V to }5.5\text{ V}$ , Overdrive = 100 mV, $V_{REF} = 850\text{ mV}$	Low to High, $T_A = -40\text{ }^\circ\text{C to }+105\text{ }^\circ\text{C}$	--	5.14	32.91	$\mu\text{s}$
			High to Low, $T_A = -40\text{ }^\circ\text{C to }+105\text{ }^\circ\text{C}$	--	4.62	31.59	$\mu\text{s}$
		Low Bandwidth - Disable, Gain = 1, $V_{DD} = 3.3\text{ V to }5.5\text{ V}$ , Overdrive = 10 mV, $V_{REF} = 850\text{ mV}$	Low to High, $T_A = -40\text{ }^\circ\text{C to }+105\text{ }^\circ\text{C}$	--	1.36	2.81	$\mu\text{s}$
			High to Low, $T_A = -40\text{ }^\circ\text{C to }+105\text{ }^\circ\text{C}$	--	1.45	2.89	$\mu\text{s}$
		Low Bandwidth - Disable, Gain = 1, $V_{DD} = 3.3\text{ V to }5.5\text{ V}$ , Overdrive = 100 mV, $V_{REF} = 850\text{ mV}$	Low to High, $T_A = -40\text{ }^\circ\text{C to }+105\text{ }^\circ\text{C}$	--	0.35	0.53	$\mu\text{s}$
			High to Low, $T_A = -40\text{ }^\circ\text{C to }+105\text{ }^\circ\text{C}$	--	0.31	0.48	$\mu\text{s}$
		Low Bandwidth - Enable, Gain = 1, $V_{DD} = 1.71\text{ V to }3.3\text{ V}$ , Overdrive = 10 mV, $V_{REF} = 1200\text{ mV}$	Low to High, $T_A = -40\text{ }^\circ\text{C to }+105\text{ }^\circ\text{C}$	--	27.40	1193.10	$\mu\text{s}$
			High to Low, $T_A = -40\text{ }^\circ\text{C to }+105\text{ }^\circ\text{C}$	--	28.14	962.09	$\mu\text{s}$

Parameter	Symbol	Note	Conditions	Min	Typ	Max	Unit		
Propagation Delay, Response Time	PROP	Low Bandwidth - Enable, Gain = 1, $V_{DD} = 1.71\text{ V to }3.3\text{ V}$ , Overdrive = 100 mV, $V_{REF} = 1200\text{ mV}$	Low to High, $T_A = -40\text{ }^\circ\text{C to }+105\text{ }^\circ\text{C}$	--	10.67	683.00	$\mu\text{s}$		
			High to Low, $T_A = -40\text{ }^\circ\text{C to }+105\text{ }^\circ\text{C}$	--	6.98	108.00	$\mu\text{s}$		
		Low Bandwidth - Disable, Gain = 1, $V_{DD} = 1.71\text{ V to }3.3\text{ V}$ , Overdrive = 10 mV, $V_{REF} = 1200\text{ mV}$	Low to High, $T_A = -40\text{ }^\circ\text{C to }+105\text{ }^\circ\text{C}$	--	8.14	1078.16	$\mu\text{s}$		
			High to Low, $T_A = -40\text{ }^\circ\text{C to }+105\text{ }^\circ\text{C}$	--	5.00	748.66	$\mu\text{s}$		
		Low Bandwidth - Disable, Gain = 1, $V_{DD} = 1.71\text{ V to }3.3\text{ V}$ , Overdrive = 100 mV, $V_{REF} = 1200\text{ mV}$	Low to High, $T_A = -40\text{ }^\circ\text{C to }+105\text{ }^\circ\text{C}$	--	4.07	648.33	$\mu\text{s}$		
			High to Low, $T_A = -40\text{ }^\circ\text{C to }+105\text{ }^\circ\text{C}$	--	0.61	27.15	$\mu\text{s}$		
		Low Bandwidth - Enable, Gain = 1, $V_{DD} = 3.3\text{ V to }5.5\text{ V}$ , Overdrive = 10 mV, $V_{REF} = 1200\text{ mV}$	Low to High, $T_A = -40\text{ }^\circ\text{C to }+105\text{ }^\circ\text{C}$	--	15.28	99.83	$\mu\text{s}$		
			High to Low, $T_A = -40\text{ }^\circ\text{C to }+105\text{ }^\circ\text{C}$	--	17.06	105.90	$\mu\text{s}$		
		Low Bandwidth - Enable, Gain = 1, $V_{DD} = 3.3\text{ V to }5.5\text{ V}$ , Overdrive = 100 mV, $V_{REF} = 1200\text{ mV}$	Low to High, $T_A = -40\text{ }^\circ\text{C to }+105\text{ }^\circ\text{C}$	--	5.38	37.46	$\mu\text{s}$		
			High to Low, $T_A = -40\text{ }^\circ\text{C to }+105\text{ }^\circ\text{C}$	--	4.73	32.64	$\mu\text{s}$		
		Low Bandwidth - Disable, Gain = 1, $V_{DD} = 3.3\text{ V to }5.5\text{ V}$ , Overdrive = 10 mV, $V_{REF} = 1200\text{ mV}$	Low to High, $T_A = -40\text{ }^\circ\text{C to }+105\text{ }^\circ\text{C}$	--	1.82	11.85	$\mu\text{s}$		
			High to Low, $T_A = -40\text{ }^\circ\text{C to }+105\text{ }^\circ\text{C}$	--	1.77	10.13	$\mu\text{s}$		
		Low Bandwidth - Disable, Gain = 1, $V_{DD} = 3.3\text{ V to }5.5\text{ V}$ , Overdrive = 100 mV, $V_{REF} = 1200\text{ mV}$	Low to High, $T_A = -40\text{ }^\circ\text{C to }+105\text{ }^\circ\text{C}$	--	0.63	6.60	$\mu\text{s}$		
			High to Low, $T_A = -40\text{ }^\circ\text{C to }+105\text{ }^\circ\text{C}$	--	0.34	0.78	$\mu\text{s}$		
		Gain error (including threshold and internal $V_{REF}$ error), $T_A = -40\text{ }^\circ\text{C to }+105\text{ }^\circ\text{C}$	G	G = 1, $V_{DD} = 1.71\text{ V}$	$V_{REF} = 50\text{ mV to }1200\text{ mV}$	--	1	--	%
				G = 1, $V_{DD} = 3.3\text{ V}$		--	1	--	
G = 1, $V_{DD} = 5.5\text{ V}$	--			1		--			
G = 0.5, $V_{DD} = 1.71\text{ V}$	-6.323			--		9.895			
G = 0.5, $V_{DD} = 3.3\text{ V}$	-6.110			--		7.751			
G = 0.5, $V_{DD} = 5.5\text{ V}$	-6.369			--		7.715			
G = 0.33, $V_{DD} = 1.71\text{ V}$	-5.028			--		11.334			
G = 0.33, $V_{DD} = 3.3\text{ V}$	-3.677			--		6.273			
G = 0.33, $V_{DD} = 5.5\text{ V}$	-5.201			--		7.370			
G = 0.25, $V_{DD} = 1.71\text{ V}$	-5.940			--		7.709			
G = 0.25, $V_{DD} = 3.3\text{ V}$	-5.910			--		7.353			
G = 0.25, $V_{DD} = 5.5\text{ V}$	-5.793			--		4.990			

Parameter	Symbol	Note	Conditions	Min	Typ	Max	Unit
Internal $V_{REF}$ error, $V_{REF} = 1200\text{ mV}$	$V_{REF}$	$V_{DD} = 1.8\text{ V} \pm 5\%$	$T_A = +25\text{ }^\circ\text{C}$	-0.25	--	0.50	%
			$T_A = -40\text{ }^\circ\text{C to } +105\text{ }^\circ\text{C}$	-2.25	--	0.67	
		$V_{DD} = 3.3\text{ V} \pm 10\%$	$T_A = +25\text{ }^\circ\text{C}$	-0.33	--	0.42	
			$T_A = -40\text{ }^\circ\text{C to } +105\text{ }^\circ\text{C}$	-2.50	--	0.58	
		$V_{DD} = 5.0\text{ V} \pm 10\%$	$T_A = +25\text{ }^\circ\text{C}$	-0.50	--	0.33	
			$T_A = -40\text{ }^\circ\text{C to } +105\text{ }^\circ\text{C}$	-2.08	--	0.50	
Internal $V_{REF}$ error, $V_{REF} = 1000\text{ mV}$		$V_{DD} = 1.8\text{ V} \pm 5\%$	$T_A = +25\text{ }^\circ\text{C}$	-0.10	--	0.70	
			$T_A = -40\text{ }^\circ\text{C to } +105\text{ }^\circ\text{C}$	-7.30	--	0.80	
		$V_{DD} = 3.3\text{ V} \pm 10\%$	$T_A = +25\text{ }^\circ\text{C}$	-0.20	--	0.60	
			$T_A = -40\text{ }^\circ\text{C to } +105\text{ }^\circ\text{C}$	-2.10	--	0.70	
		$V_{DD} = 5.0\text{ V} \pm 10\%$	$T_A = +25\text{ }^\circ\text{C}$	-0.40	--	0.50	
			$T_A = -40\text{ }^\circ\text{C to } +105\text{ }^\circ\text{C}$	-1.60	--	0.60	
Internal $V_{REF}$ error, $V_{REF} = 500\text{ mV}$	$V_{DD} = 1.8\text{ V} \pm 5\%$	$T_A = +25\text{ }^\circ\text{C}$	-0.40	--	0.60		
		$T_A = -40\text{ }^\circ\text{C to } +105\text{ }^\circ\text{C}$	-3.00	--	0.80		
	$V_{DD} = 3.3\text{ V} \pm 10\%$	$T_A = +25\text{ }^\circ\text{C}$	-0.60	--	0.40		
		$T_A = -40\text{ }^\circ\text{C to } +105\text{ }^\circ\text{C}$	-2.60	--	0.60		
	$V_{DD} = 5.0\text{ V} \pm 10\%$	$T_A = +25\text{ }^\circ\text{C}$	-0.60	--	0.40		
		$T_A = -40\text{ }^\circ\text{C to } +105\text{ }^\circ\text{C}$	-2.20	--	0.60		

## 4. User Programmability

Non-volatile memory (NVM) is used to configure the SLG46536-E's connection matrix routing and macrocells. The NVM is One Time Programmable (OTP). However, Renesas's GreenPAK development tools can be used to configure the connection matrix and macrocells, without programming the NVM, to allow on-chip emulation. This configuration will remain active on the device as long as it remains powered and can be re-written as needed to facilitate rapid design changes.

When a design is ready for in-circuit testing, the same GreenPAK development tools can be used to program the NVM and create samples for small quantity builds. Once the NVM is programmed, the device will retain this configuration for the duration of its lifetime.

Once the design is finalized, the design file can be forwarded to Renesas to integrate into the production process.

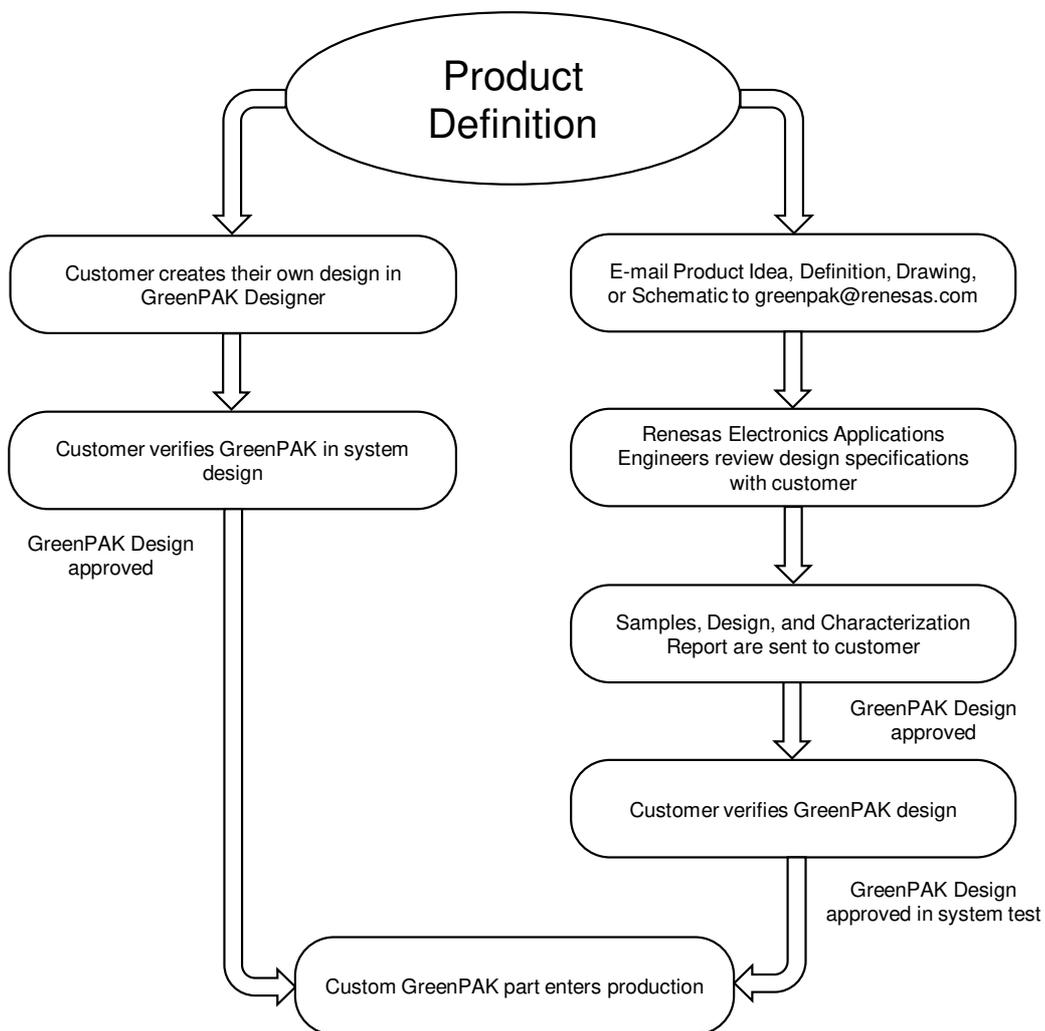


Figure 3. Steps to Create a Custom GreenPAK Device

## 5. Input/Output Pins

The SLG46536-E has eleven GPIO pins which can function as either a user defined Input or Output, as well as serving as a special function and one GPI Pin.

### 5.1 Input Modes

Each IO pin can be configured as a digital input pin with/without buffered Schmitt Trigger, or can also be configured as a low voltage digital input. Pins 4, 5, 8 and 10 can also be configured to serve as analog inputs to the on-chip comparators.

### 5.2 Output Modes

Pins 3, 4, 5, 6, 7, 8, 10, 11, 12, 13 and 14 can all be configured as digital output pins.

### 5.3 Pull-Up/Down Resistors

All IO pins have the option for user selectable resistors connected to the input structure. The selectable values on these resistors are 10 kΩ, 100 kΩ and 1 MΩ. In the case of Pin 2, the resistors are fixed to a pull-down configuration. In the case of all other IO pins, the internal resistors can be configured as either pull-up or pull-downs.

### 5.4 GPI Structure

#### 5.4.1 GPI Structure (for Pin 2)

Input Mode [1:0]  
 00: Digital In without Schmitt Trigger, wosmt\_en = 1, OE = 0  
 01: Digital In with Schmitt Trigger, smt\_en = 1, OE = 0  
 10: Low Voltage Digital In mode, lv\_en = 1, OE = 0  
 11: Reserved

Note 1: OE cannot be selected by user.  
 Note 2: OE is Matrix output, Digital In is Matrix input.

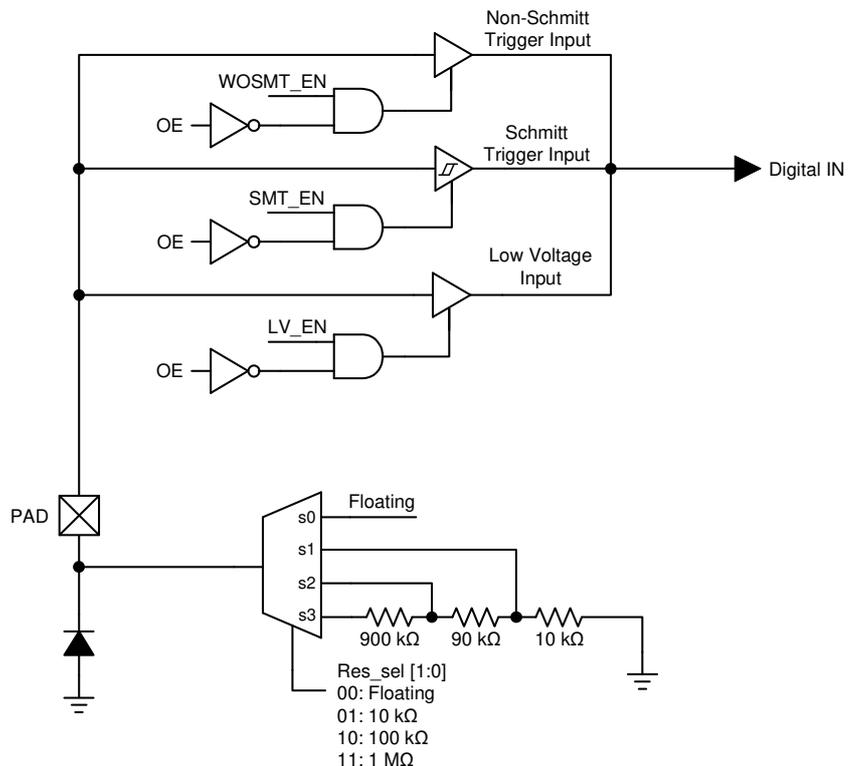


Figure 4. Pin 2 GPI Structure Diagram

## 5.5 Matrix OE IO Structure

### 5.5.1 Matrix OE IO Structure (for Pins 5, 11, 12)

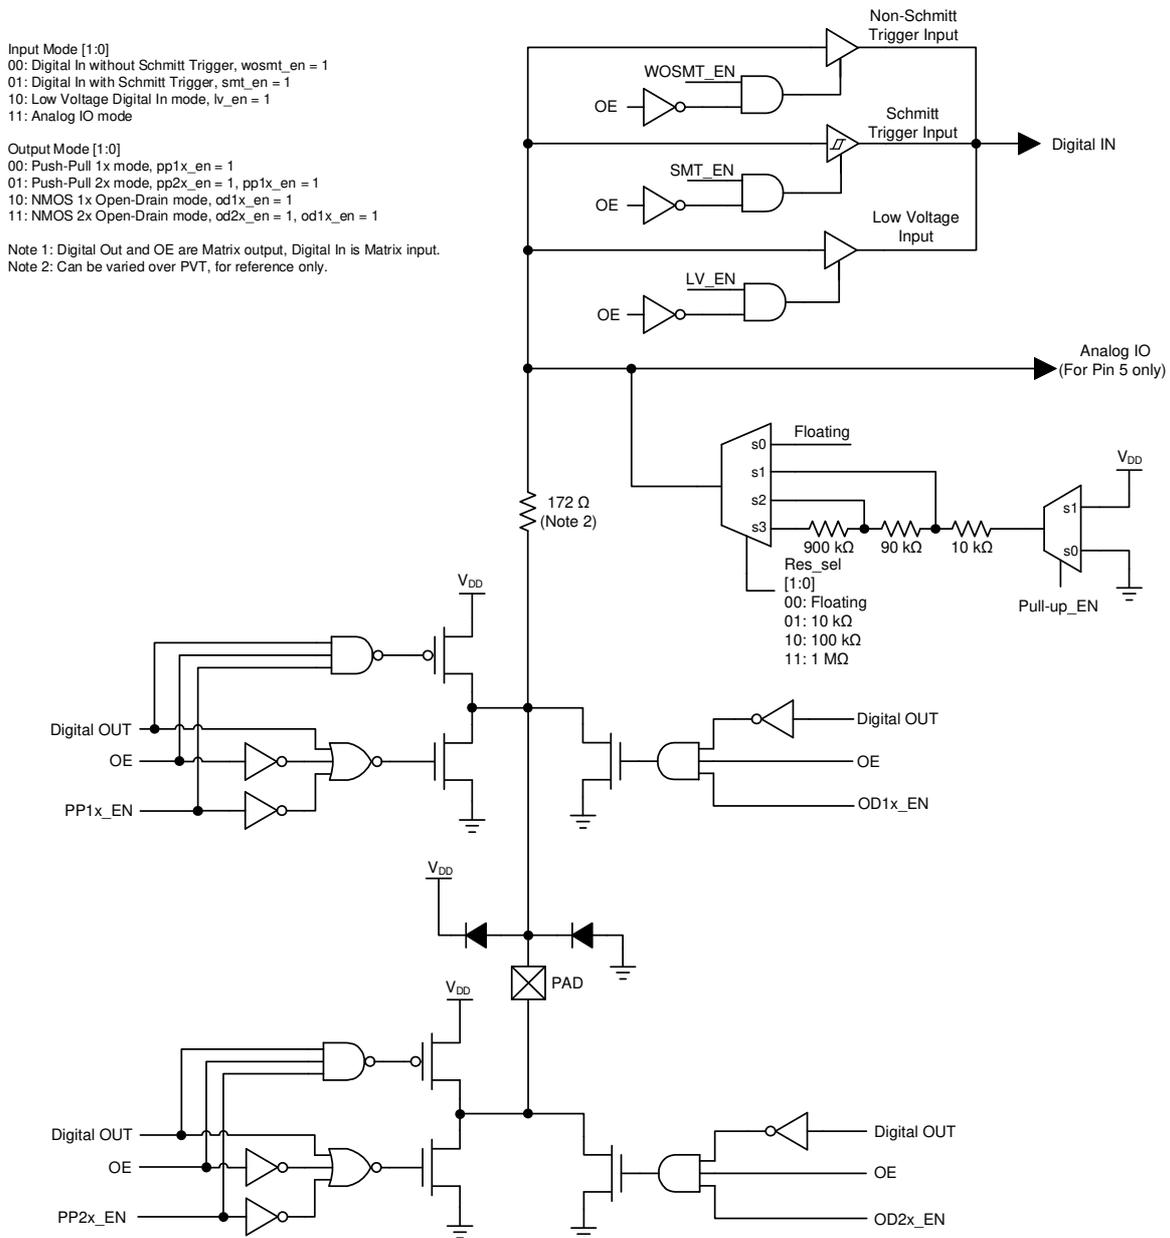


Figure 5. Matrix OE IO Structure Diagram

### 5.5.2 Matrix OE IO Structure (for Pins 6 and 7)

IO6, IO7 Mode [2:0]  
 000: Digital Input without Schmitt Trigger  
 001: Digital Input with Schmitt Trigger  
 010: Low Voltage Digital Input  
 011: Reserved  
 100: Reserved  
 101: Open Drain NMOS  
 110: Reserved  
 111: Reserved

Note1: Digital Out and OE are Matrix output, Digital In is Matrix input  
 Note2: When IO6 and IO7 are configured as I<sup>2</sup>C SCL and SDA output pins, they always operate in Open-Drain 1x NMOS mode

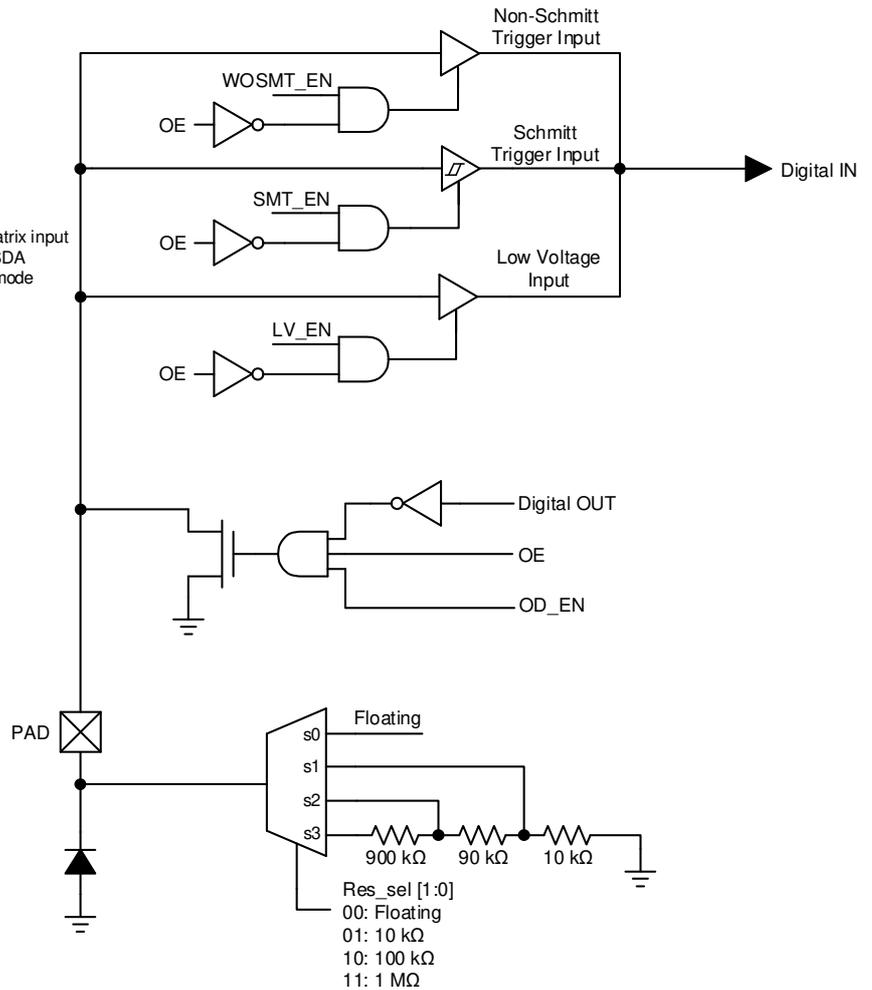


Figure 6. Matrix OE IO Structure Diagram

### 5.5.3 Matrix OE 4x Drive Structure (for Pin 8)

Input Mode [1:0]  
 00: Digital In without Schmitt Trigger, wosmt\_en = 1  
 01: Digital In with Schmitt Trigger, smt\_en = 1  
 10: Low Voltage Digital In mode, lv\_en = 1  
 11: Analog IO mode

Output Mode [1:0]  
 00: Push-Pull 1x mode, pp1x\_en = 1  
 01: Push-Pull 2x mode, pp2x\_en = 1, pp1x\_en = 1  
 10: NMOS Open-Drain 1x mode, od1x\_en = 1, odn\_en = 1  
 11: NMOS Open-Drain 2x mode, od2x\_en = 1, od1x\_en = 1, odn\_en = 1

Note 1: Digital Out and OE are Matrix output, Digital In is Matrix input.  
 Note 2: Can be varied over PVT, for reference only.

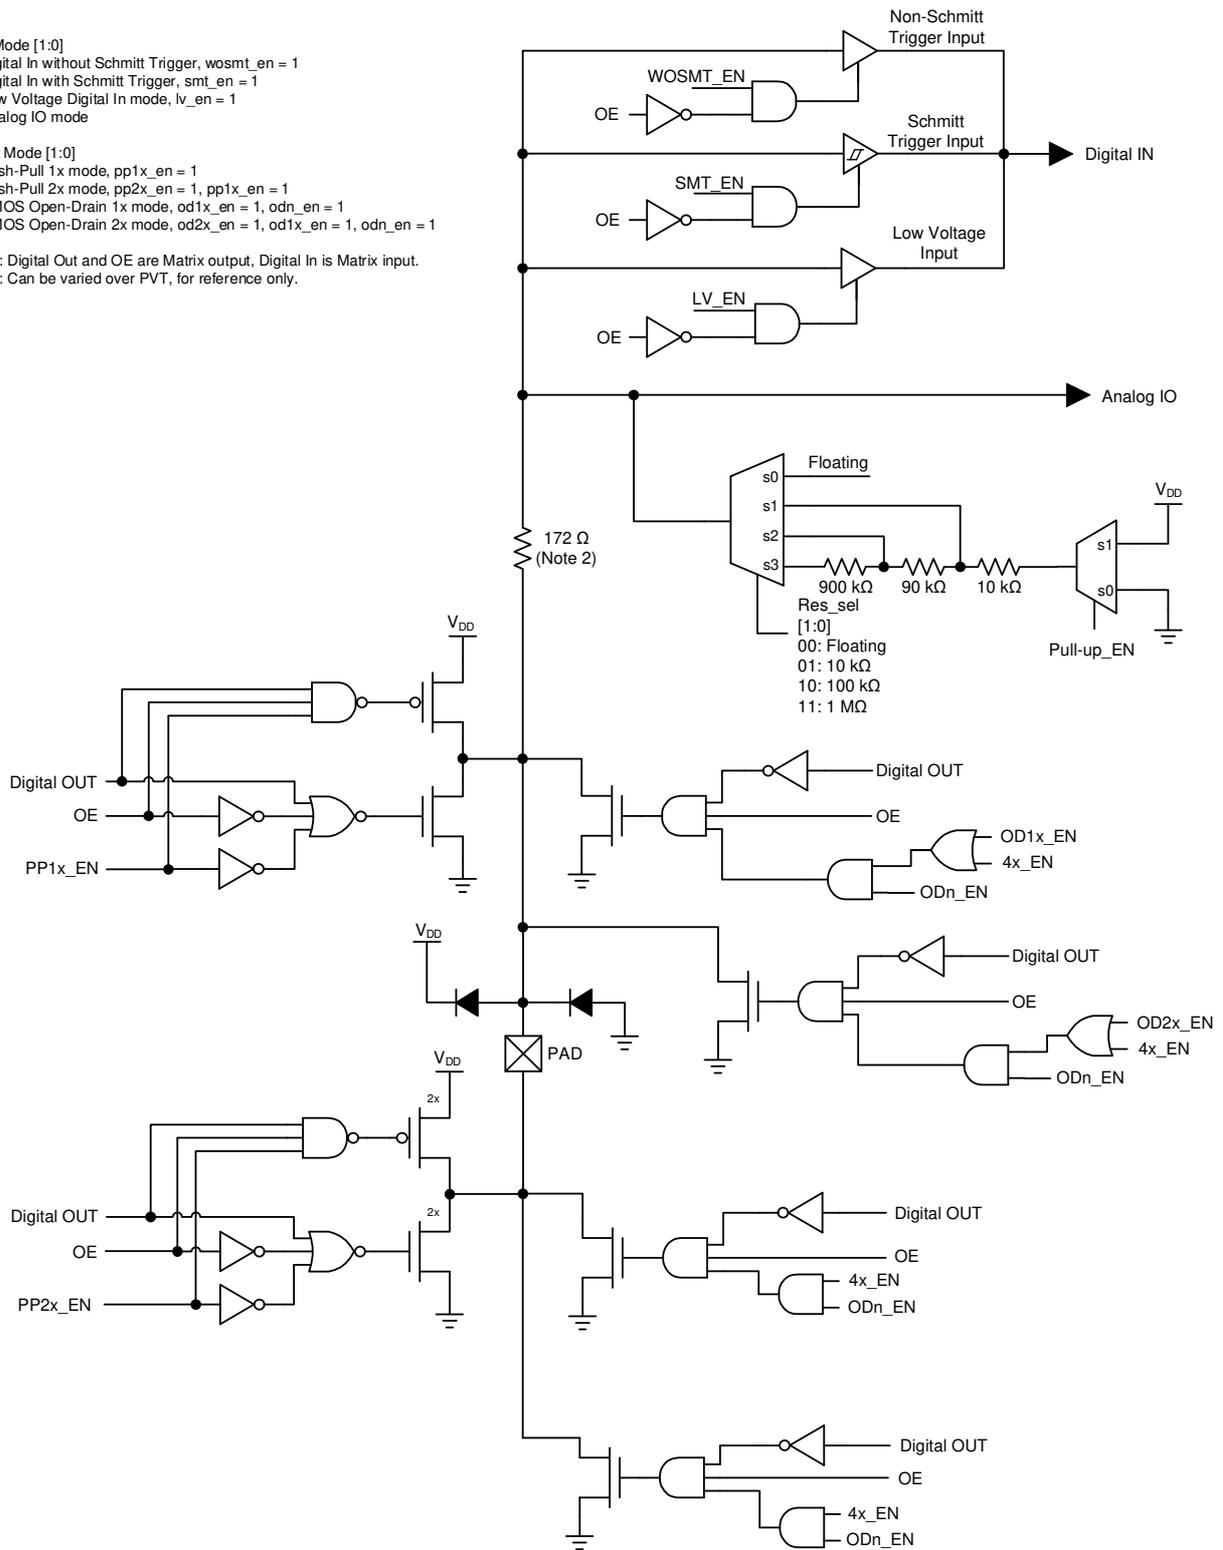


Figure 7. Matrix OE IO 4x Drive Structure Diagram

### 5.5.4 Matrix OE 4x Drive Structure (for Pin 10)

Mode [2:0]  
 000: Digital In without Schmitt Trigger, wosmt\_en = 1, OE = 0  
 001: Digital In with Schmitt Trigger, smt\_en = 1, OE = 0  
 010: Low Voltage Digital In mode, lv\_en = 1, OE = 0  
 011: Analog IO mode  
 100: Push-Pull mode, pp1x\_en = 1, OE = 1  
 101: NMOS Open-Drain mode, odn\_en = 1, OE = 1  
 110: PMOS Open-Drain mode, odp\_en = 1, OE = 1  
 111: Analog IO and NMOS Open-Drain mode, odn\_en = 1, AIO\_en = 1

Note 1: OE cannot be selected by user.  
 Note 2: Digital Out and OE are Matrix output, Digital In is Matrix input.  
 Note 3: Can be varied over PVT, for reference only.

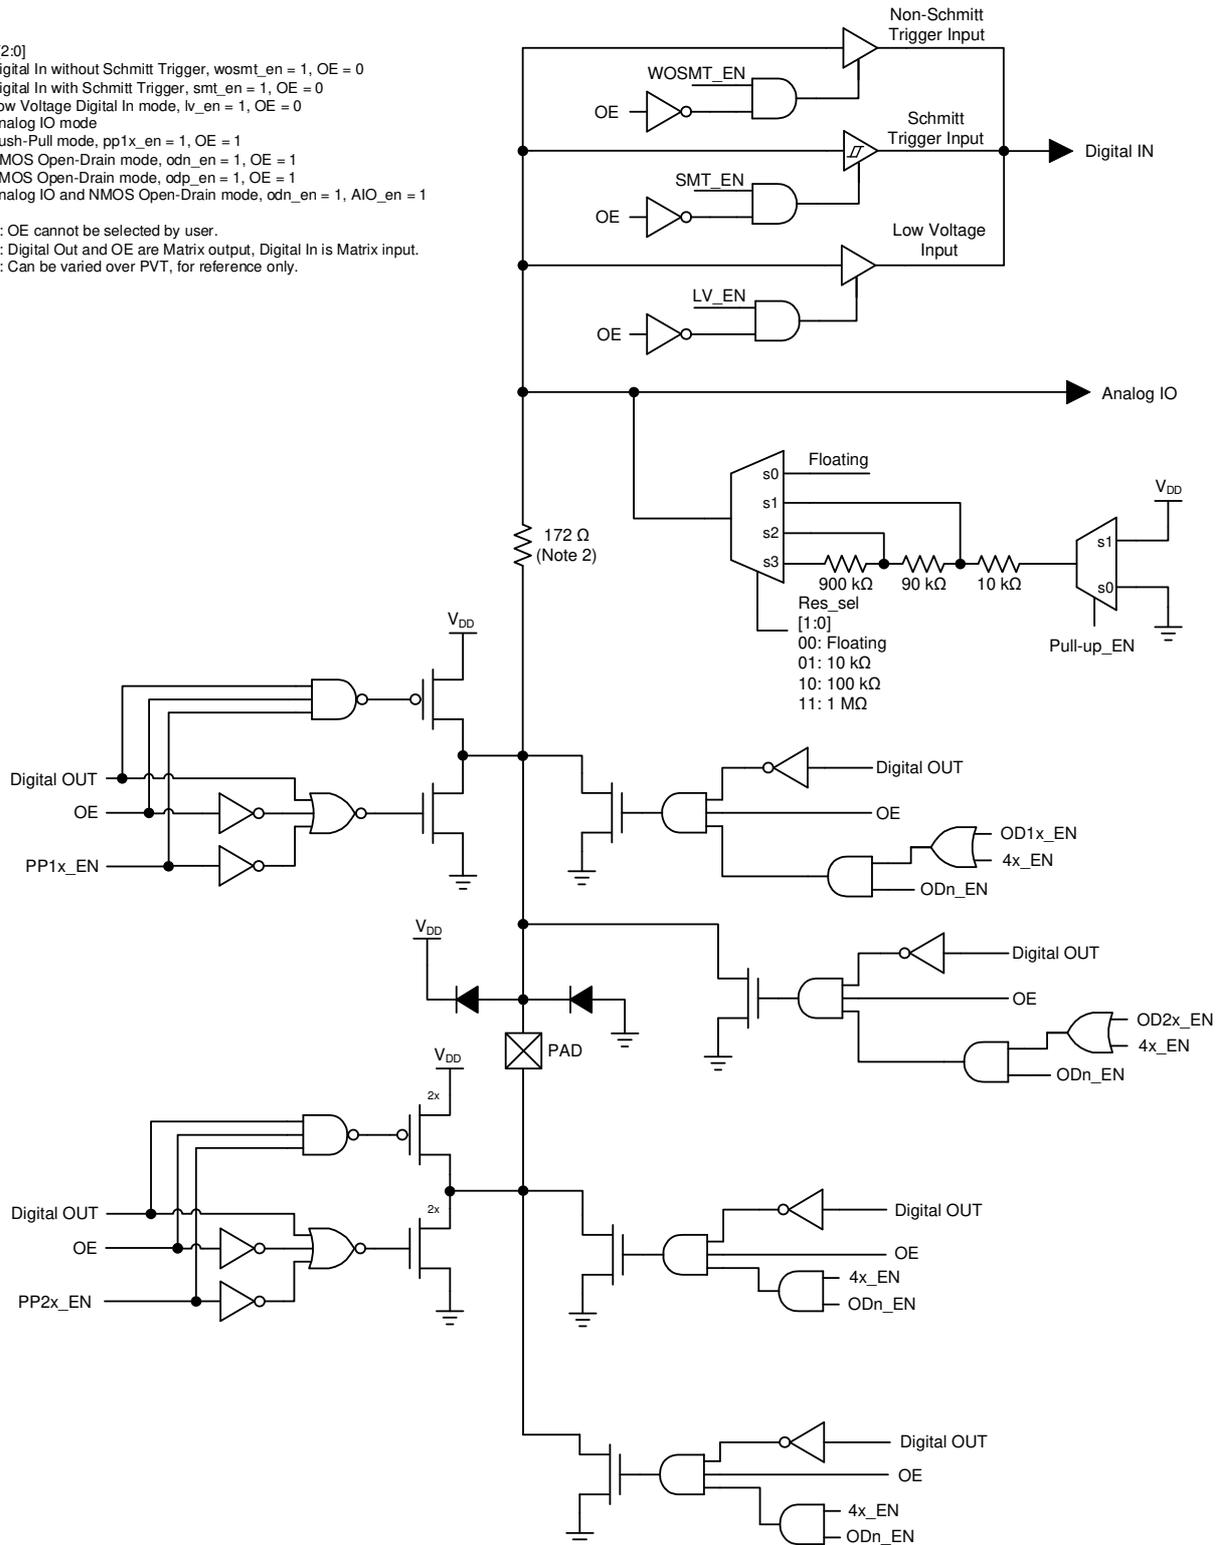


Figure 8. Matrix OE IO 4x Drive Structure Diagram

## 5.6 IO Structure

### 5.6.1 IO Structure (for Pins 3, 4, 13 and 14)

Mode [2:0]  
 000: Digital In without Schmitt Trigger, wosmt\_en = 1, OE = 0  
 001: Digital In with Schmitt Trigger, smt\_en = 1, OE = 0  
 010: Low Voltage Digital In mode, lv\_en = 1, OE = 0  
 011: Analog IO mode  
 100: Push-Pull mode, pp\_en = 1, OE = 1  
 101: NMOS Open-Drain mode, odn\_en = 1, OE = 1  
 110: PMOS Open-Drain mode, odp\_en = 1, OE = 1  
 111: Analog IO and NMOS Open-Drain mode, odn\_en = 1 and AIO\_en = 1

Note 1: OE cannot be selected by user and is controlled by register.  
 Note 2: Can be varied over PVT, for reference only.

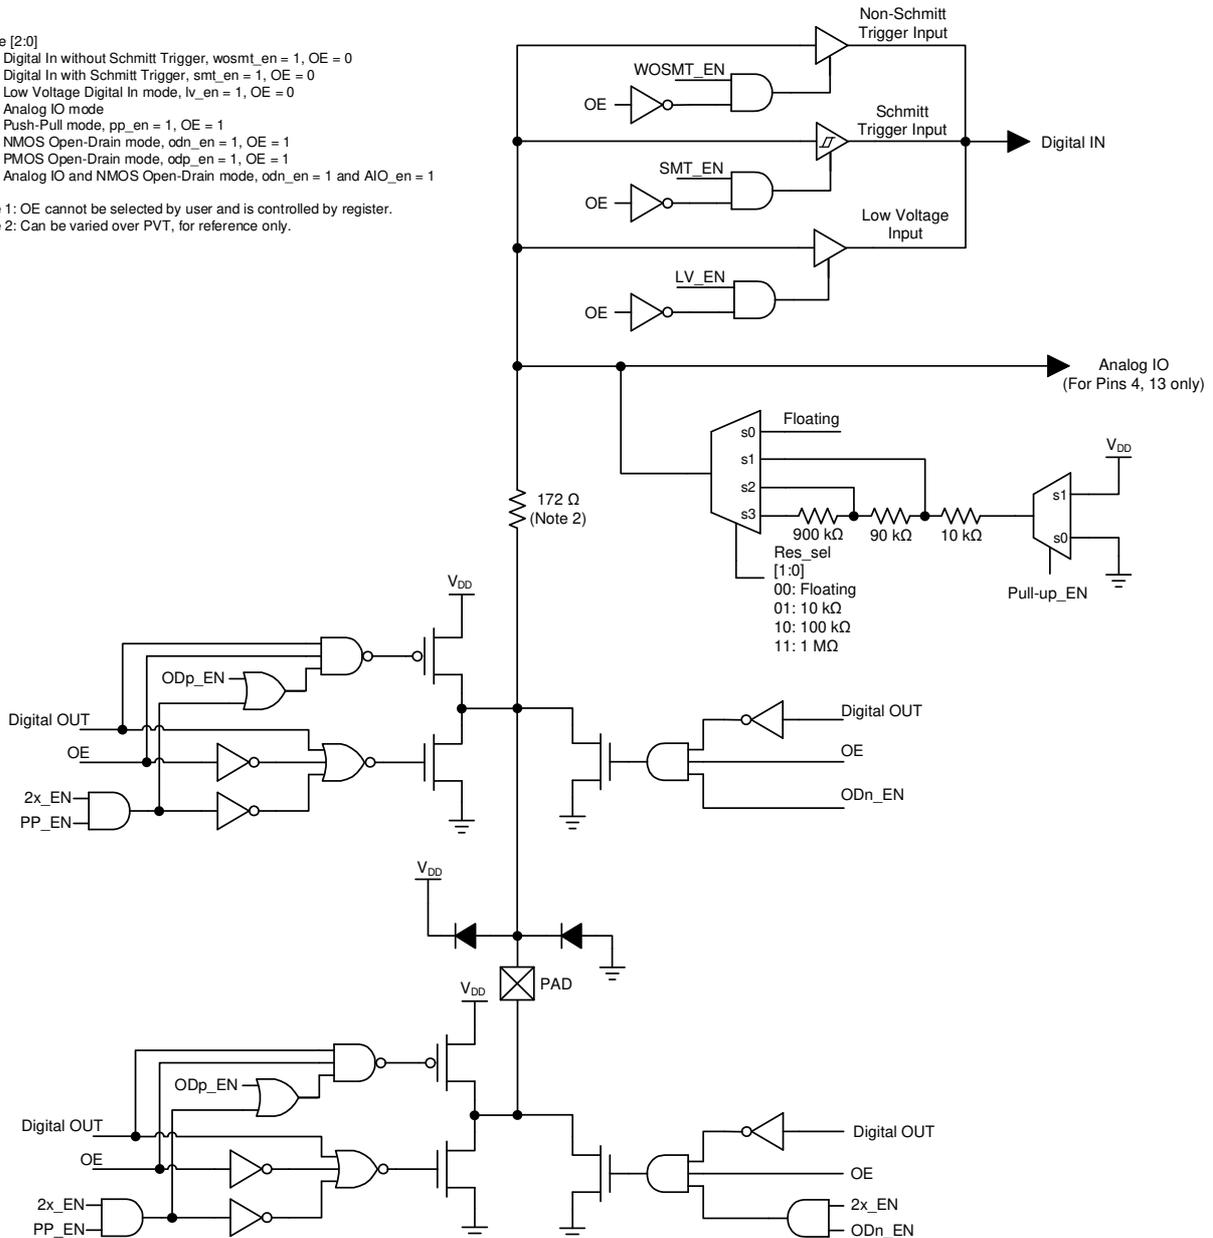


Figure 9. IO Structure Diagram

## 6. Connection Matrix

The Connection Matrix in the SLG46536-E is used to create the internal routing for internal functional macrocells of the device once it is programmed. The registers are programmed from the one-time NVM cell during Test Mode Operation. The output of each functional macrocell within the SLG46536-E has a specific digital bit code assigned to it that is either set to active “High” or inactive “Low” based on the design that is created. Once the 2048 register bits within the SLG46536-E are programmed a fully custom circuit will be created.

The Connection Matrix has 64 inputs and 110 outputs. Each of the 64 inputs to the Connection Matrix is hard-wired to the digital output of a particular source macrocell, including IO pins, LUTs, analog comparators, other digital resources, such as V<sub>DD</sub> and GND. The input to a digital macrocell uses a 6-bit register to select one of these 64 input lines.

For a complete list of the SLG46536-E’s register table, see section 16. Register Definitions.

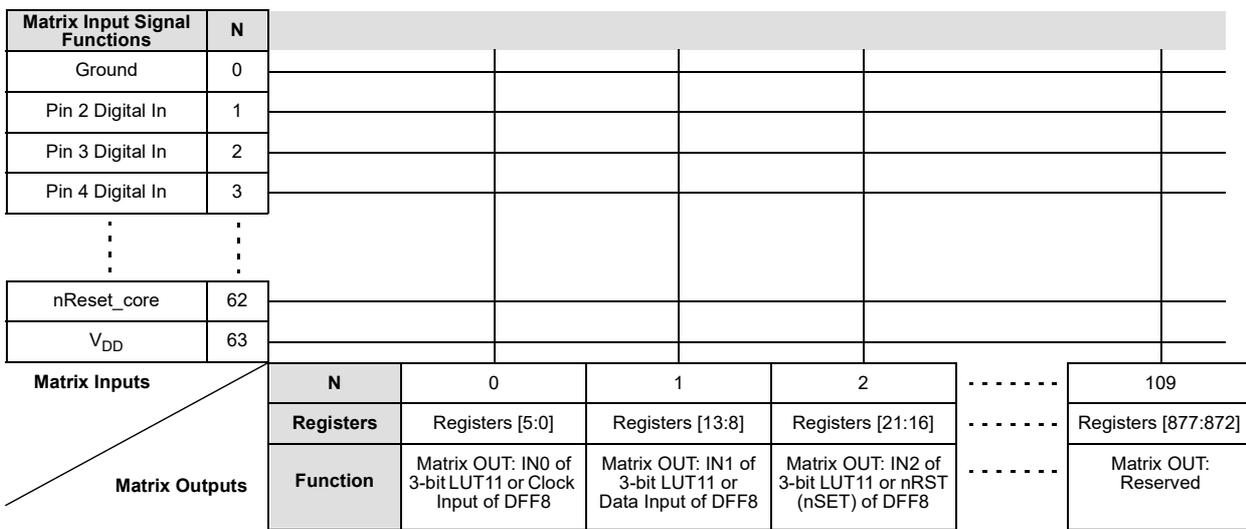


Figure 10. Connection Matrix

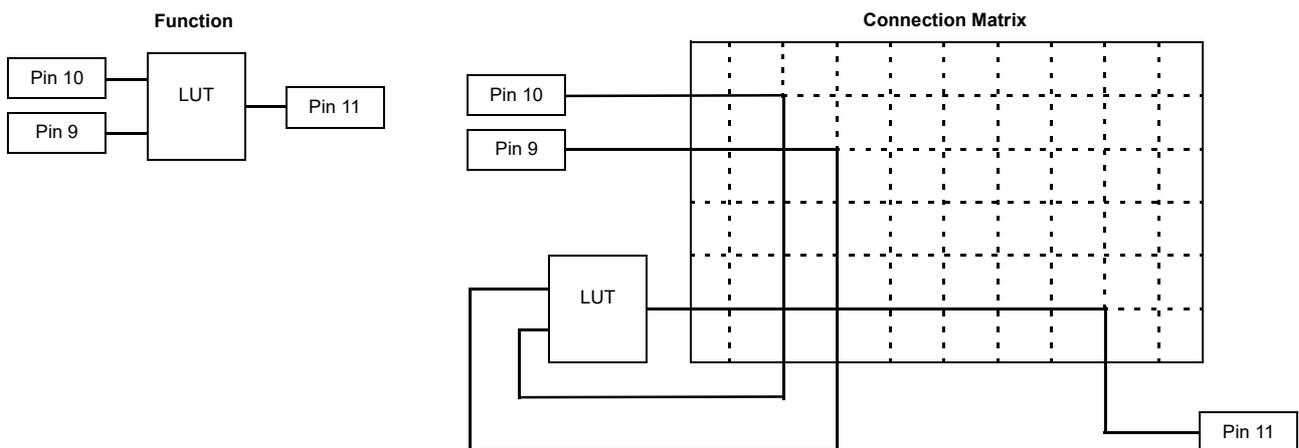


Figure 11. Connection Matrix Example

## 6.1 Matrix Input Table

Table 4. Matrix Input Table

Matrix Input Number	Matrix Input Signal Function	Matrix Decode					
		5	4	3	2	1	0
0	GND	0	0	0	0	0	0
1	Pin 2 Digital Input	0	0	0	0	0	1
2	Reserved	0	0	0	0	1	0
3	Pin 3 Digital Input	0	0	0	0	1	1
4	Reserved	0	0	0	1	0	0
5	Pin 4 Digital Input	0	0	0	1	0	1
6	Pin 5 Digital Input	0	0	0	1	1	0
7	Pin 8 Digital Input	0	0	0	1	1	1
8	2-bit LUT0/DFF0 Output	0	0	1	0	0	0
9	2-bit LUT1/DFF1 Output	0	0	1	0	0	1
10	2-bit LUT2/DFF2 Output	0	0	1	0	1	0
11	2-bit LUT3/PGen Output	0	0	1	0	1	1
12	3-bit LUT0/DFF3 Output	0	0	1	1	0	0
13	3-bit LUT1/DFF4 Output	0	0	1	1	0	1
14	3-bit LUT2/DFF5 Output	0	0	1	1	1	0
15	3-bit LUT3/DFF6 Output	0	0	1	1	1	1
16	3-bit LUT4/DFF7 Output	0	1	0	0	0	0
17	3-bit LUT5/CNT_DLY2(8bit) Output	0	1	0	0	0	1
18	3-bit LUT6/CNT_DLY3(8bit) Output	0	1	0	0	1	0
19	3-bit LUT7/CNT_DLY4(8bit) Output	0	1	0	0	1	1
20	3-bit LUT8/CNT_DLY5(8bit) Output	0	1	0	1	0	0
21	3-bit LUT9/CNT_DLY6(8bit) Output	0	1	0	1	0	1
22	4-bit LUT0/CNT_DLY0(16bit) Output	0	1	0	1	1	0
23	4-bit LUT1/CNT_DLY1(16bit) Output	0	1	0	1	1	1
24	3-bit LUT10/Pipe Delay (1st stage) Output	0	1	1	0	0	0
25	Pipe Delay Output0	0	1	1	0	0	1
26	Pipe Delay Output1	0	1	1	0	1	0
27	Internal OSC Pre-Divided by 1/2/4/8 Output and Post-Divided by 1/2/3/4/8/12/24/64 Output (25 kHz/2 MHz)	0	1	1	0	1	1
28	Internal OSC Pre-Divided by 1/2/4/8 Output and Post-Divided by 1/2/3/4/8/12/24/64 Output (25 kHz/2 MHz)	0	1	1	1	0	0
29	Internal OSC Pre-Divided by 1/2/4/8 Output (25 MHz)	0	1	1	1	0	1
30	Filter0/Edge Detect0 Output	0	1	1	1	1	0
31	Filter1/Edge Detect1 Output	0	1	1	1	1	1
32	Pin 6 Digital or I <sup>2</sup> C_virtual_0 Input	1	0	0	0	0	0
33	Pin 7 Digital or I <sup>2</sup> C_virtual_1 Input	1	0	0	0	0	1

Table 4. Matrix Input Table (Cont.)

Matrix Input Number	Matrix Input Signal Function	Matrix Decode					
		5	4	3	2	1	0
34	I <sup>2</sup> C_virtual_2 Input	1	0	0	0	1	0
35	I <sup>2</sup> C_virtual_3 Input	1	0	0	0	1	1
36	I <sup>2</sup> C_virtual_4 Input	1	0	0	1	0	0
37	I <sup>2</sup> C_virtual_5 Input	1	0	0	1	0	1
38	I <sup>2</sup> C_virtual_6 Input	1	0	0	1	1	0
39	I <sup>2</sup> C_virtual_7 Input	1	0	0	1	1	1
40	3-bit LUT11 / DFF8 Output	1	0	1	0	0	0
41	3-bit LUT2 / DFF9 Output	1	0	1	0	0	1
42	3-bit LUT13 / DFF10 Output	1	0	1	0	1	0
43	3-bit LUT14 / DFF11 Output	1	0	1	0	1	1
44	3-bit LUT15 / DFF12 Output	1	0	1	1	0	0
45	3-bit LUT16 / DFF13 (SET/RST) Output	1	0	1	1	0	1
46	3-bit LUT17 / DFF14 (SET/RST) Output	1	0	1	1	1	0
47	4-bit LUT2 Output	1	0	1	1	1	1
48	Pin 10 Digital Input	1	1	0	0	0	0
49	Reserved	1	1	0	0	0	1
50	Pin 11 Digital Input	1	1	0	0	1	0
51	Reserved	1	1	0	0	1	1
52	Pin 12 Digital Input	1	1	0	1	0	0
53	Pin 13 Digital Input	1	1	0	1	0	1
54	Reserved	1	1	0	1	1	0
55	Reserved	1	1	0	1	1	1
56	Pin 14 Digital Input	1	1	1	0	0	0
57	ACMP_0 Output	1	1	1	0	0	1
58	ACMP_1 Output	1	1	1	0	1	0
59	ACMP_2 Output	1	1	1	0	1	1
60	Reserved	1	1	1	1	0	0
61	Programmable Delay with Edge Detector Output	1	1	1	1	0	1
62	nRST_core (POR) as matrix input	1	1	1	1	1	0
63	V <sub>DD</sub>	1	1	1	1	1	1

## 6.1.1 Matrix Output Table

Table 5. Matrix Output Table

Register Bit Address	Matrix Output Signal Function	Matrix Output Number
[7:0]	Matrix OUT: IN0 of 3-bit LUT11 or Clock Input of DFF8	0
[15:8]	Matrix OUT: IN1 of 3-bit LUT11 or Data Input of DFF8	1
[23:16]	Matrix OUT: IN2 of 3-bit LUT11 or nRST (nSET) of DFF8	2
[31:24]	Matrix OUT: IN0 of 3-bit LUT12 or Clock Input of DFF9	3
[39:32]	Matrix OUT: IN1 of 3-bit LUT12 or Data Input of DFF9	4
[47:40]	Matrix OUT: IN2 of 3-bit LUT12 or nRST (nSET) of DFF9	5
[55:48]	Matrix OUT: IN0 of 3-bit LUT13 or Clock Input of DFF10	6
[63:56]	Matrix OUT: IN1 of 3-bit LUT13 or Data Input of DFF10	7
[71:64]	Matrix OUT: IN2 of 3-bit LUT13 or nRST (nSET) of DFF10	8
[79:72]	Matrix OUT: IN0 of 3-bit LUT14 or Clock Input of DFF11	9
[87:80]	Matrix OUT: IN1 of 3-bit LUT14 or Data Input of DFF11	10
[95:88]	Matrix OUT: IN2 of 3-bit LUT14 or nRST (nSET) of DFF11	11
[103:96]	Matrix OUT: IN0 of 3-bit LUT15 or Clock Input of DFF12	12
[111:104]	Matrix OUT: IN1 of 3-bit LUT15 or Data Input of DFF12	13
[119:112]	Matrix OUT: IN2 of 3-bit LUT15 or nRST (nSET) of DFF12	14
[127:120]	Matrix OUT: IN0 of 3-bit LUT16 or Clock Input of DFF13	15
[135:128]	Matrix OUT: IN1 of 3-bit LUT16 or Data Input of DFF13	16
[143:136]	Matrix OUT: IN2 of 3-bit LUT16 or nRST (nSET) of DFF13	17
[151:144]	Matrix OUT: IN0 of 3-bit LUT17 or Clock Input of DFF14	18
[159:152]	Matrix OUT: IN1 of 3-bit LUT17 or Data Input of DFF14	19
[167:160]	Matrix OUT: IN2 of 3-bit LUT17 or nRST (nSET) of DFF14	20
[175:168]	Matrix OUT: IN0 of 4-bit LUT2	21
[183:176]	Matrix OUT: IN1 of 4-bit LUT2	22
[191:184]	Matrix OUT: IN2 of 4-bit LUT2	23
[199:192]	Matrix OUT: IN3 of 4-bit LUT2	24
[207:200]	Reserved	25
[215:208]	Reserved	26
[223:216]	Matrix OUT: Pin 3 Digital Output Source	27
[231:224]	Reserved	28
[239:232]	Reserved	29
[247:240]	Matrix OUT: Pin 4 Digital Output Source	30
[255:248]	Matrix OUT: Pin 5 Digital Output Source	31
[263:256]	Matrix OUT: Pin 5 Output Enable	32
[271:264]	Matrix OUT: Pin 6 Digital Output Source (SCL with VI/Input and NMOS Open-Drain)	33
[279:272]	Matrix OUT: Pin 7 Digital Output Source (SDA with VI/Input and NMOS Open-Drain)	34

Table 5. Matrix Output Table (Cont.)

Register Bit Address	Matrix Output Signal Function	Matrix Output Number
[287:280]	Matrix OUT: Pin 8 Digital Output Source	35
[295:288]	Matrix OUT: Pin 8 Output Enable	36
[303:296]	Matrix OUT: Pin 10 Digital Output Source	37
[311:304]	Reserved	38
[319:312]	Reserved	39
[327:320]	Matrix OUT: Pin 11 Digital Output Source	40
[335:328]	Matrix OUT: Pin 11 Output Enable	41
[343:336]	Reserved	42
[351:344]	Matrix OUT: Pin 12 Digital Output Source	43
[359:352]	Matrix OUT: Pin 12 Output Enable	44
[367:360]	Matrix OUT: Pin 13 Digital Output Source	45
[375:368]	Reserved	46
[383:376]	Reserved	47
[391:384]	Reserved	48
[399:392]	Reserved	49
[407:400]	Matrix OUT: Pin 14 Digital Output Source	50
[415:408]	Matrix OUT: ACMP0 nPD (Power-Down)	51
[423:416]	Matrix OUT: ACMP1 nPD (Power-Down)	52
[431:424]	Matrix OUT: ACMP2 nPD (Power-Down)	53
[439:432]	Reserved	54
[447:440]	Matrix OUT: Input of Filter_0 with fixed time edge detector	55
[455:448]	Matrix OUT: Input of Filter_1 with fixed time edge detector	56
[463:456]	Matrix OUT: Input of Programmable Delay and Edge Detector	57
[471:464]	Matrix OUT: OSC 25 kHz/2 MHz nPD (Power-Down)	58
[479:472]	Matrix OUT: OSC 25 MHz nPD (Power-Down)	59
[487:480]	Matrix OUT: IN0 of 2-bit LUT0 or Clock Input of DFF0	60
[495:488]	Matrix OUT: IN1 of 2-bit LUT0 or Data Input of DFF0	61
[503:496]	Matrix OUT: IN0 of 2-bit LUT1 or Clock Input of DFF1	62
[511:504]	Matrix OUT: IN1 of 2-bit LUT1 or Data Input of DFF1	63
[519:512]	Matrix OUT: IN0 of 2-bit LUT2 or Clock Input of DFF2	64
[527:520]	Matrix OUT: IN1 of 2-bit LUT2 or Data Input of DFF2	65
[535:528]	Matrix OUT: IN0 of 2-bit LUT3 or Clock Input of PGen	66
[543:536]	Matrix OUT: IN1 of 2-bit LUT3 or nRST of PGen	67
[551:544]	Matrix OUT: IN0 of 3-bit LUT0 or Clock Input of DFF3	68
[559:552]	Matrix OUT: IN1 of 3-bit LUT0 or Data Input of DFF3	69
[567:560]	Matrix OUT: IN2 of 3-bit LUT0 or nRST (nSET) of DFF3	70

Table 5. Matrix Output Table (Cont.)

Register Bit Address	Matrix Output Signal Function	Matrix Output Number
[575:568]	Matrix OUT: IN0 of 3-bit LUT1 or Clock Input of DFF4	71
[583:576]	Matrix OUT: IN1 of 3-bit LUT1 or Data Input of DFF4	72
[591:584]	Matrix OUT: IN2 of 3-bit LUT1 or nRST (nSET) of DFF4	73
[599:592]	Matrix OUT: IN0 of 3-bit LUT2 or Clock Input of DFF5	74
[607:600]	Matrix OUT: IN1 of 3-bit LUT2 or Data Input of DFF5	75
[615:608]	Matrix OUT: IN2 of 3-bit LUT2 or nRST (nSET) of DFF5	76
[623:616]	Matrix OUT: IN0 of 3-bit LUT3 or Clock Input of DFF6	77
[631:624]	Matrix OUT: IN1 of 3-bit LUT3 or Data Input of DFF6	78
[639:632]	Matrix OUT: IN2 of 3-bit LUT3 or nRST (nSET) of DFF6	79
[647:640]	Matrix OUT: IN0 of 3-bit LUT4 or Clock Input of DFF7	80
[655:648]	Matrix OUT: IN1 of 3-bit LUT4 or Data Input of DFF7	81
[663:656]	Matrix OUT: IN2 of 3-bit LUT4 or nRST (nSET) of DFF7	82
[671:664]	Matrix OUT: IN0 of 3-bit LUT5 or Delay2 Input (or Counter2 RST Input)	83
[679:672]	Matrix OUT: IN1 of 3-bit LUT5 or External Clock Input of Delay2 (or Counter2)	84
[687:680]	Matrix OUT: IN2 of 3-bit LUT5	85
[695:688]	Matrix OUT: IN0 of 3-bit LUT6 or Delay3 Input (or Counter3 RST Input)	86
[703:696]	Matrix OUT: IN1 of 3-bit LUT6 or External Clock Input of Delay3 (or Counter3)	87
[711:704]	Matrix OUT: IN2 of 3-bit LUT6	88
[719:712]	Matrix OUT: IN0 of 3-bit LUT7 or Delay4 Input (or Counter4 RST Input)	89
[727:720]	Matrix OUT: IN1 of 3-bit LUT7 or External Clock Input of Delay4 (or Counter4)	90
[735:728]	Matrix OUT: IN2 of 3-bit LUT7	91
[743:736]	Matrix OUT: IN0 of 3-bit LUT8 or Delay5 Input (or Counter5 RST Input)	92
[751:744]	Matrix OUT: IN1 of 3-bit LUT8 or External Clock Input of Delay5 (or Counter5)	93
[759:752]	Matrix OUT: IN2 of 3-bit LUT8	94
[767:760]	Matrix OUT: IN0 of 3-bit LUT9 or Delay6 Input (or Counter6 RST Input)	95
[775:768]	Matrix OUT: IN1 of 3-bit LUT9 or External Clock Input of Delay6 (or Counter6)	96
[783:776]	Matrix OUT: IN2 of 3-bit LUT9	97
[791:784]	Matrix OUT: IN0 of 3-bit LUT10 or Input of Pipe Delay	98
[799:792]	Matrix OUT: IN1 of 3-bit LUT10 or nRST of Pipe Delay	99
[807:800]	Matrix OUT: IN2 of 3-bit LUT10 or Clock of Pipe Delay	100
[815:808]	Matrix OUT: IN0 of 4-bit LUT0 or Delay0 Input (or Counter0 RST/SET Input)	101
[823:816]	Matrix OUT: IN1 of 4-bit LUT0 or External Clock Input of Delay0 (or Counter0)	102
[831:824]	Matrix OUT: IN2 of 4-bit LUT0 or UP Input of FSM0	103
[839:832]	Matrix OUT: IN3 of 4-bit LUT0 or KEEP Input of FSM0	104
[847:840]	Matrix OUT: IN0 of 4-bit LUT1 or Delay1 Input (or Counter1 RST/SET Input)	105
[855:848]	Matrix OUT: IN1 of 4-bit LUT1 or External Clock Input of Delay1 (or Counter1)	106

Table 5. Matrix Output Table (Cont.)

Register Bit Address	Matrix Output Signal Function	Matrix Output Number
[863:856]	Matrix OUT: IN2 of 4-bit LUT1 or UP Input of FSM1	107
[871:864]	Matrix OUT: IN3 of 4-bit LUT1 or KEEP Input of FSM1	108
[879:872]	Reserved	109
[1] For each Address, the two most significant bits are unused.		

## 6.2 Connection Matrix Virtual Inputs

As mentioned previously, the Connection Matrix inputs come from the outputs of various digital macrocells on the device. Eight of the Connection Matrix inputs have the special characteristic that the state of these signal lines comes from a corresponding data bit written as a register value via I<sup>2</sup>C. This gives the user the ability to write data via the serial channel, and have this information translated into signals that can be driven into the Connection Matrix and from the Connection Matrix to the digital inputs of other macrocells on the device. The I<sup>2</sup>C address for reading and writing these register values is at byte 0244.

Six of the eight Connection Matrix Virtual Inputs are dedicated to this virtual input function. An I<sup>2</sup>C write command to these register bits will set the signal values going into the Connection Matrix to the desired state. A read command to these register bits will read either the original data values coming from the NVM memory bits (that were loaded during the initial device startup), or the values from a previous write command (if that has happened).

Two of the eight Connection Matrix Virtual Inputs are shared with Pin digital inputs (Pin 6 Digital or I<sup>2</sup>C\_virtual\_0 Input and Pin 7 Digital or I<sup>2</sup>C\_virtual\_1 Input). If the virtual input mode is selected, an I<sup>2</sup>C write command to these register bits will set the signal values going into the Connection Matrix to the desired state. Two register bits select whether the Connection Matrix input comes from the pin input or from the virtual register:

- register [1074] Select SCL and Virtual Input 0 or Pin 6
- register [1082] Select SDA and Virtual Input 1 or Pin 7.

See [Table 6](#) for Connection Matrix Virtual Inputs.

Table 6. Connection Matrix Virtual Inputs

Matrix Input Number	Matrix Input Signal Function	Register Bit Addresses (d)
32	I <sup>2</sup> C_virtual_0 Input	[1952]
33	I <sup>2</sup> C_virtual_1 Input	[1953]
34	I <sup>2</sup> C_virtual_2 Input	[1954]
35	I <sup>2</sup> C_virtual_3 Input	[1955]
36	I <sup>2</sup> C_virtual_4 Input	[1956]
37	I <sup>2</sup> C_virtual_5 Input	[1957]
38	I <sup>2</sup> C_virtual_6 Input	[1958]
39	I <sup>2</sup> C_virtual_7 Input	[1959]

### 6.3 Connection Matrix Virtual Outputs

The digital outputs of the various macrocells are routed to the Connection Matrix to enable interconnections to the inputs of other macrocells in the device. At the same time, it is possible to read the state of each of the macrocell outputs as a register value via I<sup>2</sup>C. This option, called Connection Matrix Virtual Outputs, allows the user to remotely read the values of each macrocell output. The I<sup>2</sup>C addresses for reading these register values are at bytes 0240 to 0247. Write commands to these same register values will be ignored (with the exception of the Virtual Input register bits at byte 0244).

## 7. Combination Function Macrocells

The SLG46536-E has seventeen combination function macrocells that can serve more than one logic or timing function. In each case, they can serve as a Look Up Table (LUT), or as another logic or timing function. See the list below for the functions that can be implemented in these macrocells.

- Three macrocells that can serve as either 2-bit LUTs or as D Flip-Flops.
- Twelve macrocells that can serve as either 3-bit LUTs or as D Flip-Flops with Set/Reset Input.
- One macrocell that can serve as either 3-bit LUT or as Pipe Delay.
- One macrocell that can serve as either 2-bit LUT or as Programmable Pattern Generator (PGen).
- Five macrocells that can serve as either 3-bit LUTs or as 8-Bit Counter/Delays.
- Two macrocells that can serve as either 4-bit LUTs or as 16-Bit Counter/Delays.

Inputs/Outputs for the 24 combination function macrocells are configured from the connection matrix with specific logic functions being defined by the state of NVM bits.

When used as a LUT to implement combinatorial logic functions, the outputs of the LUTs can be configured to any user defined function, including the following standard digital logic devices (AND, NAND, OR, NOR, XOR, XNOR).

### 7.1 2-Bit LUT or D Flip-Flop Macrocells

There are three macrocells that can serve as either 2-bit LUTs or as D Flip-Flops. When used to implement LUT functions, the 2-bit LUTs each take in two input signals from the connection matrix and produce a single output, which goes back into the connection matrix. When used to implement D Flip-Flop function, the two input signals from the connection matrix go to the data (D) and clock (CLK) inputs for the Flip-Flop, with the output going back to the connection matrix.

The operation of the D Flip-Flop and LATCH will follow the functional descriptions below:

- DFF: CLK is rising edge triggered, then Q = D; otherwise Q will not change.
- LATCH: when CLK is Low, then Q = D; otherwise Q remains its previous value (input D has no effect on the output, when CLK is High).

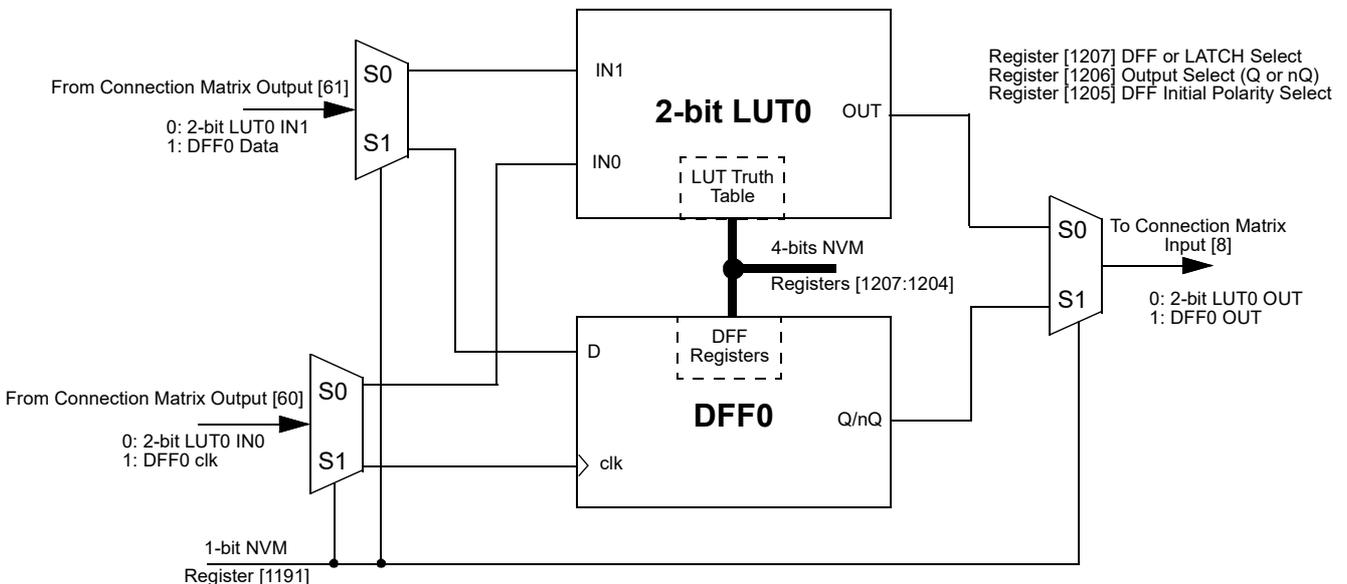


Figure 12. 2-bit LUT0 or DFF0

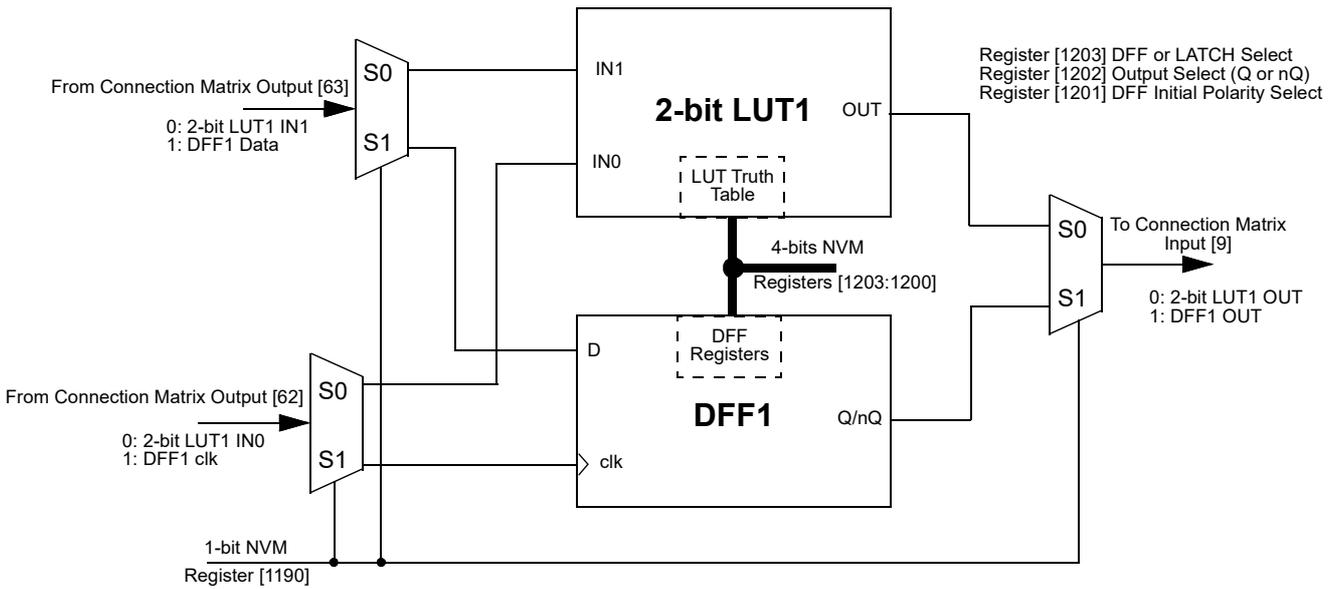


Figure 13. 2-bit LUT1 or DFF1

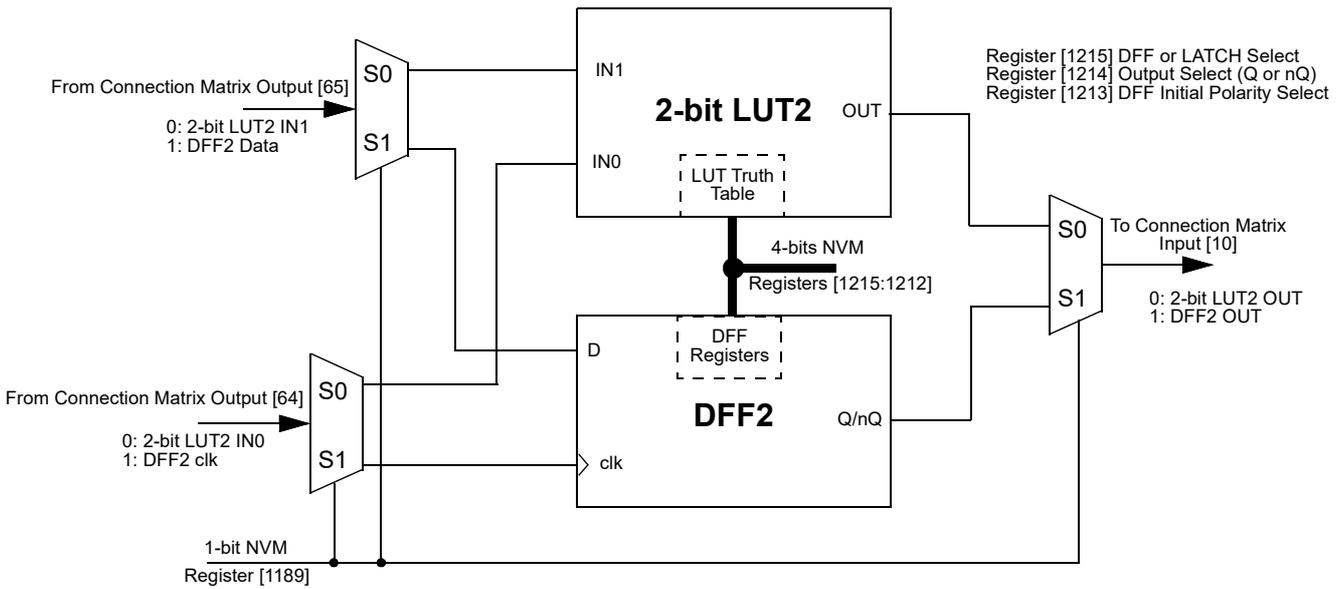


Figure 14. 2-bit LUT2 or DFF2

### 7.1.1 2-Bit LUT or D Flip-Flop Macrocells Used as 2-Bit LUTs

Table 7. 2-bit LUT0 Truth Table

IN1	IN0	OUT	
0	0	register [1204]	LSB
0	1	register [1205]	
1	0	register [1206]	
1	1	register [1207]	MSB

Table 9. 2-bit LUT2 Truth Table

IN1	IN0	OUT	
0	0	register [1212]	LSB
0	1	register [1213]	
1	0	register [1214]	
1	1	register [1215]	MSB

Table 8. 2-bit LUT1 Truth Table

IN1	IN0	OUT	
0	0	register [1200]	LSB
0	1	register [1201]	
1	0	register [1202]	
1	1	register [1203]	MSB

Each macrocell, when programmed for a LUT function, uses a 4-bit register to define their output function:

- 2-bit LUT0 is defined by registers [1207:1204]
- 2-bit LUT1 is defined by registers [1203:1200]
- 2-bit LUT2 is defined by registers [1215:1212].

Table 10 shows the register bits for the standard digital logic devices (AND, NAND, OR, NOR, XOR, XNOR) that can be created within each of the 2-bit LUT logic cells.

Table 10. 2-bit LUT Standard Digital Functions

Function	MSB			LSB
AND-2	1	0	0	0
NAND-2	0	1	1	1
OR-2	1	1	1	0
NOR-2	0	0	0	1
XOR-2	0	1	1	0
XNOR-2	1	0	0	1

### 7.1.2 Initial Polarity Operations

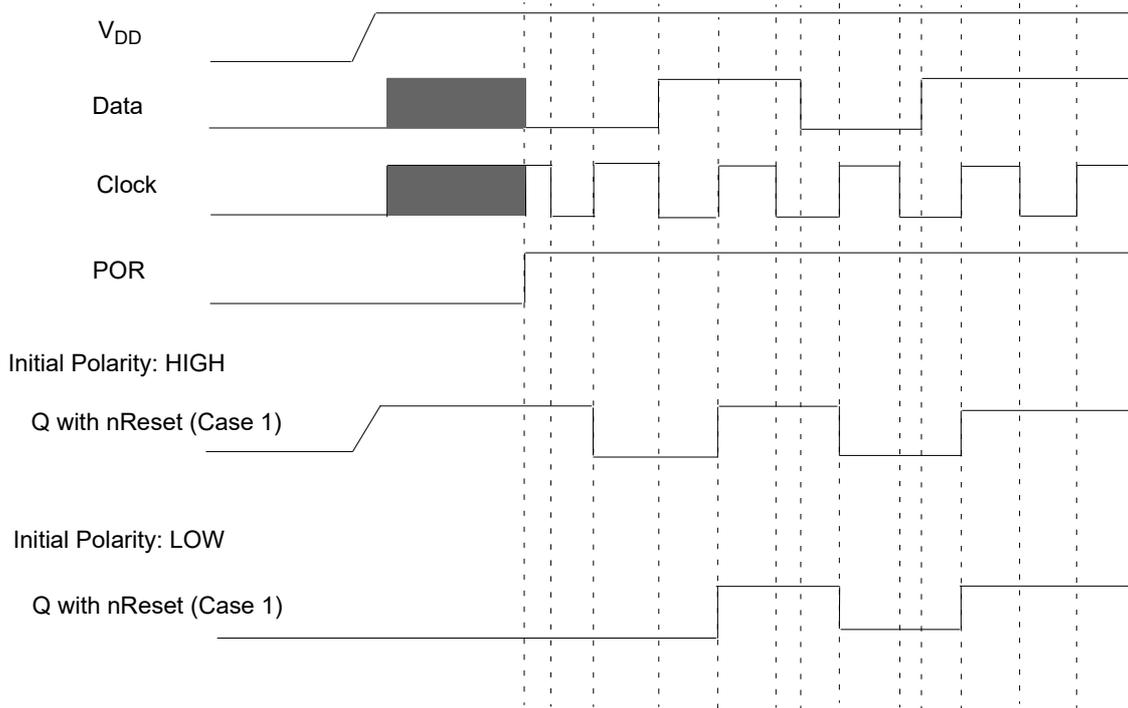


Figure 15. DFF Polarity Operations

## 7.2 3-Bit LUT or D Flip-Flop with Set/Reset Macrocells

There are twelve macrocells that can serve as either 3-bit LUTs or as D Flip-Flops with Set/Reset inputs. When used to implement LUT functions, the 3-bit LUTs each take in three input signals from the connection matrix and produce a single output, which goes back into the connection matrix. When used to implement D Flip-Flop function, the three input signals from the connection matrix go to the data (D) and clock (CLK), and Reset/Set (nRST/nSET) inputs for the Flip-Flop, with the output going back to the connection matrix.

DFF3 has a user selectable option to allow the macrocell output to either come from the Q/nQ output of one D Flip-Flop, or two D Flip-Flops in series, with the first D Flip-Flop triggering on the rising clock edge, and the second D Flip-Flop triggering on the falling clock edge.

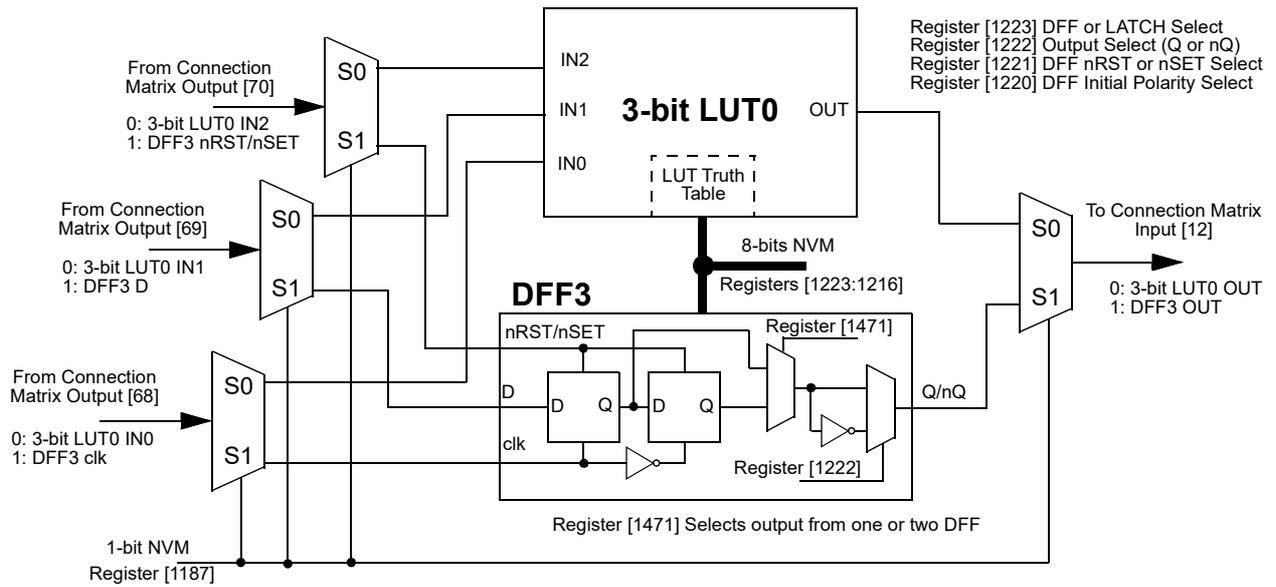


Figure 16. 3-bit LUT0 or DFF3 with RST/SET

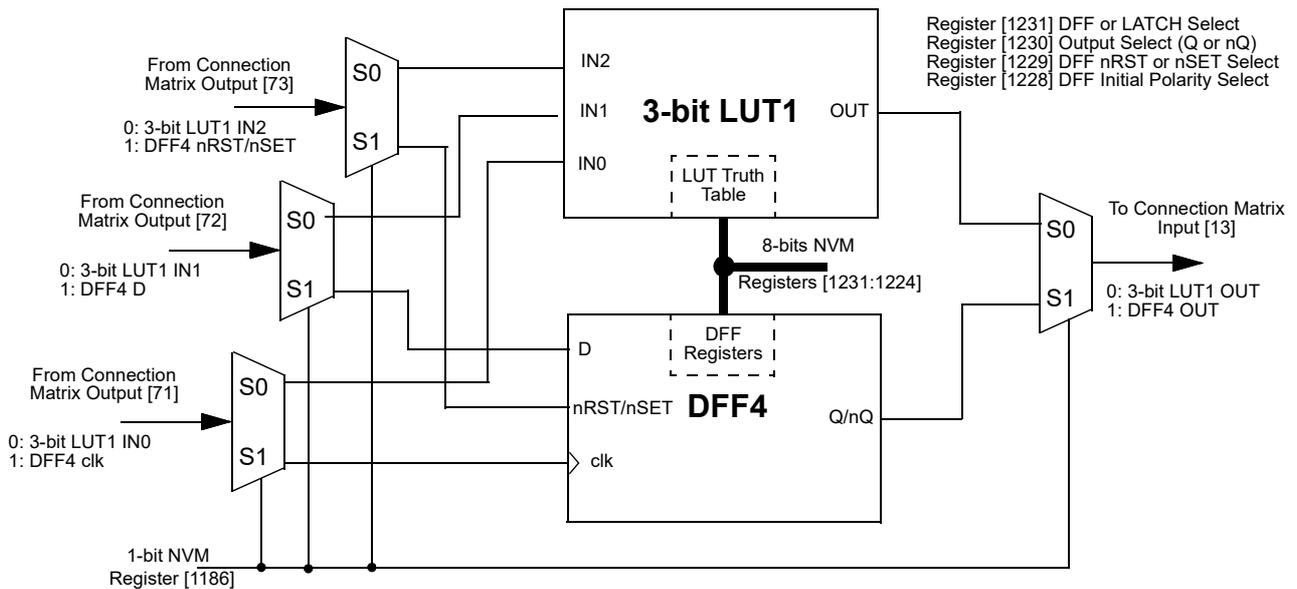


Figure 17. 3-bit LUT1 or DFF4 with RST/SET

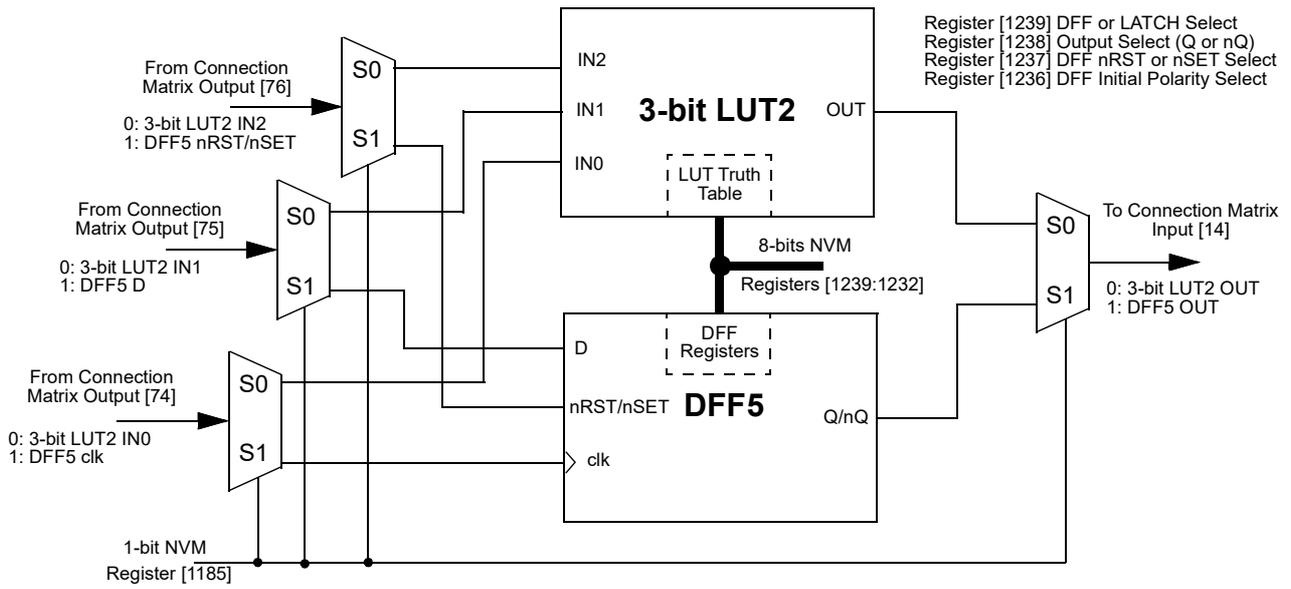


Figure 18. 3-bit LUT2 or DFF5 with RST/SET

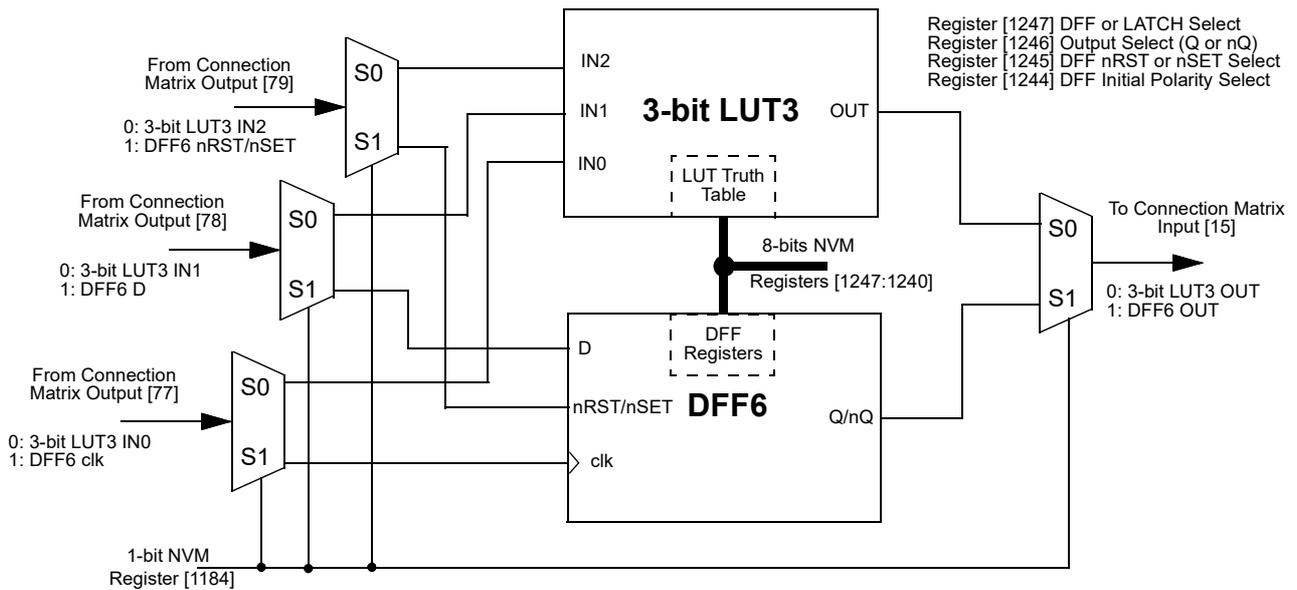


Figure 19. 3-bit LUT3 or DFF6 with RST/SET

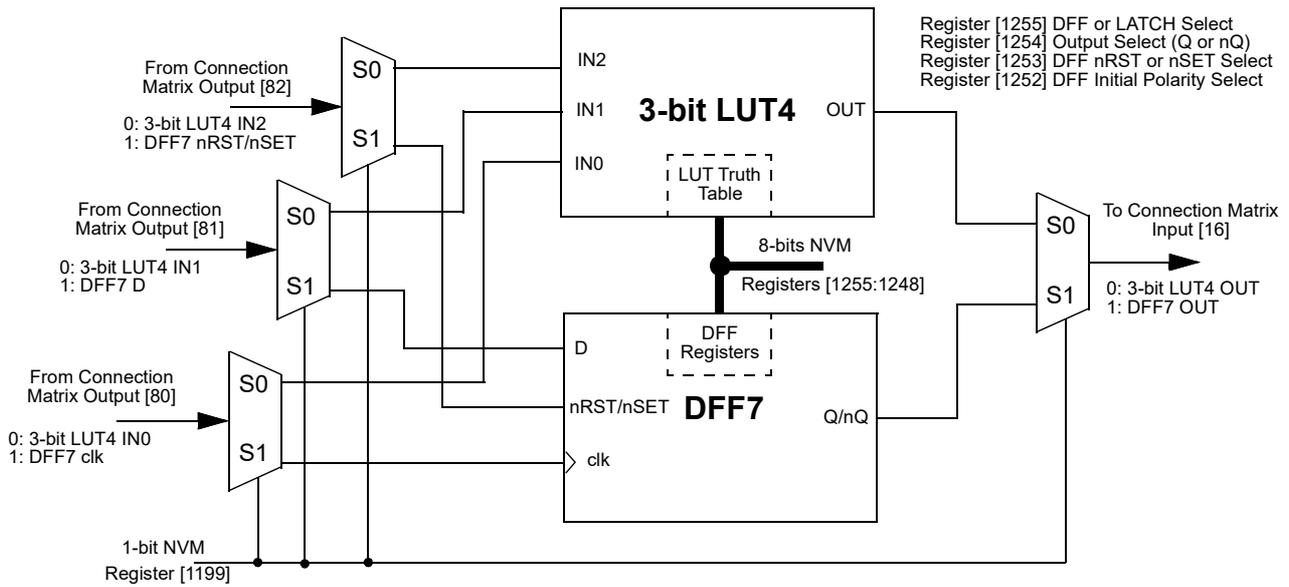


Figure 20. 3-bit LUT4 or DFF7 with RST/SET

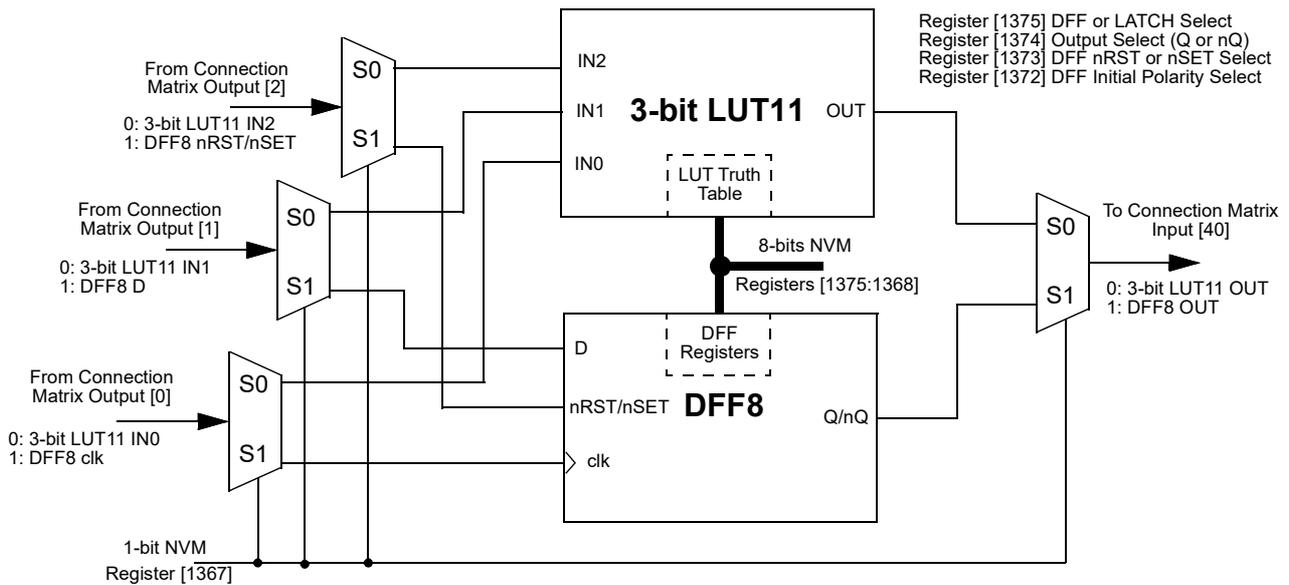


Figure 21. 3-bit LUT11 or DFF8 with RST/SET

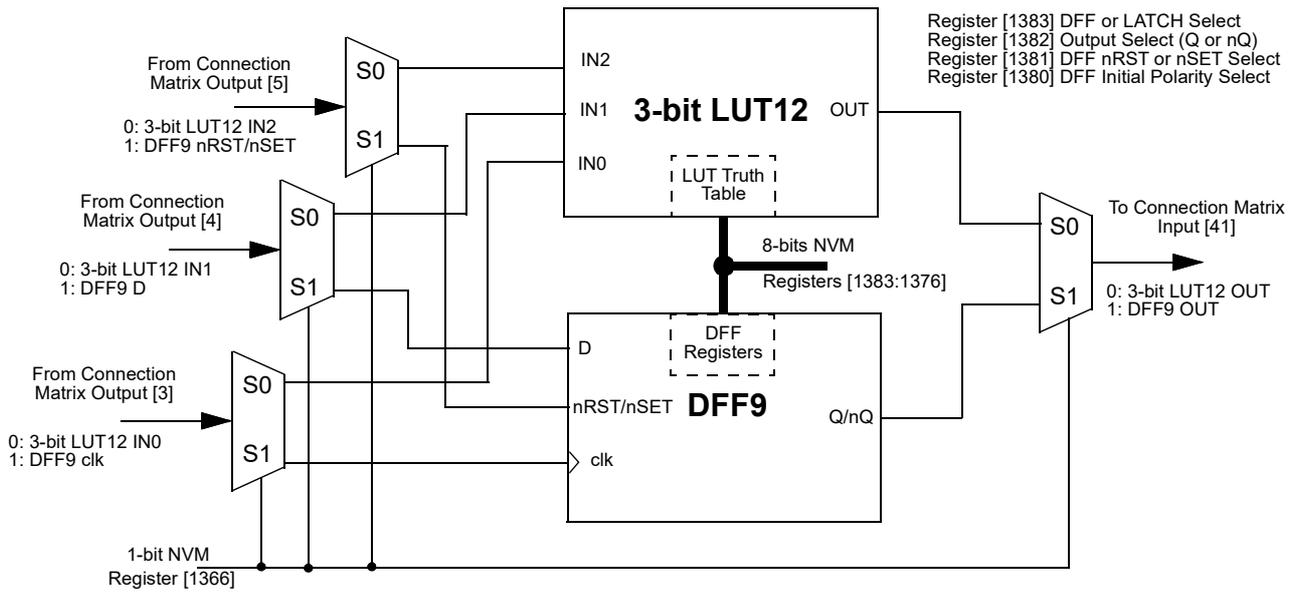


Figure 22. 3-bit LUT12 or DFF9 with RST/SET

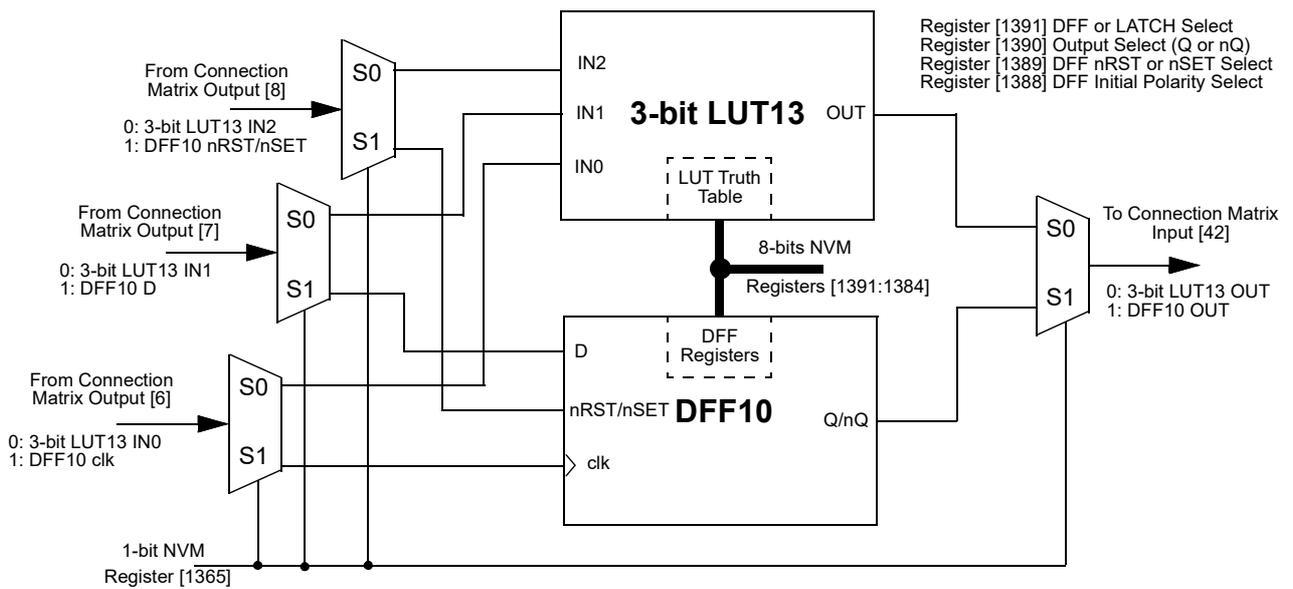


Figure 23. 3-bit LUT13 or DFF10 with RST/SET

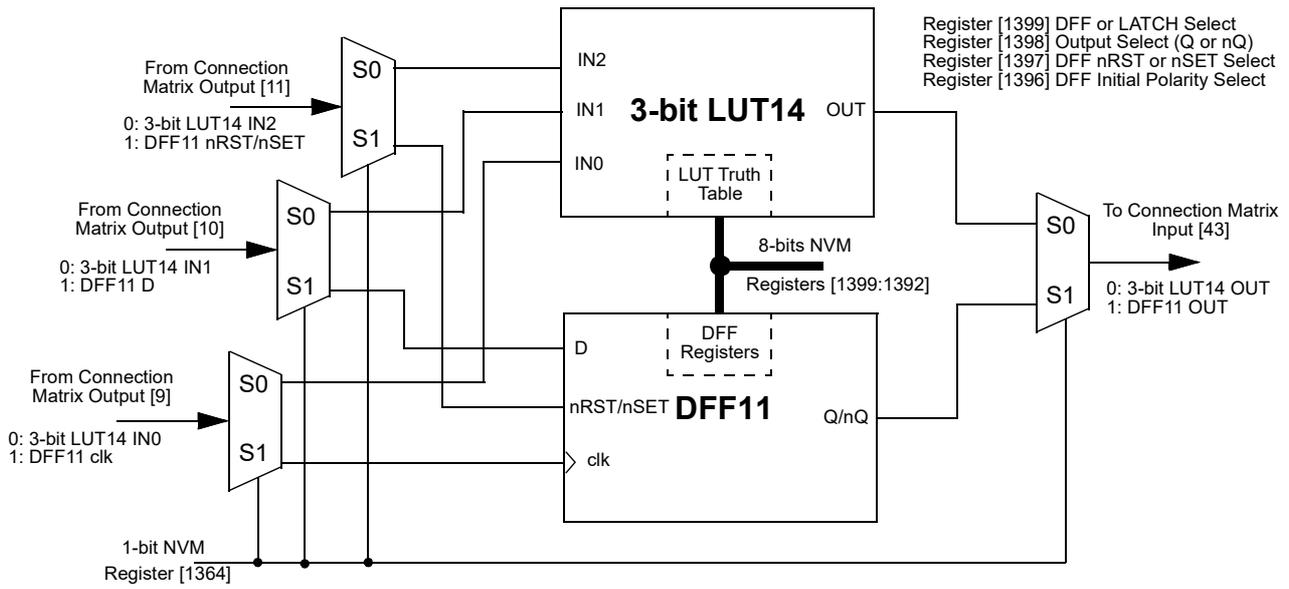


Figure 24. 3-bit LUT14 or DFF11 with RST/SET

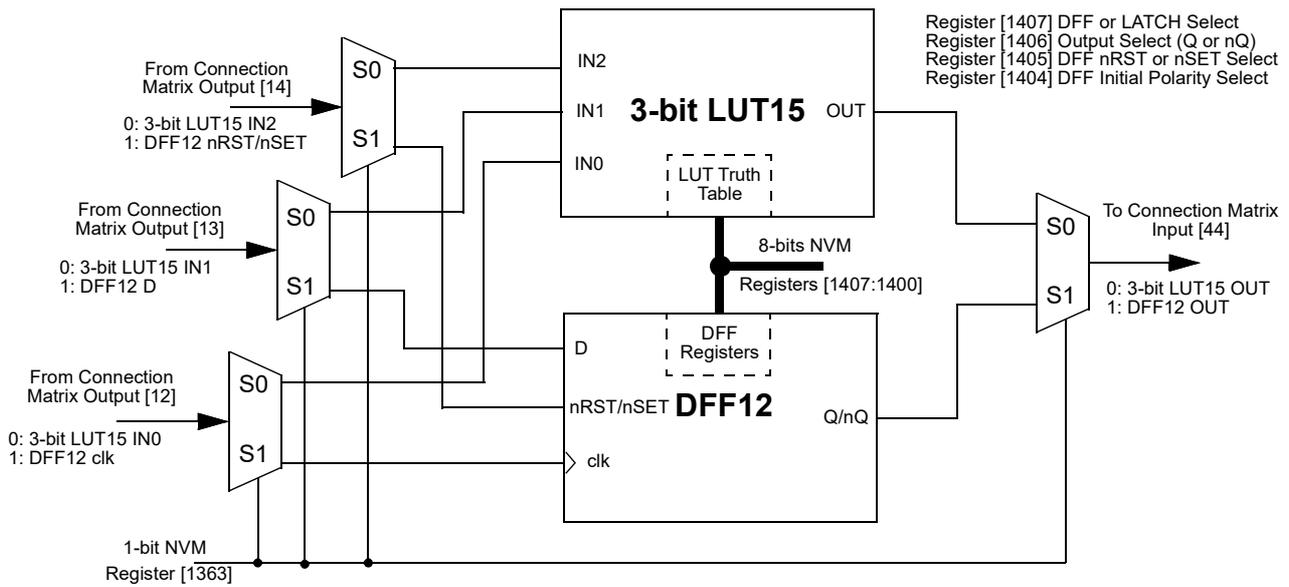


Figure 25. 3-bit LUT15 or DFF12 with RST/SET

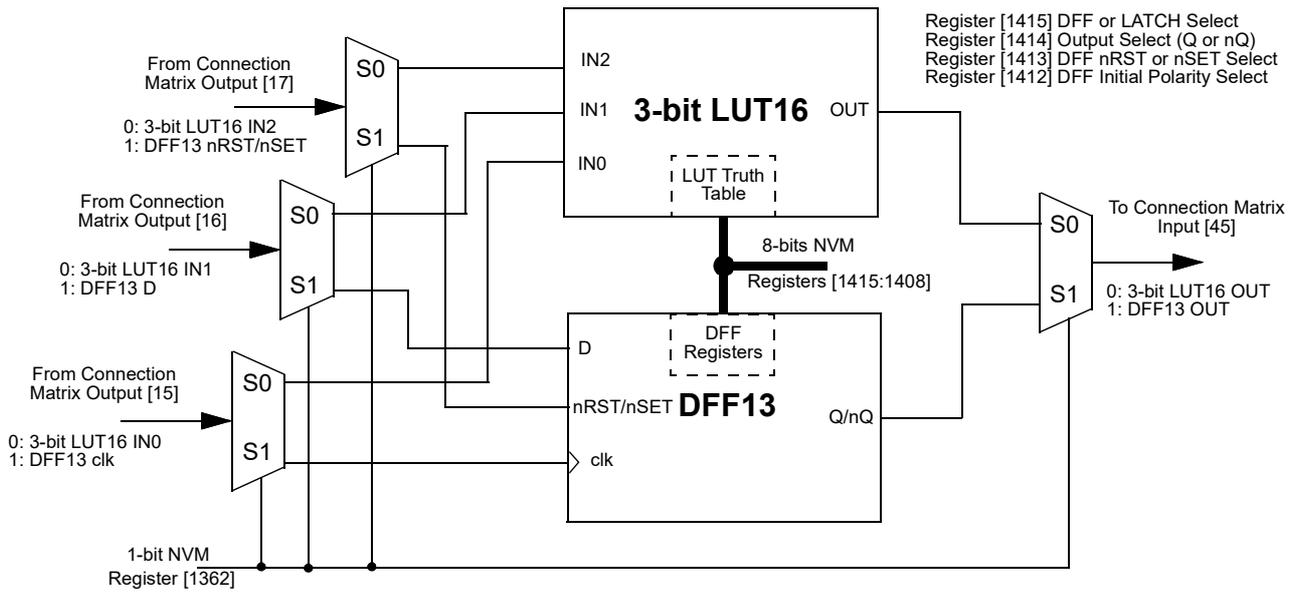


Figure 26. 3-bit LUT16 or DFF13 with RST/SET

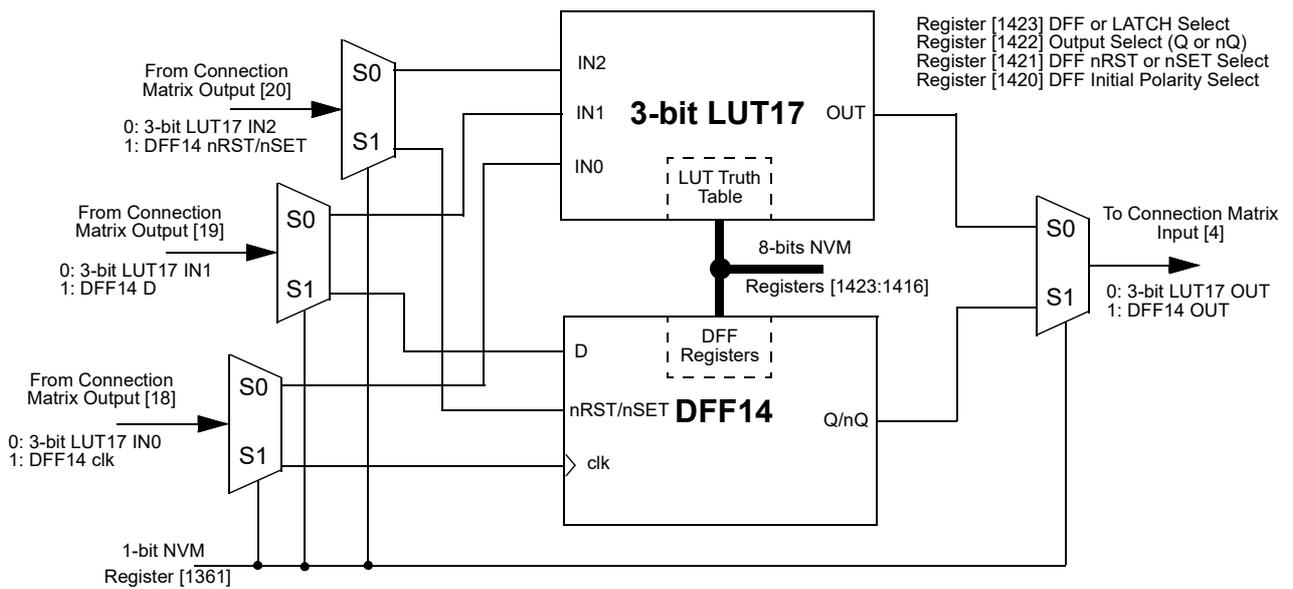


Figure 27. 3-bit LUT17 or DFF14 with RST/SET

### 7.2.1 3-Bit LUT or D Flip-Flop Macrocells Used as 3-Bit LUTs

Table 11. 3-bit LUT0 Truth Table

IN2	IN1	IN0	OUT	
0	0	0	register [1216]	LSB
0	0	1	register [1217]	
0	1	0	register [1218]	
0	1	1	register [1219]	
1	0	0	register [1220]	
1	0	1	register [1221]	
1	1	0	register [1222]	
1	1	1	register [1223]	MSB

Table 14. 3-bit LUT3 Truth Table

IN2	IN1	IN0	OUT	
0	0	0	register [1240]	LSB
0	0	1	register [1241]	
0	1	0	register [1242]	
0	1	1	register [1243]	
1	0	0	register [1244]	
1	0	1	register [1245]	
1	1	0	register [1246]	
1	1	1	register [1247]	MSB

Table 12. 3-bit LUT1 Truth Table

IN2	IN1	IN0	OUT	
0	0	0	register [1224]	LSB
0	0	1	register [1225]	
0	1	0	register [1226]	
0	1	1	register [1227]	
1	0	0	register [1228]	
1	0	1	register [1229]	
1	1	0	register [1230]	
1	1	1	register [1231]	MSB

Table 15. 3-bit LUT4 Truth Table

IN2	IN1	IN0	OUT	
0	0	0	register [1248]	LSB
0	0	1	register [1249]	
0	1	0	register [1250]	
0	1	1	register [1251]	
1	0	0	register [1252]	
1	0	1	register [1253]	
1	1	0	register [1254]	
1	1	1	register [1255]	MSB

Table 13. 3-bit LUT2 Truth Table

IN2	IN1	IN0	OUT	
0	0	0	register [1232]	LSB
0	0	1	register [1233]	
0	1	0	register [1234]	
0	1	1	register [1235]	
1	0	0	register [1236]	
1	0	1	register [1237]	
1	1	0	register [1238]	
1	1	1	register [1239]	MSB

Table 16. 3-bit LUT11 Truth Table

IN2	IN1	IN0	OUT	
0	0	0	register [1368]	LSB
0	0	1	register [1369]	
0	1	0	register [1370]	
0	1	1	register [1371]	
1	0	0	register [1372]	
1	0	1	register [1373]	
1	1	0	register [1374]	
1	1	1	register [1375]	MSB

**Table 17. 3-bit LUT12 Truth Table**

IN2	IN1	IN0	OUT	
0	0	0	register [1376]	LSB
0	0	1	register [1377]	
0	1	0	register [1378]	
0	1	1	register [1379]	
1	0	0	register [1380]	
1	0	1	register [1381]	
1	1	0	register [1382]	
1	1	1	register [1383]	MSB

**Table 20. 3-bit LUT15 Truth Table**

IN2	IN1	IN0	OUT	
0	0	0	register [1400]	LSB
0	0	1	register [1401]	
0	1	0	register [1402]	
0	1	1	register [1403]	
1	0	0	register [1404]	
1	0	1	register [1405]	
1	1	0	register [1406]	
1	1	1	register [1407]	MSB

**Table 18. 3-bit LUT13 Truth Table**

IN2	IN1	IN0	OUT	
0	0	0	register [1384]	LSB
0	0	1	register [1385]	
0	1	0	register [1386]	
0	1	1	register [1387]	
1	0	0	register [1388]	
1	0	1	register [1389]	
1	1	0	register [1390]	
1	1	1	register [1391]	MSB

**Table 21. 3-bit LUT16 Truth Table**

IN2	IN1	IN0	OUT	
0	0	0	register [1408]	LSB
0	0	1	register [1409]	
0	1	0	register [1410]	
0	1	1	register [1411]	
1	0	0	register [1412]	
1	0	1	register [1413]	
1	1	0	register [1414]	
1	1	1	register [1415]	MSB

**Table 19. 3-bit LUT14 Truth Table**

IN2	IN1	IN0	OUT	
0	0	0	register [1392]	LSB
0	0	1	register [1393]	
0	1	0	register [1394]	
0	1	1	register [1395]	
1	0	0	register [1396]	
1	0	1	register [1397]	
1	1	0	register [1398]	
1	1	1	register [1399]	MSB

**Table 22. 3-bit LUT17 Truth Table**

IN2	IN1	IN0	OUT	
0	0	0	register [1416]	LSB
0	0	1	register [1417]	
0	1	0	register [1418]	
0	1	1	register [1419]	
1	0	0	register [1420]	
1	0	1	register [1421]	
1	1	0	register [1422]	
1	1	1	register [1423]	MSB

Each macrocell, when programmed for a LUT function, uses a 8-bit register to define their output function:

- 3-bit LUT0 is defined by registers [1223:1216]
- 3-bit LUT1 is defined by registers [1231:1224]
- 3-bit LUT2 is defined by registers [1239:1232]
- 3-bit LUT3 is defined by registers [1247:1240]
- 3-bit LUT4 is defined by registers [1255:1248]
- 3-bit LUT11 is defined by registers [1375:1368]

- 3-bit LUT12 is defined by registers [1383:1376]
- 3-bit LUT13 is defined by registers [1391:1384]
- 3-bit LUT14 is defined by registers [1399:1392]
- 3-bit LUT15 is defined by registers [1407:1400]
- 3-bit LUT16 is defined by registers [1415:1408]
- 3-bit LUT17 is defined by registers [1423:1416].

Table 23 shows the register bits for the standard digital logic devices (AND, NAND, OR, NOR, XOR, XNOR) that can be created within each of the six 3-bit LUT logic cells.

**Table 23. 3-bit LUT Standard Digital Functions**

Function	MSB							LSB
AND-3	1	0	0	0	0	0	0	0
NAND-3	0	1	1	1	1	1	1	1
OR-3	1	1	1	1	1	1	1	0
NOR-3	0	0	0	0	0	0	0	1
XOR-3	1	0	0	1	0	1	1	0
XNOR-3	0	1	1	0	1	0	0	1

### 7.2.2 Initial Polarity Operations

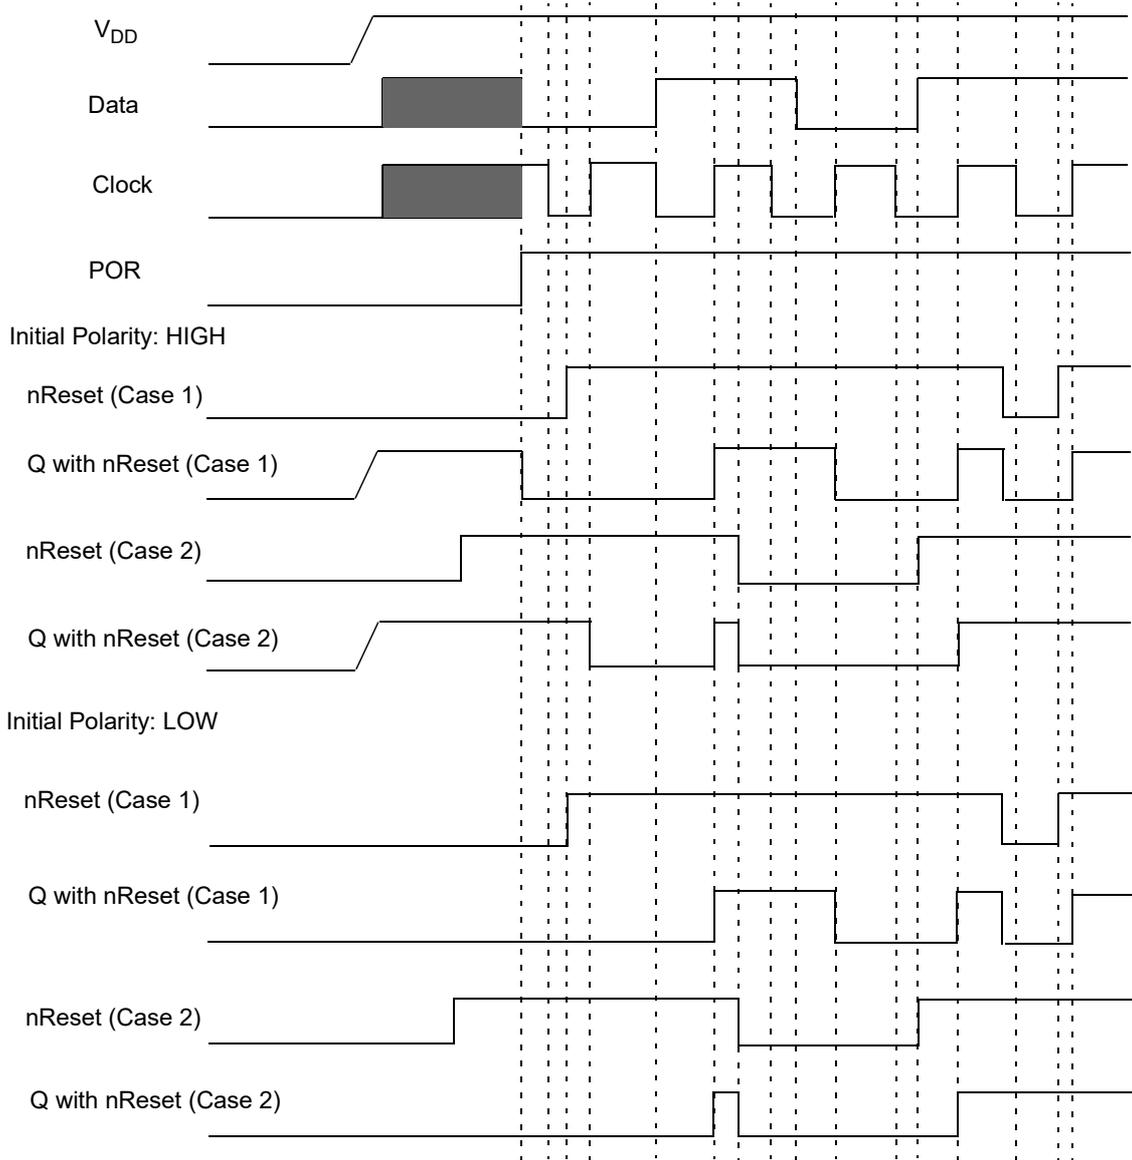


Figure 28. DFF Polarity Operations with nReset

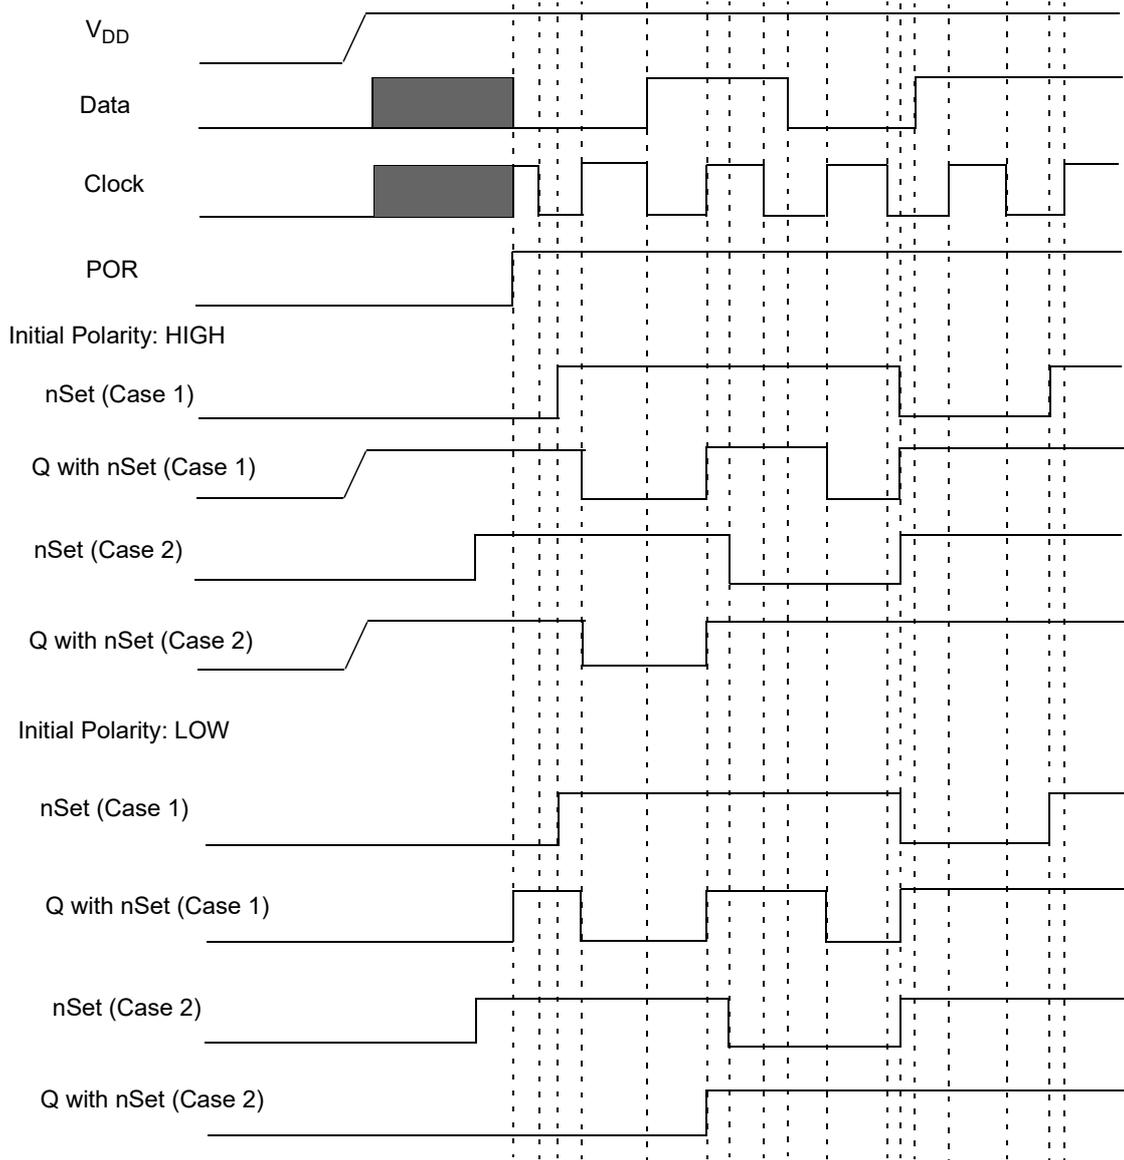


Figure 29. DFF Polarity Operations with nSet

### 7.3 3-Bit LUT or Pipe Delay Macrocell

There is one macrocell that can serve as either a 3-bit LUT or as a Pipe Delay.

When used to implement LUT functions, the 3-bit LUT takes in three input signals from the connection matrix and produces a single output, which goes back into the connection matrix.

When used as a Pipe Delay, there are three inputs signals from the matrix: Input (IN), Clock (CLK), and Reset (nRST). The Pipe Delay cell is built from 16 D Flip-Flop logic cells that provide the three delay options, two of which are user selectable. The DFF cells are tied in series where the output (Q) of each delay cell goes to the next DFF cell. The first delay option (OUT2) is fixed at the output of the first Flip-Flop stage. The other two outputs (OUT0 and OUT1) provide user selectable options for 1 to 16 stages of delay. There are delay output points for each set of the OUT0 and OUT1 outputs to a 16-input mux that is controlled by registers [1259:1256] for OUT0 and registers [1263:1260] for OUT1. The 16-input mux is used to select the amount of delay.

The overall time of the delay is based on the clock used in the SLG46536-E design. Each DFF cell has a time delay of the inverse of the clock time (either external clock or the Oscillator within the SLG46536-E). The sum of the number of DFF cells used will be the total time delay of the Pipe Delay logic cell.

Note: CLK is rising edge triggered.

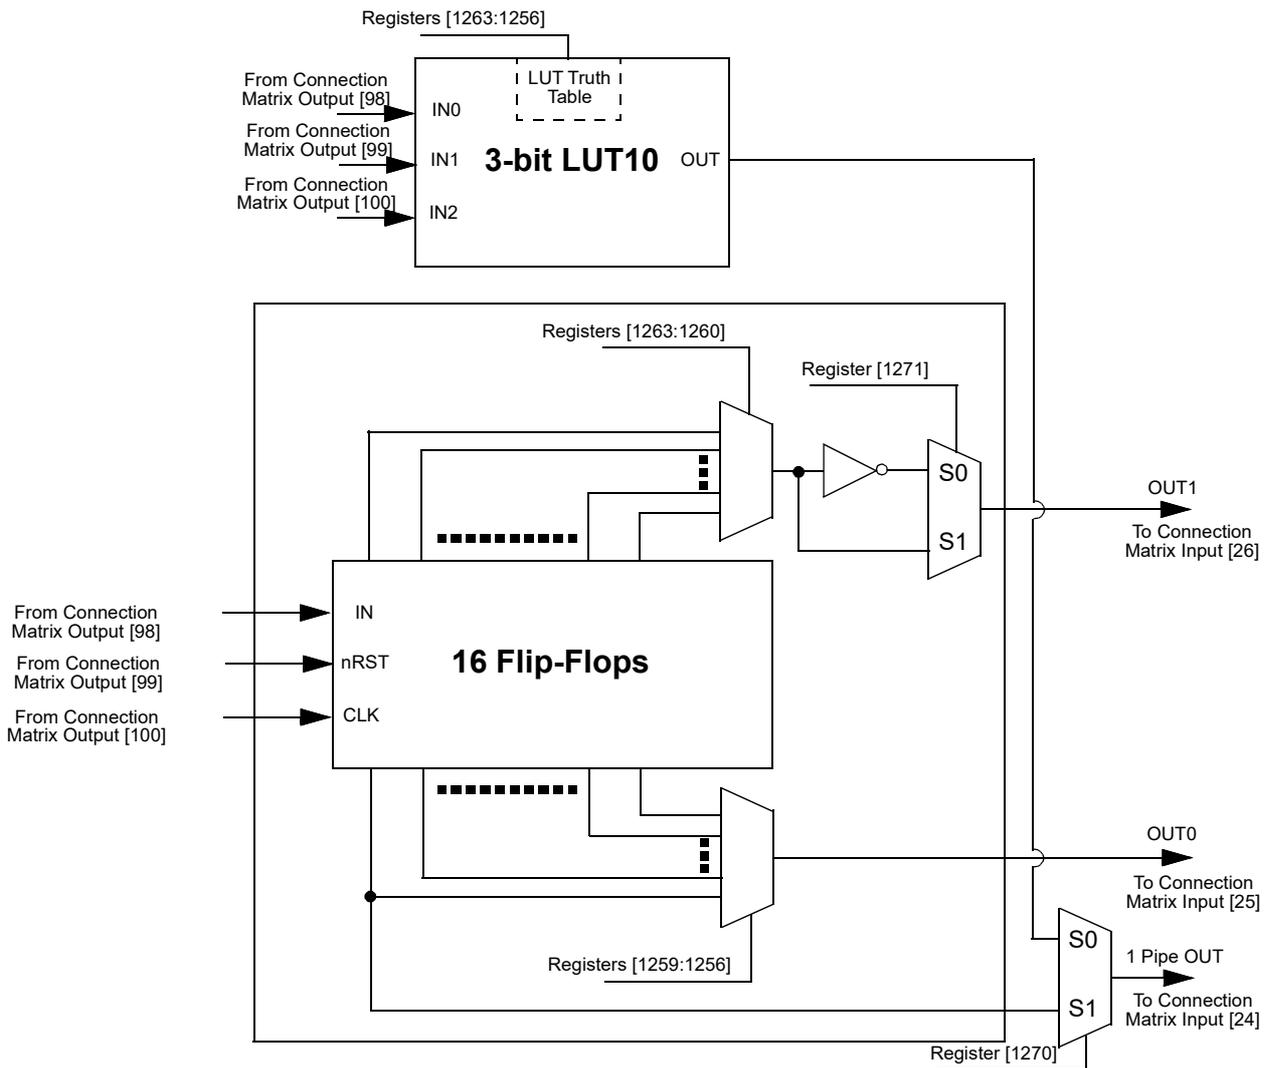


Figure 30. 3-bit LUT10 or Pipe Delay

### 7.3.1 3-Bit LUT or Pipe Delay Macrocells Used as 3-Bit LUTs

Table 24. 3-bit LUT10 Truth Table

IN2	IN1	IN0	OUT	
0	0	0	register [1256]	LSB
0	0	1	register [1257]	
0	1	0	register [1258]	
0	1	1	register [1259]	
1	0	0	register [1260]	
1	0	1	register [1261]	
1	1	0	register [1262]	
1	1	1	register [1263]	MSB

Each macrocell, when programmed for a LUT function, uses a 8-bit register to define their output function:

- 3-bit LUT10 is defined by registers [1263:1256].

## 7.4 3-Bit LUT or 8-Bit Counter/Delay Macrocells

There are five macrocells that can serve as either 3-bit LUTs or as Counter/Delays. When used to implement LUT function, the 3-bit LUT takes in three input signals from the connection matrix and produces a single output, which goes back into the connection matrix. When used to implement 8-Bit Counter/Delay function, two of the three input signals from the connection matrix go to the external clock (EXT\_CLK) and reset (DLY\_IN/CNT Reset) for the Counter/Delay, with the output going back to the connection matrix.

These macrocells can also operate in a one-shot mode, which will generate an output pulse of user-defined width. These macrocells can also operate in a frequency detection or edge detection mode.

For timing diagrams refer to section 7.6 CNT/DLY/FSM Timing Diagrams

**Note:** Counters initialize with counter data after POR.

Two of the five macrocells can have their active count value read via I<sup>2</sup>C (CNT4 and CNT6). See section 15.6.1 Reading Counter Data via I2C for further details.

### 7.4.1 3-Bit LUT or 8-Bit CNT/DLY Block Diagrams

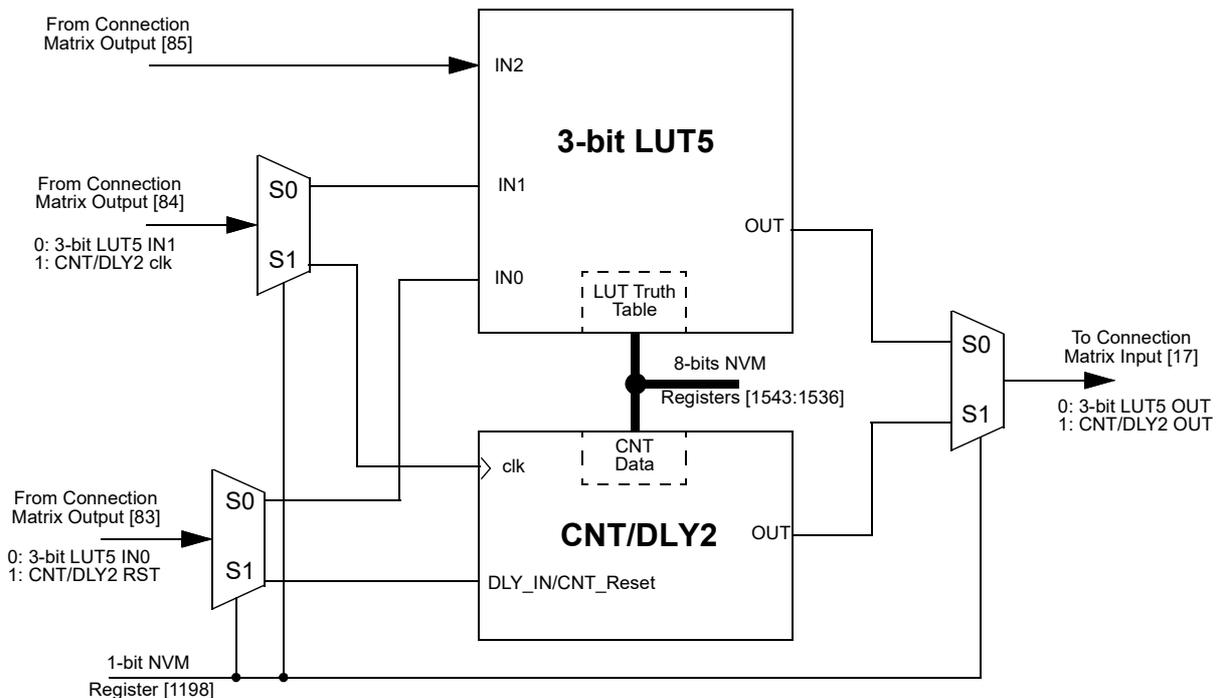


Figure 31. 3-bit LUT5 or CNT/DLY2

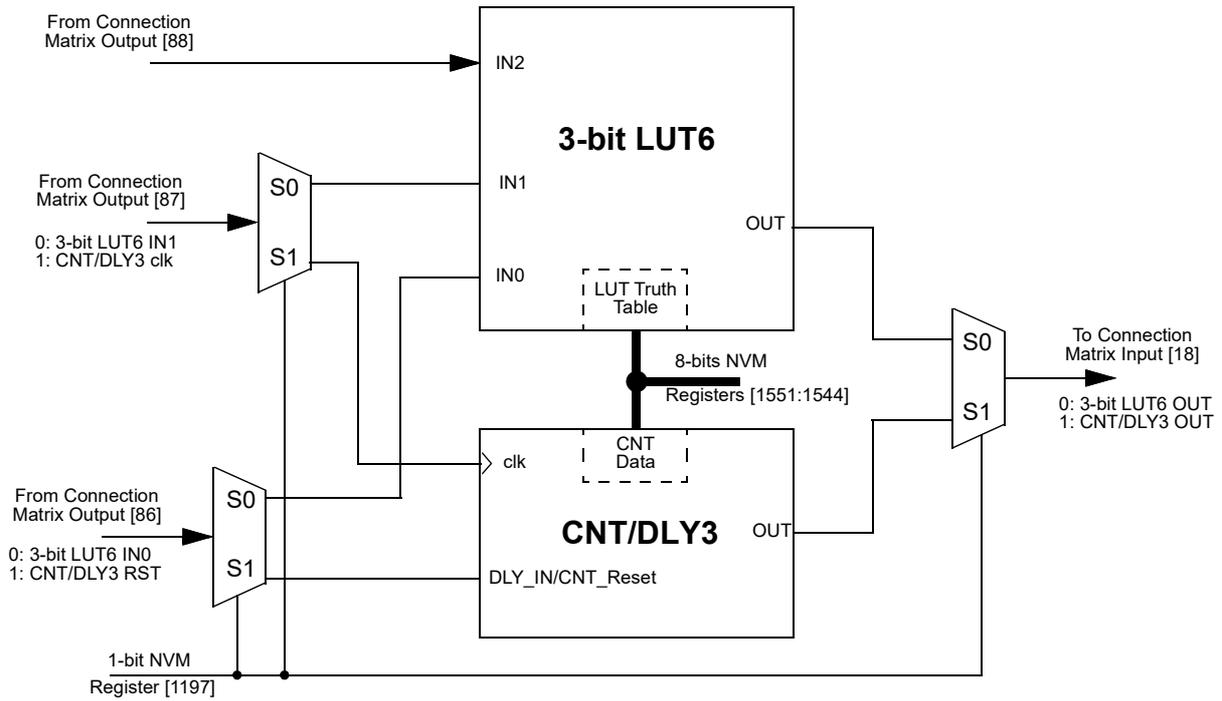


Figure 32. 3-bit LUT6 or CNT/DLY3

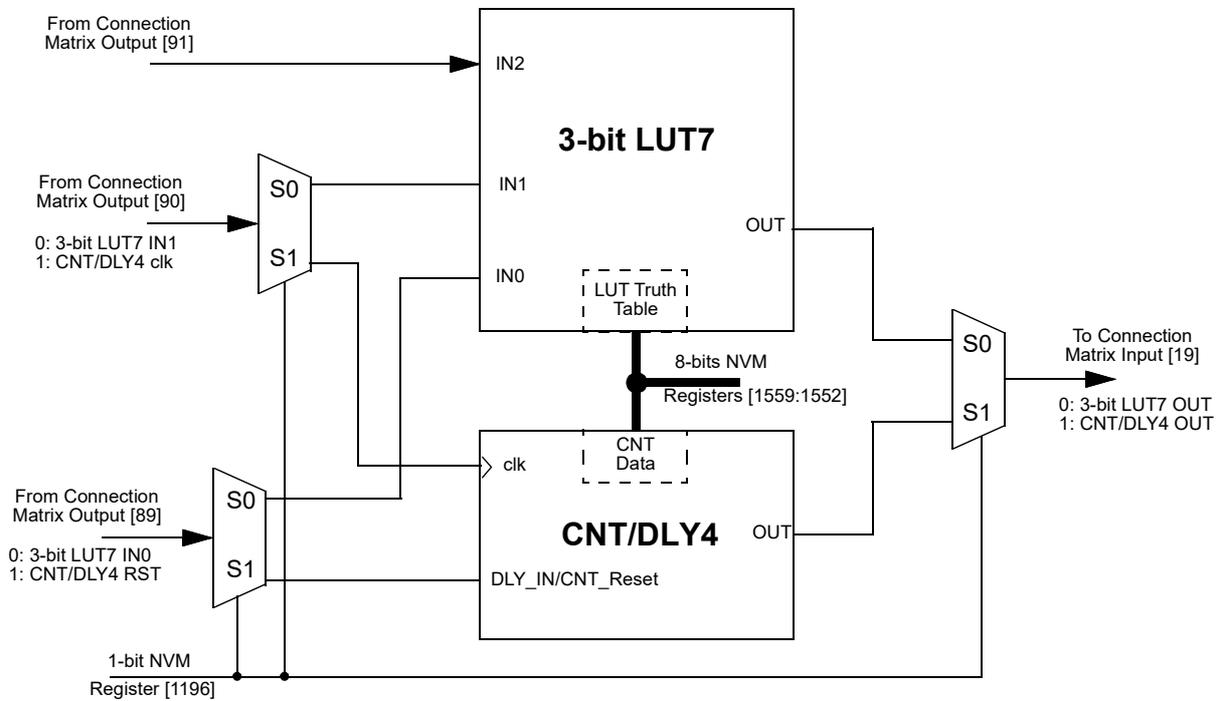


Figure 33. 3-bit LUT7 or CNT/DLY4

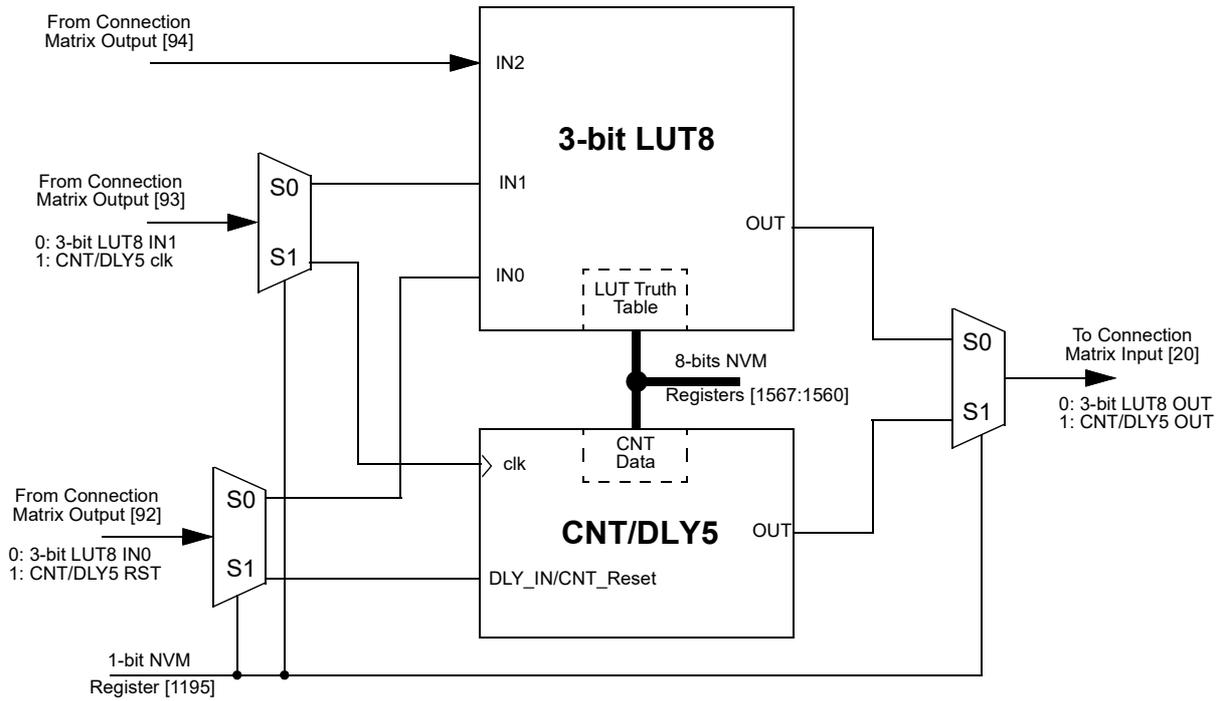


Figure 34. 3-bit LUT8 or CNT/DLY5

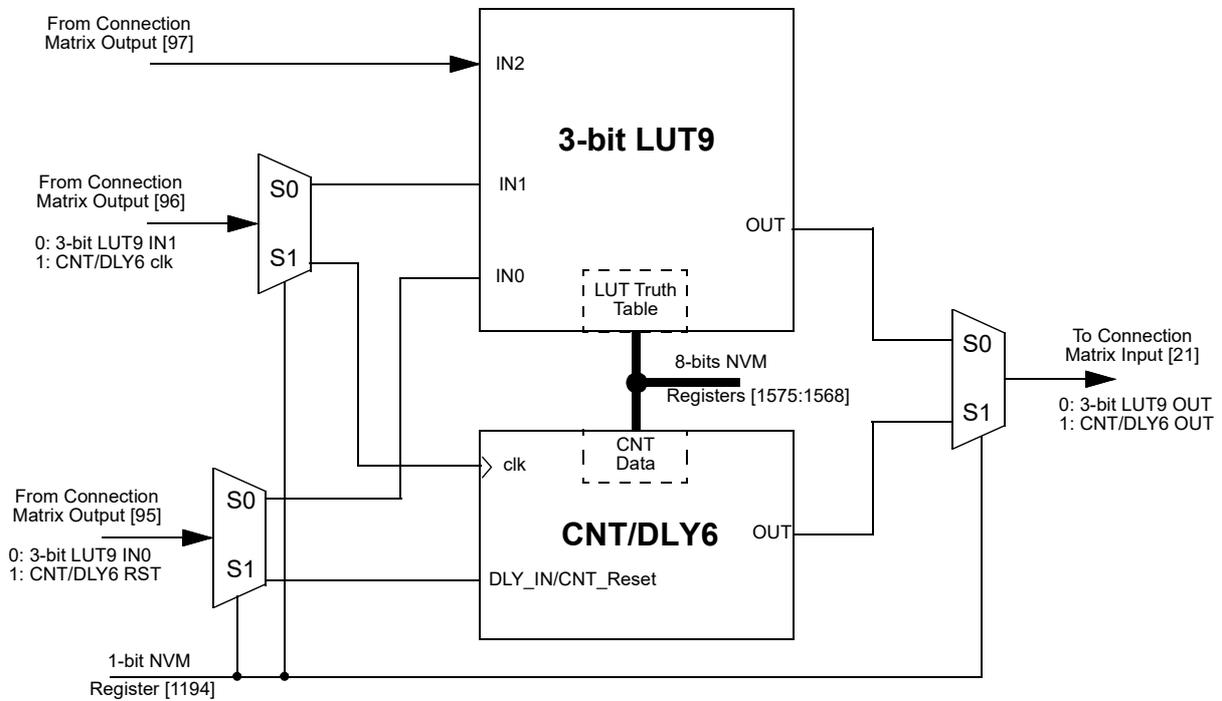


Figure 35. 3-bit LUT9 or CNT/DLY6

## 7.4.2 3-Bit LUT or Counter/Delay Macrocells Used as 3-Bit LUTs

Table 25. 3-bit LUT5 Truth Table

IN2	IN1	IN0	OUT	
0	0	0	register [1536]	LSB
0	0	1	register [1537]	
0	1	0	register [1538]	
0	1	1	register [1539]	
1	0	0	register [1540]	
1	0	1	register [1541]	
1	1	0	register [1542]	
1	1	1	register [1543]	MSB

Table 28. 3-bit LUT8 Truth Table

IN2	IN1	IN0	OUT	
0	0	0	register [1560]	LSB
0	0	1	register [1561]	
0	1	0	register [1562]	
0	1	1	register [1563]	
1	0	0	register [1564]	
1	0	1	register [1565]	
1	1	0	register [1566]	
1	1	1	register [1567]	MSB

Table 26. 3-bit LUT6 Truth Table

IN2	IN1	IN0	OUT	
0	0	0	register [1544]	LSB
0	0	1	register [1545]	
0	1	0	register [1546]	
0	1	1	register [1547]	
1	0	0	register [1548]	
1	0	1	register [1549]	
1	1	0	register [1550]	
1	1	1	register [1551]	MSB

Table 29. 3-bit LUT9 Truth Table

IN2	IN1	IN0	OUT	
0	0	0	register [1568]	LSB
0	0	1	register [1569]	
0	1	0	register [1570]	
0	1	1	register [1571]	
1	0	0	register [1572]	
1	0	1	register [1573]	
1	1	0	register [1574]	
1	1	1	register [1575]	MSB

Table 27. 3-bit LUT7 Truth Table

IN2	IN1	IN0	OUT	
0	0	0	register [1552]	LSB
0	0	1	register [1553]	
0	1	0	register [1554]	
0	1	1	register [1555]	
1	0	0	register [1556]	
1	0	1	register [1557]	
1	1	0	register [1558]	
1	1	1	register [1559]	MSB

Each macrocell, when programmed for a LUT function, uses a 8-bit register to define their output function:

- 3-bit LUT5 is defined by registers [1543:1536]
- 3-bit LUT6 is defined by registers [1551:1544]
- 3-bit LUT7 is defined by registers [1559:1552]
- 3-bit LUT8 is defined by registers [1567:1560]
- 3-bit LUT9 is defined by registers [1575:1568].

Table 30 shows the register bits for the standard digital logic devices (AND, NAND, OR, NOR, XOR, XNOR) that can be created within each of the six 3-bit LUT logic cells.

Table 30. 3-bit LUT Standard Digital Functions

Function	MSB							LSB
AND-3	1	0	0	0	0	0	0	0
NAND-3	0	1	1	1	1	1	1	1
OR-3	1	1	1	1	1	1	1	0
NOR-3	0	0	0	0	0	0	0	1
XOR-3	1	0	0	1	0	1	1	0
XNOR-3	0	1	1	0	1	0	0	1

## 7.5 4-Bit LUT or 16-Bit Counter/Delay Macrocells

There are two macrocells that can serve as either 4-bit LUTs or as 16-bit Counter/Delays. When used to implement LUT function, the 4-bit LUT takes in four input signals from the Connection Matrix and produces a single output, which goes back into the Connection Matrix. When used to implement 16-Bit Counter/Delay function, four input signals from the connection matrix go to the external clock (EXT\_CLK) and reset (DLY\_IN/CNT\_Reset), Keep and Up for the Counter/Delay, with the output going back to the connection matrix.

These two macrocells have an optional Finite State Machine (FSM) function. There are two matrix inputs for Up and Keep to support FSM functionality. Any counter within GreenPAK is counting down by default. In FSM mode (CNT/DLY0 and CNT/DLY1) it is possible to reverse counting by applying High level to Up input. Also, there is a possibility to pause counting by applying High level to Keep input, after the level goes Low, the counter will proceed counting. These macrocells can also operate in a one-shot mode, which will generate an output pulse of user-defined width.

These macrocells can also operate in a frequency detection.

Delay time and Output Period can be calculated using the following formulas:

- Delay time:  $[(\text{Counter data} + 2)/\text{CLK input frequency} - \text{Offset}^*]$
- Output Period:  $[(\text{Counter data} + 1)/\text{CLK input frequency} - \text{Offset}^*]$ .

One Shot pulse width can be calculated using formula:

- Pulse width =  $[(\text{Counter Data} + 2)/\text{CLK input frequency} - \text{Offset}^*]$ .

\*Offset is the asynchronous time offset between the input signal and the first clock pulse.

**Note:** Counters initialize with counter data after POR

For timing diagrams refer to section [7.6 CNT/DLY/FSM Timing Diagrams](#).

Both of these macrocells can have their active count value read via I<sup>2</sup>C. See section [15.6.1 Reading Counter Data via I2C](#) for further details.

### 7.5.1 4-Bit LUT or 16-Bit CNT/DLY Block Diagram

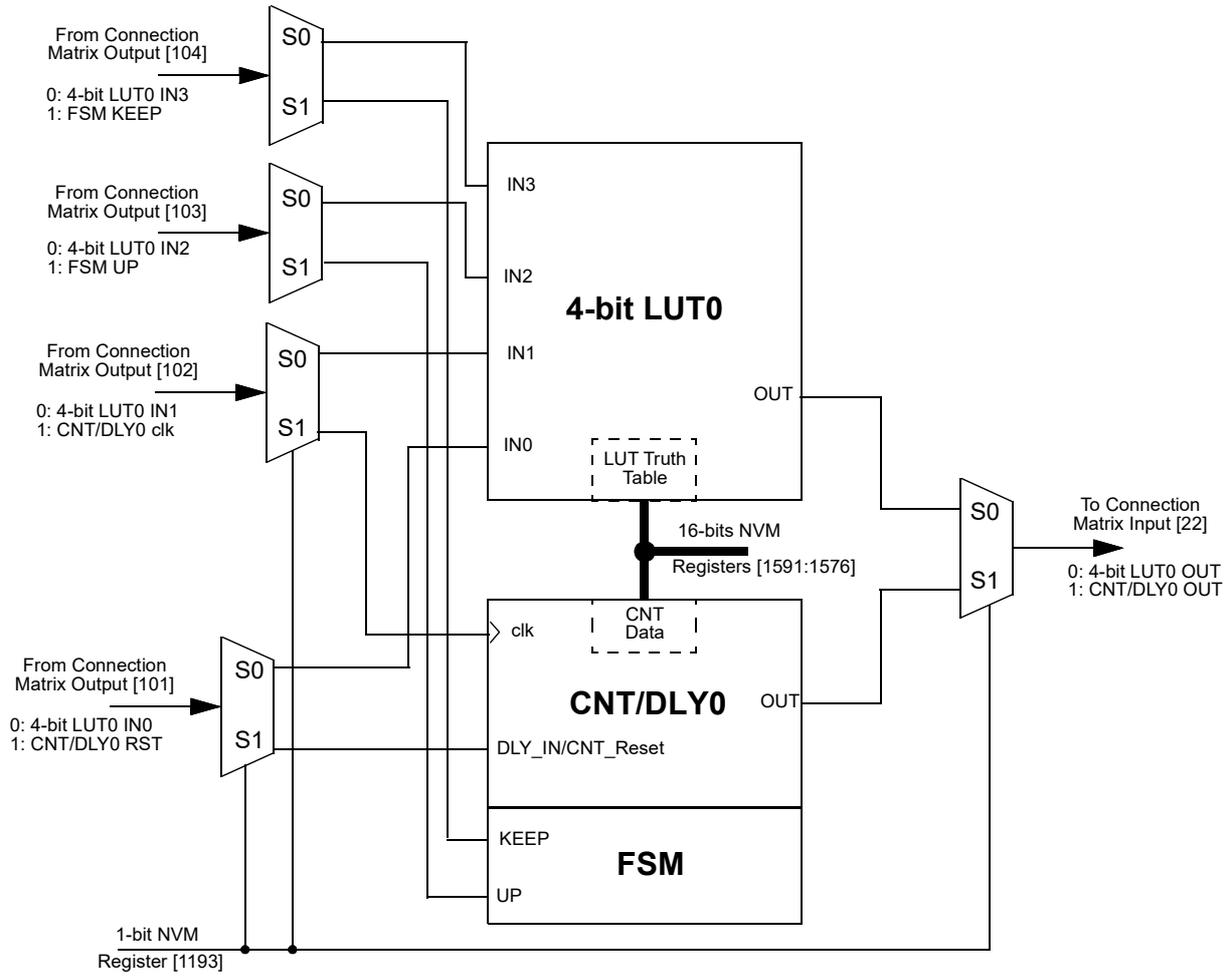


Figure 36. 4-bit LUT0 or CNT/DLY0

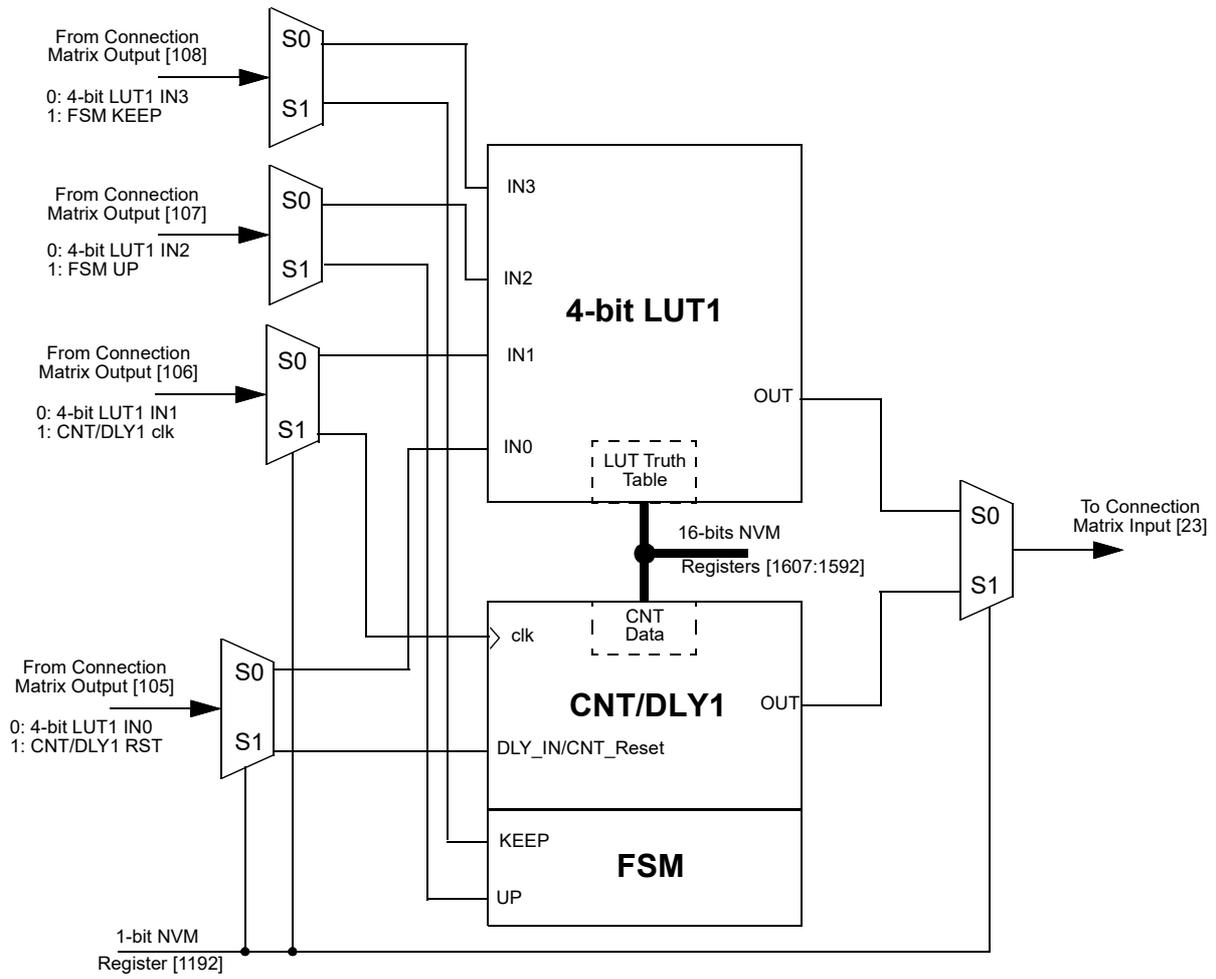


Figure 37. 4-bit LUT1 or CNT/DLY1

### 7.5.2 4-Bit LUT or 16-Bit Counter/Delay Macrocells Used as 4-Bit LUTs

Table 31. 4-bit LUT0 Truth Table

IN3	IN2	IN1	IN0	OUT	
0	0	0	0	register [1576]	LSB
0	0	0	1	register [1577]	
0	0	1	0	register [1578]	
0	0	1	1	register [1579]	
0	1	0	0	register [1580]	
0	1	0	1	register [1581]	
0	1	1	0	register [1582]	
0	1	1	1	register [1583]	
1	0	0	0	register [1584]	
1	0	0	1	register [1585]	
1	0	1	0	register [1586]	
1	0	1	1	register [1587]	
1	1	0	0	register [1588]	
1	1	0	1	register [1589]	
1	1	1	0	register [1590]	
1	1	1	1	register [1591]	MSB

Table 32. 4-bit LUT1 Truth Table

IN3	IN2	IN1	IN0	OUT	
0	0	0	0	register [1592]	LSB
0	0	0	1	register [1593]	
0	0	1	0	register [1594]	
0	0	1	1	register [1595]	
0	1	0	0	register [1596]	
0	1	0	1	register [1597]	
0	1	1	0	register [1598]	
0	1	1	1	register [1599]	
1	0	0	0	register [1600]	
1	0	0	1	register [1601]	
1	0	1	0	register [1602]	
1	0	1	1	register [1603]	
1	1	0	0	register [1604]	
1	1	0	1	register [1605]	
1	1	1	0	register [1606]	
1	1	1	1	register [1607]	MSB

Each macrocell, when programmed for a LUT function, uses a 16-bit register to define their output function:

- 4-bit LUT0 is defined by registers [1591:1576]
- 4-bit LUT1 is defined by registers [1607:1592].

Table 33. 4-bit LUT Standard Digital Functions

Function	MSB															LSB
AND-4	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
NAND-4	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
OR-4	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0
NOR-4	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1
XOR-4	0	1	1	0	1	0	0	1	1	0	0	1	0	1	1	0
XNOR-4	1	0	0	1	0	1	1	0	0	1	1	0	1	0	0	1

## 7.6 CNT/DLY/FSM Timing Diagrams

### 7.6.1 Delay Mode (Edge Select: Both, Counter Data: 3) CNT/DLY2 to CNT/DLY6

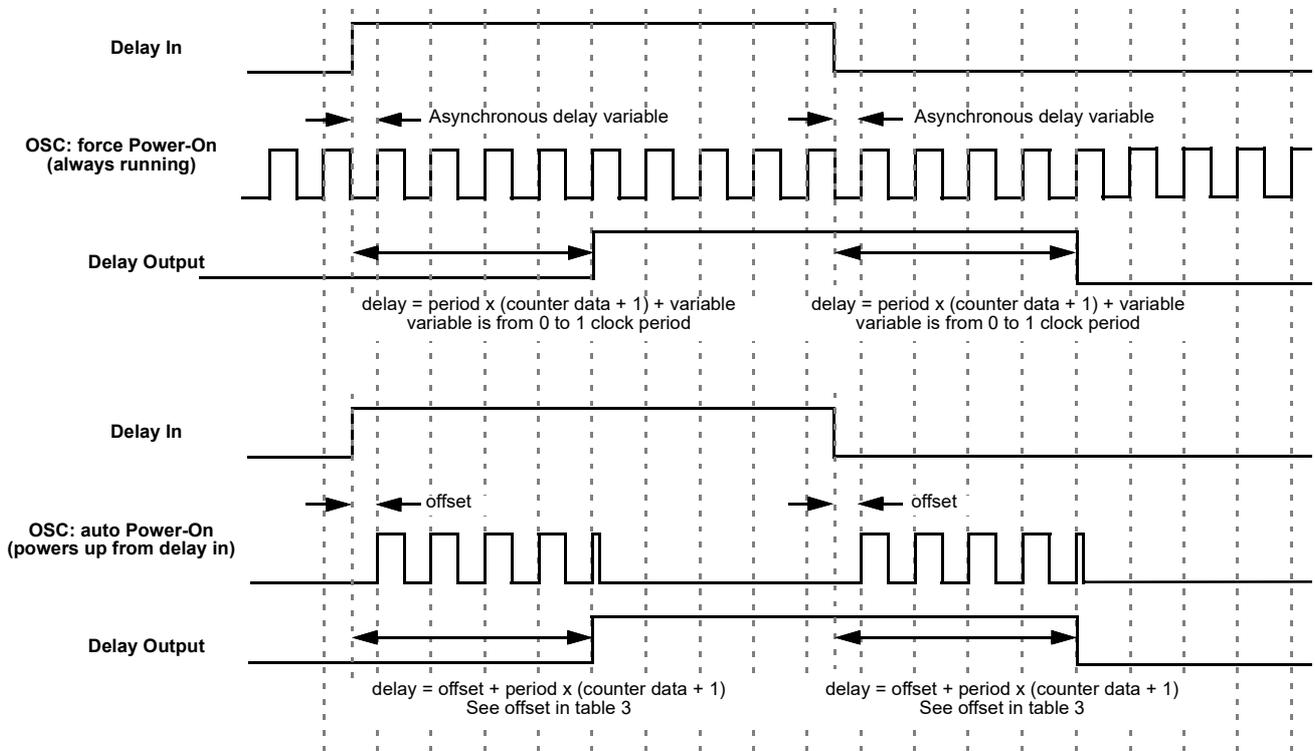


Figure 38. Delay Mode Timing Diagram

### 7.6.2 Count Mode (Count Data: 3), Counter Reset (Rising Edge Detect) CNT/DLY2 to CNT/DLY6

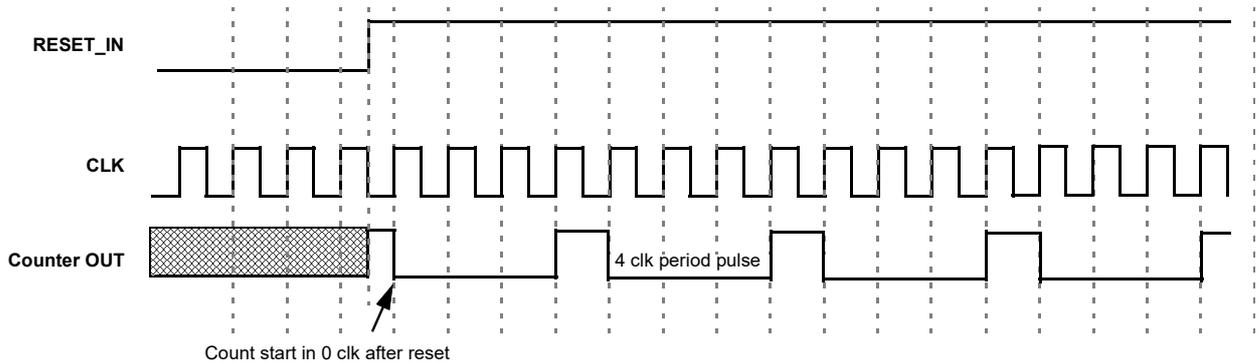


Figure 39. Counter Mode Timing Diagram

### 7.6.3 One-Shot Mode CNT/DLY0 to CNT/DLY6

This macrocell will generate a pulse whenever a selected edge is detected on its input. Register bits set the edge selection. The pulse width determines by counter data and clock selection properties. The output pulse polarity (non-inverted or inverted) is selected by register bit. Any incoming edges will be ignored during the pulse width generation. The following diagram shows one-shot function for non-inverted output.

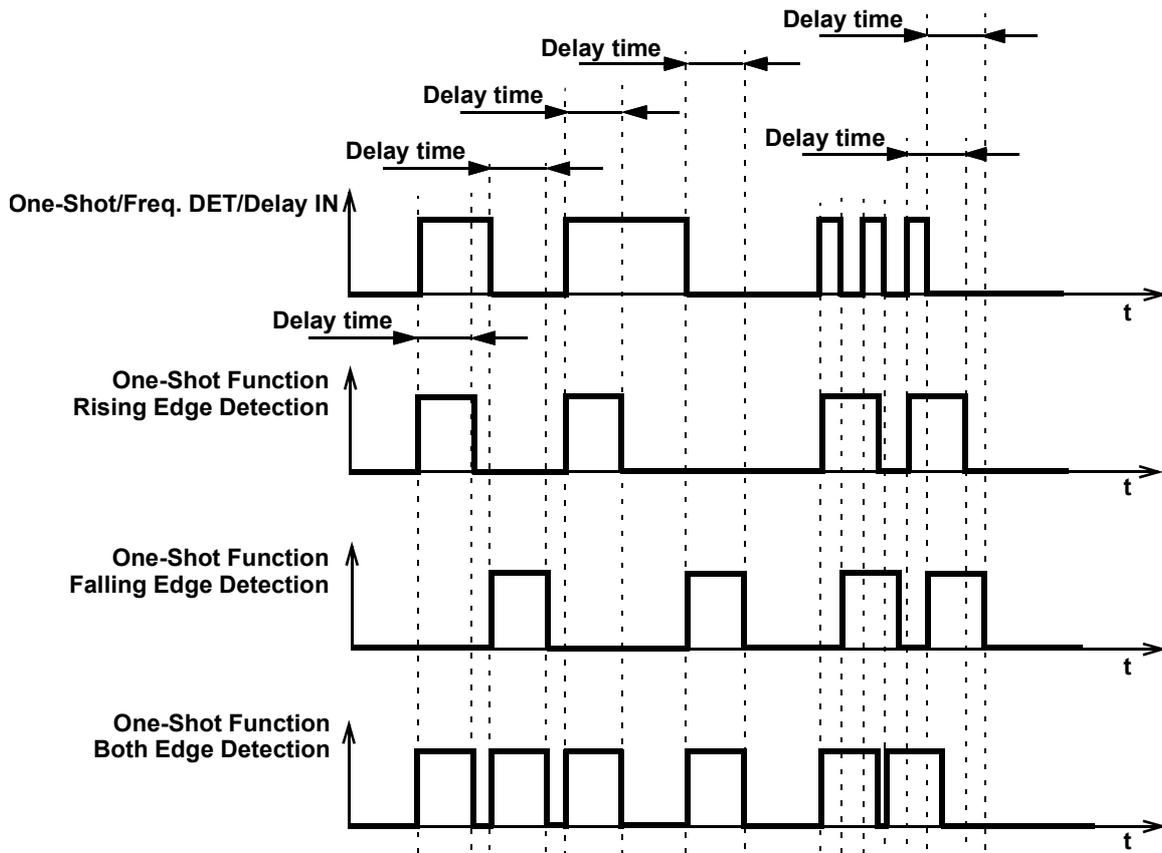


Figure 40. One-Shot Function Timing Diagram

This macrocell generates a high level pulse with a set width (defined by counter data) when detecting the respective edge. It does not restart while pulse is high.

#### 7.6.4 Frequency Detection Mode CNT/DLY0 to CNT/DLY6

**Rising Edge:** The output goes high if the time between two successive edges is less than the delay. The output goes low if the second rising edge has not come after the last rising edge in specified time.

**Falling Edge:** The output goes high if the time between two falling edges is less than the set time. The output goes low if the second falling edge has not come after the last falling edge in specified time.

**Both Edge:** The output goes high if the time between the rising and falling edges is less than the set time, which is equivalent to the length of the pulse. The output goes low if after the last rising/falling edge and specified time, the second edge has not come.

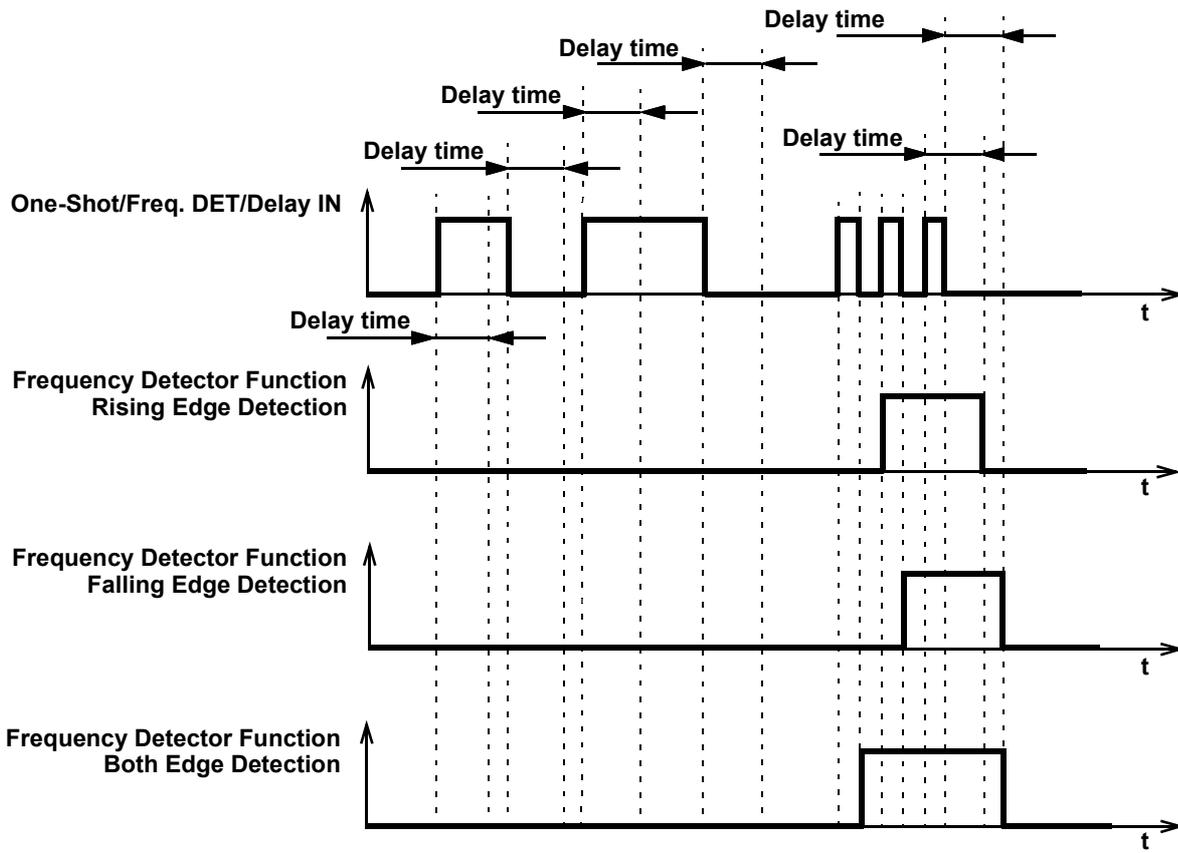


Figure 41. Frequency Detection Mode Timing Diagram

### 7.6.5 Edge Detection Mode CNT/DLY2 to CNT/DLY6

The macrocell generates high level short pulse when detecting the respective edge. See section 3.4.5 Programmable Delay Typical Delays and Widths.

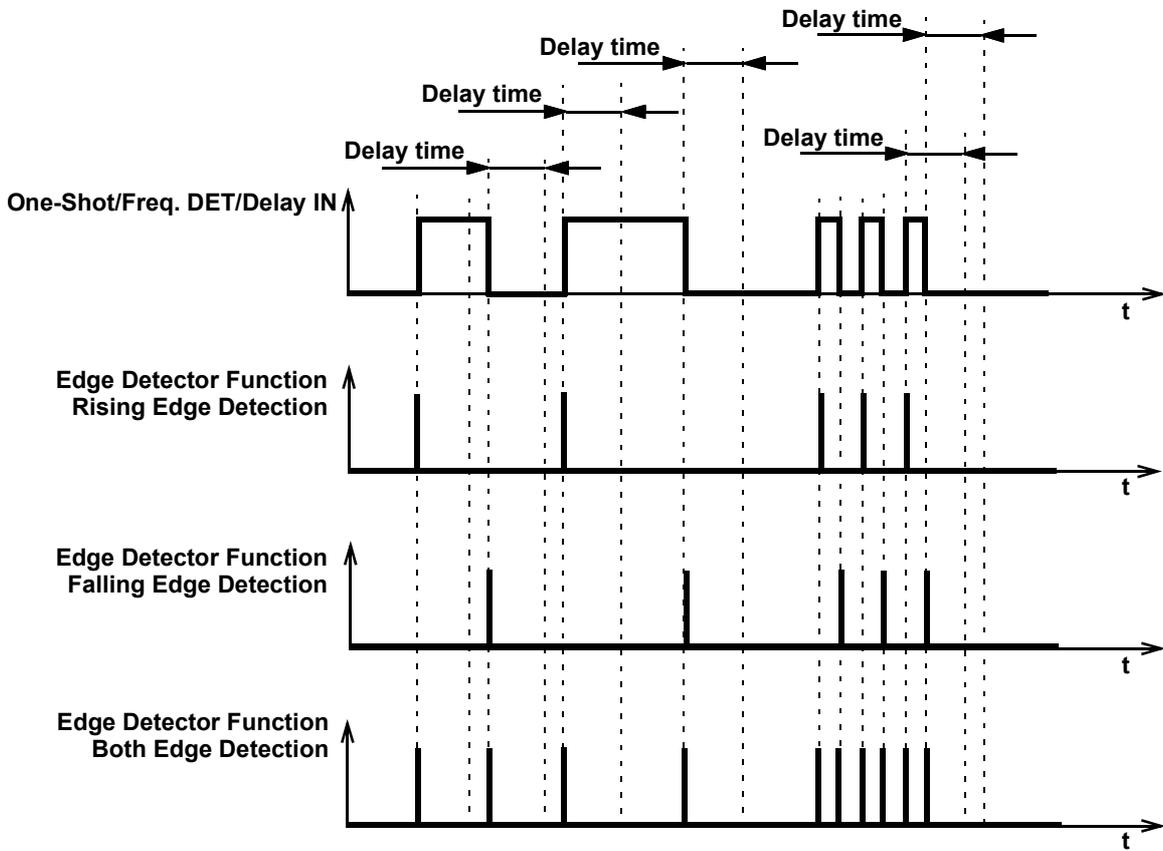


Figure 42. Edge Detection Mode Timing Diagram

### 7.6.6 Delay Mode CNT/DLY0 to CNT/DLY6

The macrocell shifts the respective edge to a set time and restarts by appropriate edge. It works as a filter if the input signal is shorter than the delay time.

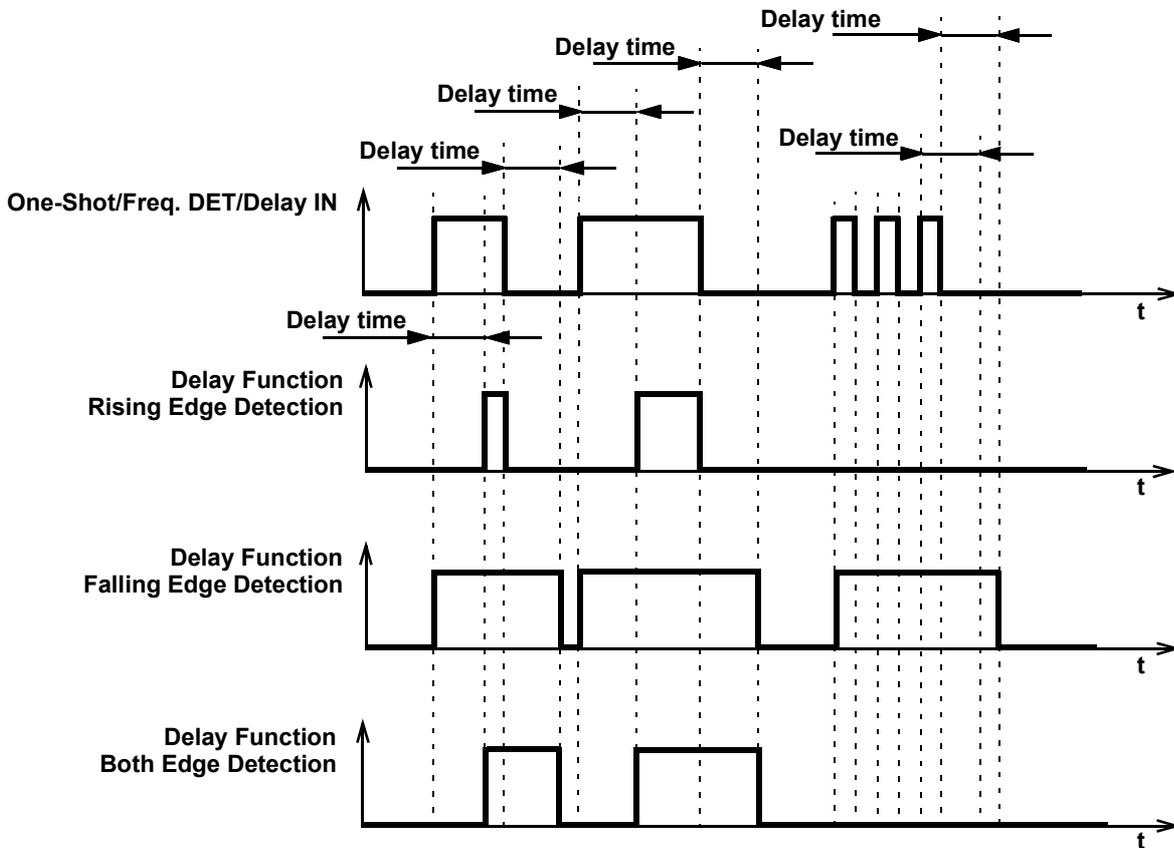


Figure 43. Delay Mode Timing Diagram

### 7.6.7 CNT/FSM Mode CNT/DLY0, CNT/DLY1

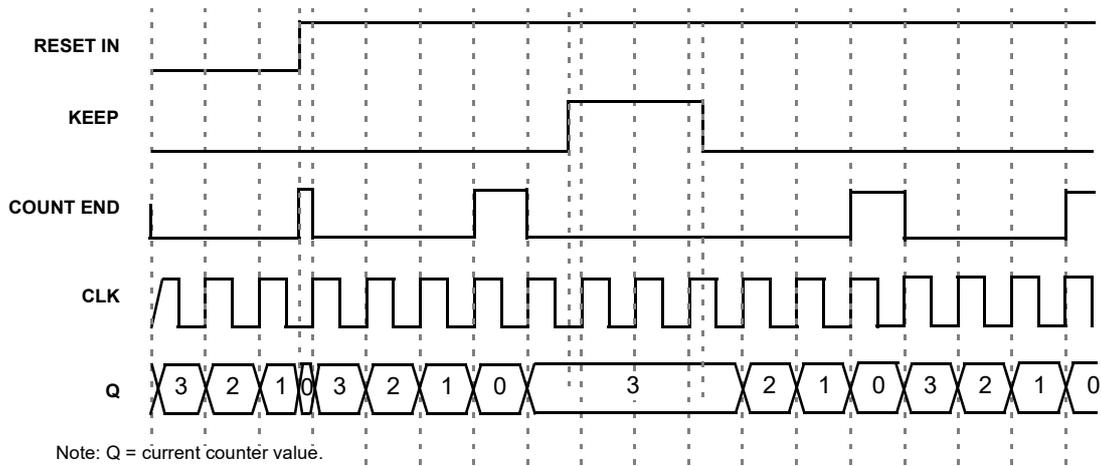


Figure 44. CNT/FSM Timing Diagram (Reset Rising Edge Mode, Oscillator is Forced On, UP = 0) for Counter Data = 3

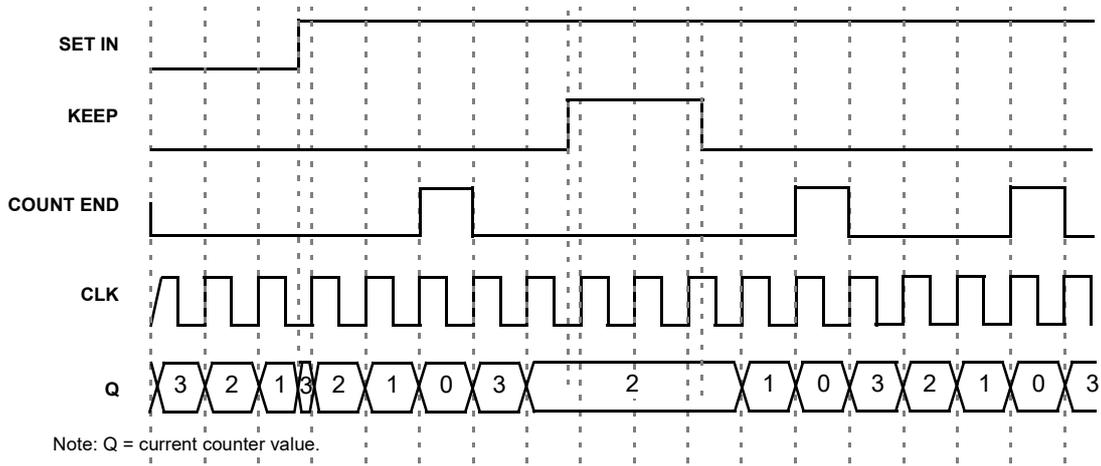


Figure 45. CNT/FSM Timing Diagram (Set Rising Edge Mode, Oscillator is Forced On, UP = 0) for Counter Data = 3

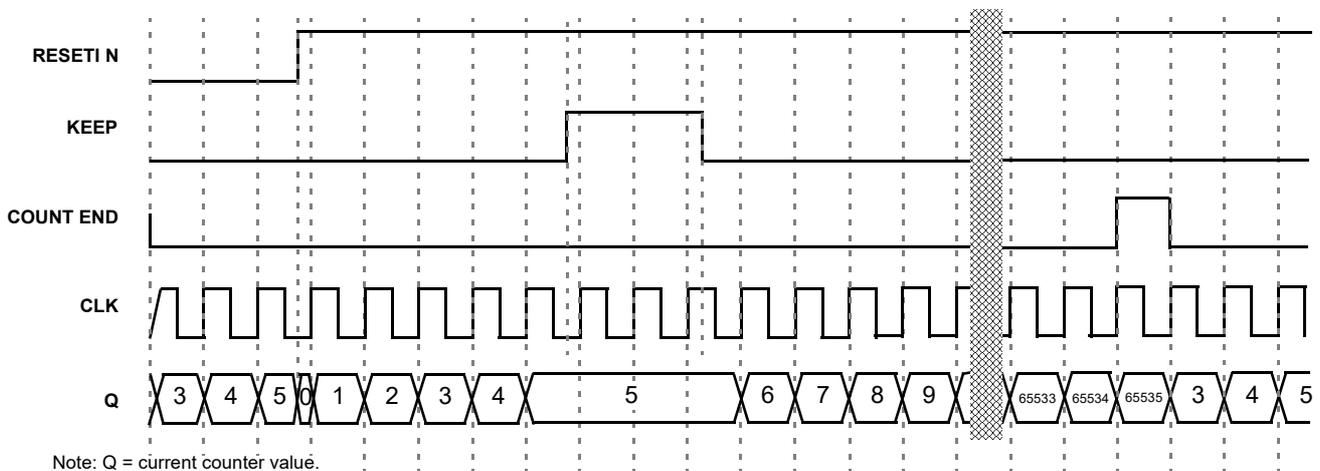


Figure 46. CNT/FSM Timing Diagram (Reset Rising Edge Mode, Oscillator is Forced On, UP = 1) for Counter Data = 3

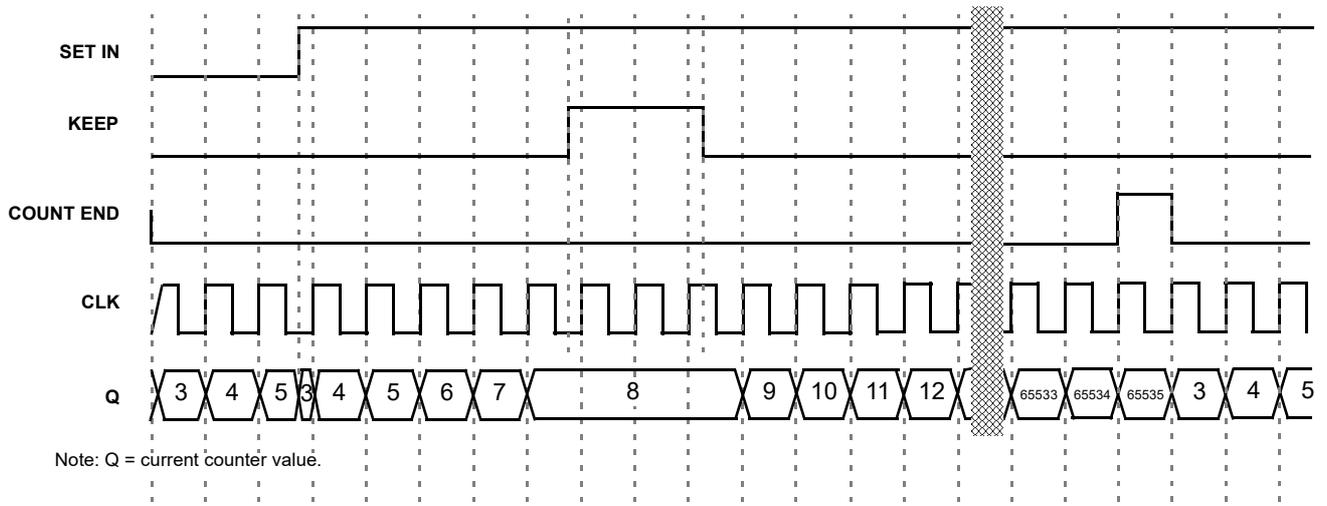


Figure 47. CNT/FSM Timing Diagram (Set Rising Edge Mode, Oscillator is Forced On, UP = 1) for Counter Data = 3

### 7.6.8 Difference in Counter Value for Counter, Delay, One-Shot, and Frequency Detect Modes

There is a difference in counter value for Counter and Delay/One-Shot/Frequency Detect modes. The counter value is shifted for two rising edges of the clock signal in Delay/One-Shot/Frequency Detect modes compared to Counter mode. See [Figure 48](#).

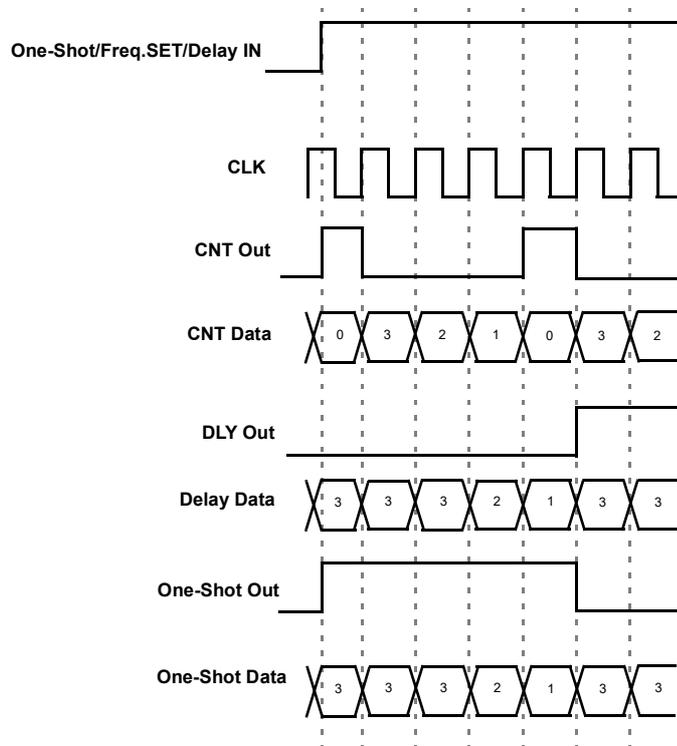


Figure 48. Counter Value, Counter Data = 3

### 7.7 2-bit LUT or Programmable Pattern Generator

The SLG46536-E has one combination function macrocell that can serve as a logic or timing function. This macrocell can serve as a Look Up Table (LUT), or Programmable Pattern Generator (PGen).

When used to implement LUT functions, the 2-bit LUT takes in four input signals from the connection matrix and produces a single output, which goes back into the connection matrix. When used as a LUT to implement combinatorial logic functions, the outputs of the LUTs can be configured to any user defined function, including the following standard digital logic devices (AND, NAND, OR, NOR, XOR, XNOR). The user can also define the combinatorial relationship between inputs and outputs to be any selectable function.

When operating as a Programmable Pattern Generator, the output of the macrocell with clock out a sequence of two to sixteen bits that are user selectable in their bit values, and user selectable in the number of bits (up to sixteen) that are output before the pattern repeats. See Figure 50.

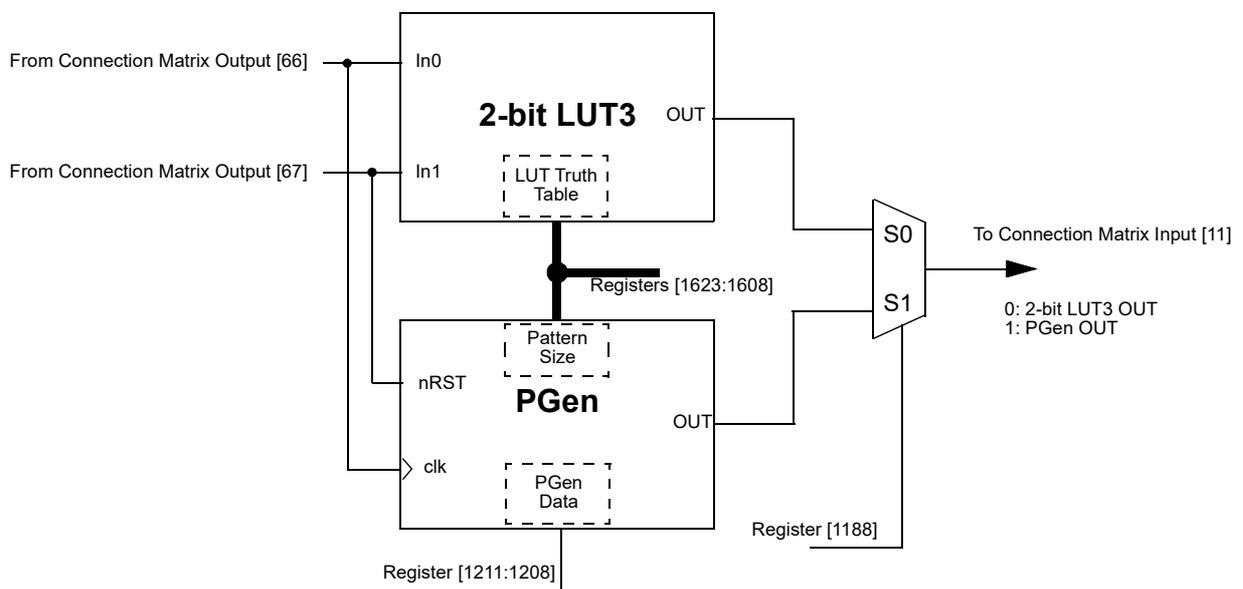


Figure 49. 2-bit LUT3 or PGen

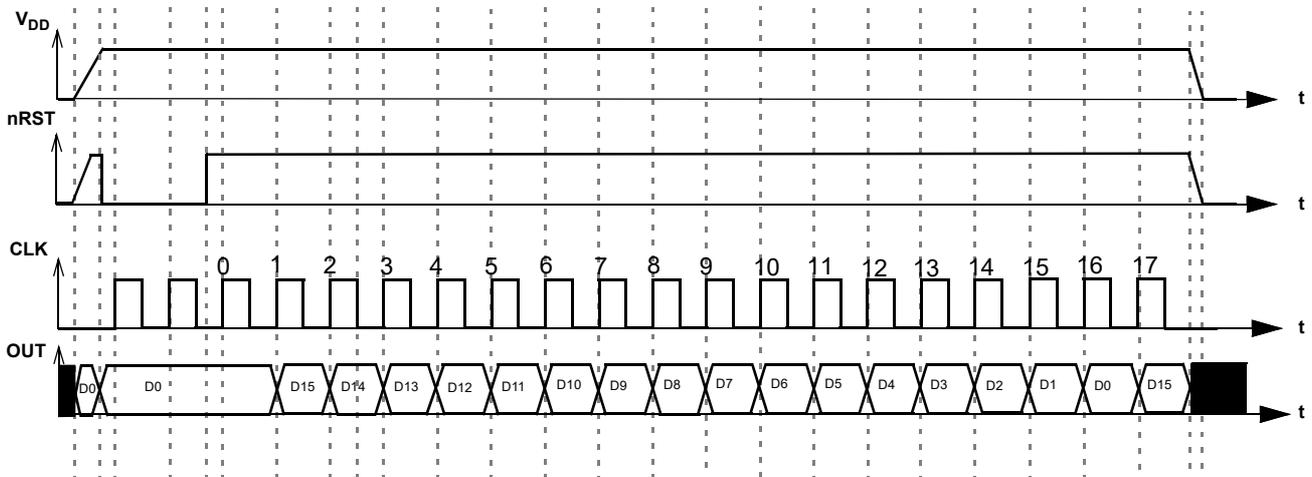


Figure 50. PGen Timing Diagram

## 7.8 Wake and Sleep Controller

The SLG46536-E has a Wake and Sleep (WS) function for all ACMPs. The macrocell CNT/DLY0 can be reconfigured for this purpose registers [1319:1318] = 11 and registers [1495] = 1. The WS serves for power saving, it allows to switch on and off selected ACMPs on selected bit of 16-bit counter.

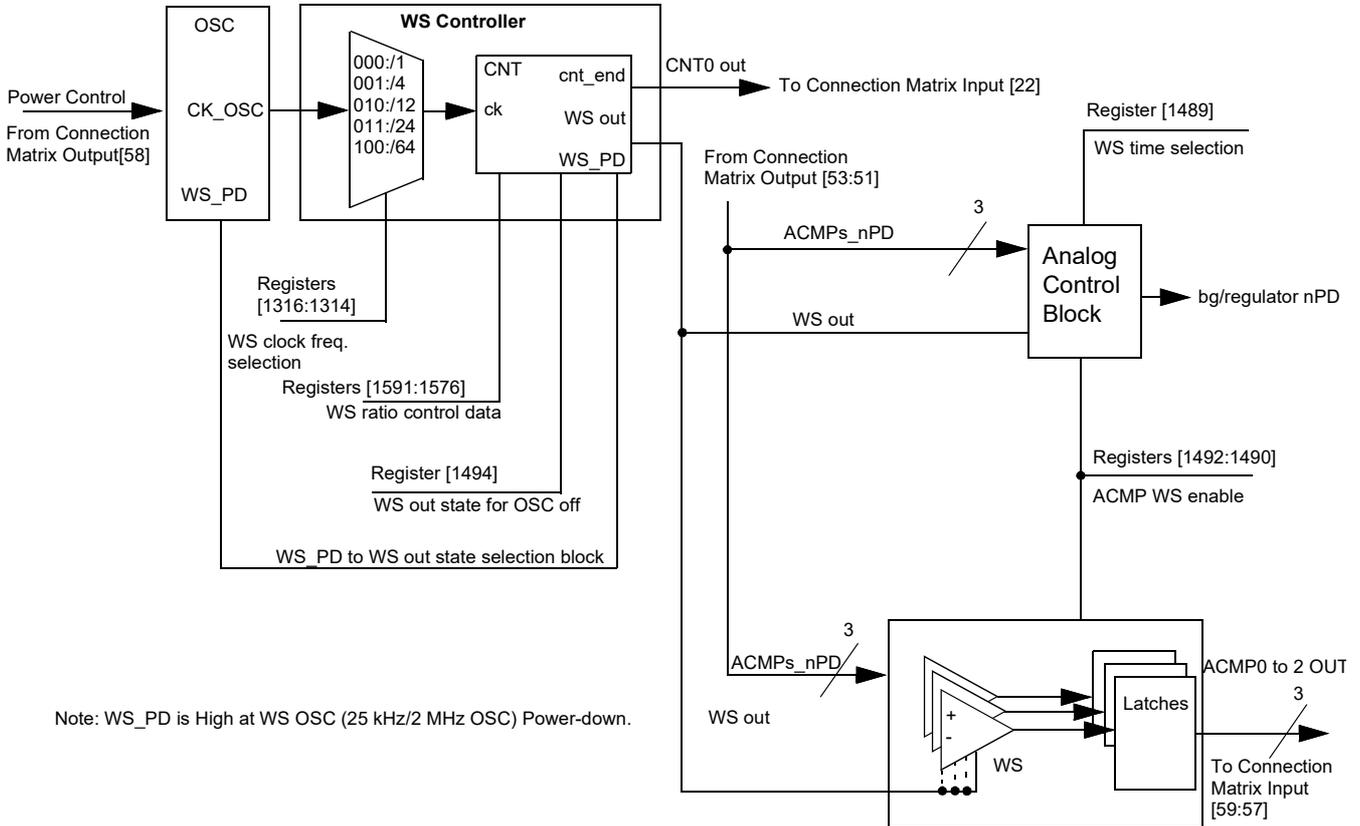


Figure 51. Wake/Sleep Controller

To use any ACMP under WS controller the following settings must be done:

- ACMP Power Up Input from matrix = 1 (for each ACMP separately)
- CNT/DLY0 must be set to Wake and Sleep Controller function (for all ACMPs)
- Register WS => enable (for each ACMP separately)
- CNT/DLY0 set/reset input = 0 (for all ACMPs)
- In case of using OSC1 (25 MHz), OSC0 must be set to Force Power-On.

As the OSC any oscillator with any pre-divider can be used. The user can select a period of time while the ACMPs are sleeping in a range of 1 - 65535 clock cycles. Before they are sent to sleep their outputs are latched, so the ACMPs remain their state (High or Low) while sleeping.

WS controller has the following settings:

- Wake and Sleep Output State (High/Low)
  - If OSC is powered off (Power-Down option is selected; power-down input = 1) and Wake and Sleep Output State = High, the ACMP is continuously on.
  - If OSC is powered off (Power-Down option is selected; power-down input = 1) and Wake and Sleep Output State = Low, the ACMP is continuously off.

Both cases WS function is turned off.

- Counter Data (Range: 1 - 65535)  
User can select wake and sleep ratio of the ACMP; counter data = sleep time, one clock = wake time.
- Q mode - defines the state of WS counter data when Set/Reset signal appears  
Reset - when active signal appears, the WS counter will reset to zero and High level signal on its output will turn the ACMPs on. When Reset signal goes out, the WS counter will go Low and turn the ACMPs off until the counter counts up to the end.  
Set - when active signal appears, the WS counter will stop and Low level signal on its output will turn the ACMPs off. When Set signal goes out, the WS counter will go on counting and High level signal will turn the ACMPs on while counter is counting up to the end.
- Edge Select defines the edge for Q mode  
High level Set/Reset - switches mode Set/Reset when level is High.  
**Note:** Q mode operates only in case of "High Level Set/Reset".
- Wake time selection - time required for wake signal to turn the ACMPs on  
Normal Wake Time - when WS signal is High, it takes a BG time (100/550  $\mu$ s) to turn the ACMPs on. They will stay on until WS signal is Low again. Wake time is one clock period. It should be longer than BG turn on time and minimal required comparing time of the ACMP.  
Short Wake Time - when WS signal is High, it takes a BG time (100/550  $\mu$ s) to turn the ACMPs on. They will stay on for 1  $\mu$ s and turn off regardless of WS signal. The WS signal width does not matter.
- Keep - pauses counting while Keep = 1
- Up - reverses counting  
If Up = 1, CNT is counting up from user selected value to 65535.  
If Up = 0, CNT is counting down from user selected value to 1.

## 8. Combinatorial Logic

Combinatorial logic is supported via one 4-bit Lookup Table. Inputs and Output for the LUT are configured from connection matrix with specific logic functions being defined by the state of NVM bits. The output of the LUT can be configured to any user defined function, including the following standard digital logic devices AND, NAND, OR, NOR, XOR and XNOR.

The one 4-bit LUT2 takes in four input signals from connection matrix and produces a single output, which goes back into connection matrix. The output state of the 4-bit LUT is defined by sixteen register bits, the output state is based on the appropriate bit selected by the value of the four inputs to the LUT.

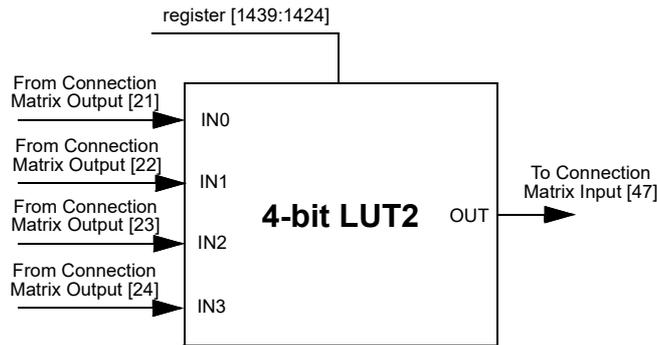


Figure 52. 4-bit LUT2

The device also includes two Combination Function Macrocells that can be used as a 4-bit LUT. For more details, please see [7. Combination Function Macrocells](#).

Table 34. 4-bit LUT2 Truth Table

IN3	IN2	IN1	IN0	OUT	
0	0	0	0	register [1424]	LSB
0	0	0	1	register [1425]	
0	0	1	0	register [1426]	
0	0	1	1	register [1427]	
0	1	0	0	register [1428]	
0	1	0	1	register [1429]	
0	1	1	0	register [1430]	
0	1	1	1	register [1431]	
1	0	0	0	register [1432]	
1	0	0	1	register [1433]	
1	0	1	0	register [1434]	
1	0	1	1	register [1435]	
1	1	0	0	register [1436]	
1	1	0	1	register [1437]	
1	1	1	0	register [1438]	
1	1	1	1	register [1439]	MSB

This macrocell, when programmed for a LUT function, uses a 16-bit register to define their output function:

- 4-bit LUT2 is defined by registers [1439:1424].

**Table 35. 4-bit LUT Standard Digital Functions**

Function	MSB															LSB
AND-4	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
NAND-4	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
OR-4	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0
NOR-4	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1
XOR-4	0	1	1	0	1	0	0	1	1	1	0	0	1	1	1	0
XNOR-4	1	0	0	1	0	1	1	0	0	0	1	1	0	0	0	1

## 9. Analog Comparators

There are three Analog Comparator (ACMP) macrocells in the SLG46536-E. In order for the ACMP cells to be used in a GreenPAK design, the power up signals (ACMPx\_nPD) need to be active. By connecting to signals coming from the Connection Matrix, it is possible to have each ACMP be always on, always off, or power cycled based on a digital signal coming from the Connection Matrix. Also, all ACMPs have Wake and Sleep function (WS), see section [7.8 Wake and Sleep Controller](#). When ACMP is powered down, output is low.

PWR UP = 1 – ACMP is powered up.

PWR UP = 0 – ACMP is powered down.

During ACMP power up, its output will remain low, and then becomes valid 1 ms (max) after ACMP power up signal goes high, see [Figure 56](#). The ACMP cells have an input "Low bandwidth" signal selection, which can be used to save power and reduce noise impact when lower bandwidth signals are being compared. To ensure proper chip startup operation, it is recommended to enable the ACMPs with the POR signal, and not the  $V_{DD}$  signal.

**Note:** Regulator and Charge Pump set to automatic ON/OFF.

Each of the ACMP cells has a positive input signal that can be provided by a variety of external sources. There is also a selectable gain stage (1x, 0.5x, 0.33x, 0.25x) before connection to the analog comparator. The Gain divider is unbuffered and consists of 250 K $\Omega$  (typ.) resistors. IN- voltage range: 0 - 1.2 V. Can use  $V_{REF}$  selection  $V_{DD}/4$  and  $V_{DD}/3$  to maintain this input range.

Input bias current < 1 nA (typ.).

Each cell also has a hysteresis selection, to offer hysteresis of (0, 25, 50, 200) mV. The 50 mV and 200 mV hysteresis options can be used with internal voltage reference only, while 25 mV hysteresis option can be used with both internal and external voltage reference. The 50 mV and 200 mV hysteresis options are one way hysteresis. It means that the actual thresholds will be  $V_{REF}$  (high threshold) and  $V_{REF} - \text{hysteresis}$  (low threshold). The ACMP output will retain its previous value, if the input voltage is within threshold window (between  $V_{REF}$  and  $V_{REF} - \text{hysteresis}$ ). Please note: for the 25 mV hysteresis option threshold levels will be  $V_{REF} + \text{hysteresis}/2$  (high threshold) and  $V_{REF} - \text{hysteresis}/2$  (low threshold).

**Note:** Any ACMP powered on enables the Bandgap internal circuit as well. An analog voltage will appear on  $V_{REF}$  even when the Force Bandgap option is set as Disabled.

For high input impedance when using the gain divider (x0.25, x0.33, x0.5), it is possible to use the input buffer. However, this will add some offset, see [Figure 57](#) and [Figure 58](#). It is not recommended to use ACMP buffer when  $V_{DD} < 2.5$  V.

## 9.1 ACMP0 Block Diagram


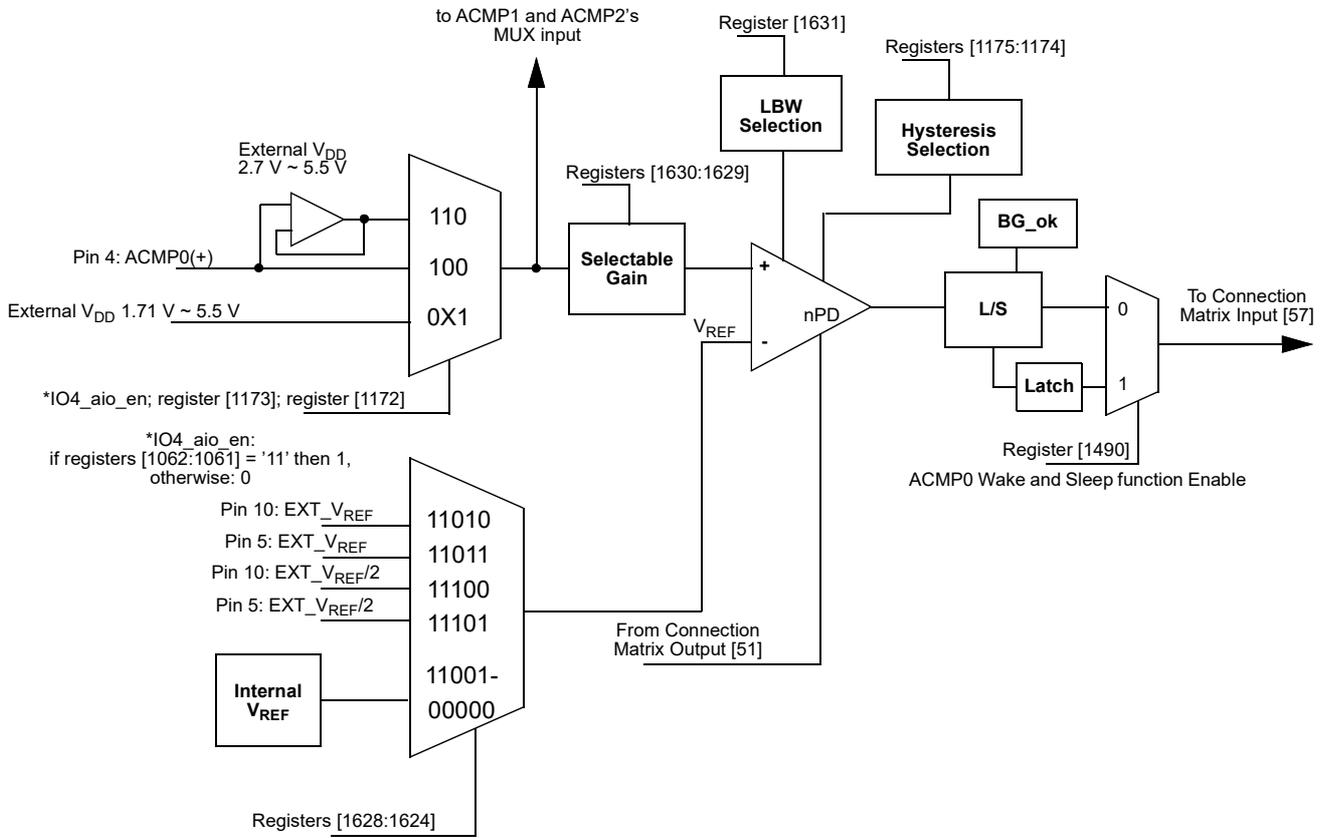


Figure 53. ACMP0 Block Diagram

## 9.2 ACMP1 Block Diagram

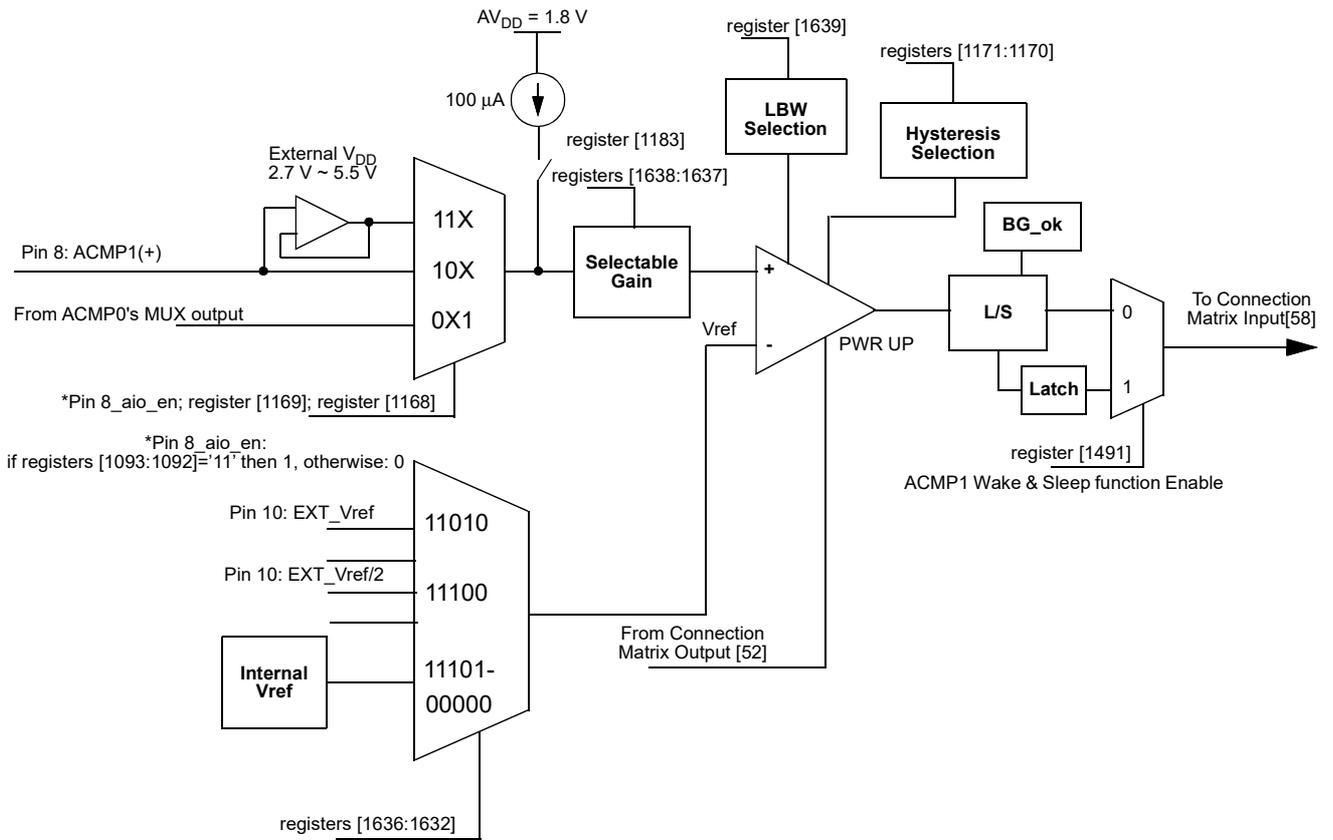

Note: when 100  $\mu A$  Current Source is enabled input voltage on Pin 8 should not exceed 1.8 V.

Figure 54: ACMP1 Block Diagram

### 9.3 ACMP2 Block Diagram

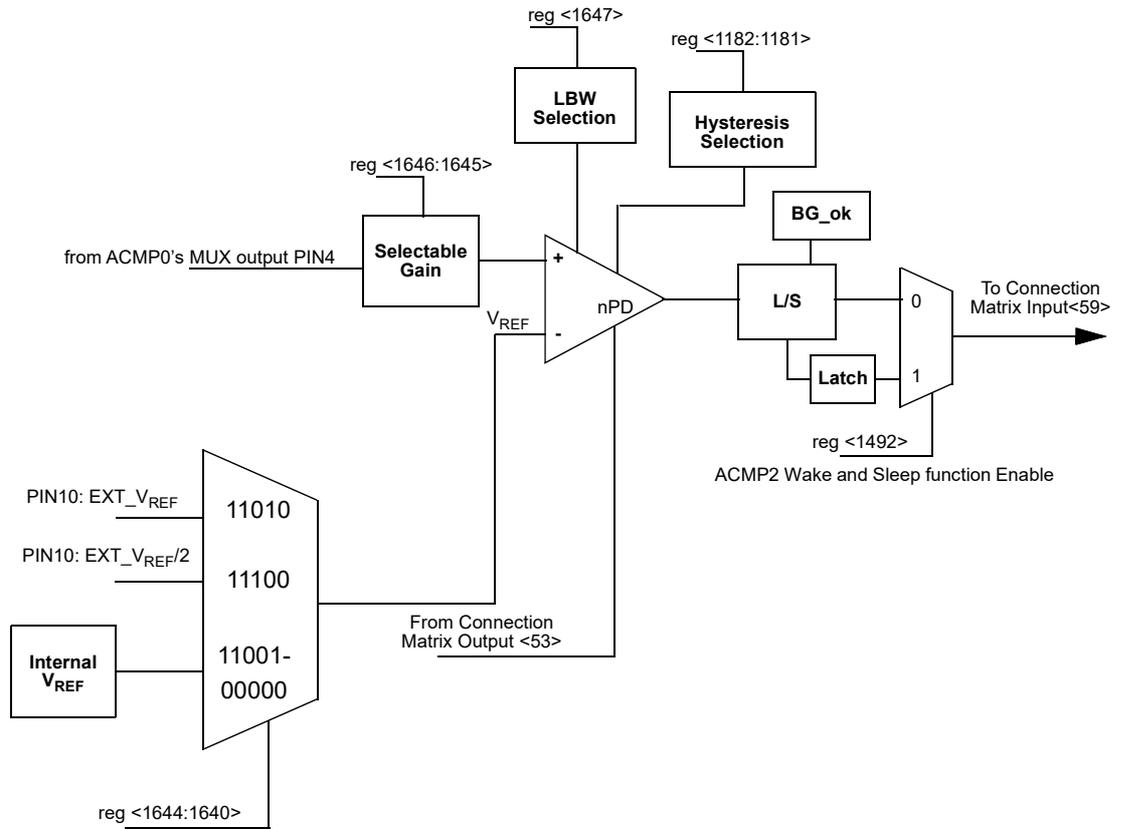


Figure 55. ACMP2 Block Diagram

### 9.4 ACMP Typical Performance

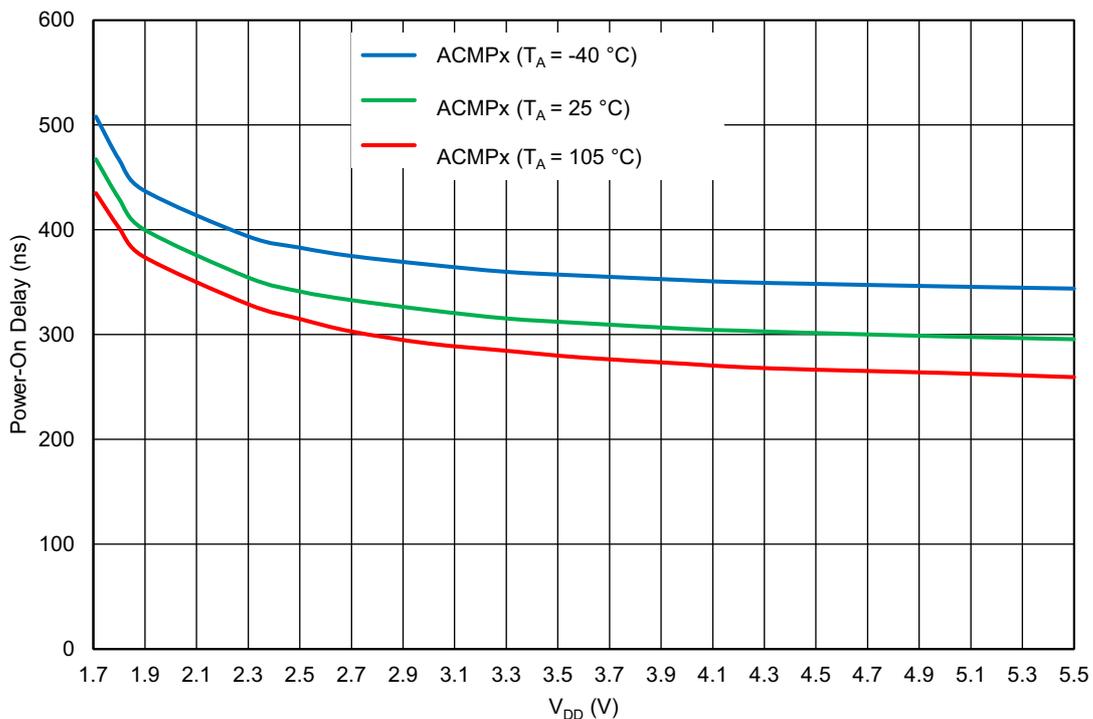


Figure 56. ACMPx Power-On Delay vs.  $V_{DD}$ , BG Delay – Any

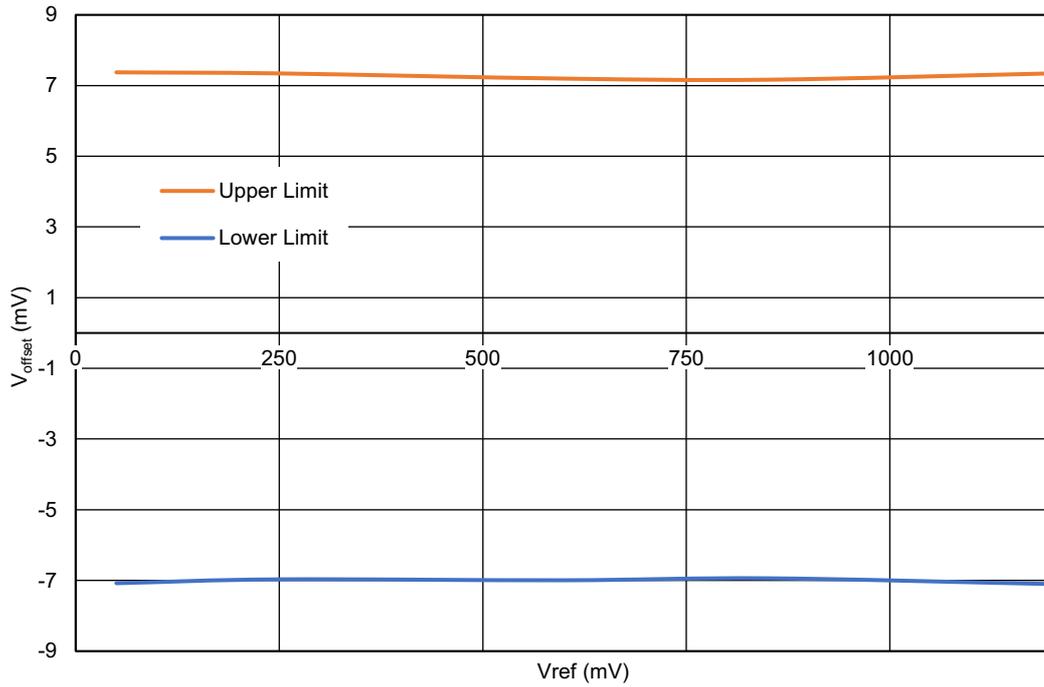


Figure 57. ACMPx Input Offset Voltage vs. V<sub>REF</sub> at V<sub>DD</sub> = 1.71 V to 5.5 V, T<sub>A</sub> = -40 °C to +105 °C

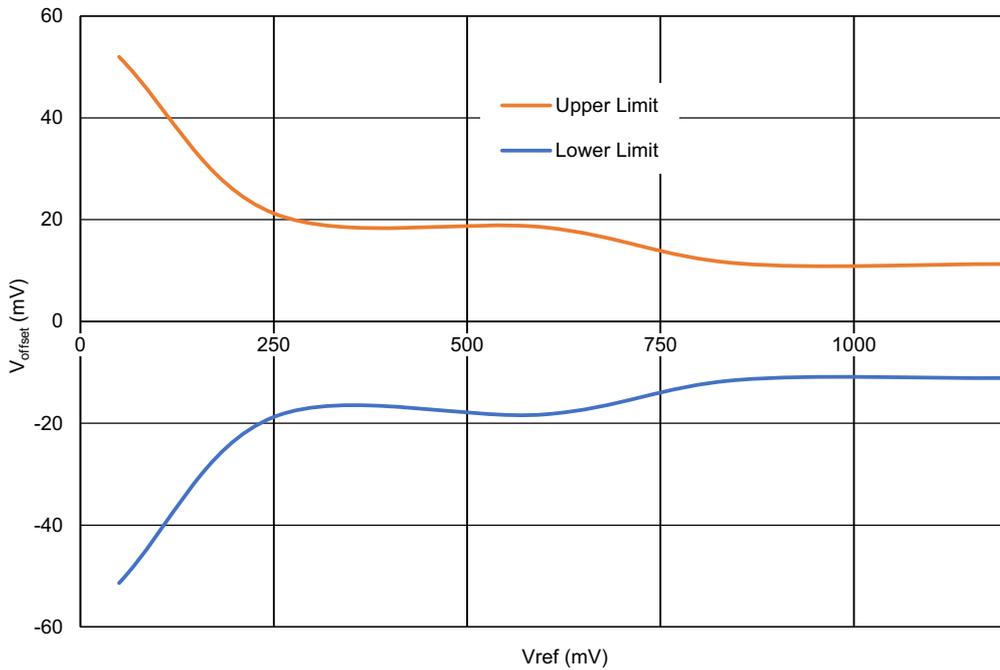


Figure 58. ACMPx Buffer Input Offset Voltage vs. V<sub>REF</sub> at V<sub>DD</sub> = 1.71 V to 5.5 V, T<sub>A</sub> = -40 °C to +105 °C

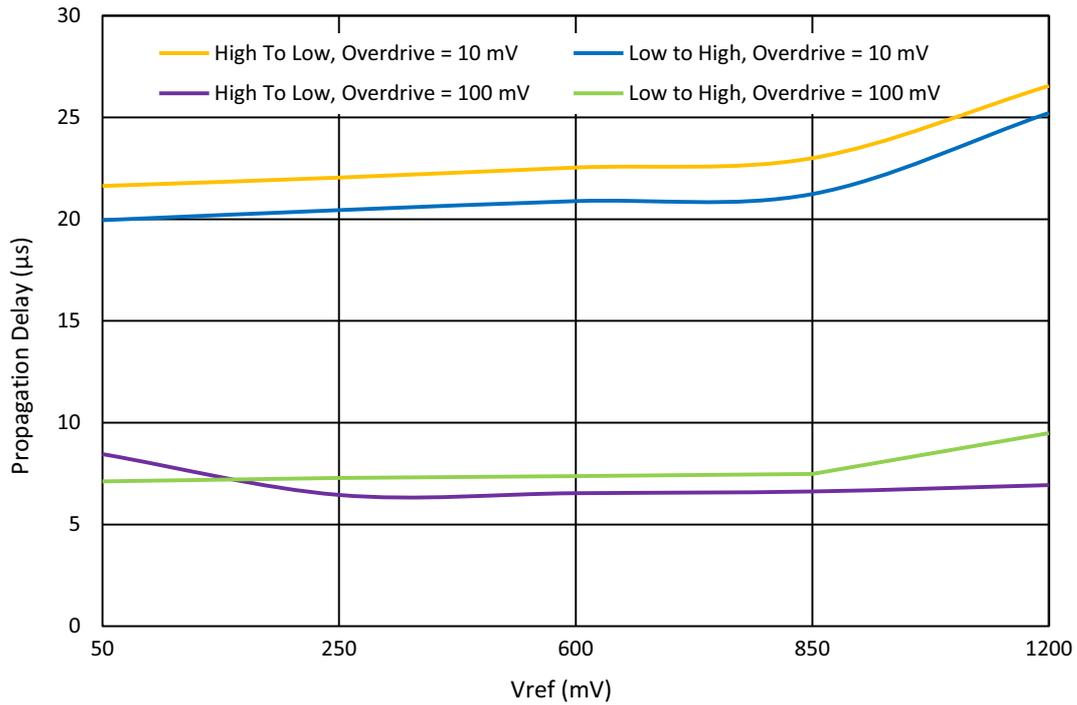


Figure 59. ACMPx Typical Propagation Delay at  $T_A = +25\text{ }^\circ\text{C}$ , Gain = 1, Hysteresis = 0,  $V_{DD} = 1.71\text{ V to }5.5\text{ V}$ , LPF-Enable

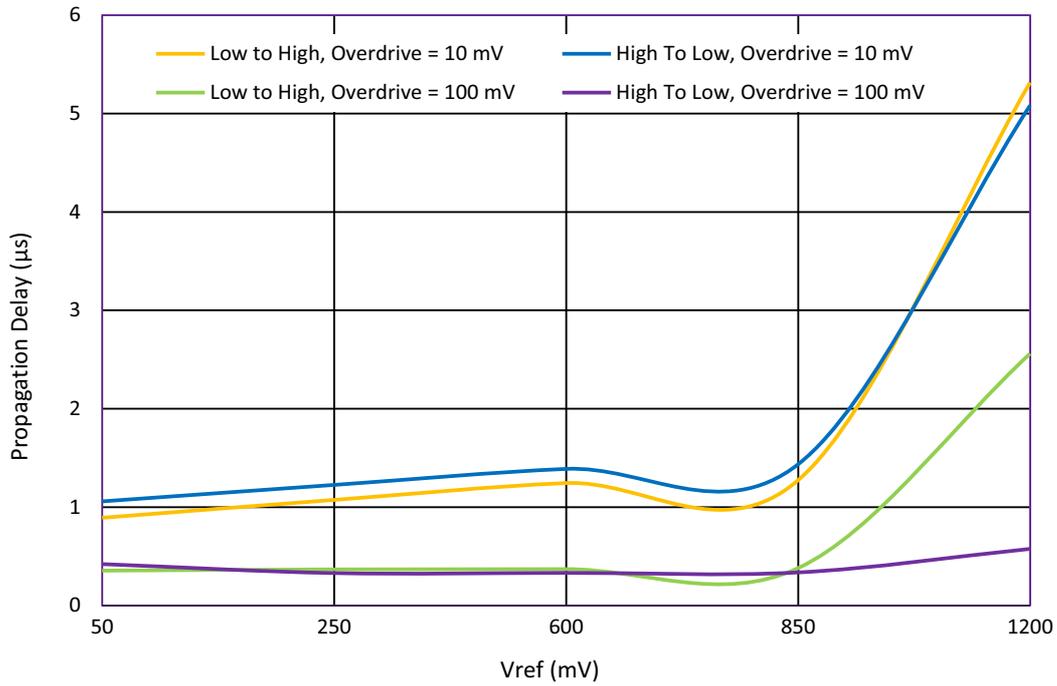


Figure 60. ACMPx Typical Propagation Delay at  $T_A = +25\text{ }^\circ\text{C}$ , Gain = 1, Hysteresis = 0,  $V_{DD} = 1.71\text{ V to }5.5\text{ V}$ , LPF-Disable

**Note:** when  $V_{DD} < 1.8\text{ V}$  voltage reference should not exceed 1100 mV.

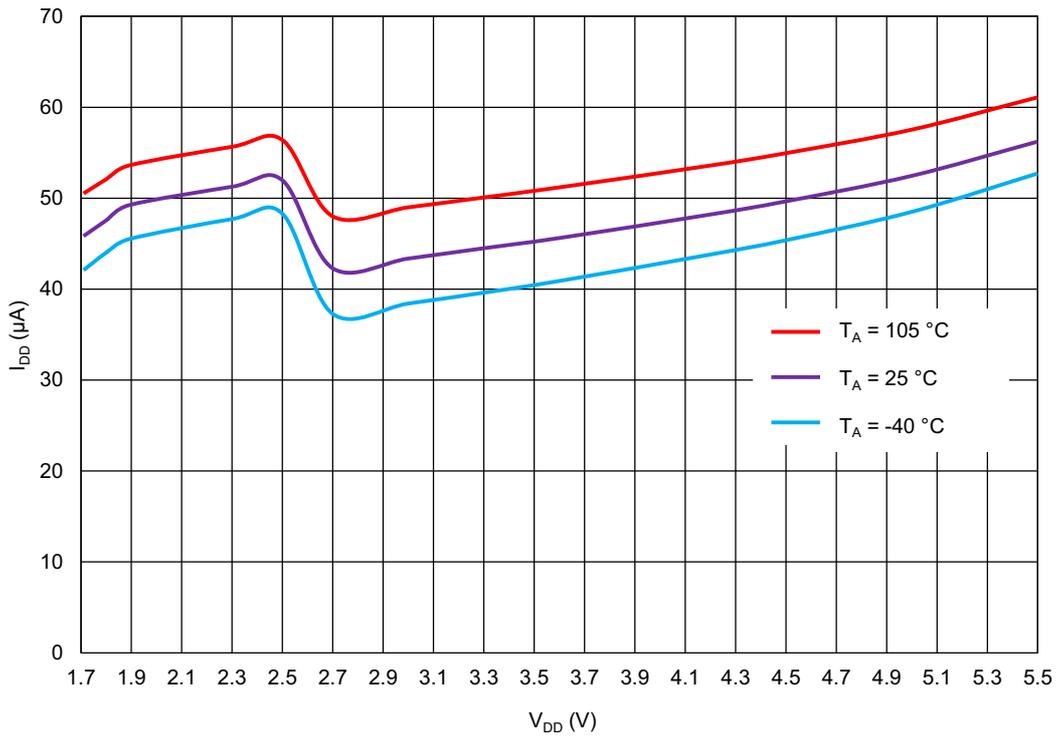


Figure 61. ACMPx Current Consumption vs. V<sub>DD</sub> at V<sub>IN+</sub> Connected to V<sub>DD</sub>, Internal V<sub>REF</sub> = 50 mV

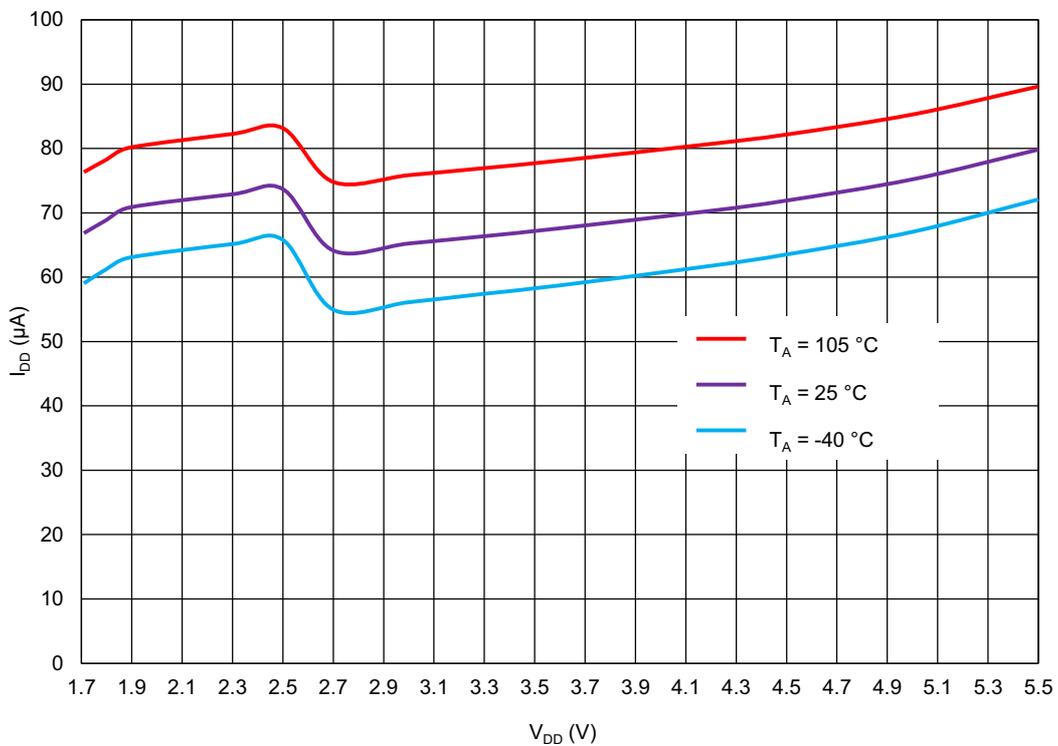


Figure 62. Buffered ACMPx Current Consumption vs. V<sub>DD</sub> at V<sub>IN+</sub> Connected to V<sub>DD</sub>, Internal V<sub>REF</sub> = 50 mV

## 10. Programmable Delay/Edge Detector

The SLG46536-E has a programmable time delay logic cell available, that can generate a delay, that is selectable from one of four timings configured in the GreenPAK Designer. The programmable time delay cell can generate one of four different delay patterns, rising edge detection, falling edge detection, both edge detection, and both edge delay. See [Figure 63](#) and [Figure 64](#) for further information.

**Note:** The input signal must be longer than the delay, otherwise it will be filtered out.

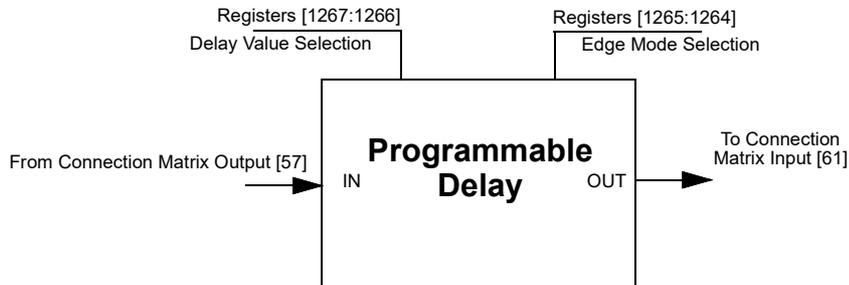


Figure 63. Programmable Delay

### 10.1 Programmable Delay Timing Diagram - Edge Detector Output

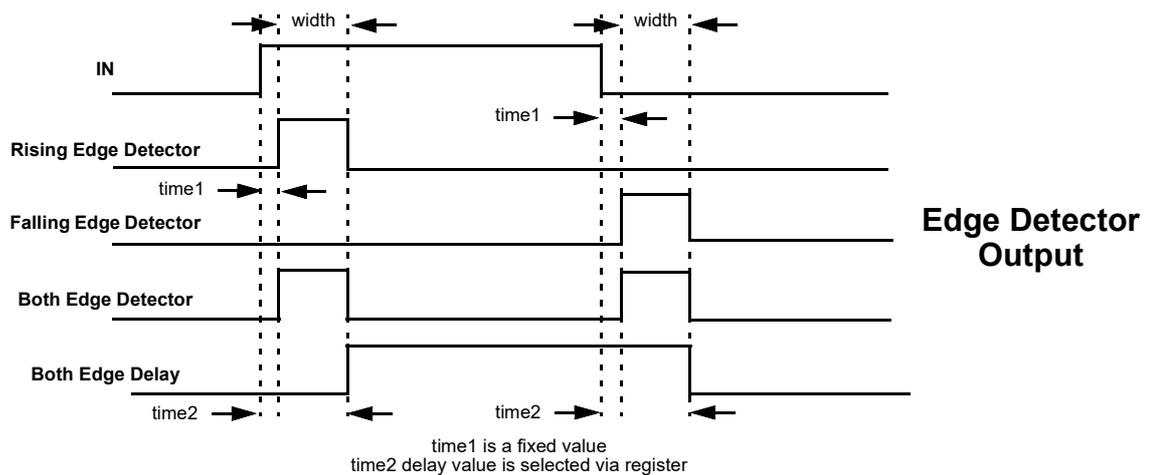


Figure 64. Edge Detector Output

Please refer to [3.4.5 Programmable Delay Typical Delays and Widths](#).

## 11. Additional Logic Function. Deglitch Filter

The SLG46536-E has three additional logic functions that are connected directly to the Connection Matrix inputs and outputs. There are two deglitch filters, each with edge detector functions. See section 3.4.6 Typical Filter Rejection Pulse Width.

### 11.1 Deglitch Filter/Edge Detector

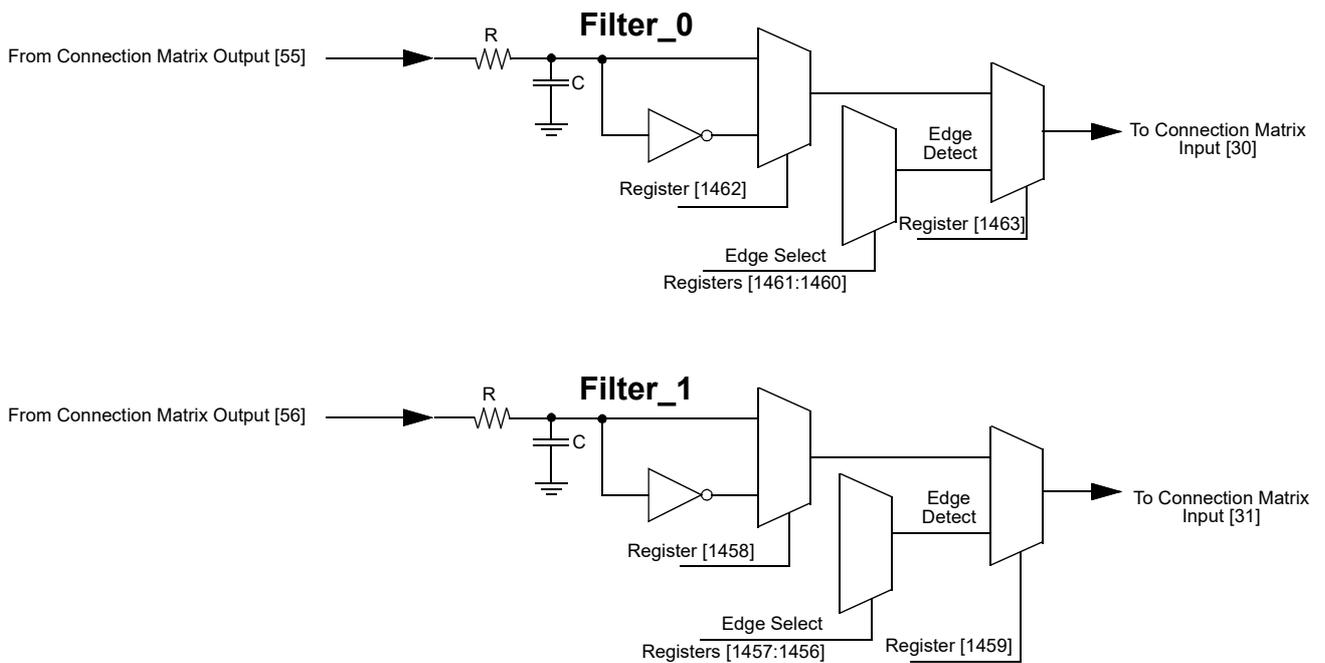


Figure 65. Deglitch Filter/Edge Detector

## 12. Voltage Reference

### 12.1 Voltage Reference Overview

The SLG46536-E has an internal Voltage Reference ( $V_{REF}$ ) Macrocell to provide references to the three analog comparators. This macrocell can supply a user selection of fixed voltage references, /3 and /4 reference off of the  $V_{DD}$  power supply to the device, and externally supplied voltage references from Pins 5 and 10. See [Table 36](#) for the available selections for each analog comparator. Also, see [Figure 66](#), which shows the reference output structure.

**Table 36.  $V_{REF}$  Selection Table**

SEL[4:0]	ACMP0_ $V_{REF}$	ACMP1_ $V_{REF}$	ACMP2_ $V_{REF}$
11101	PIN 5: EXT_ $V_{REF}/2$	Reserved	Reserved
11100	PIN 10: EXT_ $V_{REF}/2$	PIN 10: EXT_ $V_{REF}/2$	PIN 10: EXT_ $V_{REF}/2$
11011	PIN 5: EXT_ $V_{REF}$	Reserved	Reserved
11010	PIN 10: EXT_ $V_{REF}$	PIN 10: EXT_ $V_{REF}$	PIN 10: EXT_ $V_{REF}$
11001	$V_{DD}/4$	$V_{DD}/4$	$V_{DD}/4$
11000	$V_{DD}/3$	$V_{DD}/3$	$V_{DD}/3$
10111	1.20	1.20	1.20
10110	1.15	1.15	1.15
10101	1.10	1.10	1.10
10100	1.05	1.05	1.05
10011	1.00	1.00	1.00
10010	0.95	0.95	0.95
10001	0.90	0.90	0.90
10000	0.85	0.85	0.85
01111	0.80	0.80	0.80
01110	0.75	0.75	0.75
01101	0.70	0.70	0.70
01100	0.65	0.65	0.65
01011	0.60	0.60	0.60
01010	0.55	0.55	0.55
01001	0.50	0.50	0.50
01000	0.45	0.45	0.45
00111	0.40	0.40	0.40
00110	0.35	0.35	0.35
00101	0.30	0.30	0.30
00100	0.25	0.25	0.25
00011	0.20	0.20	0.20
00010	0.15	0.15	0.15
00001	0.10	0.10	0.10
00000	0.05	0.05	0.05

Table 37. Practical  $V_{REF}$  Range of Voltage Reference Macrocell

$V_{DD}$	Practical $V_{REF}$ Range	Note
2.0 V - 5.5 V	50 mV ~ 1.2 V	
1.7 V - 2.0 V	50 mV ~ 1.0 V	Do not operate above 1.0 V

## 12.2 $V_{REF}$ Block Diagram

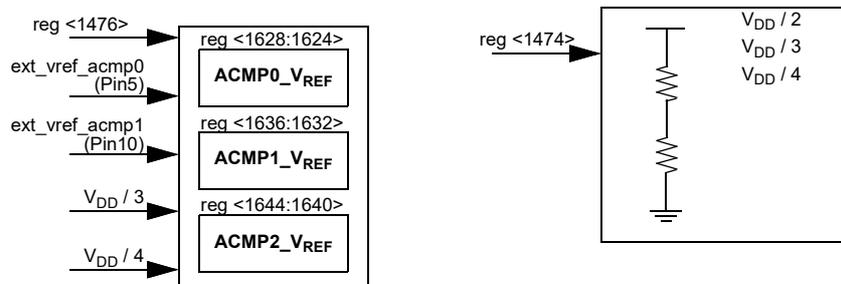


Figure 66. Voltage Reference Block Diagram

### 12.3 V<sub>REF</sub> Load Regulation

**Note 1:** V<sub>REF</sub> buffer performance is not guaranteed at V<sub>DD</sub> < 2.7 V.

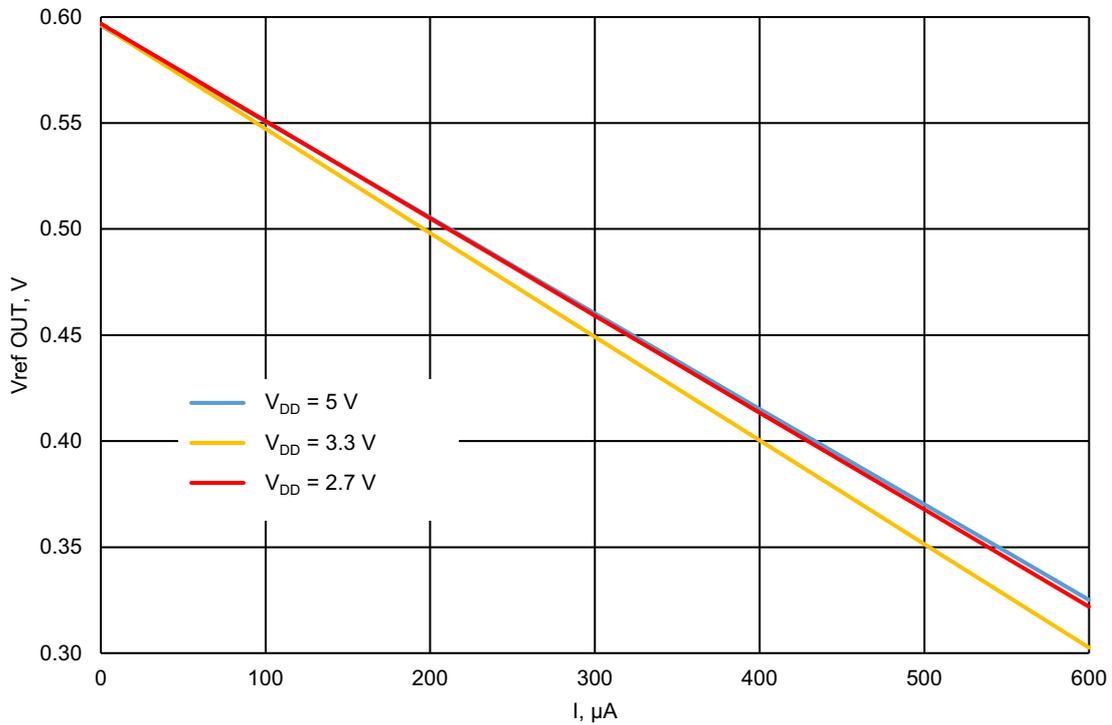


Figure 67. Typical Load Regulation, V<sub>REF</sub> = 600 mV, T<sub>A</sub> = -40 °C to +105 °C, Buffer - Enable

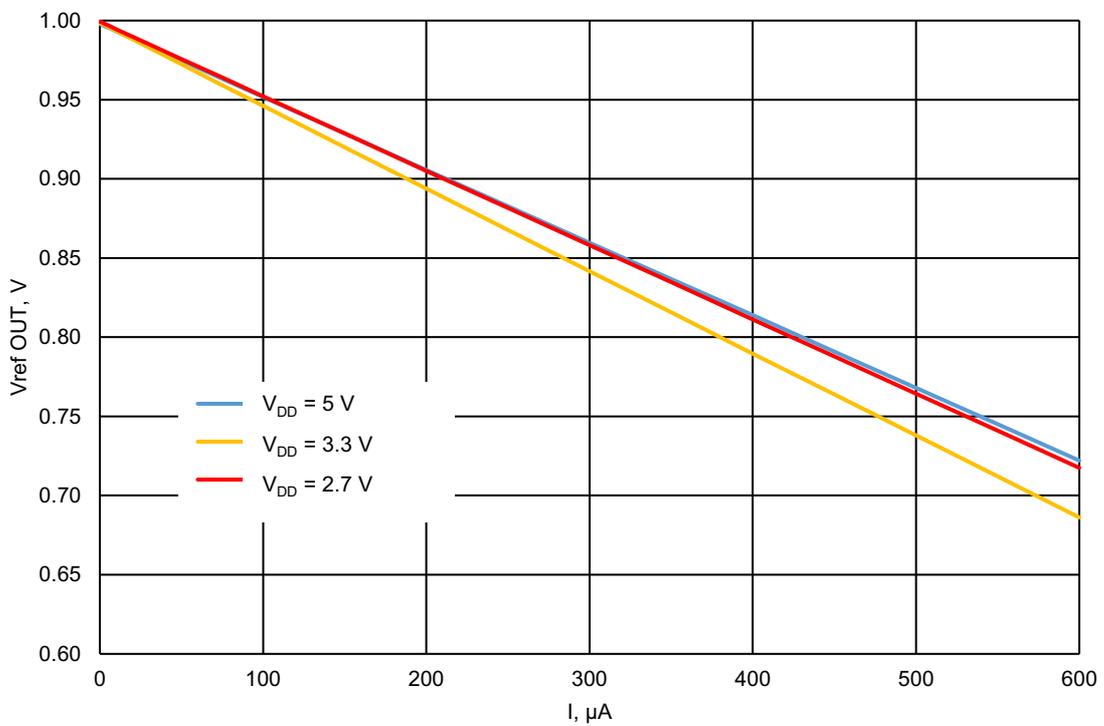


Figure 68. Typical Load Regulation, V<sub>REF</sub> = 1000 mV, T<sub>A</sub> = -40 °C to +105 °C, Buffer - Enable

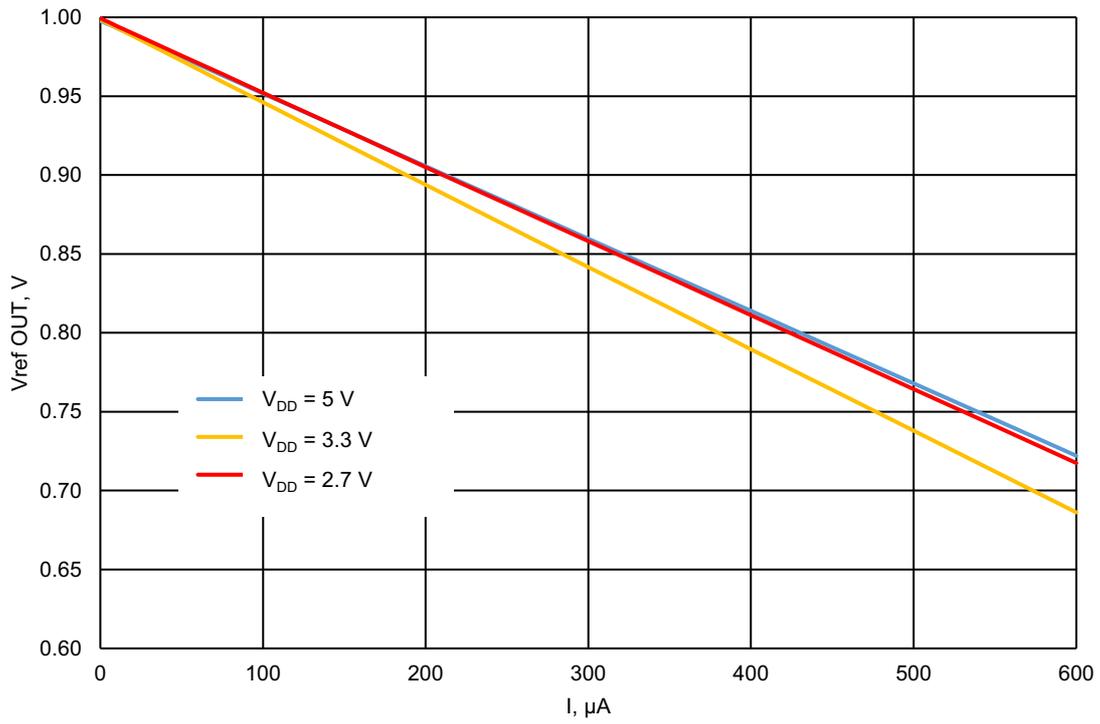


Figure 69. Typical Load Regulation,  $V_{\text{REF}} = 1200\text{ mV}$ ,  $T_{\text{A}} = -40\text{ }^{\circ}\text{C}$  to  $+105\text{ }^{\circ}\text{C}$ , Buffer - Enable

## 13. Clocking

### 13.1 OSC General Description

The SLG46536-E has two internal oscillators. Oscillator OSC0 that runs at 25 kHz / 2 MHz and Oscillator OSC1 that runs at 25 MHz. It is possible to use OSC0 and OSC1 simultaneously. The fundamental frequency can also come from clock input (Pin 14 for 25 kHz/2 MHz and Pin 13 for 25 MHz), see section [13.3 External Clocking](#).

### 13.2 25 kHz/2 MHz and 25 MHz Oscillators

There are two divider stages that allow the user flexibility for introducing clock signals on various Connection Matrix Input lines. The pre-divider allows the selection of /1, /2, /4, or /8 divide down frequency from the fundamental. The second stage divider (only for 25 kHz / 2 MHz Oscillator) has an input of frequency from the pre-divider, and outputs one of seven different frequencies on Connection Matrix Input lines [27] (OUT0) and [28] (OUT1). See [Figure 70](#) and [Figure 71](#) for details.

There are two modes of the POWER CONTROL pin, (register [1658] for 25 kHz/2 MHz OSC and register [1657] for 25 MHz OSC):

- **POWER-DOWN [0]**. If PWR CONTROL input of oscillator is LOW, the oscillator will be turned on. If PWR CONTROL input of oscillator is HIGH the oscillator will be turned off and OSC divider will reset.
- **FORCE ON [1]**. If PWR CONTROL input of oscillator is HIGH, the oscillator will be turned on. If PWR CONTROL input of oscillator is LOW the oscillator will be turned off.

The PWR CONTROL signal has the highest priority.

The SLG46536-E has a 25 kHz/2 MHz OSC FAST START-UP function register [1338] (1 – on, 0 – off). It allows the OSC to run immediately after power-up this decreases the settling time. Note that when OSC FAST START-UP is on, the current consumption will rise.

The user can select two OSC POWER MODEs (register [1343] for 25 kHz/2 MHz OSC and register [1341] for 25 MHz OSC):

- If **AUTO POWER-ON [0]** is selected, the OSC will run when any macrocell that uses OSC is powered on.
- If **FORCE POWER-ON [1]** is selected, the OSC will run when the SLG46536-E is powered on.

OSC can be turned on by:

- Register control (force Power-On)
- Delay mode, when delay requires OSC
- CNT/FSM.

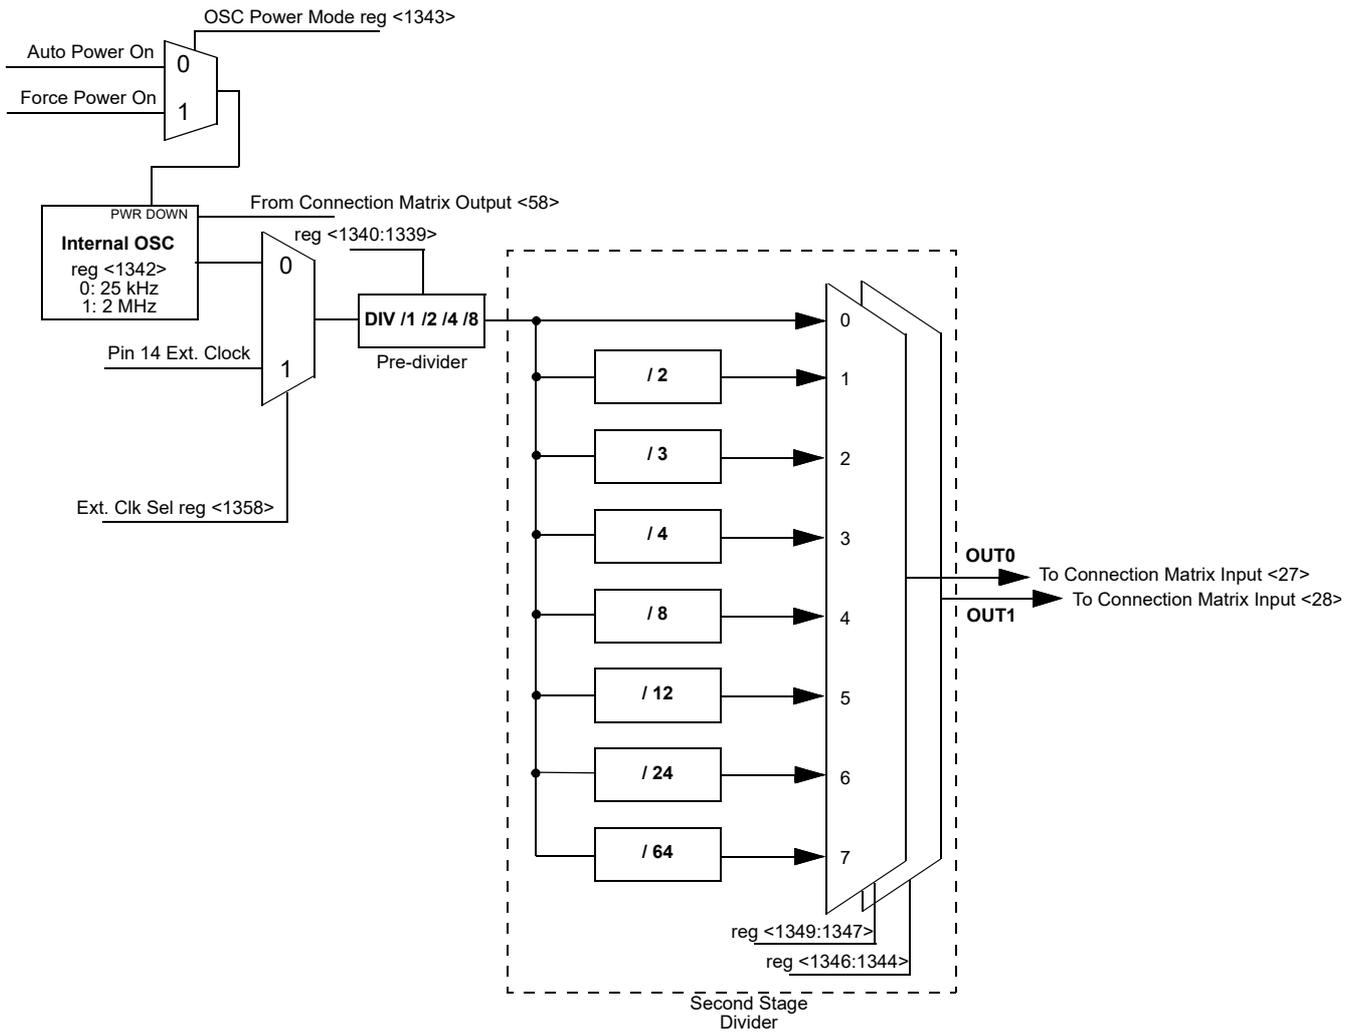


Figure 70. 25 kHz/2 MHz OSC0 Block Diagram

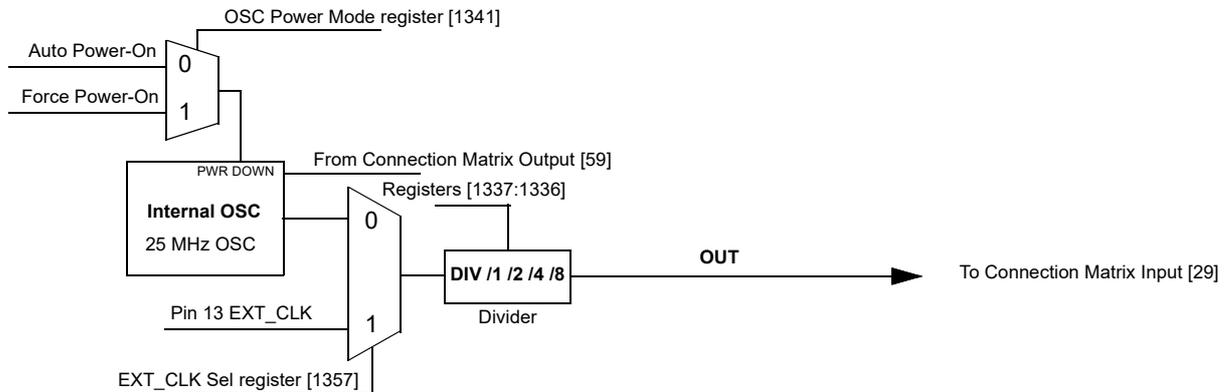


Figure 71. 25 MHz OSC1 Block Diagram

### 13.3 External Clocking

The SLG46536-E supports several ways to use an external, higher accuracy clock as a reference source for internal operations.

### 13.3.1 Pin 14 Source for 25 kHz/2 MHz Clock

When register [1358] is set to 1, an external clocking signal on Pins 14 will be routed in place of the internal oscillator derived 25 kHz / 2 MHz clock source. See Figure 70.

The high and low limits for external frequency that can be selected are 0 MHz and 77 MHz.

### 13.3.2 Pin 13 Source for 25 MHz Clock

When register [1357] is set to 1, an external clocking signal on Pin 13 will be routed in place of the internal oscillator derived 25 MHz clock source. See Figure 71. The high and low limits for external frequency that can be selected are 0 MHz and 84 MHz.

## 13.4 Oscillators Power-On Delay

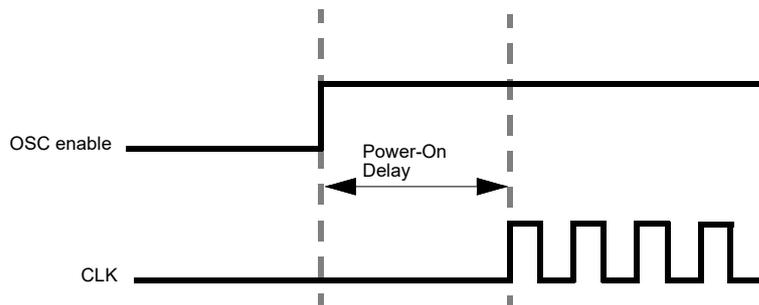


Figure 72. Oscillator Startup Diagram

**Note 1:** OSC power mode: “Auto Power-On”.

**Note 2:** “OSC enable” signal appears when any macrocell that uses OSC is powered on.

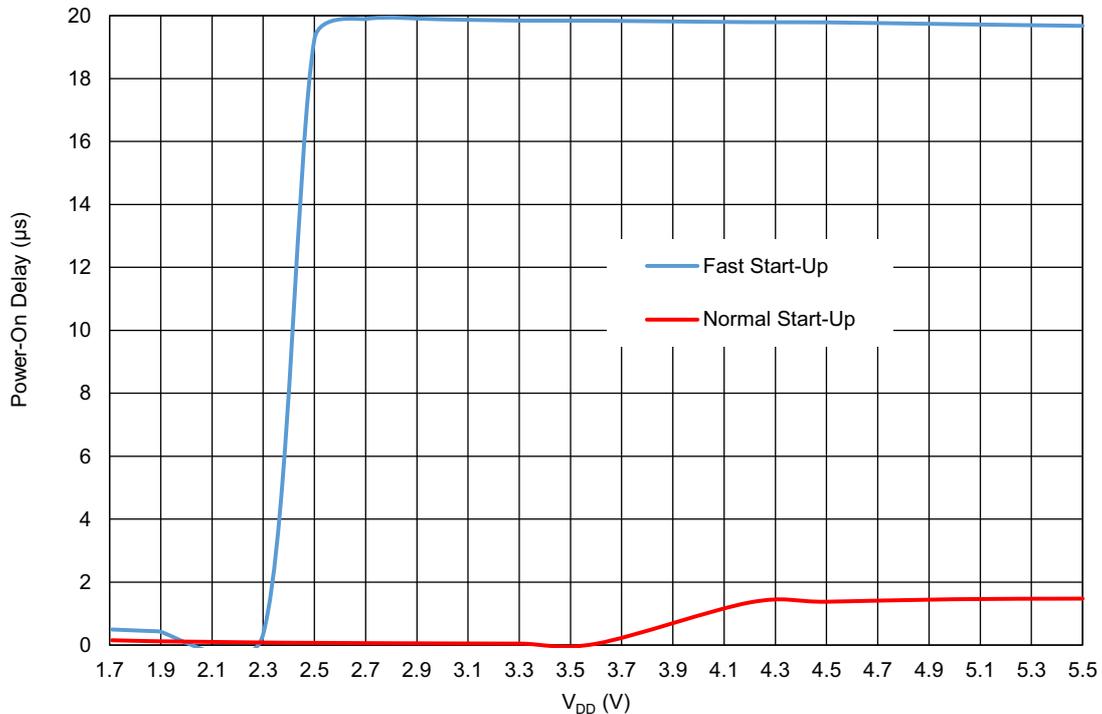


Figure 73. Oscillator Maximum Power-On Delay vs. V<sub>DD</sub> at T<sub>A</sub> = +25 °C, OSC0 = 25 kHz

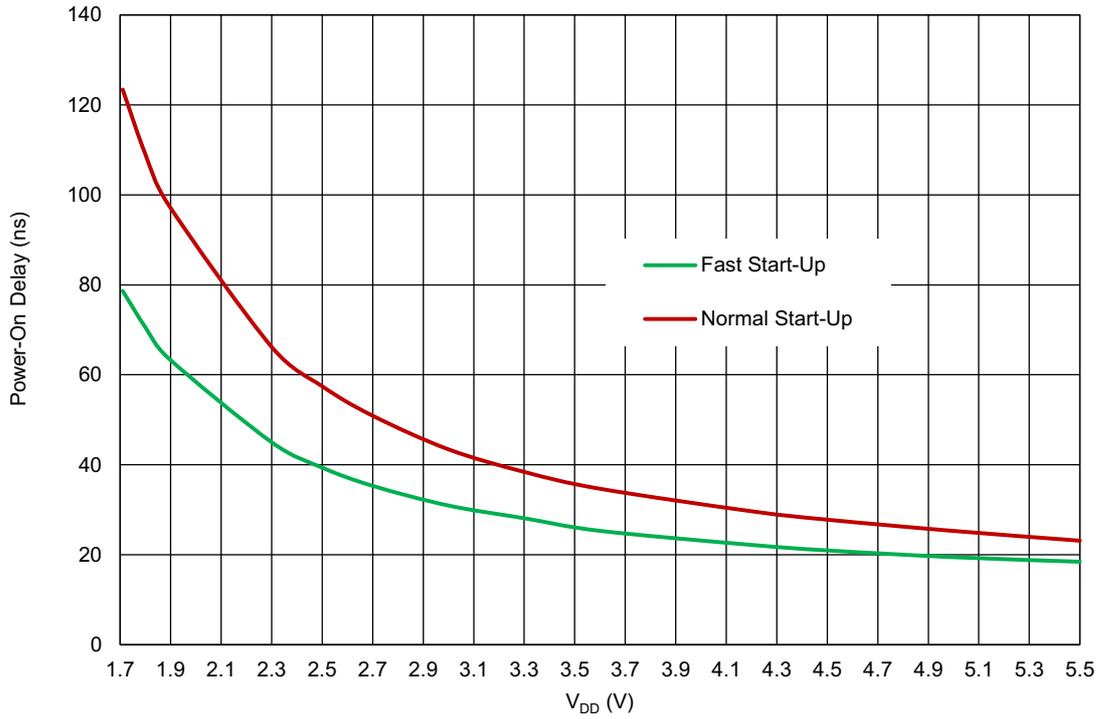


Figure 74. Oscillator Maximum Power-On Delay vs. V<sub>DD</sub> at T<sub>A</sub> = +25 °C, OSC0 = 2 MHz

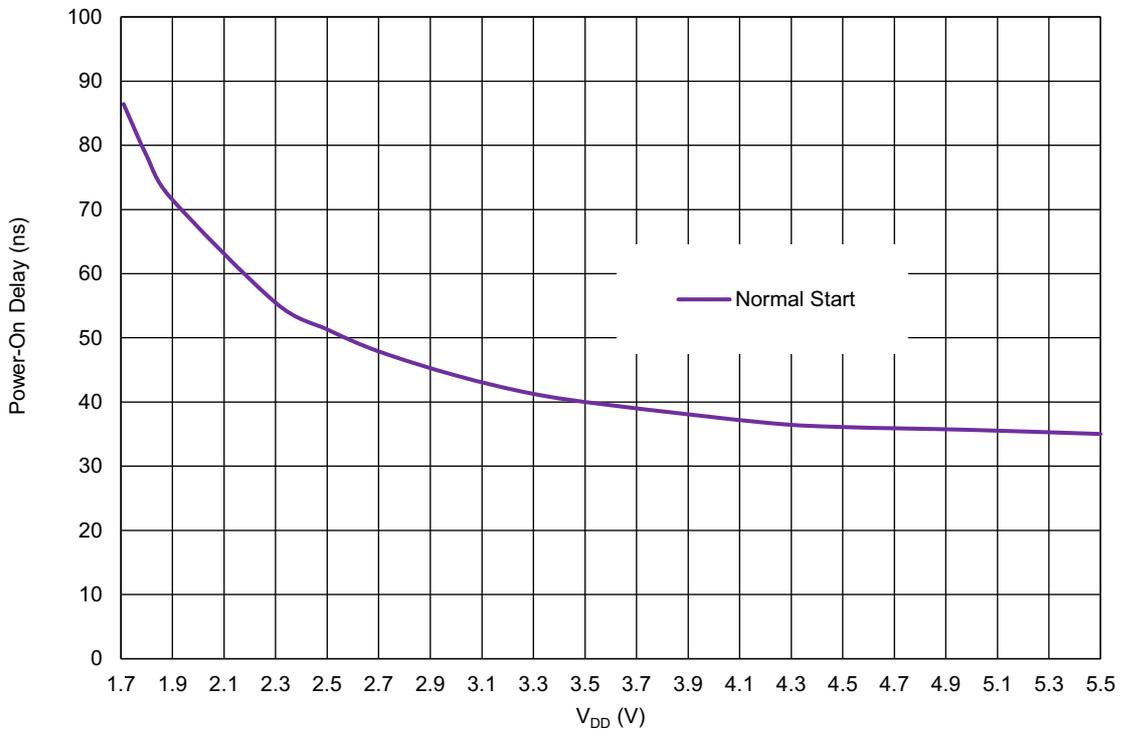


Figure 75. Oscillator Maximum Power-On Delay vs. V<sub>DD</sub> at T<sub>A</sub> = +25 °C, OSC1 = 25 MHz

### 13.5 Oscillators Accuracy

**Note 1:** OSC power setting: Force Power-On; Clock to matrix input - enable; Bandgap: turn on by register - enable.

**Note 2:** For more information see sections [3.4.8 25 kHz OSC0 Frequency Limits](#), [3.4.10 2 MHz OSC0 Frequency Limits](#), [3.4.12 25 MHz OSC1 Frequency Limits](#).

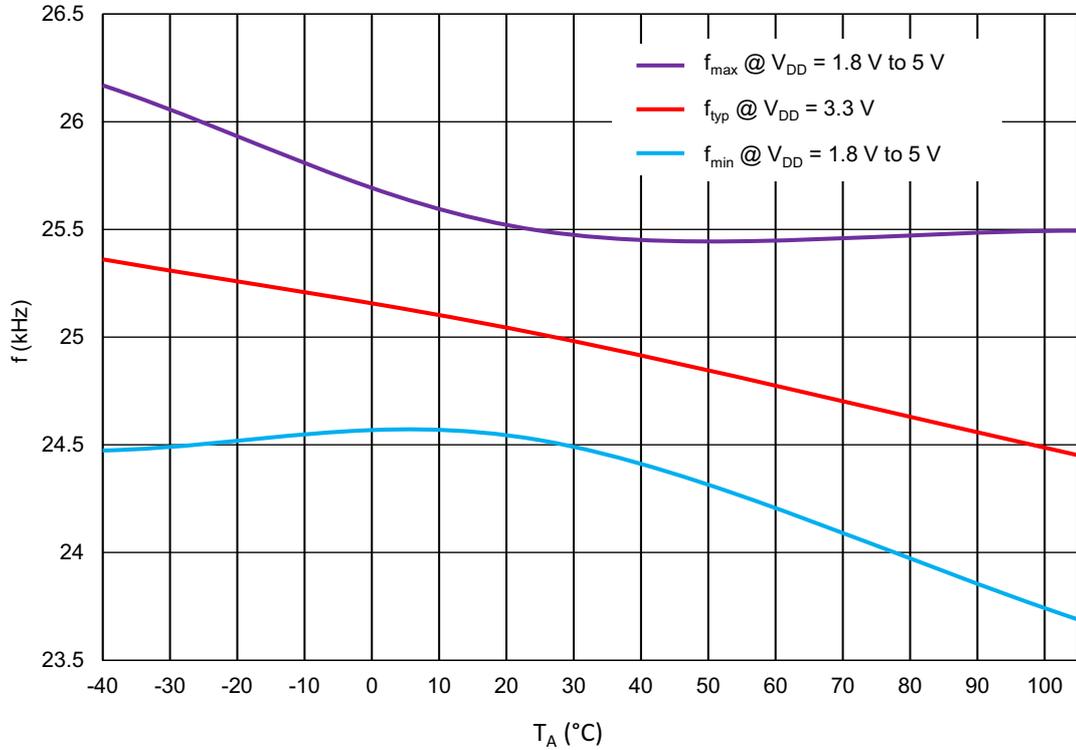


Figure 76. Oscillator Frequency vs. Ambient Temperature, OSC0 = 25 kHz

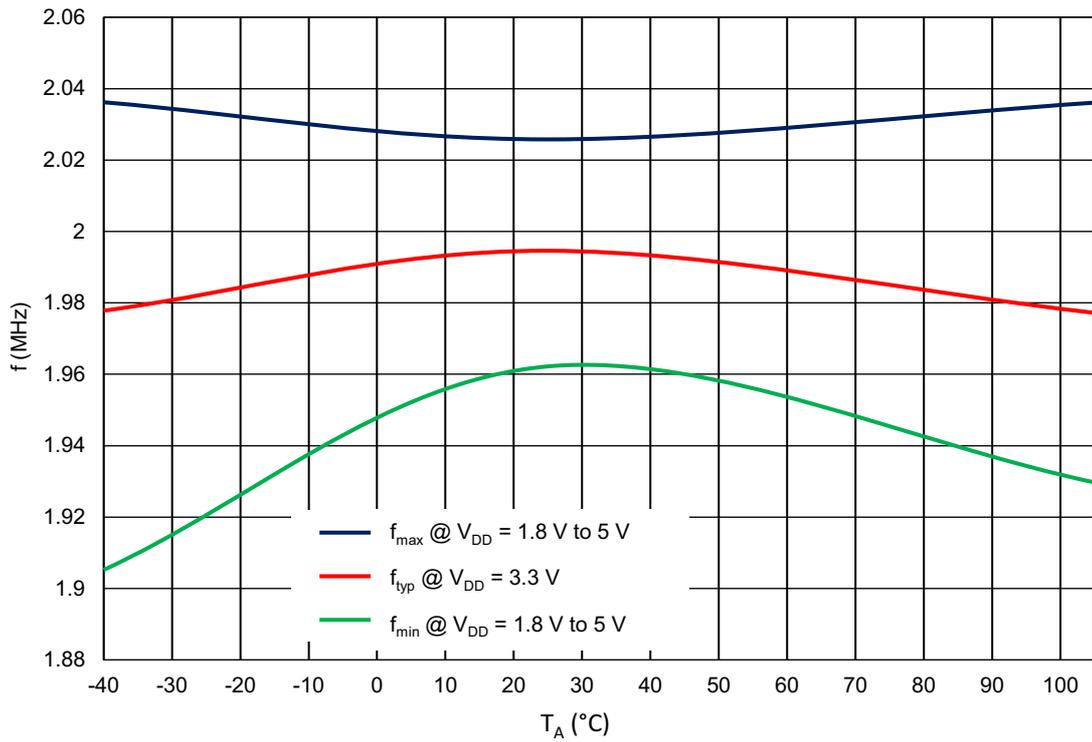


Figure 77. Oscillator Frequency vs. Ambient Temperature, OSC0 = 2 MHz

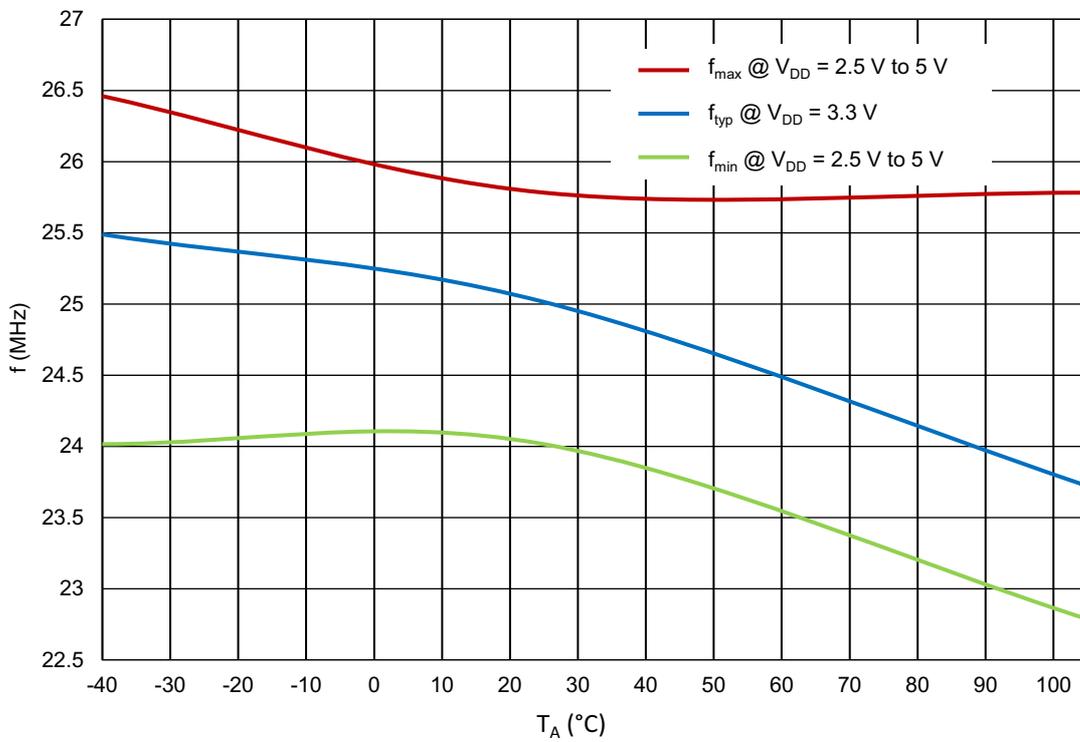


Figure 78. Oscillator Frequency vs. Ambient Temperature, OSC1 = 25 MHz

**Note:** 25 MHz OSC1 performance is not guaranteed at  $V_{DD} < 2.5$  V.

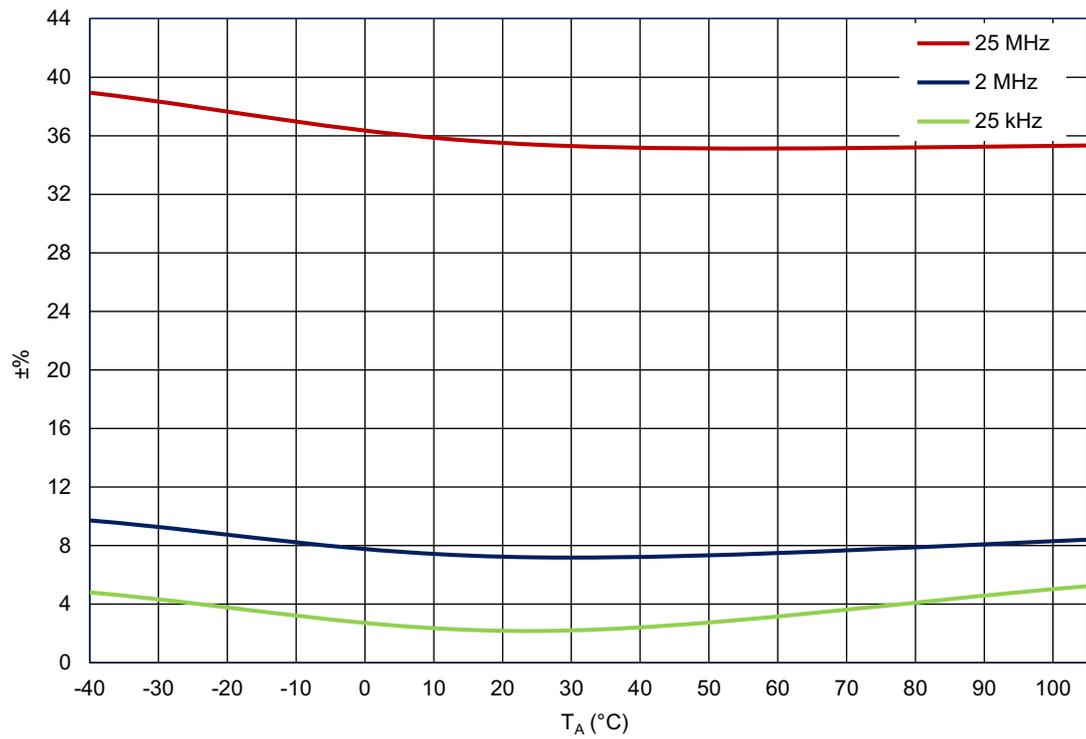


Figure 79. Oscillators Total Error vs. Ambient Temperature

### 13.6 Oscillators Settling Time

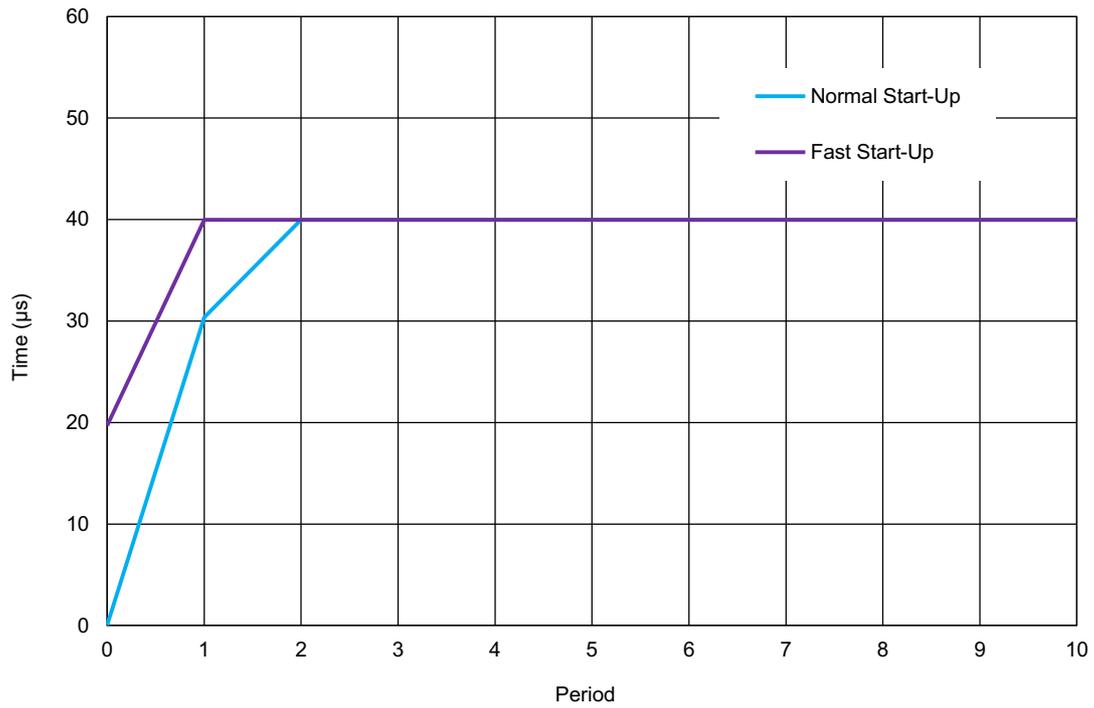


Figure 80. Oscillator0 Settling Time,  $V_{DD} = 3.3\text{ V}$ ,  $T_A = +25\text{ }^\circ\text{C}$ ,  $OSC0 = 25\text{ kHz}$

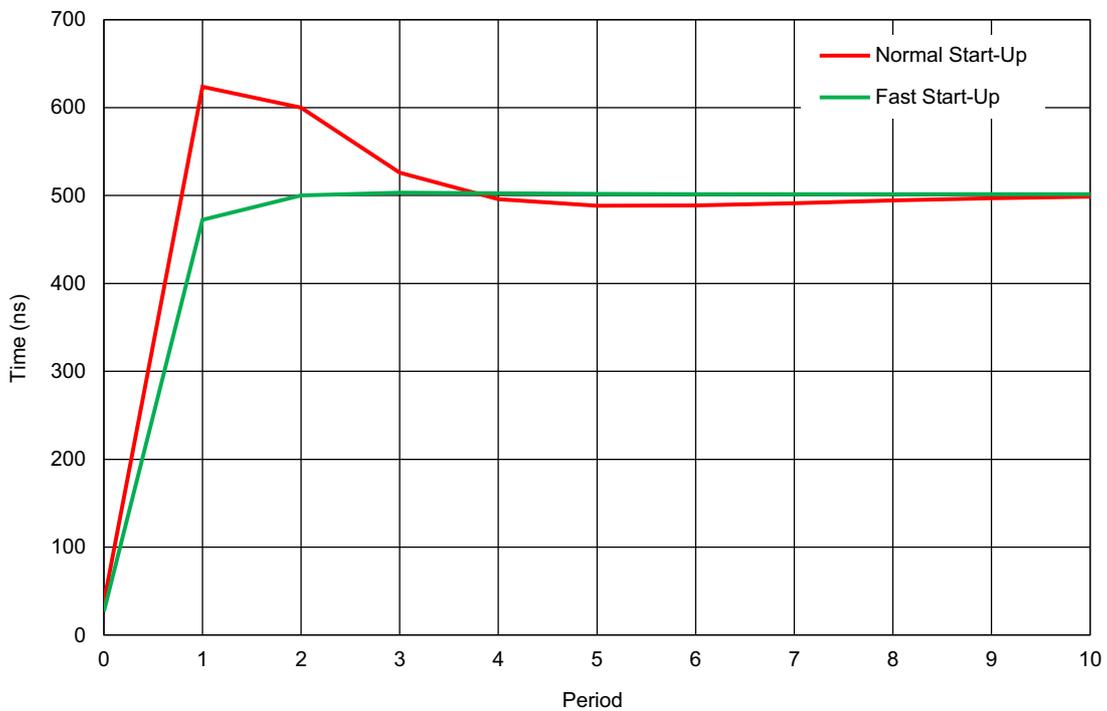


Figure 81. Oscillator0 Settling Time,  $V_{DD} = 3.3\text{ V}$ ,  $T_A = +25\text{ }^\circ\text{C}$ ,  $OSC0 = 2\text{ MHz}$

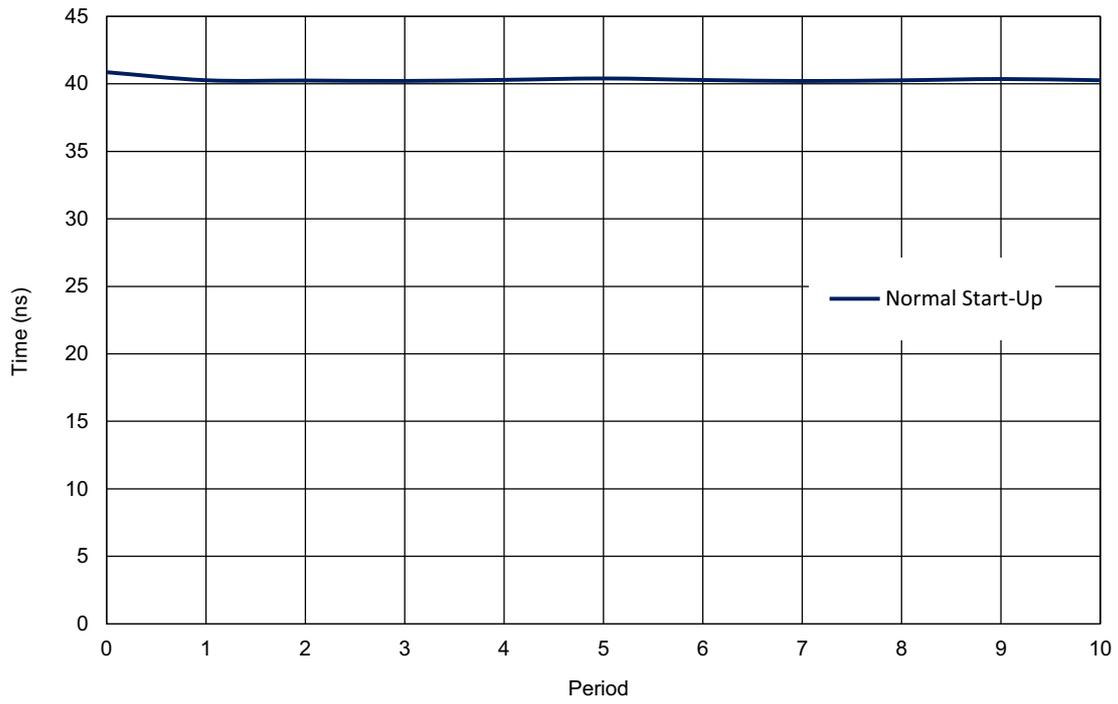


Figure 82. Oscillator1 Settling Time,  $V_{DD} = 3.3\text{ V}$ ,  $T_A = +25\text{ }^\circ\text{C}$ ,  $\text{OSC2} = 25\text{ MHz}$

### 13.7 Oscillators Current Consumption

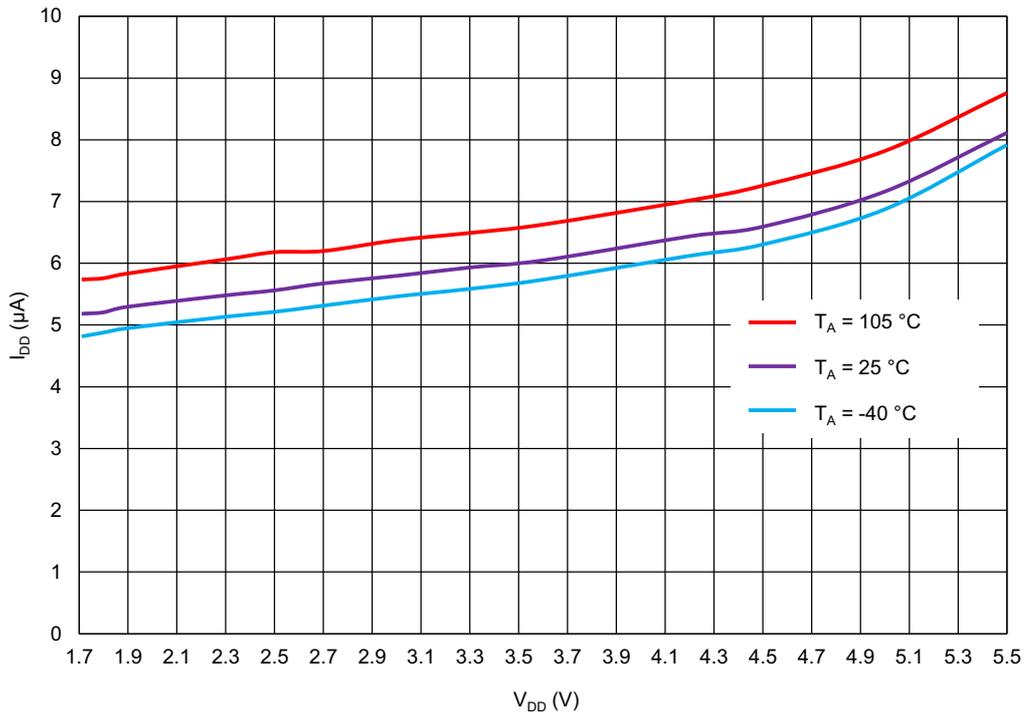


Figure 83. OSC0 (25 kHz) Current Consumption vs. V<sub>DD</sub>, All Pre-Dividers

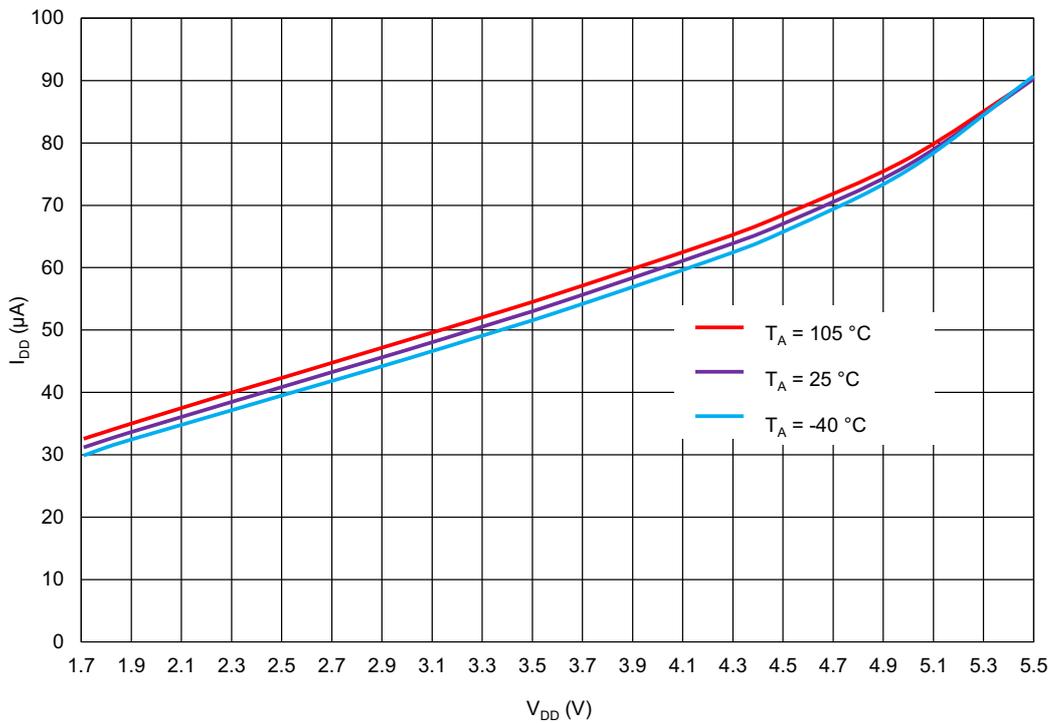


Figure 84. OSC0 (2 MHz) Current Consumption vs. V<sub>DD</sub>, Pre-Divider = 1

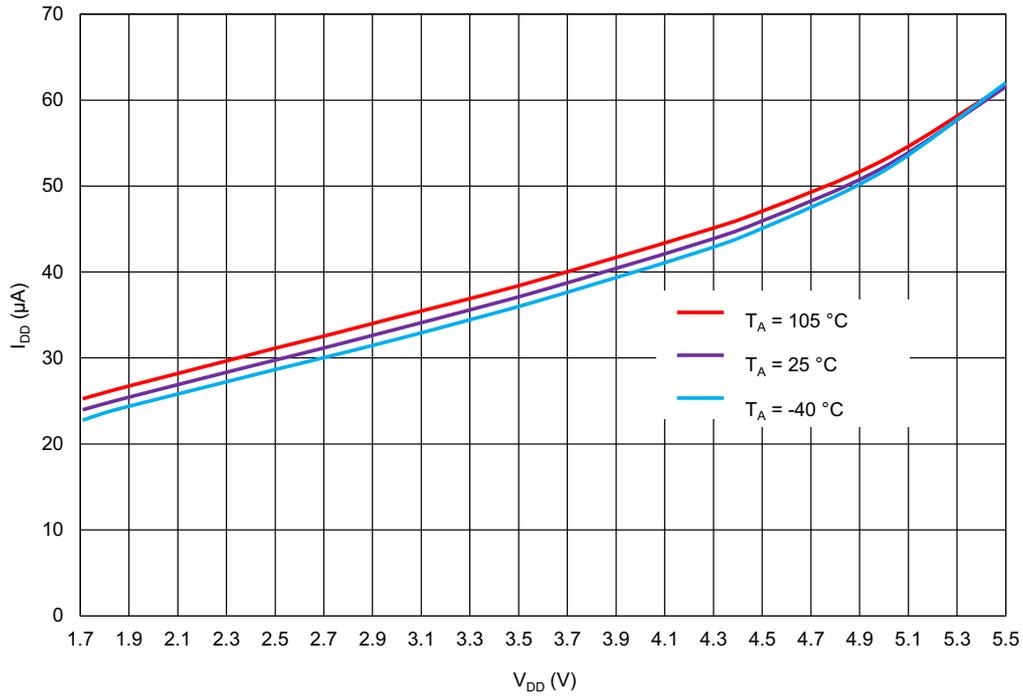


Figure 85. OSC0 (2 MHz) Current Consumption vs. V<sub>DD</sub>, Pre-Divider = 2

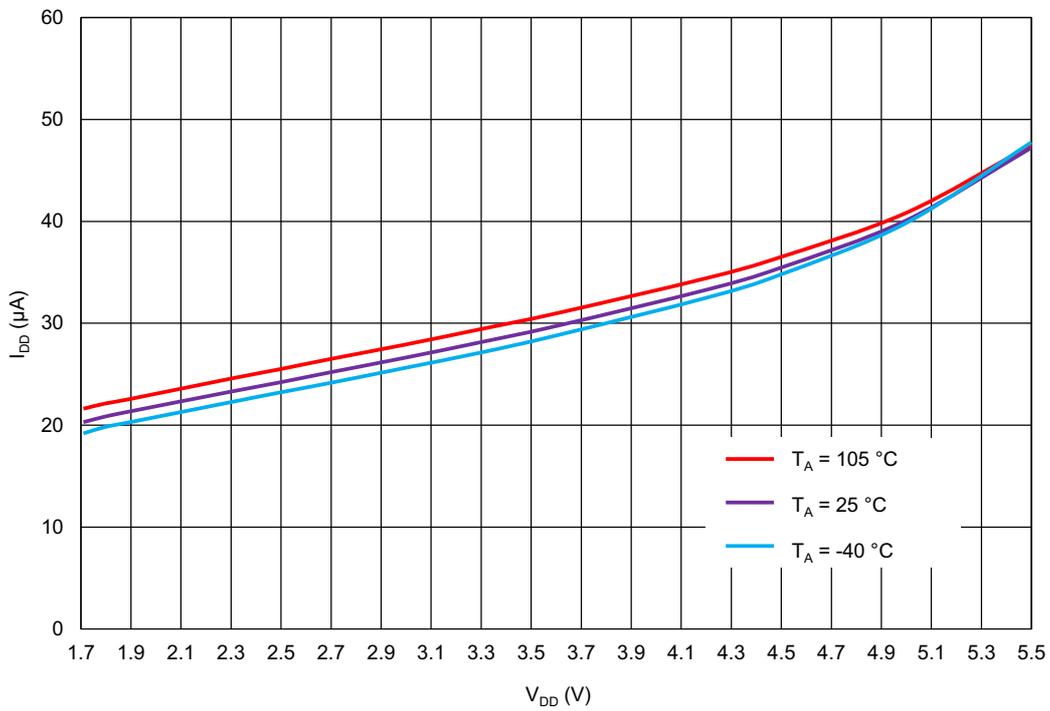


Figure 86. OSC0 (2 MHz) Current Consumption vs. V<sub>DD</sub>, Pre-Divider = 4

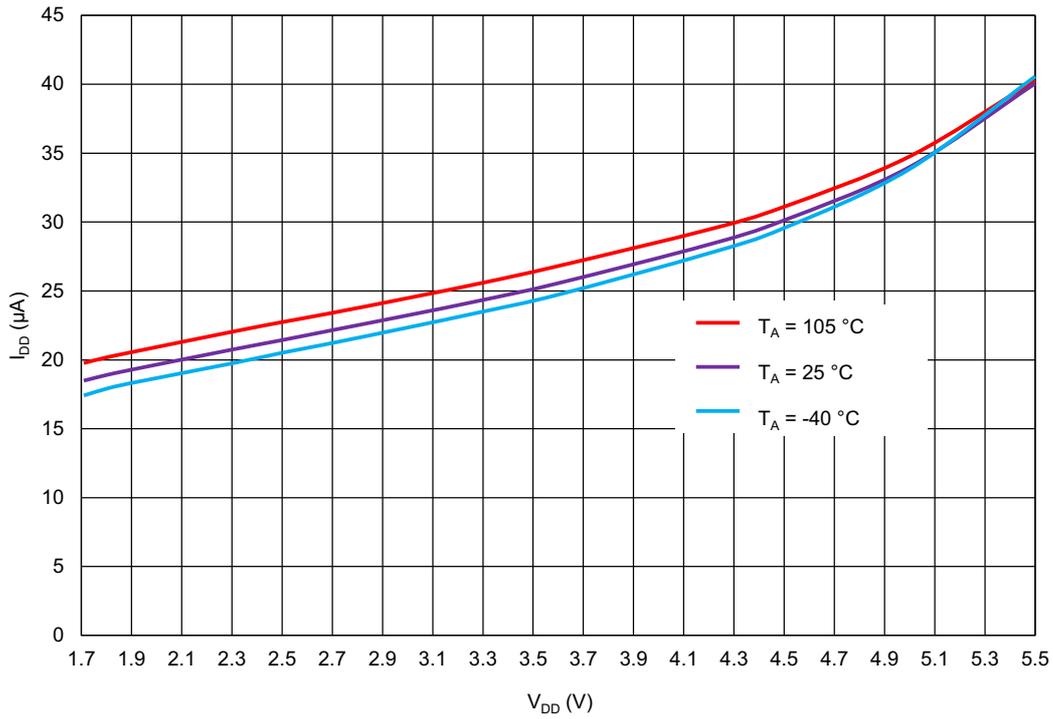


Figure 87. OSC0 (2 MHz) Current Consumption vs. V<sub>DD</sub>, Pre-Divider = 8

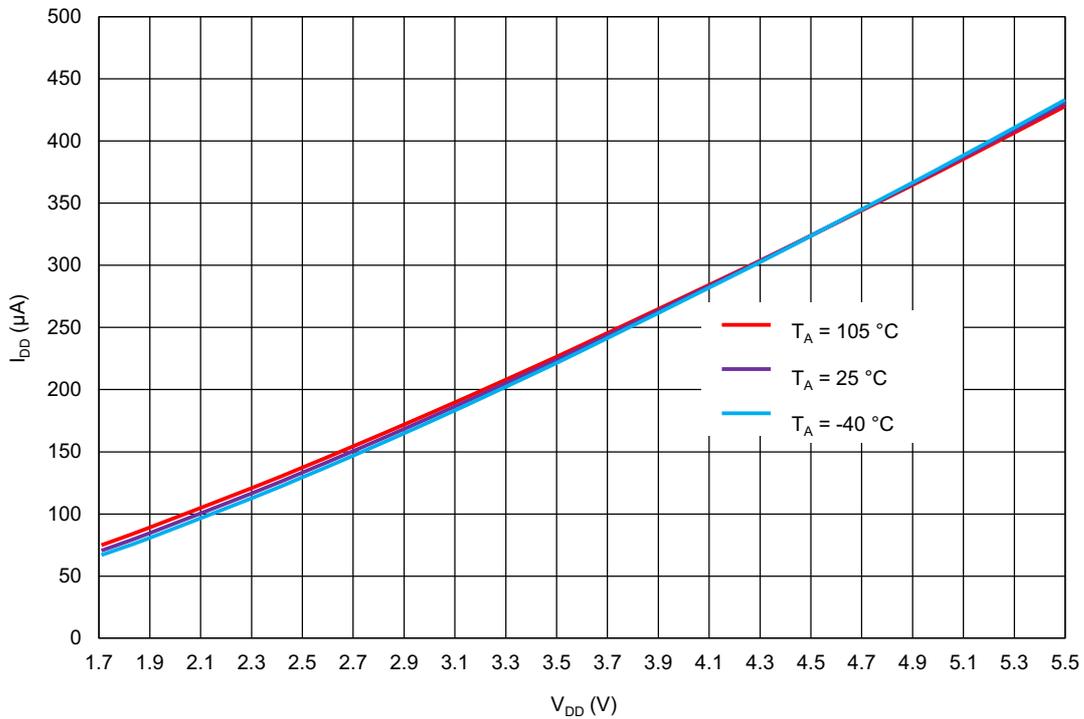


Figure 88. OSC1 (25 MHz) Current Consumption vs. V<sub>DD</sub>, Pre-Divider = 1

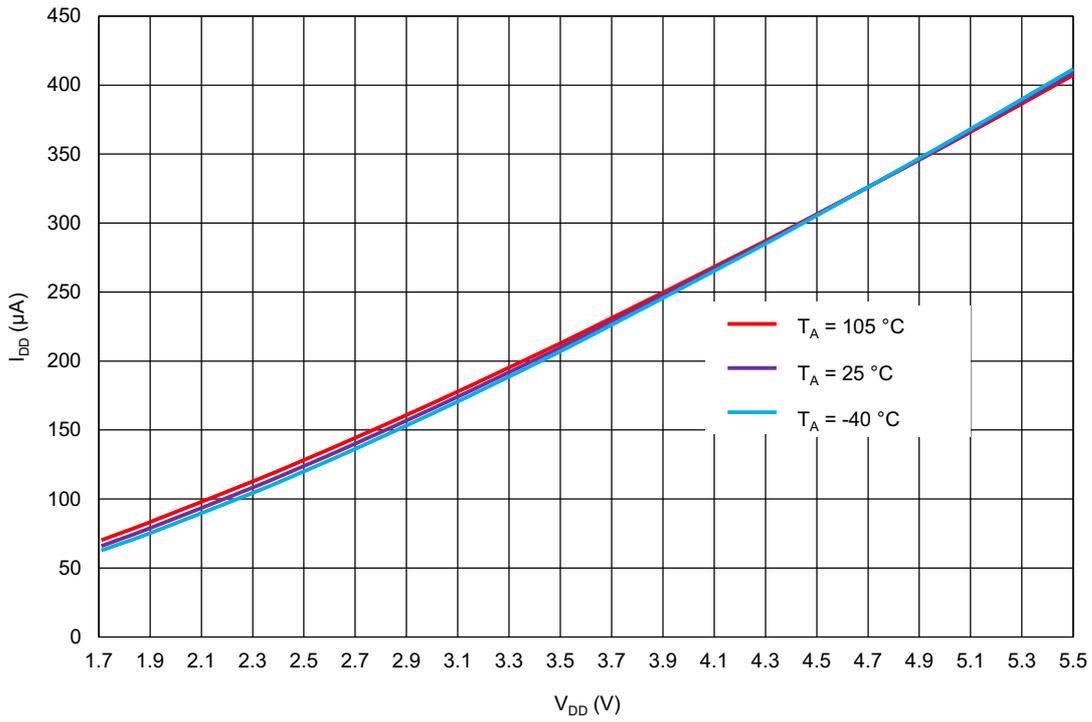


Figure 89. OSC1 (25 MHz) Current Consumption vs. V<sub>DD</sub>, Pre-Divider = 2

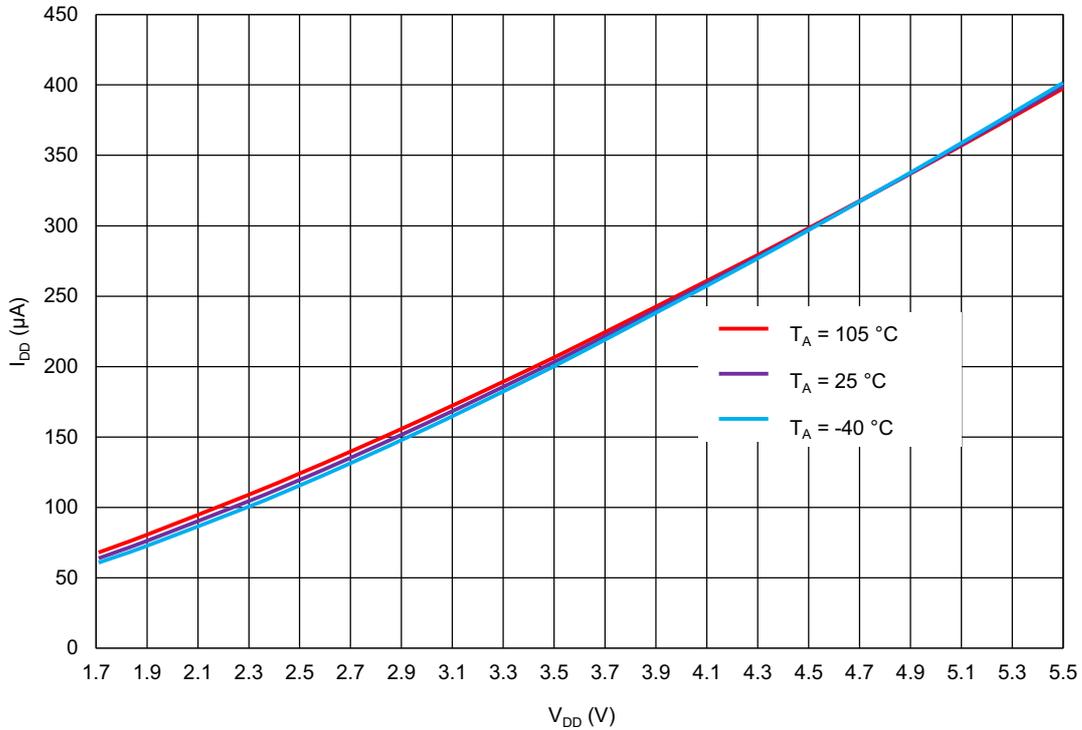


Figure 90. OSC1 (25 MHz) Current Consumption vs. V<sub>DD</sub>, Pre-Divider = 4

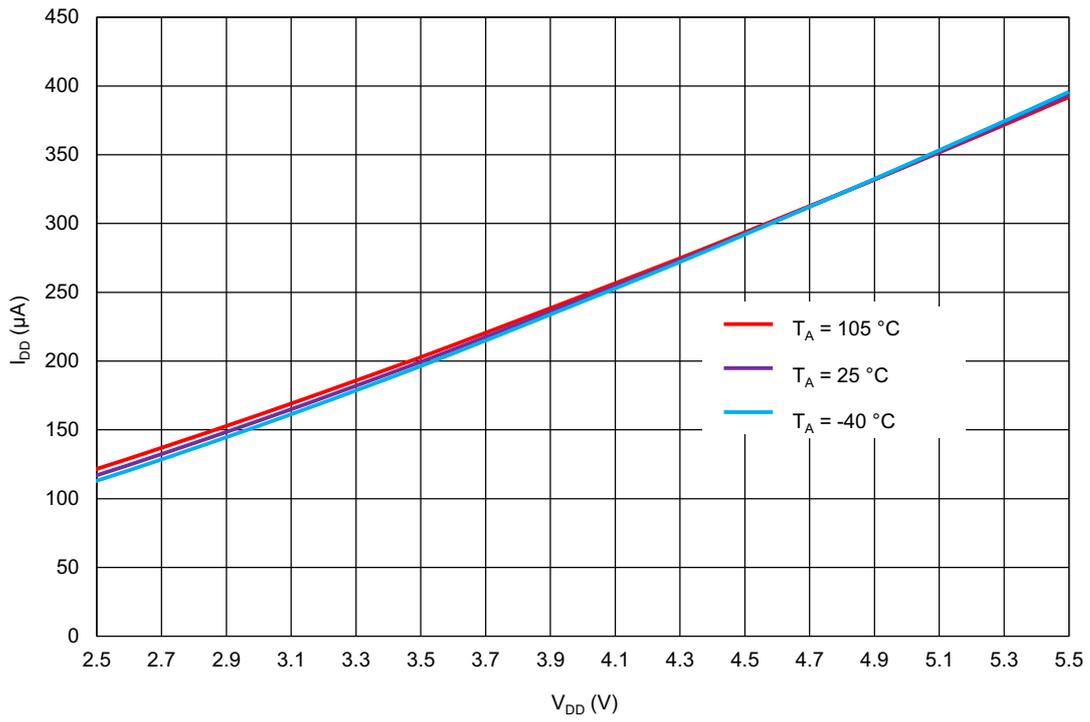


Figure 91. OSC1 (25 MHz) Current Consumption vs. V<sub>DD</sub>, Pre-Divider = 8

## 14. Power-On Reset

The SLG46536-E has a Power-On Reset (POR) macrocell to ensure correct device initialization and operation of all macrocells in the device. The purpose of the POR circuit is to have consistent behavior and predictable results when the  $V_{DD}$  power is first ramping to the device, and also while the  $V_{DD}$  is falling during power-down. To accomplish this goal, the POR drives a defined sequence of internal events that trigger changes to the states of different macrocells inside the device, and finally to the state of the IO pins.

### 14.1 General Operation

To start the POR sequence in the SLG46536-E, the voltage applied on the  $V_{DD}$  should be higher than the Power-On Threshold (**Note 1**). The full operational  $V_{DD}$  range for the SLG46536-E is 1.71 V to 5.5 V (1.8 V  $\pm 5\%$  to 5.0 V  $\pm 10\%$ ). This means that the  $V_{DD}$  voltage must ramp up to the operational voltage value, but the POR sequence will start earlier, as soon as the  $V_{DD}$  voltage rises to the Power-On Threshold. After the POR sequence has started, the SLG46536-E will have a typical period of time to go through all the steps in the sequence (noted in the datasheet for that device), and will be ready and completely operational after the POR sequence is complete.

The SLG46536-E is guaranteed to be powered down and nonoperational when the  $V_{DD}$  voltage (voltage on  $V_{DD}$ ) is less than Power-Off Threshold (see in Electrical Characteristics table), but not less than -0.6 V. Another essential condition for the chip to be powered down is that no voltage higher than the  $V_{DD}$  voltage is applied to any other Pin (**Note 2**). For example, if  $V_{DD}$  voltage is 0.3 V, applying a voltage higher than 0.3 V to any other Pin is incorrect, and can lead to incorrect or unexpected device behavior.

**Note 1:** The Power-On Threshold is defined in Electrical Characteristics table.

**Note 2:** There is a 0.6 V margin due to forward drop voltage of the ESD protection diodes.

To power down the chip the  $V_{DD}$  voltage should be lower than the operational and to guarantee that chip is powered down it should be less than Power-Off Threshold.

All Pins are in high impedance state when the chip is powered down and while the POR sequence is taking place. The last step in the POR sequence releases the IO structures from the high impedance state, at which time the device is operational. The pin configuration at this point in time is defined by the design programmed into the chip. Also, as it was mentioned before the voltage on Pins can't be bigger than the  $V_{DD}$ , this rule also applies to the case when the chip is powered on.

## 14.2 POR Sequence

The POR system generates a sequence of signals that enable certain macrocells. The sequence is shown in Figure 92.

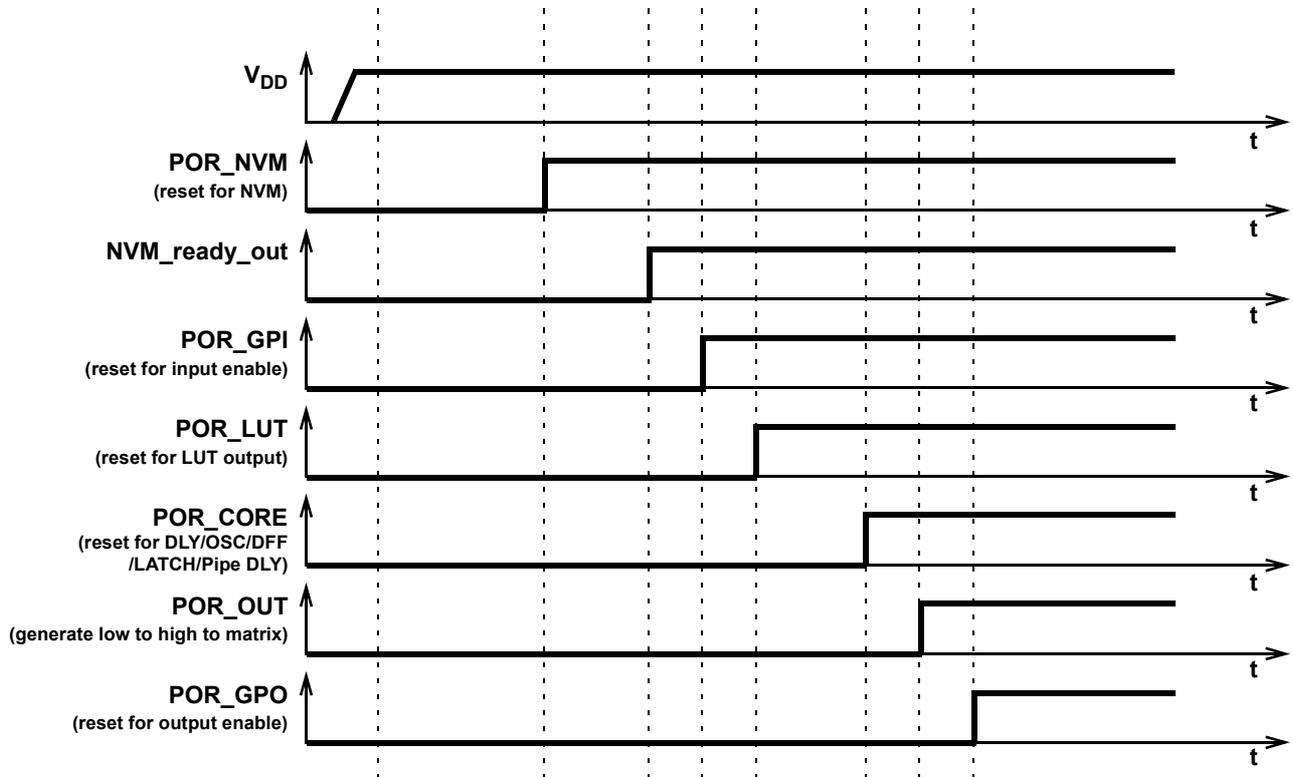


Figure 92. POR Sequence

As can be seen from Figure 92 after the V<sub>DD</sub> has start ramping up and crosses the Power-On threshold, first, the on-chip NVM memory is reset. Next, the chip reads the data from NVM, and transfers this information to SRAM registers that serve to configure each macrocell, and the Connection Matrix which routes signals between macrocells. The third stage causes the reset of the input pins, and then to enable them. After that, the LUTs are reset and become active. After LUTs, the Delay cells, OSC, DFFs, LATCHES, and Pipe Delay are initialized. Only after all macrocells are initialized internal POR signal (POR macrocell output) goes from LOW to HIGH. The last portion of the device to be initialized are the output Pins, which transition from high impedance to active at this point.

The typical time that takes to complete the POR sequence varies by device type in the GreenPAK family. It also depends on many environmental factors, such as: slew rate, V<sub>DD</sub> value, temperature, and even will vary from chip to chip (process influence).

## 14.3 Macrocells Output States During POR Sequence

To have a full picture of SLG46536-E operation during powering and POR sequence, review the overview the macrocell output states during the POR sequence (Figure 93 describes the output signals states).

First, before the NVM has been reset, all macrocells have their output set to logic LOW (except the output Pins which are in high impedance state). Before the NVM is ready, all macrocell outputs are unpredictable (except the output Pins). On the next step, some of the macrocells start initialization: input pins output state becomes LOW; LUTs also output LOW. Only P DLY macrocell configured as edge detector becomes active at this time. After that input Pins are enabled. Next, only LUTs are configured. Next, all other macrocells are initialized. After macrocells are initialized, internal POR matrix signal switches from LOW to HIGH. The last are output Pins that become active and determined by the input signals.

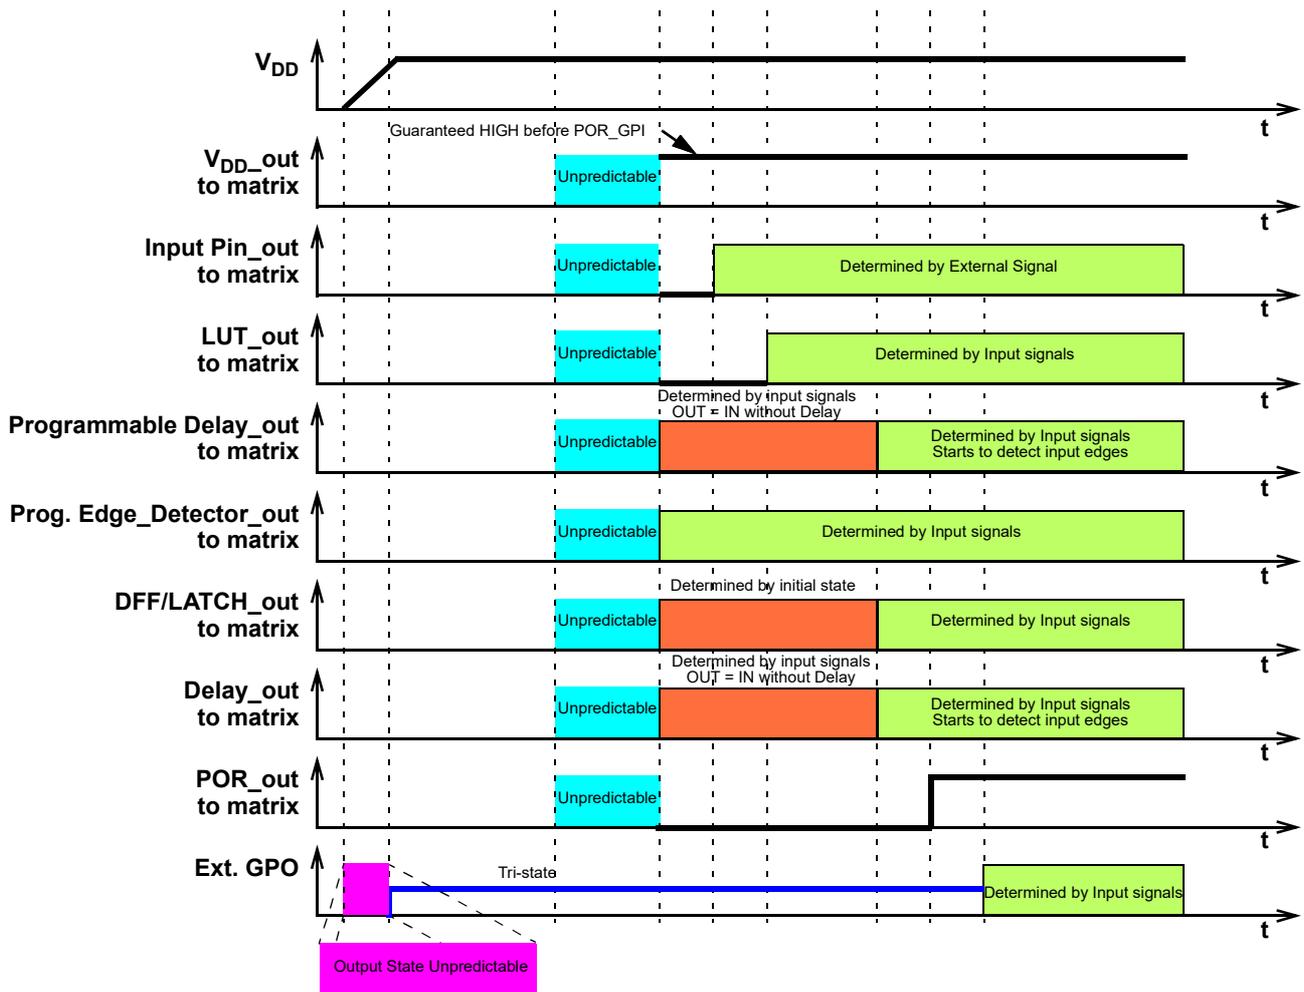


Figure 93. Internal Macrocell States during POR Sequence

### 14.3.1 Initialization

All internal macrocells by default have initial LOW level. Starting from indicated power-up time of 1.15 V to 1.6 V, macrocells in GPAK are powered on while forced to the reset state. All outputs are in Hi-Z and chip starts loading data from NVM. Then the reset signal is released for internal macrocells and they start to initialize according to the following sequence:


1. I<sup>2</sup>C.
2. Input Pins, ACMP, Pull-up/down.
3. LUTs.
4. DFFs, Delays/Counters, Pipe Delay.
5. POR output to matrix.
6. Output Pin corresponds to the internal logic.

The POR signal going high indicates the mentioned power-up sequence is complete.

**Note:** The maximum voltage applied to any Pin should not be higher than the V<sub>DD</sub> level. There are ESD Diodes between Pin → V<sub>DD</sub> and Pin → GND on each Pin. So, if the input signal applied to PIN is higher than V<sub>DD</sub>, then current will sink through the diode to V<sub>DD</sub>. Exceeding V<sub>DD</sub> results in leakage current on the input PIN, and V<sub>DD</sub> will

be pulled up, following the voltage on the input Pin. There is no effect from input pin when input voltage is applied at the same time as  $V_{DD}$ .

### 14.3.2 Power-Down

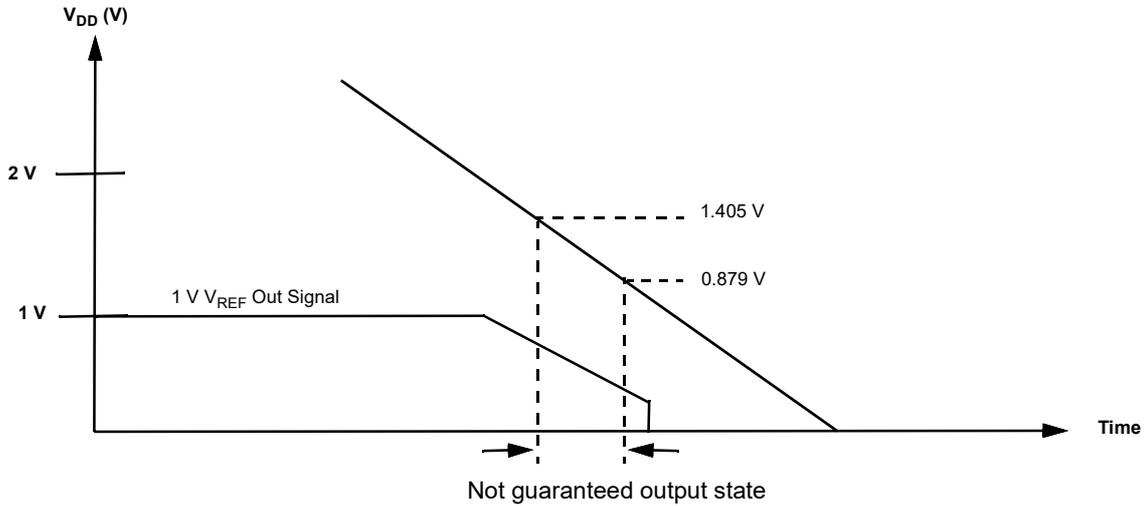

**Figure 94. Power-Down**

During power-down, macrocells in SLG46536-E are powered off after  $V_{DD}$  falling down below Power-Off Threshold. Please note that during a slow ramp down, outputs can possibly switch state during this time.

## 15. I<sup>2</sup>C Serial Communications Macrocell

### 15.1 I<sup>2</sup>C Serial Communications Macrocell Overview

In the standard use case for the GreenPAK devices, the configuration choices made by the user are stored as bit settings in the Non-Volatile Memory (NVM), and this information is transferred at startup time to volatile RAM registers that enable the configuration of the macrocells. Other RAM registers in the device are responsible for setting the connections in the Connection Matrix to route signals in the manner most appropriate for the user's application.

The I<sup>2</sup>C Serial Communications Macrocell in this device allows an I<sup>2</sup>C bus Controller to read and write this information via a serial channel directly to the RAM registers, allowing the remote re-configuration of macrocells, and remote changes to signal chains within the device.

An I<sup>2</sup>C bus Controller is also able read and write other register bits that are not associated with NVM memory. As an example, the input lines to the Connection Matrix can be read as digital register bits. These are the signal outputs of each of the macrocells in the device, giving an I<sup>2</sup>C bus Controller the capability to remotely read the current value of any macrocell.

The user has the flexibility to control read access and write access via registers bits register [1832], register [1870], and register [1871]. See section [15.5 I<sup>2</sup>C Serial Command Register Protection](#) for more details on I<sup>2</sup>C read/write memory protection.

**Note:** GreenPAK I<sup>2</sup>C is fully compatible with standard I<sup>2</sup>C protocol.

### 15.2 I<sup>2</sup>C Serial Communications Device Addressing

Each command to the I<sup>2</sup>C Serial Communications macrocell begins with a Control Byte. The bits inside this Control Byte are shown in [Figure 95](#). After the Start bit, the first four bits are a control code, which can be set by the user in registers [1867:1864]. This gives the user flexibility on the chip level addressing of this device and other devices on the same I<sup>2</sup>C bus. The Block Address is the next three bits (A10, A9, A8), which will define the most significant bits in the addressing of the data to be read or written by the command. The last bit in the Control Byte is the R/W bit, which selects whether a read command or write command is requested, with a "1" selecting for a Read command, and a "0" selecting for a Write command. This Control Byte will be followed by an Acknowledge bit (ACK), which is sent by this device to indicate successful communication of the Control Byte data.

In the I<sup>2</sup>C-bus specification and user manual, there are two groups of eight addresses (0000 xxx and 1111 xxx) that are reserved for the special functions, such as a system General Call address. If the user of this device chooses to set the Control Code to either "1111" or "0000" in a system with other target device, please consult the I<sup>2</sup>C-bus specification and user manual to understand the addressing and implementation of these special functions, to ensure reliable operation.

In the read and write command address structure, there are a total of 11 bits of addressing, each pointing to a unique byte of information, resulting in a total address space of 2K bytes. Of this 2K byte address space, the valid addresses accessible to the I<sup>2</sup>C Macrocell on the SLG46536-E are in the range from 0 (0x00) to 255 (0xFF). The MSB address bits (A10, A9, and A8) will be "0" for all commands to the SLG46536-E.

With the exception of the Current Address Read command, all commands will have the Control Byte followed by the Word Address. [Figure 95](#) shows this basic command structure.

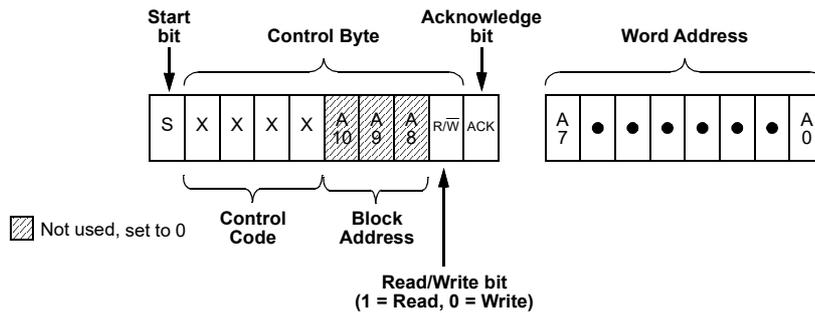


Figure 95. Basic Command Structure

### 15.3 I<sup>2</sup>C Serial General Timing

General timing characteristics for the I<sup>2</sup>C Serial Communications macrocell are shown in Figure 96. Timing specifications can be found in section 3.4.2 I2C Pins Electrical Specifications.

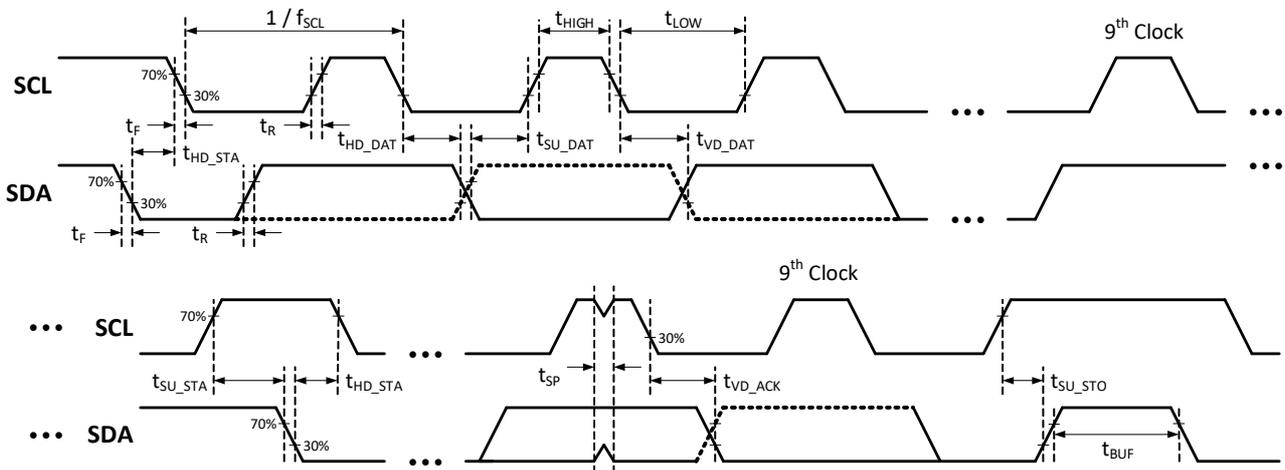


Figure 96. I<sup>2</sup>C General Timing Characteristics

### 15.4 I<sup>2</sup>C Serial Communications Commands

#### 15.4.1 Byte Write Command

Following the Start condition from the Controller, the Control Code [4 bits], the Block Address [3 bits], and the R/W bit (set to “0”), are placed onto the I<sup>2</sup>C bus by the Controller. After the SLG46536-E sends an Acknowledge bit (ACK), the next byte transmitted by the Controller is the Word Address. The Block Address (A10, A9, A8), combined with the Word Address (A7 through A0), together set the internal address pointer in the SLG46536-E, where the data byte is to be written. After the SLG46536-E sends another Acknowledge bit, the Controller will transmit the data byte to be written into the addressed memory location. The SLG46536-E again provides an Acknowledge bit and then the Controller generates a Stop condition. The internal write cycle for the data will take place at the time that the SLG46536-E generates the Acknowledge bit.

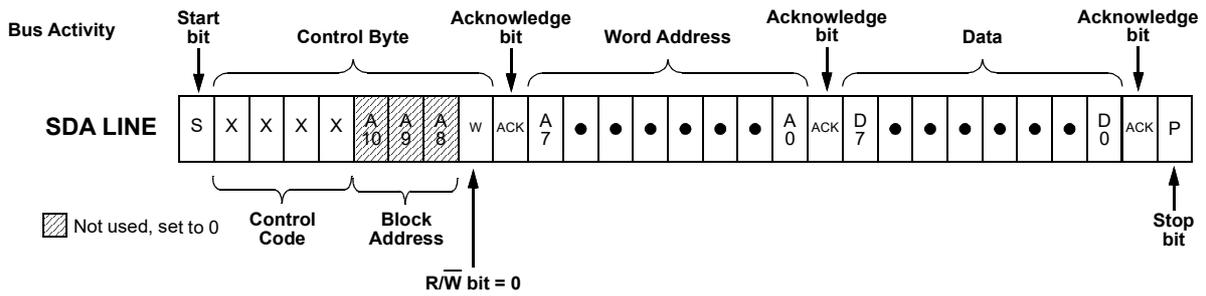


Figure 97. Byte Write Command,  $\overline{R/W} = 0$

### 15.4.2 Sequential Write Command

The write Control Byte, Word Address, and the first data byte are transmitted to the SLG46536-E in the same way as in a Byte Write command. However, instead of generating a Stop condition, the Bus Controller continues to transmit data bytes to the SLG46536-E. Each subsequent data byte will increment the internal address counter, and will be written into the next higher byte in the command addressing. As in the case of the Byte Write command, the internal write cycle will take place at the time that the SLG46536-E generates the Acknowledge bit.

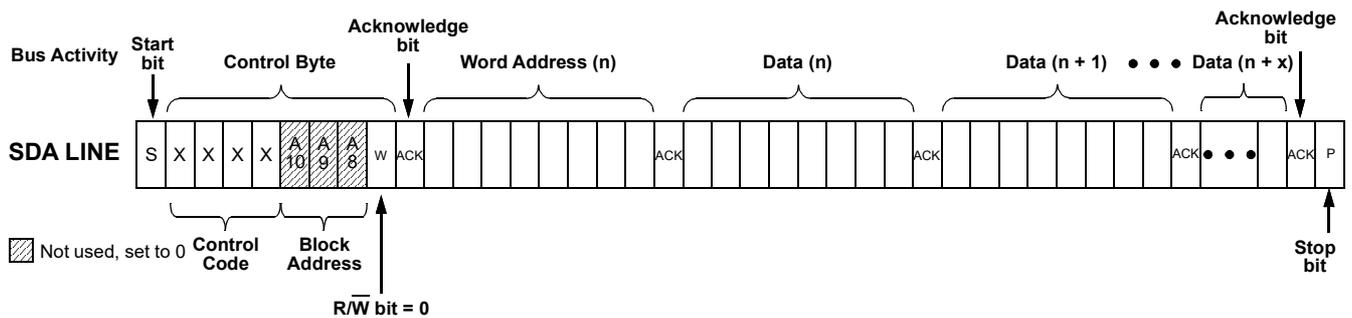


Figure 98. Sequential Write Command

### 15.4.3 Current Address Read Command

The Current Address Read Command reads from the current pointer address location. The address pointer is incremented at the first STOP bit following any write control byte. For example, if a Sequential Read command (which contains a write control byte) reads data up to address n, the address pointer would get incremented to n + 1 upon the STOP of that command. Subsequently, a Current Address Read that follows would start reading data at n + 1. The Current Address Read Command contains the Control Byte sent by the Controller, with the  $\overline{R/W}$  bit = "1". The SLG46536-E will issue an Acknowledge bit, and then transmit eight data bits for the requested byte. The Controller will not issue an Acknowledge bit, and follow immediately with a Stop condition.

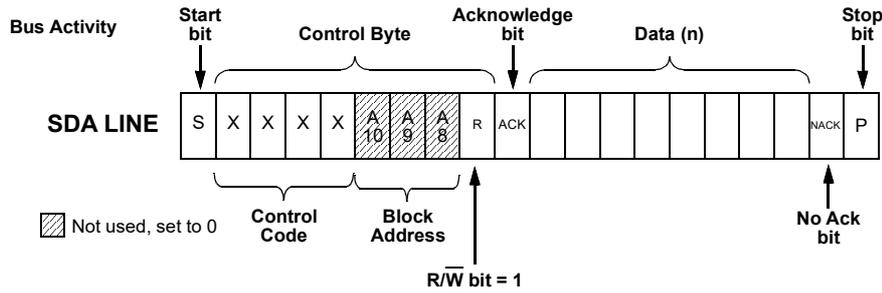


Figure 99. Current Address Read Command,  $\overline{R/W} = 1$

### 15.4.4 Random Read Command

The Random Read command starts with a Control Byte (with R/W bit set to “0”, indicating a write command) and Word Address to set the internal byte address, followed by a Start bit, and then the Control Byte for the read (exactly the same as the Byte Write command). The Start bit in the middle of the command will halt the decoding of a Write command, but will set the internal address counter in preparation for the second half of the command. After the Start bit, the Bus Controller issues a second control byte with the R/W bit set to “1”, after which the SLG46536-E issues an Acknowledge bit, followed by the requested eight data bits.

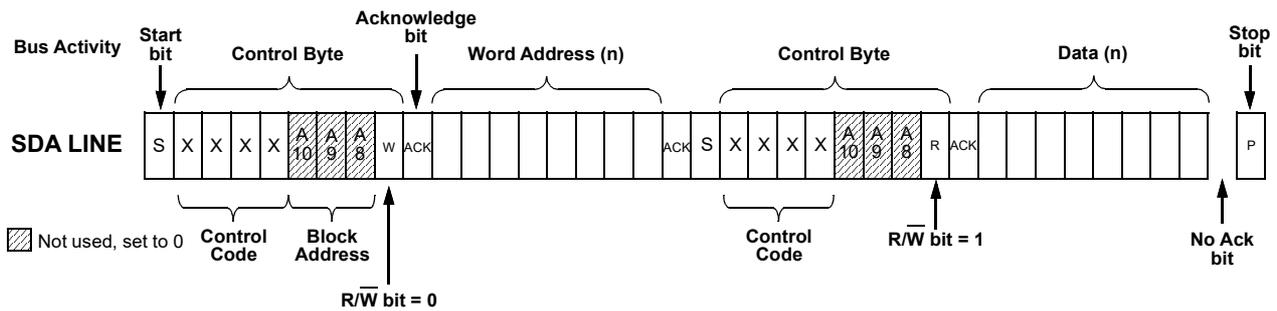


Figure 100. Random Read Command

### 15.4.5 Sequential Read Command

The Sequential Read command is initiated in the same way as a Current Address Read or Random Read command, except that once the SLG46536-E transmits the first data byte, the Controller issues an Acknowledge bit as opposed to a Stop condition in a random read. The Controller can continue reading sequential bytes of data, and will terminate the command with a Stop condition.

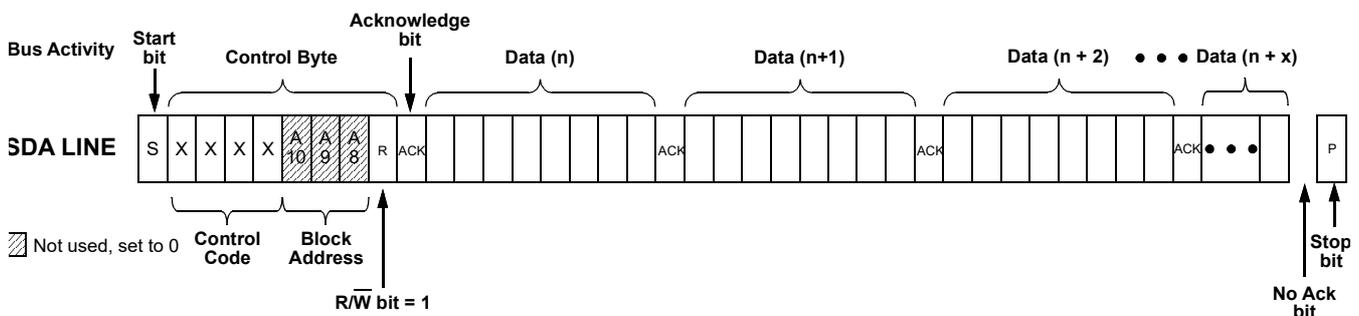


Figure 101. Sequential Read Command

### 15.4.6 I<sup>2</sup>C Serial Command Address Space

In the read and write command address structure, there are a total of 11 bits of addressing, each pointing to a unique byte of information, resulting in a total address space of 2K bytes. Of this 2K byte address space, the valid addresses accessible to the I<sup>2</sup>C Macrocell on the SLG46536-E are in the range from 0 (0x00) to 255 (0xFF). The MSB address bits (A10, A9, and A8) will be “0” for all commands to the SLG46536-E.

### 15.4.7 I<sup>2</sup>C Serial Command Register Map

These register addresses are broken down into four Banks to give the user greater control on access to reading and writing information in each bank. Each of the four banks is 512 bits (64 bytes) in length. Writing information to register bits in these Banks will change the configuration of the device, resulting in either a change in the interconnection options provided by the Connection Matrix, or by changing the configuration of individual macrocells. During device use, all register bits can be read or written via I<sup>2</sup>C, unless protection bits are set to prevent this.

See section 16. Register Definitions for detailed information on all register bits.

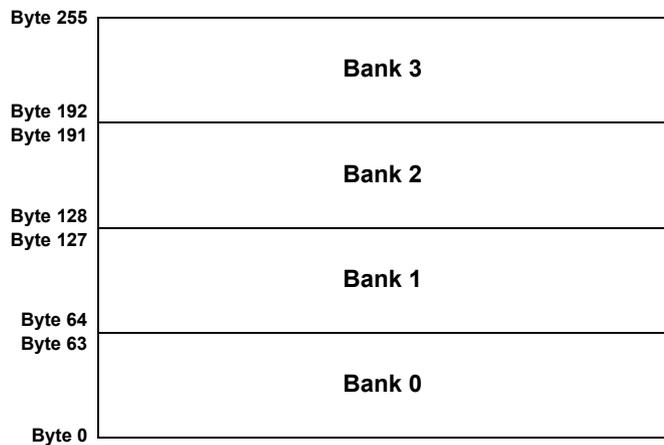


Figure 102. Register Bank Map

## 15.5 I<sup>2</sup>C Serial Command Register Protection

The memory space is divided into four banks, each of which has 512bits (64bytes). There are three bits that allow the user to define rules for reading and writing bits in each of these banks via I<sup>2</sup>C:

- register [1832] I<sup>2</sup>C lock for read bits [1535:0] (Bank 0/1/2). If the system provides any read commands to the addresses in these three banks, the device will respond with 'FFH' in data field.
- register [1871] I<sup>2</sup>C lock for write bits [1535:0] (Bank 0/1/2). If the system provides any write commands to the addresses in these three banks, the device will acknowledge these commands, but will not do internal writes to the register space.
- register [1870] I<sup>2</sup>C lock for write all bits (Bank 0/1/2/3). If the system provides any write commands to the addresses in these four banks, the device will acknowledge these commands, but will not do internal writes to the register space.

**Note 1:** register [1870] is higher priority than register [1871], and if register [1870] is set, than register [1871] does not have any effect.

**Note 2:** If the user sets Pins 8 and 9 function to a selection other than SDA and SCL, all access via I<sup>2</sup>C will be disabled.

If register [1870] is not set, register bits in Bank 3 are open to read and write commands via I<sup>2</sup>C with the following exceptions:

- register [1871] Bank 0/1/2 I<sup>2</sup>C-write protection bit is always protected from I<sup>2</sup>C write
- registers [1867:1864] I<sup>2</sup>C Control Code Bit [3:0] is always protected from I<sup>2</sup>C write.

**Note:** Any write commands that come to the device via I<sup>2</sup>C that are not blocked, based on the protection bits, will change the contents of the RAM register bits that mirror the NVM bits. These write commands will not change the NVM bits themselves, and a POR event will restore the register bits to original programmed contents of the NVM.

See section 16. Register Definitions for detailed information on all registers.

### 15.5.1 Register Read/Write Protection

There are six read/write protect modes for the design sequence from being corrupted or copied. See Table 38 for details.

Table 38. Read/Write Protection Options

Bank	Byte	Bits	Description	Lock Status					
				Unlocked	Locked for read bits [1535:0]	Locked for write bits [1535:0]	Locked for write all bits	Locked for read and write bits [1535:0]	Locked for read bits [1535:0] and write all bits
				register [1832] = 0, [1871] = 0, [1870] = 0	register [1832] = 1, [1871] = 0, [1870] = 0	register [1832] = 0, [1871] = 1, [1870] = 0	register [1832] = 0, [1871] = x, [1870] = 1	register [1832] = 1, [1871] = 1, [1870] = 0	register [1832] = 1, [1871] = x, [1870] = 1
0	0-63	511-0	Connection Matrix	R/W	W	R	R	-	-
1	64-109	879-512	Outputs Configuration	R/W	W	R	R	-	-
	110-127	880-1023	Reserved	-	-	-	-	-	-
2	128-186	1495-1024	Function Configuration for Pins, LUTs/DFFs, OSC, and some configuration for DLYs, ACMP	R/W	W	R	R	-	-
	187-191	1535-1496	Reserved	-	-	-	-	-	-
3	192-206	1655-1536	CNT/DLY counter data and some LUTs truth table, ACMP V <sub>REF</sub>	R/W	R/W	R/W	R	R/W	R
	207	1662	I <sup>2</sup> C reset bit with reloading NVM into Data register	R/W	R/W	R/W	R	R/W	R
		1661-1659, 1663	Reserved	R	R	R	R	R	R
		1658-1656	OSC Power Control	R/W	R/W	R/W	R	R/W	R


Table 38. Read/Write Protection Options (Cont.)

Bank	Byte	Bits	Description	Lock Status					
				Unlocked	Locked for read bits [1535:0]	Locked for write bits [1535:0]	Locked for write all bits	Locked for read and write bits [1535:0]	Locked for read bits [1535:0] and write all bits
				register [1832] = 0, [1871] = 0, [1870] = 0	register [1832] = 1, [1871] = 0, [1870] = 0	register [1832] = 0, [1871] = 1, [1870] = 0	register [1832] = 0, [1871] = x, [1870] = 1	register [1832] = 1, [1871] = 1, [1870] = 0	register [1832] = 1, [1871] = x, [1870] = 1
3	208-223	1791-1664	User configurable RAM / OTP	R/W	R/W	R/W	R	R/W	R
	224-227	1823-1792	Reserved	-	-	-	-	-	-
	228	1831-1824	Reserved	R/W	R/W	R/W	R	R/W	R
	229	1839-1836	Product Family ID	R	R	R	R	R	R
		1835-1834	Reserved	-	-	-	-	-	-
		1833	Reserved	R	R	R	R	R	R
		1832	I <sup>2</sup> C Lock for read bits [1535:0]	R	R	R	R	R	R
	230	1847-1840	Pattern ID	R/W	R/W	R/W	R	R/W	R
	231	1855-1848	Reserved	R	R	R	R	R	R
	232	1863-1856	Reserved	R	R	R	R	R	R
	233	1871	I <sup>2</sup> C Lock for write bits [1535:0]	R	R	R	R	R	R
		1870	I <sup>2</sup> C Lock for write all bits	R	R	R	R	R	R
		1869-1868	Reserved	-	-	-	-	-	-
		1867-1864	I <sup>2</sup> C Control Code	R	R	R	R	R	R
	234-239	1919-1872	Counter Current Value	R	R	R	R	R	R
	240-243	1951-1920	Macrocells Output Values (Connection Matrix Inputs)	R	R	R	R	R	R
244	1959-1952	Connection Matrix Virtual Inputs	R/W	R/W	R/W	R	R/W	R	
245-247	1983-1960	Macrocells Output Values (Connection Matrix Inputs)	R	R	R	R	R	R	
248-250	2007-1984	Reserved	R	R	R	R	R	R	
3	251	2015-2008	Reserved	R/W	R/W	R/W	R	R/W	R
	252-253	2031-2016	Reserved	R	R	R	R	R	R
	254	2039-2032	Reserved	R/W	R/W	R/W	R	R/W	R
	255	2047-2040	Reserved	R/W	R/W	R/W	R	R/W	R
R/W				Allow Read and Write Data					
W				Allow Write Data Only					
R				Allow Read Data Only					
-				The Data is protected for Read and Write					

### 15.5.2 I<sup>2</sup>C Serial Reset Command

If I<sup>2</sup>C serial communication is established with the device, it is possible to reset the device to initial power up conditions, including configuration of all macrocells, and all connections provided by the Connection Matrix. This is implemented by setting register [1662] I<sup>2</sup>C reset bit to “1”, which causes the device to re-enable the Power-On Reset (POR) sequence, including the reload of all register data from NVM. During the POR sequence, the outputs of the device will be in tri-state. After the reset has taken place, the contents of register [1662] will be set to “0” automatically. Figure 103 illustrates the sequence of events for this reset function.

**Note:** I<sup>2</sup>C Serial Reset Command is not available during emulation.

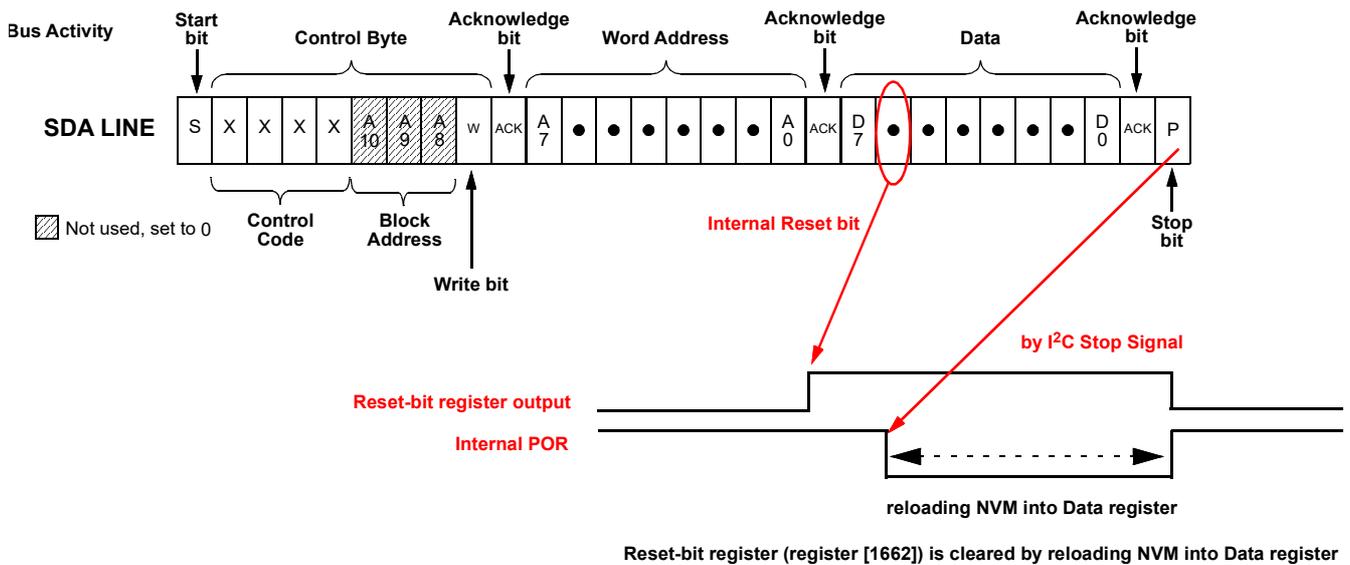

- 1) I<sup>2</sup>C write with register [1662] = 1 (I<sup>2</sup>C reset bit with reloading NVM into Data register)
- 2) POR go to LOW and reloading NVM into Data register start after “STOP” of I<sup>2</sup>C
- 3) POR go to HIGH after reloading NVM into Data register

Figure 103. Reset Command Timing

## 15.6 I<sup>2</sup>C Additional Options

### 15.6.1 Reading Counter Data via I<sup>2</sup>C

The current count value in four counters in the device can be read via I<sup>2</sup>C. The counters that have this additional functionality are 16-bit CNT0 and CNT1, and 8-bit counters CNT4 and CNT6.

### 15.6.2 User RAM and OTP Memory Array

There are eight bytes of RAM memory that can be read and written remotely by I<sup>2</sup>C commands. The initial contents of this memory space can be selected by the user, and this information will be transferred from OTP memory to the RAM memory space during the power-up sequence. The lowest order byte in this array (User

Configurable RAM/OTP Byte 0) is located at I<sup>2</sup>C address 0xD8, and the highest order byte in this array is located at I<sup>2</sup>C address 0xD7.

Table 39. RAM Array Table

I <sup>2</sup> C Address (hex)	Highest Bit Address	Lowest Bit Address	Memory Byte
D0	1671	1664	User Configurable RAM/OTP Byte 8
D1	1679	1672	User Configurable RAM/OTP Byte 9
D2	1687	1680	User Configurable RAM/OTP Byte 10
D3	1695	1688	User Configurable RAM/OTP Byte 11
D4	1703	1696	User Configurable RAM/OTP Byte 12
D5	1711	1704	User Configurable RAM/OTP Byte 13
D6	1719	1712	User Configurable RAM/OTP Byte 14
D7	1727	1720	User Configurable RAM/OTP Byte 15
D8	1735	1728	User Configurable RAM/OTP Byte 0
D9	1743	1736	User Configurable RAM/OTP Byte 1
DA	1751	1744	User Configurable RAM/OTP Byte 2
DB	1759	1752	User Configurable RAM/OTP Byte 3
DC	1767	1760	User Configurable RAM/OTP Byte 4
DD	1775	1768	User Configurable RAM/OTP Byte 5
DE	1783	1776	User Configurable RAM/OTP Byte 6
DF	1791	1784	User Configurable RAM/OTP Byte 7

## 16. Register Definitions

### 16.1 Register Map

Table 40. Register Map

Address		Signal Function	Register Bit Definition	I <sup>2</sup> C Interface	
Byte	Register Bit			Read	Write
<b>Note: For register [0] to register [1495], I<sup>2</sup>C Read is valid (assuming register [1832] = 0), I<sup>2</sup>C Write is valid (assuming register [1871] = 0).</b>					
<b>Matrix 64-to-1 MUX's 6 Selection Bits</b>					
00	5:0	Matrix OUT	IN0 of 3-bit LUT11 or Clock Input of DFF8	Valid	Valid
	7:6	Reserved		Valid	Valid
01	13:8	Matrix OUT	IN1 of 3-bit LUT11 or Data Input of DFF8	Valid	Valid
	15:14	Reserved		Valid	Valid
02	21:16	Matrix OUT	IN2 of 3-bit LUT11 or nRST (nSET) of DFF8	Valid	Valid
	23:22	Reserved		Valid	Valid
03	29:24	Matrix OUT	IN0 of 3-bit LUT12 or Clock Input of DFF9	Valid	Valid
	31:30	Reserved		Valid	Valid
04	37:32	Matrix OUT	IN1 of 3-bit LUT12 or Data Input of DFF9	Valid	Valid
	39:38	Reserved		Valid	Valid
05	45:40	Matrix OUT	IN2 of 3-bit LUT12 or nRST (nSET) of DFF9	Valid	Valid
	47:46	Reserved		Valid	Valid
06	53:48	Matrix OUT	IN0 of 3-bit LUT13 or Clock Input of DFF10	Valid	Valid
	55:54	Reserved		Valid	Valid
07	61:56	Matrix OUT	IN1 of 3-bit LUT13 or Data Input of DFF10	Valid	Valid
	63:62	Reserved		Valid	Valid
08	69:64	Matrix OUT	IN2 of 3-bit LUT13 or nRST (nSET) of DFF10	Valid	Valid
	71:70	Reserved		Valid	Valid
09	77:72	Matrix OUT	IN0 of 3-bit LUT14 or Clock Input of DFF11	Valid	Valid
	79:78	Reserved		Valid	Valid
0A	85:80	Matrix OUT	IN1 of 3-bit LUT14 or Data Input of DFF11	Valid	Valid
	87:86	Reserved		Valid	Valid
0B	93:88	Matrix OUT	IN2 of 3-bit LUT14 or nRST (nSET) of DFF11	Valid	Valid
	95:94	Reserved		Valid	Valid
0C	101:96	Matrix OUT	IN0 of 3-bit LUT15 or Clock Input of DFF12	Valid	Valid
	103:102	Reserved		Valid	Valid
0D	109:104	Matrix OUT	IN1 of 3-bit LUT15 or Data Input of DFF12	Valid	Valid
	111:110	Reserved		Valid	Valid

Table 40. Register Map (Cont.)

Address		Signal Function	Register Bit Definition	I <sup>2</sup> C Interface	
Byte	Register Bit			Read	Write
0E	117:112	Matrix OUT	IN2 of 3-bit LUT15 or nRST (nSET) of DFF12	Valid	Valid
	119:118	Reserved		Valid	Valid
0F	125:120	Matrix OUT	IN0 of 3-bit LUT16 or Clock Input of DFF13	Valid	Valid
	127:126	Reserved		Valid	Valid
10	133:128	Matrix OUT	IN1 of 3-bit LUT16 or Data Input of DFF13	Valid	Valid
	135:134	Reserved		Valid	Valid
11	141:136	Matrix OUT	IN2 of 3-bit LUT16 or nRST (nSET) of DFF13	Valid	Valid
	143:142	Reserved		Valid	Valid
12	149:144	Matrix OUT	IN0 of 3-bit LUT17 or Clock Input of DFF14	Valid	Valid
	151:150	Reserved		Valid	Valid
13	157:152	Matrix OUT	IN1 of 3-bit LUT17 or Data Input of DFF14	Valid	Valid
	159:158	Reserved		Valid	Valid
14	165:160	Matrix OUT	IN2 of 3-bit LUT17 or nRST (nSET) of DFF14	Valid	Valid
	167:166	Reserved		Valid	Valid
15	173:168	Matrix OUT	IN0 of 4-bit LUT2	Valid	Valid
	175:174	Reserved		Valid	Valid
16	181:176	Matrix OUT	IN1 of 4-bit LUT2	Valid	Valid
	183:182	Reserved		Valid	Valid
17	189:184	Matrix OUT	IN2 of 4-bit LUT2	Valid	Valid
	191:190	Reserved		Valid	Valid
18	197:192	Matrix OUT	IN3 of 4-bit LUT2	Valid	Valid
	199:198	Reserved		Valid	Valid
19	205:200	Reserved		Valid	Valid
	207:206	Reserved		Valid	Valid
1A	213:208	Reserved		Valid	Valid
	215:214	Reserved		Valid	Valid
1B	221:216	Matrix OUT	Pin 3 Digital Output Source	Valid	Valid
	223:222	Reserved		Valid	Valid
1C	229:224	Reserved		Valid	Valid
	231:230	Reserved		Valid	Valid
1D	237:232	Reserved		Valid	Valid
	239:238	Reserved		Valid	Valid
1E	245:240	Matrix OUT	Pin 4 Digital Output Source	Valid	Valid
	247:246	Reserved		Valid	Valid

Table 40. Register Map (Cont.)

Address		Signal Function	Register Bit Definition	I <sup>2</sup> C Interface	
Byte	Register Bit			Read	Write
1F	253:248	Matrix OUT	Pin 5 Digital Output Source	Valid	Valid
	255:254	Reserved		Valid	Valid
20	261:256	Matrix OUT	Pin 5 Output Enable	Valid	Valid
	263:262	Reserved		Valid	Valid
21	269:264	Matrix OUT	Pin 6 Digital Output Source (SCL with VI/Input and NMOS Open-Drain)	Valid	Valid
	271:270	Reserved		Valid	Valid
22	277:272	Matrix OUT	Pin 7 Digital Output Source (SDA with VI/Input and NMOS Open-Drain)	Valid	Valid
	279:278	Reserved		Valid	Valid
23	285:280	Matrix OUT	Pin 8 Digital Output Source	Valid	Valid
	287:286	Reserved		Valid	Valid
24	293:288	Matrix OUT	Pin 8 Output Enable	Valid	Valid
	295:294	Reserved		Valid	Valid
25	301:296	Matrix OUT	Pin 10 Digital Output Source	Valid	Valid
	303:302	Reserved		Valid	Valid
26	309:304	Reserved		Valid	Valid
	311:310	Reserved		Valid	Valid
27	317:312	Reserved		Valid	Valid
	319:318	Reserved		Valid	Valid
28	325:320	Matrix OUT	Pin 11 Digital Output Source	Valid	Valid
	327:326	Reserved		Valid	Valid
29	333:328	Reserved	Pin 11 Output Enable	Valid	Valid
	335:334	Reserved		Valid	Valid
2A	341:336	Reserved		Valid	Valid
	343:342	Reserved		Valid	Valid
2B	349:344	Matrix OUT	Pin 12 Digital Output Source	Valid	Valid
	351:350	Reserved		Valid	Valid
2C	357:352	Matrix OUT	Pin 12 Output Enable	Valid	Valid
	359:358	Reserved		Valid	Valid
2D	365:360	Matrix OUT	Pin 13 Digital Output Source	Valid	Valid
	367:366	Reserved		Valid	Valid
2E	373:368	Reserved		Valid	Valid
	375:374	Reserved		Valid	Valid
2F	381:376	Reserved		Valid	Valid
	383:382	Reserved		Valid	Valid

Table 40. Register Map (Cont.)

Address		Signal Function	Register Bit Definition	I <sup>2</sup> C Interface	
Byte	Register Bit			Read	Write
30	389:384	Reserved		Valid	Valid
	391:390	Reserved		Valid	Valid
31	397:392	Reserved		Valid	Valid
	399:398	Reserved		Valid	Valid
32	405:400	Matrix OUT	Pin 14 Digital Output Source	Valid	Valid
	407:406	Reserved		Valid	Valid
33	413:408	Matrix OUT	ACMP0 nPD (Power-Down)	Valid	Valid
	415:414	Reserved		Valid	Valid
34	421:416	Matrix OUT	ACMP1 nPD (Power-Down)	Valid	Valid
	423:422	Reserved		Valid	Valid
35	429:424	Matrix OUT	ACMP2 nPD (Power-Down)	Valid	Valid
	431:430	Reserved		Valid	Valid
36	437:432	Reserved		Valid	Valid
	439:438	Reserved		Valid	Valid
37	445:440	Matrix OUT	Input of Filter_0 with fixed time edge detector	Valid	Valid
	447:446	Reserved		Valid	Valid
38	453:448	Matrix OUT	Input of Filter_1 with fixed time edge detector	Valid	Valid
	455:454	Reserved		Valid	Valid
39	461:456	Matrix OUT	Input of Programmable Delay and Edge Detector	Valid	Valid
	463:462	Reserved		Valid	Valid
3A	469:464	Matrix OUT	OSC0 25 kHz/2 MHz nPD (Power-Down)	Valid	Valid
	471:470	Reserved		Valid	Valid
3B	477:472	Matrix OUT	OSC1 25 MHz nPD (Power-Down)	Valid	Valid
	479:478	Reserved		Valid	Valid
3C	485:480	Matrix OUT	IN0 of 2-bit LUT0 or Clock Input of DFF0	Valid	Valid
	487:486	Reserved		Valid	Valid
3D	493:488	Matrix OUT	IN1 of 2-bit LUT0 or Data Input of DFF0	Valid	Valid
	495:494	Reserved		Valid	Valid
3E	501:496	Matrix OUT	IN0 of 2-bit LUT1 or Clock Input of DFF1	Valid	Valid
	503:502	Reserved		Valid	Valid
3F	509:504	Matrix OUT	IN1 of 2-bit LUT1 or Data Input of DFF1	Valid	Valid
	511:510	Reserved		Valid	Valid

Table 40. Register Map (Cont.)

Address		Signal Function	Register Bit Definition	I <sup>2</sup> C Interface	
Byte	Register Bit			Read	Write
40	517:512	Matrix OUT	IN0 of 2-bit LUT2 or Clock Input of DFF2	Valid	Valid
	519:518	Reserved		Valid	Valid
41	525:520	Matrix OUT	IN1 of 2-bit LUT2 or Data Input of DFF2	Valid	Valid
	527:526	Reserved		Valid	Valid
42	533:528	Matrix OUT	IN0 of 2-bit LUT3 or Clock Input of PGen	Valid	Valid
	535:534	Reserved		Valid	Valid
43	541:536	Matrix OUT	IN1 of 2-bit LUT3 or nRST of PGen	Valid	Valid
	543:542	Reserved		Valid	Valid
44	549:544	Matrix OUT	IN0 of 3-bit LUT0 or Clock Input of DFF3	Valid	Valid
	551:550	Reserved		Valid	Valid
45	557:552	Matrix OUT	IN1 of 3-bit LUT0 or Data Input of DFF3	Valid	Valid
	559:558	Reserved		Valid	Valid
46	565:560	Matrix OUT	IN2 of 3-bit LUT0 or nRST (nSET) of DFF3	Valid	Valid
	567:566	Reserved		Valid	Valid
47	573:568	Matrix OUT	IN0 of 3-bit LUT1 or Clock Input of DFF4	Valid	Valid
	575:574	Reserved		Valid	Valid
48	581:576	Matrix OUT	IN1 of 3-bit LUT1 or Data Input of DFF4	Valid	Valid
	583:582	Reserved		Valid	Valid
49	589:584	Matrix OUT	IN2 of 3-bit LUT1 or nRST (nSET) of DFF4	Valid	Valid
	591:590	Reserved		Valid	Valid
4A	597:592	Matrix OUT	IN0 of 3-bit LUT2 or Clock Input of DFF5	Valid	Valid
	599:598	Reserved		Valid	Valid
4B	605:600	Matrix OUT	IN1 of 3-bit LUT2 or Data Input of DFF5	Valid	Valid
	607:606	Reserved		Valid	Valid
4C	613:608	Matrix OUT	IN2 of 3-bit LUT2 or nRST (nSET) of DFF5	Valid	Valid
	615:614	Reserved		Valid	Valid
4D	621:616	Matrix OUT	IN0 of 3-bit LUT3 or Clock Input of DFF6	Valid	Valid
	623:622	Reserved		Valid	Valid
4E	629:624	Matrix OUT	IN1 of 3-bit LUT3 or Data Input of DFF6	Valid	Valid
	631:630	Reserved		Valid	Valid
4F	637:632	Matrix OUT	IN2 of 3-bit LUT3 or nRST (nSET) of DFF6	Valid	Valid
	639:638	Reserved		Valid	Valid
50	645:640	Matrix OUT	IN0 of 3-bit LUT4 or Clock Input of DFF7	Valid	Valid
	647:646	Reserved		Valid	Valid

Table 40. Register Map (Cont.)

Address		Signal Function	Register Bit Definition	I <sup>2</sup> C Interface	
Byte	Register Bit			Read	Write
51	653:648	Matrix OUT	IN1 of 3-bit LUT4 or Data Input of DFF7	Valid	Valid
	655:654	Reserved		Valid	Valid
52	661:656	Matrix OUT	IN2 of 3-bit LUT4 or nRST (nSET) of DFF7	Valid	Valid
	663:662	Reserved		Valid	Valid
53	669:664	Matrix OUT	IN0 of 3-bit LUT5 or Delay2 Input (or Counter2 RST Input)	Valid	Valid
	671:670	Reserved		Valid	Valid
54	677:672	Matrix OUT	IN1 of 3-bit LUT5 or External Clock Input of Delay2 (or Counter2)	Valid	Valid
	679:678	Reserved		Valid	Valid
55	685:680	Matrix OUT	IN2 of 3-bit LUT5	Valid	Valid
	687:686	Reserved		Valid	Valid
56	693:688	Matrix OUT	IN0 of 3-bit LUT6 or Delay3 Input (or Counter3 RST Input)	Valid	Valid
	695:694	Reserved		Valid	Valid
57	701:696	Matrix OUT	IN1 of 3-bit LUT6 or External Clock Input of Delay3 (or Counter3)	Valid	Valid
	703:702	Reserved		Valid	Valid
58	709:704	Matrix OUT	IN2 of 3-bit LUT6	Valid	Valid
	711:710	Reserved		Valid	Valid
59	717:712	Matrix OUT	IN0 of 3-bit LUT7 or Delay4 Input (or Counter4 RST Input)	Valid	Valid
	719:718	Reserved		Valid	Valid
5A	725:720	Matrix OUT	IN1 of 3-bit LUT7 or External Clock Input of Delay4 (or Counter4)	Valid	Valid
	727:726	Reserved		Valid	Valid
5B	733:728	Matrix OUT	IN2 of 3-bit LUT7	Valid	Valid
	735:734	Reserved		Valid	Valid
5C	741:736	Matrix OUT	IN0 of 3-bit LUT8 or Delay5 Input (or Counter5 RST Input)	Valid	Valid
	743:742	Reserved		Valid	Valid
5D	749:744	Matrix OUT	IN1 of 3-bit LUT8 or External Clock Input of Delay5 (or Counter5)	Valid	Valid
	751:750	Reserved		Valid	Valid
5E	757:752	Matrix OUT	IN2 of 3-bit LUT8	Valid	Valid
	759:758	Reserved		Valid	Valid
5F	765:760	Matrix OUT	IN0 of 3-bit LUT9 or Delay6 Input (or Counter6 RST Input)	Valid	Valid
	767:766	Reserved		Valid	Valid

Table 40. Register Map (Cont.)

Address		Signal Function	Register Bit Definition	I <sup>2</sup> C Interface	
Byte	Register Bit			Read	Write
60	773:768	Matrix OUT	IN1 of 3-bit LUT9 or External Clock Input of Delay6 (or Counter6)	Valid	Valid
	775:774	Reserved		Valid	Valid
61	781:776	Matrix OUT	IN2 of 3-bit LUT9	Valid	Valid
	783:782	Reserved		Valid	Valid
62	789:784	Matrix OUT	IN0 of 3-bit LUT10 or Input of Pipe Delay	Valid	Valid
	791:790	Reserved		Valid	Valid
63	797:792	Matrix OUT	IN1 of 3-bit LUT10 or nRST of Pipe Delay	Valid	Valid
	799:798	Reserved		Valid	Valid
64	805:800	Matrix OUT	IN2 of 3-bit LUT10 or Clock of Pipe Delay	Valid	Valid
	807:806	Reserved		Valid	Valid
65	813:808	Matrix OUT	IN0 of 4-bit LUT0 or Delay0 Input (or Counter0 RST/SET Input)	Valid	Valid
	815:814	Reserved		Valid	Valid
66	821:816	Matrix OUT	IN1 of 4-bit LUT0 or External Clock Input of Delay0 (or Counter0)	Valid	Valid
	823:822	Reserved		Valid	Valid
67	829:824	Matrix OUT	IN2 of 4-bit LUT0 or UP Input of FSM0	Valid	Valid
	831:830	Reserved		Valid	Valid
68	837:832	Matrix OUT	IN3 of 4-bit LUT0 or KEEP Input of FSM0	Valid	Valid
	839:838	Reserved		Valid	Valid
69	845:840	Matrix OUT	IN0 of 4-bit LUT1 or Delay1 Input (or Counter1 RST/SET Input)	Valid	Valid
	847:846	Reserved		Valid	Valid
6A	853:848	Matrix OUT	IN1 of 4-bit LUT1 or External Clock Input of Delay1 (or Counter1)	Valid	Valid
	855:854	Reserved		Valid	Valid
6B	861:856	Matrix OUT	IN2 of 4-bit LUT1 or UP Input of FSM1	Valid	Valid
	863:862	Reserved		Valid	Valid
6C	869:864	Matrix OUT	IN3 of 4-bit LUT1 or KEEP Input of FSM1	Valid	Valid
	871:870	Reserved		Valid	Valid
6D	877:872	Reserved		Valid	Valid
	879:878	Reserved		Valid	Valid
6E	887:880	Reserved		Invalid	Invalid
6F	895:888	Reserved		Invalid	Invalid
70	903:896	Reserved		Invalid	Invalid
71	911:904	Reserved		Invalid	Invalid

Table 40. Register Map (Cont.)

Address		Signal Function	Register Bit Definition	I <sup>2</sup> C Interface	
Byte	Register Bit			Read	Write
72	919:912	Reserved		Invalid	Invalid
73	927:920	Reserved		Invalid	Invalid
74	935:928	Reserved		Invalid	Invalid
75	943:936	Reserved		Invalid	Invalid
76	951:944	Reserved		Invalid	Invalid
77	959:952	Reserved		Invalid	Invalid
78	967:960	Reserved		Invalid	Invalid
79	975:968	Reserved		Invalid	Invalid
7A	983:976	Reserved		Invalid	Invalid
7B	991:984	Reserved		Invalid	Invalid
7C	999:992	Reserved		Invalid	Invalid
7D	1007:1000	Reserved		Invalid	Invalid
7E	1015:1008	Reserved		Invalid	Invalid
7F	1023:1016	Reserved		Invalid	Invalid
<b>Pin 2</b>					
80	1024	Reserved		Valid	Valid
	1025	Reserved		Valid	Valid
	1027:1026	Reserved		Valid	Valid
	1029:1028	Pin 2 Pull Down Resistor Value Selection	00: Floating 01: 10 k 10: 100 k 11: 1 M	Valid	Valid
80	1031:1030	Pin 2 Mode Control	00: Digital Input without Schmitt Trigger 01: Digital Input with Schmitt Trigger 10: Low Voltage Digital Input 11: Reserved	Valid	Valid
	1032	Reserved		Valid	Valid
81	1039:1033	Reserved		Valid	Valid

Table 40. Register Map (Cont.)

Address		Signal Function	Register Bit Definition	I <sup>2</sup> C Interface	
Byte	Register Bit			Read	Write
<b>Pin 3</b>					
82	1040	Reserved		Valid	Valid
	1041	Pin 3 Driver Strength Selection	0: 1x 1: 2x	Valid	Valid
	1042	Pin 3 Pull-up/down Resistor Selection	0: Pull-down Resistor 1: Pull-up Resistor	Valid	Valid
	1044:1043	Pin 3 Pull-up/down Resistor Value Selection	00: Floating 01: 10 k 10: 100 k 11: 1 M	Valid	Valid
	1047:1045	Pin 3 Mode Control	000: Digital Input without Schmitt Trigger 001: Digital Input with Schmitt Trigger 010: Low Voltage Digital Input 011: Reserved 100: Push-Pull 101: Open-Drain NMOS 110: Open-Drain PMOS 111: Reserved	Valid	Valid
83	1055:1048			Valid	Valid
<b>Pin 4</b>					
84	1056	Reserved		Valid	Valid
	1057	Pin 4 Driver Strength Selection	0: 1x 1: 2x	Valid	Valid
	1058	Pin 4 Pull-up/down Resistor Selection	0: Pull-down Resistor 1: Pull-up Resistor	Valid	Valid
	1060:1059	Pin 4 Pull-up/down Resistor Value Selection	00: Floating 01: 10 k 10: 100 k 11: 1 M	Valid	Valid
84	1063:1061	Pin 4 Mode Control	000: Digital Input without Schmitt Trigger 001: Digital Input with Schmitt Trigger 010: Low Voltage Digital Input 011: Analog Input/Output 100: Push-Pull 101: Open-Drain NMOS 110: Open-Drain PMOS 111: Analog Input and Open-Drain	Valid	Valid

Table 40. Register Map (Cont.)

Address		Signal Function	Register Bit Definition	I <sup>2</sup> C Interface	
Byte	Register Bit			Read	Write
<b>Pin 5</b>					
85	1064	Reserved		Valid	Valid
	1065	Pin 5 Pull-up/down Resistor Selection	0: Pull-down Resistor 1: Pull-up Resistor	Valid	Valid
	1067:1066	Pin 5 Pull-up/down Resistor Value Selection	00: Floating 01: 10 k 10: 100 k 11: 1 M	Valid	Valid
	1069:1068	Pin 5 Mode Control (sig_io5_oe = 0)	00: Digital Input without Schmitt Trigger 01: Digital Input with Schmitt Trigger 10: Low Voltage Digital Input 11: Analog Input/Output	Valid	Valid
	1071:1070	Pin 5 Mode Control (sig_io5_oe = 1)	00: Push-Pull 1x 01: Push-Pull 2x 10: Open-Drain NMOS 1x 11: Open-Drain NMOS 2x	Valid	Valid
<b>Pin 6</b>					
86	1072	Reserved		Valid	Valid
	1073	Pin 6 Driver Strength Selection	0: 1x 1: 2x	Valid	Valid
	1074	Select SCL and Virtual Input 0 or Pin 6	0: SCL and Virtual Input 0 1: Pin 6	Valid	Valid
	1076:1075	Pin 6 Pull-down Resistor Value Selection	00: Floating 01: 10 k 10: 100 k 11: 1 M	Valid	Valid
86	1079:1077	Pin 6 (or SCL) Mode Control (input mode is selected by register at SCL)	000: Digital Input without Schmitt Trigger 001: Digital Input with Schmitt Trigger 010: Low Voltage Digital Input 011: Reserved 100: Reserved 101: Open-Drain NMOS 110: Reserved 111: Reserved	Valid	Valid
<b>Pin 7</b>					
87	1080	Reserved		Valid	Valid
	1081	Pin 7 (or SDA) Driver Strength Selection	0: 1x 1: 2x	Valid	Valid
	1082	Select SDA and Virtual Input 1 or Pin 7	0: SDA and Virtual Input 1 1: Pin 7	Valid	Valid

Table 40. Register Map (Cont.)

Address		Signal Function	Register Bit Definition	I <sup>2</sup> C Interface	
Byte	Register Bit			Read	Write
87	1084:1083	Pin 7 Pull-down Resistor Value Selection	00: Floating 01: 10 k 10: 100 k 11: 1 M	Valid	Valid
	1087:1085	Pin 7 (or SDA) Mode Control (input mode is selected by register at SDA, output mode is fixed as OD at SDA)	000: Digital Input without Schmitt Trigger 001: Digital Input with Schmitt Trigger 010: Low Voltage Digital Input 011: Reserved 100: Reserved 101: Open-Drain NMOS 110: Reserved 111: Reserved	Valid	Valid
<b>Pin 8</b>					
88	1088	Pin 8 Super Drive (4x, NMOS Open-Drain) Selection	0: Super Drive OFF 1: Super Drive ON (if sig_io8_oe = '1' and Pin 8 Mode Control = '1x')	Valid	Valid
	1089	Pin 8 Pull-up/down Resistor Selection	0: Pull-down Resistor 1: Pull-up Resistor	Valid	Valid
	1091:1090	Pin 8 Pull-up/down Resistor Value Selection	00: Floating 01: 10 k 10: 100 k 11: 1 M	Valid	Valid
	1093:1092	Pin 8 Mode Control (sig_io8_oe = 0)	00: Digital Input without Schmitt Trigger 01: Digital Input with Schmitt Trigger 10: Low Voltage Digital Input 11: Analog Input/Output	Valid	Valid
	1095:1094	Pin 8 Mode Control (sig_io8_oe = 1)	00: Push-Pull 1x 01: Push-Pull 2x 10: Open-Drain NMOS 1x 11: Open-Drain NMOS 2x	Valid	Valid
<b>Pin 10</b>					
89	1096	Pin 10 Super Drive (4x, NMOS Open-Drain) Selection	0: Super Drive OFF 1: Super Drive ON (if Pin 10 Mode Control = '101')	Valid	Valid
	1097	Pin 10 Driver Strength Selection	0: 1x 1: 2x	Valid	Valid

Table 40. Register Map (Cont.)

Address		Signal Function	Register Bit Definition	I <sup>2</sup> C Interface	
Byte	Register Bit			Read	Write
89	1098	Pin 10 Pull-up/down Resistor Selection	0: Pull-down Resistor 1: Pull-up Resistor	Valid	Valid
	1100:1099	Pin 10 Pull-up/down Resistor Value Selection	00: Floating 01: 10 k 10: 100 k 11: 1 M	Valid	Valid
	1103:1101	Pin 10 Mode Control	000: Digital Input without Schmitt Trigger 001: Digital Input with Schmitt Trigger 010: Low Voltage Digital Input 011: Analog Input/Output 100: Push-Pull 101: Open-Drain NMOS 110: Open-Drain PMOS 111: Analog Input and Open-Drain	Valid	Valid
8A	1111:1104	Reserved		Valid	Valid
<b>Pin 11</b>					
8B	1112	Reserved		Valid	Valid
	1113	Pin 11 Pull-up/down Resistor Selection	0: Pull-down Resistor 1: Pull-up Resistor	Valid	Valid
	1115:1114	Pin 11 Pull-up/down Resistor Value Selection	00: Floating 01: 10 k 10: 100 k 11: 1 M	Valid	Valid
	1117:1116	Pin 11 Mode Control (sig_io10_oe = 0)	00: Digital Input without Schmitt Trigger 01: Digital Input with Schmitt Trigger 10: Low Voltage Digital Input 11: Analog Input/Output	Valid	Valid
	1119:1118	Pin 11 Mode Control (sig_io10_oe = 1)	00: Push-Pull 1x 01: Push-Pull 2x 10: Reserved 11: Reserved	Valid	Valid
8C	1127:1120	Reserved		Valid	Valid
<b>Pin 12</b>					
8D	1128	Reserved		Valid	Valid
	1129	Pin 12 Pull-up/down Resistor Selection	0: Pull-down Resistor 1: Pull-up Resistor	Valid	Valid
	1131:1130	Pin 12 Pull-up/down Resistor Value Selection	00: Floating 01: 10 k 10: 100 k 11: 1 M	Valid	Valid

Table 40. Register Map (Cont.)

Address		Signal Function	Register Bit Definition	I <sup>2</sup> C Interface	
Byte	Register Bit			Read	Write
8D	1133:1132	Pin 12 Mode Control (sig_io13_oe = 0)	00: Digital Input without Schmitt Trigger 01: Digital Input with Schmitt Trigger 10: Low Voltage Digital Input 11: Reserved	Valid	Valid
	1135:1134	Pin 12 Mode Control (sig_io13_oe = 1)	00: Push-Pull 1x 01: Push-Pull 2x 10: Open-Drain NMOS 1x 11: Open-Drain NMOS 2x	Valid	Valid
<b>Pin 13</b>					
8E	1136	Reserved		Valid	Valid
	1137	Pin 13 Driver Strength Selection	0: 1x 1: 2x	Valid	Valid
	1138	Pin 13 Pull-up/down Resistor Selection	0: Pull-down Resistor 1: Pull-up Resistor	Valid	Valid
	1140:1139	Pin 13 Pull-up/down Resistor Value Selection	00: Floating 01: 10 k 10: 100 k 11: 1 M	Valid	Valid
	1143:1141	Pin 13 Mode Control	000: Digital Input without Schmitt Trigger 001: Digital Input with Schmitt Trigger 010: Low Voltage Digital Input 011: Reserved 100: Push-Pull 101: Open-Drain NMOS 110: Open-Drain PMOS 111: Reserved	Valid	Valid
8F	1151:1144	Reserved		Valid	Valid
90	1159:1152	Reserved		Valid	Valid
<b>Pin 14</b>					
91	1160	Reserved		Valid	Valid
	1161	Pin 14 Driver Strength Selection	0: 1x 1: 2x	Valid	Valid
	1162	Pin 14 Pull-up/down Resistor Selection	0: Pull-down Resistor 1: Pull-up Resistor	Valid	Valid
	1164:1163	Pin 14 Pull-up/down Resistor Value Selection	00: Floating 01: 10 k 10: 100 k 11: 1 M	Valid	Valid

Table 40. Register Map (Cont.)

Address		Signal Function	Register Bit Definition	I <sup>2</sup> C Interface	
Byte	Register Bit			Read	Write
	1167:1165	Pin 14 Mode Control	000: Digital Input without Schmitt Trigger 001: Digital Input with Schmitt Trigger 010: Low Voltage Digital Input 011: Reserved 100: Push-Pull 101: Open-Drain NMOS 110: Open-Drain PMOS 111: Reserved	Valid	Valid
<b>ACMP1</b>					
92	1168	ACMP1 Positive Input Source Select	0: Pin 8 1: ACMP0 IN+ source	Valid	Valid
	1169	ACMP1 Analog Buffer Enable (Max BW 1 MHz)	0: Disable analog buffer 1: Enable analog buffer	Valid	Valid
	1171:1170	ACMP1 Hysteresis Enable	00: 0 mV 01: 25 mV 10: 50 mV 11: 200 mV	Valid	Valid
<b>ACMP0</b>					
92	1172	ACMP0 Positive Input Source Select	0: Pin 4 1: V <sub>DD</sub>	Valid	Valid
	1173	ACMP0 Analog Buffer Enable (Max BW 1 MHz)	0: Disable analog buffer 1: Enable analog buffer	Valid	Valid
	1175:1174	ACMP0 Hysteresis Enable	00: 0 mV 01: 25 mV 10: 50 mV 11: 200 mV	Valid	Valid
93	1179:1176	Reserved		Valid	Valid
<b>ACMP2</b>					
93	1180	Reserved		Valid	Valid
	1182:1181	ACMP2 Hysteresis Enable	00: 0 mV 01: 25 mV 10: 50 mV 11: 200 mV	Valid	Valid
<b>ACMP1 100 μA Current Source Enable</b>					
93	1183	ACMP1 100 μA Current Source Enable	0: Disable 1: Enable	Valid	Valid
<b>3-bit LUTx Function Select</b>					
94	1184	3-bit LUT3 or DFF6 with nRST/nSET Select	0: 3-bit LUT3 1: DFF6 with nRST/nSET	Valid	Valid
	1185	3-bit LUT2 or DFF5 with nRST/nSET Select	0: 3-bit LUT2 1: DFF5 with nRST/nSET	Valid	Valid

Table 40. Register Map (Cont.)

Address		Signal Function	Register Bit Definition	I <sup>2</sup> C Interface	
Byte	Register Bit			Read	Write
94	1186	3-bit LUT1 or DFF4 with nRST/nSET Select	0: 3-bit LUT1 1: DFF4 with nRST/nSET	Valid	Valid
	1187	3-bit LUT0 or DFF3 with nRST/nSET Select	0: 3-bit LUT0 1: DFF3 with nRST/nSET	Valid	Valid
<b>2-bit LUTx Function Select</b>					
94	1188	2-bit LUT3 or PGen Select	0: 2-bit LUT3 1: PGen	Valid	Valid
	1189	2-bit LUT2 or DFF2 Select	0: 2-bit LUT2 1: DFF2	Valid	Valid
	1190	2-bit LUT1 or DFF1 Select	0: 2-bit LUT1 1: DFF1	Valid	Valid
	1191	2-bit LUT0 or DFF0 Select	0: 2-bit LUT0 1: DFF0	Valid	Valid
<b>4-bit LUTx Function Select</b>					
95	1192	4-bit LUT1 or DLY/CNT1(16bits) Select	0: 4-bit LUT1 1: DLY/CNT1(16bits)	Valid	Valid
	1193	4-bit LUT0 or DLY/CNT0(16bits) Select	0: 4-bit LUT0 1: DLY/CNT0(16bits)	Valid	Valid
<b>3-bit LUTx Function Select</b>					
95	1194	3-bit LUT9 or DLY/CNT6(8bits) Select	0: 3-bit LUT9 1: DLY/CNT6 (8bits)	Valid	Valid
	1195	3-bit LUT8 or DLY/CNT5(8bits) Select	0: 3-bit LUT8 1: DLY/CNT5 (8bits)	Valid	Valid
	1196	3-bit LUT7 or DLY/CNT4(8bits) Select	0: 3-bit LUT7 1: DLY/CNT4 (8bits)	Valid	Valid
	1197	3-bit LUT6 or DLY/CNT3(8bits) Select	0: 3-bit LUT6 1: DLY/CNT3 (8bits)	Valid	Valid
	1198	3-bit LUT5 or DLY/CNT2(8bits) Select	0: 3-bit LUT5 1: DLY/CNT2 (8bits)	Valid	Valid
	1199	3-bit LUT4 or DFF7 with nRST/nSET Select	0: 3-bit LUT4 1: DFF7 with nRST/nSET	Valid	Valid
<b>2-bit LUT1/DFF1</b>					
96	1200	2-bit LUT1 [0]		Valid	Valid
	1201	2-bit LUT1 [1]/DFF1 Initial Polarity Select	0: Low 1: High	Valid	Valid
	1202	2-bit LUT1 [2]/DFF1 Output Select	0: Q output 1: nQ output	Valid	Valid
	1203	2-bit LUT1 [3]/DFF1 or LATCH Select	0: DFF function 1: LATCH function	Valid	Valid

Table 40. Register Map (Cont.)

Address		Signal Function	Register Bit Definition	I <sup>2</sup> C Interface	
Byte	Register Bit			Read	Write
<b>2-bit LUT0/DFF0</b>					
96	1204	2-bit LUT0 [0]		Valid	Valid
	1205	2-bit LUT0 [1]/DFF0 Initial Polarity Select	0: Low 1: High	Valid	Valid
	1206	2-bit LUT0 [2]/DFF0 Output Select	0: Q output 1: nQ output	Valid	Valid
	1207	2-bit LUT0 [3]/DFF0 or LATCH Select	0: DFF function 1: LATCH function	Valid	Valid
<b>2-bit LUT3/PGen</b>					
97	1211:1208	2-bit LUT3 [3:0] or PGen 4bit counter data [3:0]		Valid	Valid
<b>2-bit LUT2/DFF2</b>					
97	1212	2-bit LUT2 [0]		Valid	Valid
	1213	2-bit LUT2 [1]/DFF2 Initial Polarity Select	0: Low 1: High	Valid	Valid
	1214	2-bit LUT2 [2]/DFF2 Output Select	0: Q output 1: nQ output	Valid	Valid
	1215	2-bit LUT2 [3]/DFF2 or LATCH Select	0: DFF function 1: LATCH function	Valid	Valid
<b>3-bit LUT0/DFF3</b>					
98	1219:1216	3-bit LUT0 [3:0]		Valid	Valid
	1220	3-bit LUT0 [4]/DFF3 Initial Polarity Select	0: Low 1: High	Valid	Valid
	1221	3-bit LUT0 [5]/DFF3 nRST or nSET Select	0: nRST from Matrix Output 1: nSET from Matrix Output	Valid	Valid
	1222	3-bit LUT0 [6]/DFF3 Output Select	0: Q output 1: nQ output	Valid	Valid
	1223	3-bit LUT0 [7]/DFF3 or LATCH Select	0: DFF function 1: LATCH function	Valid	Valid
<b>3-bit LUT1/DFF4</b>					
99	1227:1224	3-bit LUT1 [3:0]		Valid	Valid
	1228	3-bit LUT1 [4]/DFF4 Initial Polarity Select	0: Low 1: High	Valid	Valid
	1229	3-bit LUT1 [5]/DFF4 nRST or nSET Select	0: nRST from Matrix Output 1: nSET from Matrix Output	Valid	Valid
	1230	3-bit LUT1 [6]/DFF4 Output Select	0: Q output 1: nQ output	Valid	Valid
	1231	3-bit LUT1 [7]/DFF4 or LATCH Select	0: DFF function 1: LATCH function	Valid	Valid

Table 40. Register Map (Cont.)

Address		Signal Function	Register Bit Definition	I <sup>2</sup> C Interface	
Byte	Register Bit			Read	Write
<b>3-bit LUT2/DF5</b>					
9A	1235:1232	3-bit LUT2 [3:0]		Valid	Valid
	1236	3-bit LUT2 [4]/DF5 Initial Polarity Select	0: Low 1: High	Valid	Valid
	1237	3-bit LUT2 [5]/DF5 nRST or nSET Select	0: nRST from Matrix Output 1: nSET from Matrix Output	Valid	Valid
	1238	3-bit LUT2 [6]/DF5 Output Select	0: Q output 1: nQ output	Valid	Valid
	1239	3-bit LUT2 [7]/DF5 or LATCH Select	0: DFF function 1: LATCH function	Valid	Valid
<b>3-bit LUT3/DF6</b>					
9B	1243:1240	3-bit LUT3 [3:0]		Valid	Valid
	1244	3-bit LUT3 [4]/DF6 Initial Polarity Select	0: Low 1: High	Valid	Valid
	1245	3-bit LUT3 [5]/DF6 nRST or nSET Select	0: nRST from Matrix Output 1: nSET from Matrix Output	Valid	Valid
	1246	3-bit LUT3 [6]/DF6 Output Select	0: Q output 1: nQ output	Valid	Valid
	1247	3-bit LUT3 [7]/DF6 or LATCH Select	0: DFF function 1: LATCH function	Valid	Valid
<b>3-bit LUT4/DF7</b>					
9C	1251:1248	3-bit LUT4 [3:0]		Valid	Valid
	1252	3-bit LUT4 [4]/DF7 Initial Polarity Select	0: Low 1: High	Valid	Valid
	1253	3-bit LUT4 [5]/DF7 nRST or nSET Select	0: nRST from Matrix Output 1: nSET from Matrix Output	Valid	Valid
	1254	3-bit LUT4 [6]/DF7 Output Select	0: Q output 1: nQ output	Valid	Valid
	1255	3-bit LUT4 [7]/DF7 or LATCH Select	0: DFF function 1: LATCH function	Valid	Valid
<b>3-bit LUT10/Pipe Delay</b>					
9D	1259:1256	3-bit LUT10 [3:0]/Pipe Delay OUT0 Select		Valid	Valid
	1263:1260	3-bit LUT10 [7:4]/Pipe Delay OUT1 Select		Valid	Valid
9E	1265:1264	Select the Edge Mode of Programmable Delay and Edge Detector	00: Rising Edge Detector 01: Falling Edge Detector 10: Both Edge Detector 11: Both Edge Delay	Valid	Valid

Table 40. Register Map (Cont.)

Address		Signal Function	Register Bit Definition	I <sup>2</sup> C Interface	
Byte	Register Bit			Read	Write
9E	1267:1266	Delay Value Select for Programmable Delay and Edge Detector ( $V_{DD} = 3.3V$ , typical)	00: 125 ns 01: 250 ns 10: 375 ns 11: 500 ns	Valid	Valid
	1269:1268	Reserved		Valid	Valid
	1270	3-bit LUT10 or Pipe Delay Select	0: 3-bit LUT10 1: Pipe Delay	Valid	Valid
	1271	Pipe Delay OUT1 Polarity Select	0: Non-inverted 1: Inverted	Valid	Valid
<b>DLY/CNT2</b>					
9F	1273:1272	DLY2 Mode Select or Asynchronous CNT2 Reset	00: On both Falling and Rising Edges (for Delay and Counter Reset) 01: on Falling Edge only (for Delay and Counter Reset) 10: on Rising Edge only (for Delay and Counter Reset) 11: No Delay on either Falling or Rising Edges/High Level Reset	Valid	Valid
	1276:1274	DLY/CNT2 Clock Source Select	000: Internal OSC clock 001: OSC/4 010: OSC/12 011: OSC/24 100: OSC/64 101: 25 MHz OSC clock 110: External Clock 111: Counter1 Overflow	Valid	Valid
	1277	DLY/CNT2 Output Selection if DLY/CNT2 Mode Selection is "11"	0: Default Output 1: Edge Detector Output	Valid	Valid
	1279:1278	DLY/CNT2 Mode Selection	00: Delay mode 01: One Shot 10: Freq. Detect 11: Counter mode	Valid	Valid
<b>DLY/CNT3</b>					
A0	1281:1280	DLY3 Mode Select or Asynchronous CNT3 Reset	00: On both Falling and Rising Edges (for Delay and Counter Reset) 01: on Falling Edge only (for Delay and Counter Reset) 10: on Rising Edge only (for Delay and Counter Reset) 11: No Delay on either Falling or Rising Edges/High Level Reset	Valid	Valid

Table 40. Register Map (Cont.)

Address		Signal Function	Register Bit Definition	I <sup>2</sup> C Interface	
Byte	Register Bit			Read	Write
	1284:1282	DLY/CNT3 Clock Source Select	000: Internal OSC clock 001: OSC/4 010: OSC/12 011: OSC/24 100: OSC/64 101: 25 MHz OSC clock 110: External Clock 111: Counter2 Overflow	Valid	Valid
	1285	DLY/CNT3 Output Selection if DLY/CNT3 Mode Selection is "11"	0: Default Output 1: Edge Detector Output	Valid	Valid
	1287:1286	DLY/CNT3 Mode Selection	00: Delay mode 01: One Shot 10: Freq. Detect 11: Counter mode	Valid	Valid
<b>DLY/CNT4</b>					
A1	1289:1288	DLY4 Mode Select or Asynchronous CNT4 Reset	00: On both Falling and Rising Edges (for Delay and Counter Reset) 01: on Falling Edge only (for Delay and Counter Reset) 10: on Rising Edge only (for Delay and Counter Reset) 11: No Delay on either Falling or Rising Edges/High Level Reset	Valid	Valid
	1292:1290	DLY/CNT4 Clock Source Select	000: Internal OSC clock 001: OSC/4 010: OSC/12 011: OSC/24 100: OSC/64 101: 25 MHz OSC clock 110: External Clock 111: Counter3 Overflow	Valid	Valid
	1293	DLY/CNT4 Output Selection if DLY/CNT4 Mode Selection is "11"	0: Default Output 1: Edge Detector Output	Valid	Valid
	1295:1294	DLY/CNT4 Mode Selection	00: Delay mode 01: One Shot 10: Freq. Detect 11: Counter mode	Valid	Valid
<b>DLY/CNT5</b>					
A2	1297:1296	DLY5 Mode Select or Asynchronous CNT5 Reset	00: On both Falling and Rising Edges (for Delay and Counter Reset) 01: on Falling Edge only (for Delay and Counter Reset) 10: on Rising Edge only (for Delay and Counter Reset) 11: No Delay on either Falling or Rising Edges/High Level Reset	Valid	Valid

Table 40. Register Map (Cont.)

Address		Signal Function	Register Bit Definition	I <sup>2</sup> C Interface	
Byte	Register Bit			Read	Write
A2	1300:1298	DLY/CNT5 Clock Source Select	000: Internal OSC clock 001: OSC/4 010: OSC/12 011: OSC/24 100: OSC/64 101: 25 MHz OSC clock 110: External Clock 111: Counter4 Overflow	Valid	Valid
	1301	DLY/CNT5 Output Selection if DLY/CNT5 Mode Selection is "11"	0: Default Output 1: Edge Detector Output	Valid	Valid
	1303:1302	DLY/CNT5 Mode Selection	00: Delay mode 01: One Shot 10: Freq. Detect 11: Counter mode	Valid	Valid
<b>DLY/CNT6</b>					
A3	1305:1304	DLY6 Mode Select or Asynchronous CNT6 Reset	00: On both Falling and Rising Edges (for Delay and Counter Reset) 01: on Falling Edge only (for Delay and Counter Reset) 10: on Rising Edge only (for Delay and Counter Reset) 11: No Delay on either Falling or Rising Edges/High Level Reset	Valid	Valid
	1308:1306	DLY/CNT6 Clock Source Select	000: Internal OSC clock 001: OSC/4 010: OSC/12, 011: OSC/24 100: OSC/64 101: 25 MHz OSC clock 110: External Clock 111: Counter5 Overflow	Valid	Valid
	1309	DLY/CNT6 Output Selection if DLY/CNT6 Mode Selection is "11"	0: Default Output 1: Edge Detector Output	Valid	Valid
	1311:1310	DLY/CNT6 Mode Selection	00: Delay mode 01: One Shot 10: Freq. Detect 11: Counter mode	Valid	Valid
<b>DLY/CNT0</b>					
A4	1313:1312	DLY0 Mode Select or Asynchronous CNT0 Reset (16-bits)	00: On both Falling and Rising Edges (for Delay and Counter Reset) 01: on Falling Edge only (for Delay and Counter Reset) 10: on Rising Edge only (for Delay and Counter Reset) 11: No Delay on either Falling or Rising Edges/High Level Reset	Valid	Valid

Table 40. Register Map (Cont.)

Address		Signal Function	Register Bit Definition	I <sup>2</sup> C Interface	
Byte	Register Bit			Read	Write
A4	1316:1314	DLY/CNT0 Clock Source Select (16bits)	000: Internal OSC clock 001: OSC/4 010: OSC/12 011: OSC/24 100: OSC/64 101: 25 MHz OSC clock 110: External Clock 111: Counter6 Overflow	Valid	Valid
	1317	CNT0/FSM0's Q are Set to data or Reset to 0s Selection (16bits)	0: Reset to 0s 1: Set to data (Registers [1583:1576, 1591:1584])	Valid	Valid
	1319:1318	DLY/CNT0 Mode Selection (16bits)	00: Delay mode 01: One Shot 10: Freq. Detect 11: Counter mode	Valid	Valid
<b>DLY/CNT1</b>					
A5	1321:1320	DLY1 Mode Select or Asynchronous CNT1 Reset (16bits)	00: On both Falling and Rising Edges (for Delay and Counter Reset) 01: on Falling Edge only (for Delay and Counter Reset) 10: on Rising Edge only (for Delay and Counter Reset) 11: No Delay on either Falling or Rising Edges/High Level Reset	Valid	Valid
	1324:1322	DLY/CNT1 Clock Source Select (16bits)	000: Internal OSC clock 001: OSC/4 010: OSC/12 011: OSC/24 100: OSC/64 101: 25 MHz OSC clock 110: External Clock 111: Counter0 Overflow	Valid	Valid
	1325	CNT1/FSM1's Q are Set to data or Reset to 0s Selection (16bits)	0: Reset to 0s 1: Set to data (Registers [1599:1592, 1607:1600])	Valid	Valid
	1327:1326	DLY/CNT1 Mode Selection (16bits)	00: Delay mode 01: One Shot 10: Freq. Detect 11: Counter mode	Valid	Valid
<b>DLY/CNTx One-Shot/Freq. Detect Output Polarity</b>					
A6	1328	DLY/CNT0 stop and restarting enable in CNT mode when new data is loaded	0: Disable 1: Enable	Valid	Valid
	1329	Select the Polarity of DLY/CNT6's One Shot/Freq. Detect Output	0: Default Output 1: Inverted Output	Valid	Valid

Table 40. Register Map (Cont.)

Address		Signal Function	Register Bit Definition	I <sup>2</sup> C Interface	
Byte	Register Bit			Read	Write
A6	1330	Select the Polarity of DLY/CNT5's One Shot/Freq. Detect Output	0: Default Output 1: Inverted Output	Valid	Valid
	1331	Select the Polarity of DLY/CNT4's One Shot/Freq. Detect Output	0: Default Output 1: Inverted Output	Valid	Valid
	1332	Select the Polarity of DLY/CNT3's One Shot/Freq. Detect Output	0: Default Output 1: Inverted Output	Valid	Valid
	1333	Select the Polarity of DLY/CNT2's One Shot/Freq. Detect Output	0: Default Output 1: Inverted Output	Valid	Valid
	1334	Select the Polarity of DLY/CNT1's One Shot/Freq. Detect Output	0: Default Output 1: Inverted Output	Valid	Valid
	1335	Select the Polarity of DLY/CNT0's One Shot/Freq. Detect Output	0: Default Output 1: Inverted Output	Valid	Valid
<b>Oscillators</b>					
A7	1337:1336	OSC Clock Pre-divider for 25 MHz	00: Div1 01: Div2 10: Div4 11: Div8	Valid	Valid
	1338	OSC Fast Start-Up Enable for 25 kHz/2 MHz	0: Disable 1: Enable	Valid	Valid
	1340:1339	OSC Clock Pre-divider for 25 kHz/2 MHz	00: Div1 01: Div2 10: Div4 11: Div8	Valid	Valid
	1341	Force 25 MHz Oscillator ON	0: Auto Power-On (if any CNT/DLY use 25 MHz source) 1: Force Power-On	Valid	Valid
	1342	Oscillator (25 kHz OSC, 2 MHz: OSC) Select	0: 25 kHz OSC 1: 2 MHz OSC	Valid	Valid
	1343	Force 25 kHz/2 MHz Oscillator ON	0: Auto Power-On (if any CNT/DLY use 25k/2 MHz source) 1: Force Power-On	Valid	Valid
A8	1346:1344	Internal OSC 25 kHz/2 MHz Frequency Divider Control for matrix input [28]	000: OSC/1 001: OSC/2 010: OSC/3 011: OSC/4 100: OSC/8 101: OSC/12 110: OSC/24 111: OSC/64	Valid	Valid

Table 40. Register Map (Cont.)

Address		Signal Function	Register Bit Definition	I <sup>2</sup> C Interface	
Byte	Register Bit			Read	Write
A8	1349:1347	Internal OSC 25 kHz/2 MHz Frequency Divider Control for matrix input [27]	000: OSC/1 001: OSC/2 010: OSC/3 011: OSC/4 100: OSC/8 101: OSC/12 110: OSC/24 111: OSC/64	Valid	Valid
	1350	OSC Clock 25 kHz/2 MHz to matrix input [28] enable	0: Disable 1: Enable	Valid	Valid
	1351	OSC Clock 25 kHz/2 MHz to matrix input [27] enable	0: Disable 1: Enable	Valid	Valid
A9	1354:1352	Reserved		Valid	Valid
	1355	Reserved		Valid	Valid
	1356	OSC Clock 25 MHz to matrix input [29] enable	0: Disable 1: Enable	Valid	Valid
	1357	External Clock Source Select instead of 25 MHz	0: Internal Oscillator 1: External Clock from Pin 13	Valid	Valid
	1358	External Clock Source Select instead of 25 kHz/2 MHz	0: Internal Oscillator 1: External Clock from IO15 or Pin 14	Valid	Valid
	1359	DLY/CNT1 stop and restarting enable in CNT mode when new data is loaded	0: Disable 1: Enable	Valid	Valid
<b>3-bit LUT or DFF</b>					
AA	1360	Reserved		Valid	Valid
	1361	3-bit LUT17 or DFF14 with nRST / nSET Select	0: 3-bit LUT17 1: DFF14 with nRST / nSET		
	1362	3-bit LUT16 or DFF13 with nRST / nSET Select	0: 3-bit LUT16 1: DFF13 with nRST / nSET		
	1363	3-bit LUT15 or DFF12 with nRST / nSET Select	0: 3-bit LUT15 1: DFF12 with nRST / nSET		
	1364	3-bit LUT14 or DFF11 with nRST / nSET Select	0: 3-bit LUT14 1: DFF11 with nRST / nSET	Valid	Valid
	1365	3-bit LUT13 or DFF10 with nRST / nSET Select	0: 3-bit LUT13 1: DFF10 with nRST / nSET	Valid	Valid
	1366	3-bit LUT12 or DFF9 with nRST / nSET Select	0: 3-bit LUT12 1: DFF9 with nRST / nSET		
	1367	3-bit LUT11 or DFF8 with nRST / nSET Select	0: 3-bit LUT11 1: DFF8 with nRST / nSET	Valid	Valid

Table 40. Register Map (Cont.)

Address		Signal Function	Register Bit Definition	I <sup>2</sup> C Interface	
Byte	Register Bit			Read	Write
AB	1371:1368	3-bit LUT11 [3:0]		Valid	Valid
	1372	3-bit LUT11 [4] / DFF8 Initial Polarity Select	0: Low 1: High	Valid	Valid
	1373	3-bit LUT11 [5] / DFF8 nRST or nSET Select	0: nRST from Matrix Output 1: nSET from Matrix Output	Valid	Valid
	1374	3-bit LUT11 [6] / DFF8 Output Select	0: Q output 1: nQ output	Valid	Valid
	1375	3-bit LUT11 [7] / DFF8 or Latch Select	0: DFF function 1: Latch function		
AC	1379:1376	3-bit LUT12 [3:0]		Valid	Valid
	1380	3-bit LUT12 [4] / DFF9 Initial Polarity Select	0: Low 1: High	Valid	Valid
	1381	3-bit LUT12 [5] / DFF9 nRST or nSET Select	0: nRST from Matrix Output 1: nSET from Matrix Output		
	1382	3-bit LUT12 [6] / DFF9 Output Select	0: Q output 1: nQ output		
	1383	3-bit LUT12 [7] / DFF9 or Latch Select	0: DFF function 1: Latch function	Valid	Valid
AD	1387:1384	3-bit LUT13 [3:0]		Valid	Valid
	1388	3-bit LUT13 [4] / DFF10 Initial Polarity Select	0: Low 1: High	Valid	Valid
	1389	3-bit LUT13 [5] / DFF10 nRST or nSET Select	0: nRST from Matrix Output 1: nSET from Matrix Output	Valid	Valid
	1390	3-bit LUT13 [6] / DFF10 Output Select	0: Q output 1: nQ output		
	1391	3-bit LUT13 [7] / DFF10 or Latch Select	0: DFF function 1: Latch function	Valid	Valid
AE	1395:1392	3-bit LUT14 [3:0]		Valid	Valid
	1396	3-bit LUT14 [4] / DFF11 Initial Polarity Select	0: Low 1: High	Valid	Valid
	1397	3-bit LUT14 [5] / DFF11 nRST or nSET Select	0: nRST from Matrix Output 1: nSET from Matrix Output	Valid	Valid
	1398	3-bit LUT14 [6] / DFF11 Output Select	0: Q output 1: nQ output		
	1399	3-bit LUT14 [7] / DFF11 or Latch Select	0: DFF function 1: Latch function	Valid	Valid

Table 40. Register Map (Cont.)

Address		Signal Function	Register Bit Definition	I <sup>2</sup> C Interface	
Byte	Register Bit			Read	Write
AF	1403:1400	3-bit LUT15 [3:0]		Valid	Valid
	1404	3-bit LUT15 [4] / DFF12 Initial Polarity Select	0: Low 1: High	Valid	Valid
	1405	3-bit LUT15 [5] / DFF12 nRST or nSET Select	0: nRST from Matrix Output 1: nSET from Matrix Output	Valid	Valid
	1406	3-bit LUT15 [6] / DFF12 Output Select	0: Q output 1: nQ output		
	1407	3-bit LUT15 [7] / DFF12 or Latch Select	0: DFF function 1: Latch function	Valid	Valid
B0	1411:1408	3-bit LUT16 [3:0]		Valid	Valid
	1412	3-bit LUT16 [4] / DFF13 Initial Polarity Select	0: Low 1: High	Valid	Valid
	1413	3-bit LUT16 [5] / DFF13 nRST or nSET Select	0: nRST from Matrix Output 1: nSET from Matrix Output	Valid	Valid
	1414	3-bit LUT16 [6] / DFF13 Output Select	0: Q output 1: nQ output		
	1415	3-bit LUT16 [7] / DFF13 or Latch Select	0: DFF function 1: Latch function	Valid	Valid
B1	1419:1416	3-bit LUT17 [3:0]		Valid	Valid
	1420	3-bit LUT17 [4] / DFF14 Initial Polarity Select	0: Low 1: High	Valid	Valid
	1421	3-bit LUT17 [5] / DFF14 nRST or nSET Select	0: nRST from Matrix Output 1: nSET from Matrix Output	Valid	Valid
	1422	3-bit LUT17 [6] / DFF14 Output Select	0: Q output 1: nQ output		
	1423	3-bit LUT17 [7] / DFF14 or Latch Select	0: DFF function 1: Latch function	Valid	Valid
B2	1431:1424	4-bit LUT2 [15:0]		Valid	Valid
B3	1439:1432			Valid	Valid
B4	1440	Reserved		Valid	Valid
	1441	Reserved		Valid	Valid
	1442	Reserved			
	1443	Reserved			
	1444	Reserved			
	1445	Reserved		Valid	Valid
	1446	Reserved			
	1447	Reserved		Valid	Valid

Table 40. Register Map (Cont.)

Address		Signal Function	Register Bit Definition	I <sup>2</sup> C Interface	
Byte	Register Bit			Read	Write
B5	1448	Reserved		Valid	Valid
	1449	Reserved		Valid	Valid
	1450	Reserved		Valid	Valid
	1451	Reserved			
	1452	Reserved			
	1453	Reserved			
	1454	Reserved		Valid	Valid
<b>Filter/Edge Detector</b>					
B6	1457:1456	Select the edge mode of Edge Detector_1	00: Rising Edge 01: Falling Edge 10: Both Edge 11: Delay	Valid	Valid
	1458	Filter_1/Edge Detector_1 output Polarity Select	0: Filter_1 output 1: Filter_1 output inverted	Valid	Valid
	1459	Filter_1 or Edge Detector_1 Select (Typ 30 ns at V <sub>DD</sub> = 3.3 V)	0: Filter_1 1: Edge Detector_1	Valid	Valid
B6	1461:1460	Select the edge mode of Edge Detector_0	00: Rising Edge 01: Falling Edge 10: Both Edge 11: Delay	Valid	Valid
	1462	Filter_0/Edge Detector_0 output Polarity Select	0: Filter_0 output 1: Filter_0 output inverted	Valid	Valid
	1463	Filter_0 or Edge Detector_0 Select (Typ 47 ns at V <sub>DD</sub> = 3.3 V)	0: Filter_0 1: Edge Detector_0	Valid	Valid
<b>V<sub>REF</sub>/Bandgap</b>					
B7	1464	Reserved		Valid	Valid
	1466:1465	Bandgap OK for ACMP Output Delay Time Select, the start Time is "nReset_core go to High"	00 or 10 with registers [1474:1472] = 100 (WideV <sub>DD</sub> range, 1.7 V~5.5 V): Auto-delay mode, 550 μs for V <sub>DD</sub> < 2.7 V and 100 μs for 2.7 V < V <sub>DD</sub> 00 or 10 with registers [1474:1472] = X10: Always 100 μs delay for 2.7 V < V <sub>DD</sub> 00 or 10 with registers [1474:1472] = XX1: Always 550 μs delay for V <sub>DD</sub> < 2.7 V, 01: Always 550 μs delay regardless of registers [1474:1472] and V <sub>DD</sub> , 11: Always 100 μs delay with 2.7 V < V <sub>DD</sub> regardless of registers [1474:1472]	Valid	Valid
	1467	Reserved		Valid	Valid
	1468	Reserved		Valid	Valid
	1469	Reserved		Valid	Valid

Table 40. Register Map (Cont.)

Address		Signal Function	Register Bit Definition	I <sup>2</sup> C Interface	
Byte	Register Bit			Read	Write
B7	1470	Reserved		Valid	Valid
	1471	Two consecutive DFFs enable for SM	0: Disable 1: Enable	Valid	Valid
B8	1474:1472	Power divider ( $V_{DD}/3$ , $V_{DD}/4$ ) ON/OFF	0XX: Power divider off (if there is no use of $V_{DD}/3$ , $V_{DD}/4$ at ACMP negative in) 100: Reserved X10: Reserved XX1: Reserved	Valid	Valid
	1475	$V_{DD}$ Bypass Enable when device power is 1.8 V	0: Regulator Auto ON 1: Regulator OFF ( $V_{DD}$ Bypass)	Valid	Valid
	1476	Force Bandgap ON	0: Auto-Mode 1: Enable (if chip is Power-down, the Bandgap will Power-down even if it is Set to 1).	Valid	Valid
	1477	NVM Power-down	0: None (Or Programming Enable) 1: Power-down (Or Programming Disable)	Valid	Valid
B8	1478	Reserved		Valid	Valid
	1479	GPIO Quick Charge Enable	0: Disable 1: Enable	Valid	Valid
B9	1487:1480	Reserved		Valid	Valid
BA	1488	Reserved		Valid	Valid
	1489	Wake time Selection in Wake Sleep Mode	0: Short wake time 1: Normal wake time	Valid	Valid
	1490	ACMP0 Wake and Sleep function Enable	0: Disable 1: Enable	Valid	Valid
	1491	ACMP1 Wake and Sleep function Enable	0: Disable 1: Enable	Valid	Valid
	1492	ACMP2 Wake and Sleep function Enable	0: Disable 1: Enable	Valid	Valid
	1493	Reserved		Valid	Valid
	1494	Wake Sleep Output State When WS Oscillator is Power-down if DLY/CNT0 Mode Selection is "11"	0: Low 1: High	Valid	Valid
	1495	Wake Sleep Ratio Control Mode Selection if DLY/CNT0 Mode Selection is "11"	0: Default Mode 1: Wake Sleep Ratio Control Mode	Valid	Valid
BB	1503:1496	Reserved		Invalid	Invalid
BC	1511:1504	Reserved		Invalid	Invalid
BD	1519:1512	Reserved		Invalid	Invalid
BE	1527:1520	Reserved		Invalid	Invalid
BF	1535:1528	Reserved		Invalid	Invalid

Table 40. Register Map (Cont.)

Address		Signal Function	Register Bit Definition	I <sup>2</sup> C Interface	
Byte	Register Bit			Read	Write
<b>LUT/DLY/CNT Control Data</b>					
C0	1543:1536	3-bit LUT5 [7:0] or DLY/CNT2 Control Data	1 - 255 (Delay Time = [Counter Control Data + 1]/Freq)	Valid	Valid
C1	1551:1544	3-bit LUT6 [7:0] or DLY/CNT3 Control Data	1 - 255 (Delay Time = [Counter Control Data + 1]/Freq)	Valid	Valid
C2	1559:1552	3-bit LUT7 [7:0] or DLY/CNT4 Control Data	1 - 255 (Delay Time = [Counter Control Data + 1]/Freq)	Valid	Valid
C3	1567:1560	3-bit LUT8 [7:0] or DLY/CNT5 Control Data	1 - 255 (Delay Time = [Counter Control Data + 1]/Freq)	Valid	Valid
C4	1575:1568	3-bit LUT9 [7:0] or DLY/CNT6 Control Data	1 - 255 (Delay Time = [Counter Control Data + 1]/Freq)	Valid	Valid
C5	1583:1576	4-bit LUT0 [15:0] or DLY/CNT0 (16bits, [15:0] = [1591:1576]) Control Data	1 - 65535 (Delay Time = [Counter Control Data + 2]/Freq)	Valid	Valid
C6	1591:1584			Valid	Valid
C7	1599:1592	4-bit LUT1 [15:0] or DLY/CNT1 (16bits, [15:0] = [1607:1592]) Control Data	1 - 65535 (Delay Time = [Counter Control Data + 2]/Freq)	Valid	Valid
C8	1607:1600			Valid	Valid
C9	1615:1608	PGen pattern data [15:0] = [1623:1608]		Valid	Valid
CA	1623:1616			Valid	Valid
<b>ACMP0</b>					
CB	1628:1624	ACMP0-IN Voltage Select	0000: 50 mV      00001: 100 mV 00010: 150 mV    00011: 200 mV 00100: 250 mV    00101: 300 mV 00110: 350 mV    00111: 400 mV 01000: 450 mV    01001: 500 mV 01010: 550 mV    01011: 600 mV 01100: 650 mV    01101: 700 mV 01110: 750 mV    01111: 800 mV 10000: 850 mV    10001: 900 mV 10010: 950 mV    10011: 1 V 10100: 1.05 V    10101: 1.1 V 10110: 1.15 V    10111: 1.2 V 11000: V <sub>DD</sub> /3    11001: V <sub>DD</sub> /4 11010: Pin 10: EXT_V <sub>REF</sub> 11011: Pin 5: EXT_V <sub>REF</sub> 11100: Pin 10: EXT_V <sub>REF</sub> /2 11101: Pin 5: EXT_V <sub>REF</sub> /2 11110: Reserved 11111: Reserved	Valid	Valid
CB	1630:1629	ACMP0 Positive Input Divider	00: 1.0x 01: 0.5x 10: 0.33x 11: 0.25x	Valid	Valid
	1631	ACMP0 Low Bandwidth (MAX: 1 MHz) Enable	0: OFF 1: ON	Valid	Valid

Table 40. Register Map (Cont.)

Address		Signal Function	Register Bit Definition	I <sup>2</sup> C Interface	
Byte	Register Bit			Read	Write
<b>ACMP1</b>					
CC	1636:1632	ACMP1-IN Voltage Select	00000: 50 mV      00001: 100 mV 00010: 150 mV    00011: 200 mV 00100: 250 mV    00101: 300 mV 00110: 350 mV    00111: 400 mV 01000: 450 mV    01001: 500 mV 01010: 550 mV    01011: 600 mV 01100: 650 mV    01101: 700 mV 01110: 750 mV    01111: 800 mV 10000: 850 mV    10001: 900 mV 10010: 950 mV    10011: 1 V 10100: 1.05 V    10101: 1.1 V 10110: 1.15 V    10111: 1.2 V 11000: V <sub>DD</sub> /3    11001: V <sub>DD</sub> /4 11010: EXT_V <sub>REF</sub> (Pin 10) 11011: Reserved 11100: EXT_V <sub>REF</sub> (Pin 10)/2 11101: Reserved 11110: Reserved 11111: Reserved	Valid	Valid
	1638:1637	ACMP1 Positive Input Divider	00: 1.0x 01: 0.5x 10: 0.33x 11: 0.25x	Valid	Valid
	1639	ACMP1 Low Bandwidth (MAX: 1 MHz) Enable	0: OFF 1: ON	Valid	Valid

Table 40. Register Map (Cont.)

Address		Signal Function	Register Bit Definition	I <sup>2</sup> C Interface		
Byte	Register Bit			Read	Write	
<b>ACMP2</b>						
CD	1644:1640	ACMP2-IN Voltage Select	00000: 50 mV 00010: 150 mV 00100: 250 mV 00110: 350 mV 01000: 450 mV 01010: 550 mV 01100: 650 mV 01110: 750 mV 10000: 850 mV 10010: 950 mV 10100: 1.05 V 10110: 1.15 V 11000: V <sub>DD</sub> /3 11010: Pin 10: EXT_V <sub>REF</sub> 11011: Reserved 11100: Pin 10: EXT_V <sub>REF</sub> /2 11101: Reserved 11110: Reserved 11111: Reserved	00001: 100 mV 00011: 200 mV 00101: 300 mV 00111: 400 mV 01001: 500 mV 01011: 600 mV 01101: 700 mV 01111: 800 mV 10001: 900 mV 10011: 1 V 10101: 1.1 V 10111: 1.2 V 11001: V <sub>DD</sub> /4	Valid	Valid
	1646:1645	ACMP2 Positive Input Divider	00: 1.0x 01: 0.5x 10: 0.33x 11: 0.25x		Valid	Valid
	1647	ACMP2 Low Bandwidth (MAX: 1 MHz) Enable	0: OFF 1: ON		Valid	Valid
CE	1655:1648	Reserved			Valid	Valid
<b>Miscellaneous</b>						
CF	1656	Reserved			Valid	Valid
	1657	Switch from "Matrix OUT: OSC 25 MHz PD" to "Matrix OUT: OSC 25 MHz Force On"	0: OSC PD 1: OSC Force On (Matrix Output [59])		Valid	Valid
	1658	Switch from "Matrix OUT: OSC 25 kHz/2 MHz PD" to "Matrix OUT: OSC 25 kHz/2 MHz Force On"	0: OSC PD 1: OSC Force On (Matrix Output [58])		Valid	Valid
	1659	Reserved			Valid	Valid
	1660	Reserved			Valid	Valid
	1661	Reserved			Valid	Valid
	1662	I <sup>2</sup> C reset bit with reloading NVM into Data register	0: Keep existing condition 1: Reset execution		Valid	Valid
CF	1663	Reserved			Valid	Valid
D0	1671:1664	User configurable RAM/OTP Byte 8			Valid	Valid
D1	1679:1672	User configurable RAM/OTP Byte 9			Valid	Valid

Table 40. Register Map (Cont.)

Address		Signal Function	Register Bit Definition	I <sup>2</sup> C Interface	
Byte	Register Bit			Read	Write
D2	1687:1680	User configurable RAM/OTP Byte 10	Valid	Valid	
D3	1695:1688	User configurable RAM/OTP Byte 11	Valid	Valid	
D4	1703:1696	User configurable RAM/OTP Byte 12	Valid	Valid	
D5	1711:1704	User configurable RAM/OTP Byte 13	Valid	Valid	
D6	1719:1712	User configurable RAM/OTP Byte 14	Valid	Valid	
D7	1727:1720	User configurable RAM/OTP Byte 15	Valid	Valid	
D8	1735:1728	User configurable RAM/OTP Byte 0	Valid	Valid	
D9	1743:1736	User configurable RAM/OTP Byte 1	Valid	Valid	
DA	1751:1744	User configurable RAM/OTP Byte 2	Valid	Valid	
DB	1759:1752	User configurable RAM/OTP Byte 3	Valid	Valid	
DC	1767:1760	User configurable RAM/OTP Byte 4	Valid	Valid	
DD	1775:1768	User configurable RAM/OTP Byte 5	Invalid	Invalid	
DE	1783:1776	User configurable RAM/OTP Byte 6	Invalid	Invalid	
DF	1791:1784	User configurable RAM/OTP Byte 7	Invalid	Invalid	
E0	1799:1792	Reserved	Invalid	Invalid	
E1	1807:1800	Reserved	Invalid	Invalid	
E2	1815:1808	Reserved	Invalid	Invalid	
E3	1823:1816	Reserved	Invalid	Invalid	
E4	1831:1824	Reserved	Valid	Valid	
E5	1832	I <sup>2</sup> C lock for read bits [1535:0] (Bank 0/1/2)	0: Disable (Programmed data can be read) 1: Enable (Programmed data can't be read)	Valid	Invalid
	1833	Reserved		Valid	Invalid
	1835:1834	Reserved		Valid	Invalid
	1839:1836	Reserved		Valid	Invalid
E6	1847:1840	16-bit Pattern ID Byte 0 (From NVM): ID[23:16]		Valid	Valid
E7	1855:1848	Reserved		Valid	Invalid
E8	1863:1856	Reserved		Valid	Invalid
E9	1867:1864	I <sup>2</sup> C Control Code Bit [3:0]	Value for target address	Valid	Invalid
	1868	Reserved		Valid	Invalid
	1869	Reserved		Valid	Invalid
	1870	BANK0/1/2/3 I <sup>2</sup> C-write protection bit	0: Writable 1: Non-writable	Valid	Invalid
	1871	I <sup>2</sup> C lock for write bits [1535:0] (Bank 0/1/2)	0: Writable 1: Non-writable	Valid	Invalid
EA	1879:1872	CNT4 Counted Value		Valid	Invalid

Table 40. Register Map (Cont.)

Address		Signal Function	Register Bit Definition	I <sup>2</sup> C Interface	
Byte	Register Bit			Read	Write
EB	1887:1880	CNT0 (16bits) = [1895:1880] Counted Value		Valid	Invalid
EC	1895:1888			Valid	Invalid
ED	1903:1896	CNT6 Counted Value		Valid	Invalid
EE	1911:1904	CNT1 (16-bits) = [1919:1904] Counted Value		Valid	Invalid
EF	1919:1912			Valid	Invalid
<b>Matrix Input</b>					
F0	1920	Matrix Input 0	Ground	Valid	Invalid
	1921	Matrix Input 1	Pin 2 Digital Input	Valid	Invalid
	1922	Reserved		Valid	Invalid
	1923	Matrix Input 3	Pin 3 Digital Input	Valid	Invalid
	1924	Reserved		Valid	Invalid
	1925	Matrix Input 5	Pin 4 Digital Input	Valid	Invalid
	1926	Matrix Input 6	Pin 5 Digital Input	Valid	Invalid
	1927	Matrix Input 7	Pin 8 Digital Input	Valid	Invalid
F1	1928	Matrix Input 8	2-bit LUT0/DFF0 Output	Valid	Invalid
	1929	Matrix Input 9	2-bit LUT1/DFF1 Output	Valid	Invalid
	1930	Matrix Input 10	2-bit LUT2/DFF2 Output	Valid	Invalid
	1931	Matrix Input 11	2-bit LUT3/PGen Output	Valid	Invalid
	1932	Matrix Input 12	3-bit LUT0/DFF3 Output	Valid	Invalid
	1933	Matrix Input 13	3-bit LUT1/DFF4 Output	Valid	Invalid
	1934	Matrix Input 14	3-bit LUT2/DFF5 Output	Valid	Invalid
	1935	Matrix Input 15	3-bit LUT3/DFF6 Output	Valid	Invalid
F2	1936	Matrix Input 16	3-bit LUT4/DFF7 Output	Valid	Invalid
	1937	Matrix Input 17	3-bit LUT5/CNT_DLY2(8bit) Output	Valid	Invalid
	1938	Matrix Input 18	3-bit LUT6/CNT_DLY3(8bit) Output	Valid	Invalid
	1939	Matrix Input 19	3-bit LUT7/CNT_DLY4(8bit) Output	Valid	Invalid
	1940	Matrix Input 20	3-bit LUT8/CNT_DLY5(8bit) Output	Valid	Invalid
	1941	Matrix Input 21	3-bit LUT9/CNT_DLY6(8bit) Output	Valid	Invalid
	1942	Matrix Input 22	4-bit LUT0/CNT_DLY0(16bit) Output	Valid	Invalid
	1943	Matrix Input 23	4-bit LUT1/CNT_DLY1(16bit) Output	Valid	Invalid

Table 40. Register Map (Cont.)


Address		Signal Function	Register Bit Definition	I <sup>2</sup> C Interface	
Byte	Register Bit			Read	Write
F3	1944	Matrix Input 24	3-bit LUT10/Pipe Delay (1st stage) Output	Valid	Invalid
	1945	Matrix Input 25	Pipe Delay Output0	Valid	Invalid
	1946	Matrix Input 26	Pipe Delay Output1	Valid	Invalid
	1947	Matrix Input 27	Fixed "L" output because it is OSC clock	Valid	Invalid
	1948	Matrix Input 28	Fixed "L" output because it is OSC clock	Valid	Invalid
	1949	Matrix Input 29	Fixed "L" output because it is OSC clock	Valid	Invalid
	1950	Matrix Input 30	Filter0/Edge Detect0 Output	Valid	Invalid
	1951	Matrix Input 31	Filter1/Edge Detect1 Output	Valid	Invalid
F4	1952	Matrix Input 32	Virtual Input [0]	Valid	Valid
	1953	Matrix Input 33	Virtual Input [1]	Valid	Valid
	1954	Matrix Input 34	Virtual Input [2]	Valid	Valid
	1955	Matrix Input 35	Virtual Input [3]	Valid	Valid
	1956	Matrix Input 36	Virtual Input [4]	Valid	Valid
	1957	Matrix Input 37	Virtual Input [5]	Valid	Valid
	1958	Matrix Input 38	Virtual Input [6]	Valid	Valid
	1959	Matrix Input 39	Virtual Input [7]	Valid	Valid
F5	1960	Matrix Input 40	3-bit LUT11 / DFF8 Output	Valid	Invalid
	1961	Matrix Input 41	3-bit LUT12 / DFF9 Output	Valid	Invalid
	1962	Matrix Input 42	3-bit LUT13 / DFF10 Output	Valid	Invalid
	1963	Matrix Input 43	3-bit LUT14 / DFF11 Output	Valid	Invalid
	1964	Matrix Input 44	3-bit LUT15 / DFF12 Output	Valid	Invalid
	1965	Matrix Input 45	3-bit LUT16 / DFF13 Output	Valid	Invalid
	1966	Matrix Input 46	3-bit LUT17 / DFF14 Output	Valid	Invalid
	1967	Matrix Input 47	4-bit LUT2 Output	Valid	Invalid
F6	1968	Matrix Input 48	Pin 10 Digital Input	Valid	Invalid
	1969	Reserved		Valid	Invalid
	1970	Matrix Input 50	Pin 11 Digital Input	Valid	Invalid
	1971	Reserved		Valid	Invalid
	1972	Matrix Input 52	Pin 12 Digital Input	Valid	Invalid
	1973	Matrix Input 53	Pin 13 Digital Input	Valid	Invalid
	1974	Reserved		Valid	Invalid
	1975	Reserved		Valid	Invalid

Table 40. Register Map (Cont.)

Address		Signal Function	Register Bit Definition	I <sup>2</sup> C Interface	
Byte	Register Bit			Read	Write
F7	1976	Matrix Input 56	Pin 14 Digital Input	Valid	Invalid
	1977	Matrix Input 57	ACMP_0 Output	Valid	Invalid
	1978	Matrix Input 58	ACMP_1 Output	Valid	Invalid
	1979	Matrix Input 59	ACMP_2 Output	Valid	Invalid
	1980	Reserved		Valid	Invalid
	1981	Matrix Input 61	Programmable Delay with Edge Detector Output	Valid	Invalid
	1982	Matrix Input 62	nRST_core	Valid	Invalid
	1983	Matrix Input 63	V <sub>DD</sub>	Valid	Invalid
<b>Reserved</b>					
F8	1991:1984	Reserved		Valid	Invalid
F9	1999:1992	Reserved		Valid	Invalid
FA	2007:2000	Reserved		Valid	Invalid
FB	2015:2008	Reserved		Valid	Valid
FC	2023:2016	Reserved		Valid	Invalid
FD	2031:2024	Reserved		Valid	Invalid
FE	2039:2032	Reserved		Valid	Valid
FF	2047:2040	Reserved		Valid	Valid

## 17. Package Top Marking Definitions


### 17.1 STQFN 14L 2.0 mm x 2.2 mm 0.4P COL Package

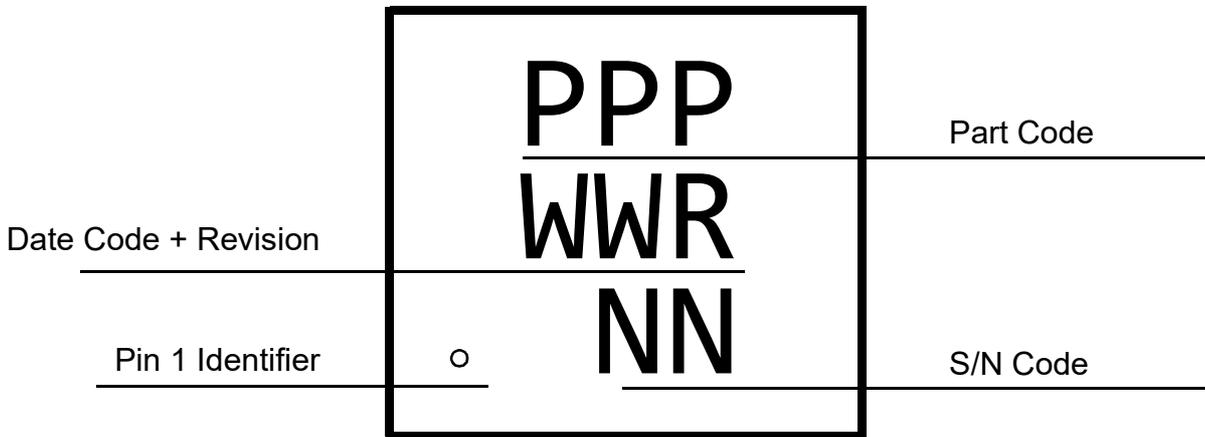


## 18. Package Information

### 18.1 Package Outlines for STQFN 14L 2.0 mm x 2.2 mm 0.4P COL Package


JEDEC MO-220, Variation WECE  
 IC Net Weight: 0.0068 g

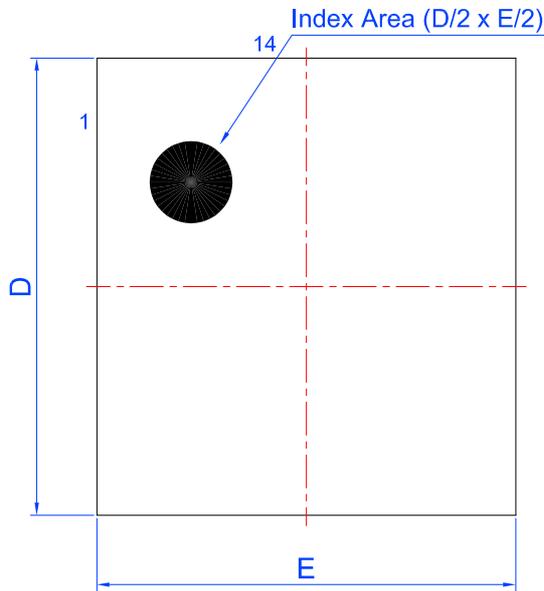

Top View (package face down)

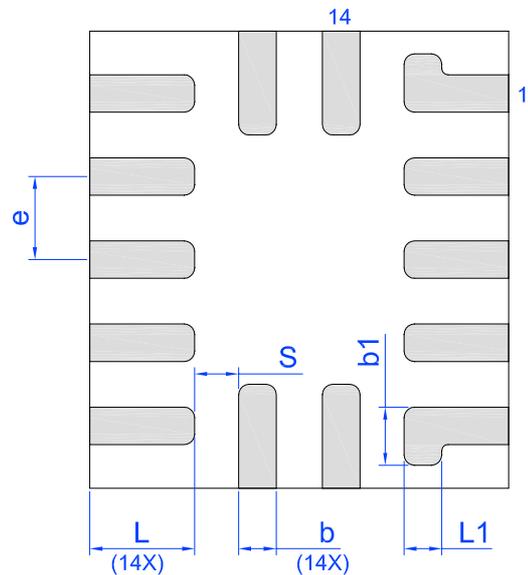

Bottom View

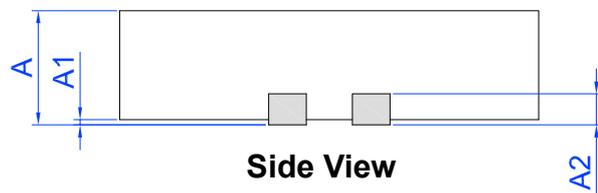

Side View

Unit: mm

Symbol	Min	Nom.	Max	Symbol	Min	Nom.	Max
A	0.50	0.55	0.60	D	2.15	2.20	2.25
A1	0.005	-	0.050	E	1.95	2.00	2.05
A2	0.10	0.15	0.20	L	0.45	0.50	0.55
b	0.13	0.18	0.23	S	0.21 TYP		
e	0.40 BSC			b1	0.28 TYP		
				L1	0.18 TYP		

## 18.2 STQFN Handling

Be sure to handle STQFN package only in a clean, ESD-safe environment. Tweezers or vacuum pick-up tools are suitable for handling. Do not handle STQFN package with fingers as this can contaminate the package pins and interface with solder reflow.

## 18.3 Soldering Information


Please see IPC/JEDEC J-STD-020: latest revision for reflow profile based on package volume of 2.42 mm<sup>3</sup> (nominal) for STQFN 14L Package. More information can be found at <http://www.jedec.org>.

## 19. Layout Guidelines

### 19.1 STQFN 14L 2.0 mm x 2.2 mm 0.4P COL Package

 Exposed Pad  
(PKG face down)

 Recommended Land Pattern  
(PKG face down)

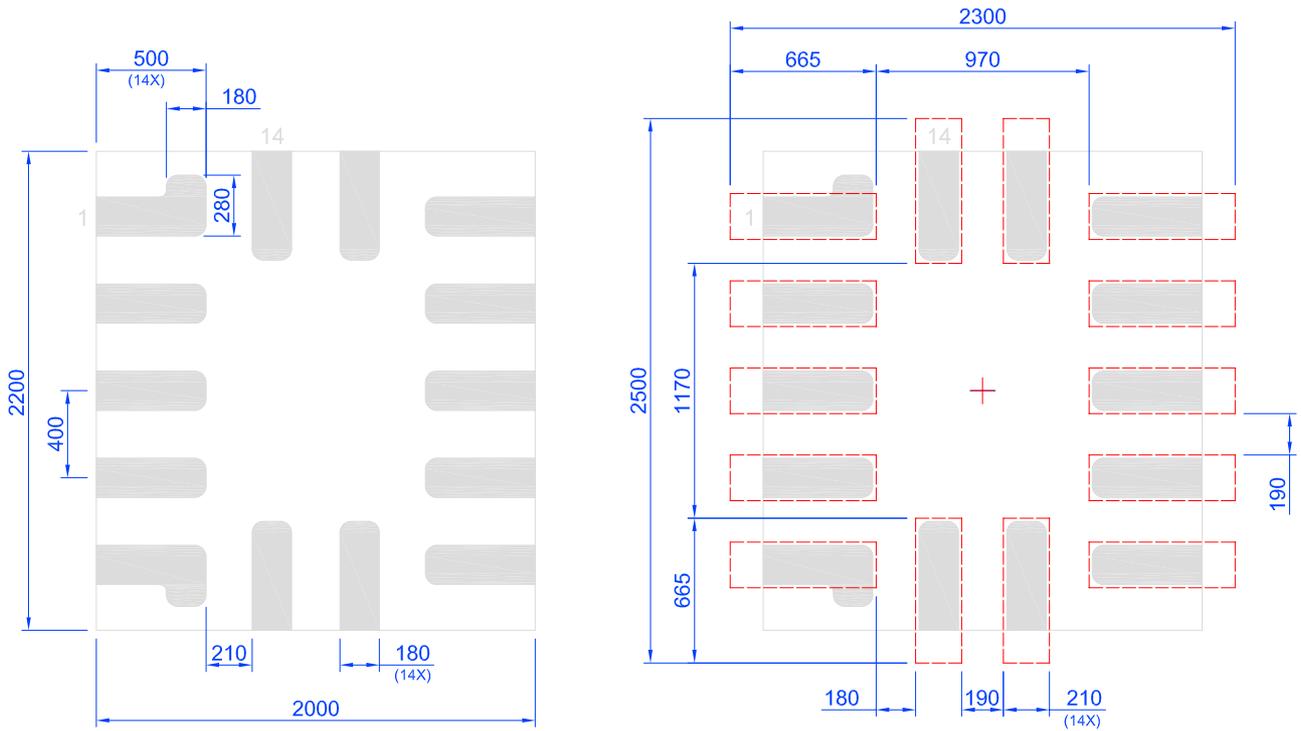

Unit:um

## 20. Ordering Information


Part Number	Package Description	Carrier Type	Temperature Range
SLG46536-EV	14-pin STQFN	Tape and Reel	-40 °C to +105 °C

### 20.1 Tape and Reel Specifications

Package Type	# of Pins	Nominal Package Size (mm)	Max Units		Reel & Hub Size (mm)	Trailer (min)		Leader (min)		Tape Width (mm)	Part Pitch (mm)
			per Reel	per Box		Pockets	Length (mm)	Pockets	Length (mm)		
STQFN 14L 2.0 mm x 2.2 mm 0.4P COL	14	2 x 2.2 x 0.55	3,000	3,000	178 / 60	100	400	100	400	8	4

### 20.2 Carrier Tape Drawing and Dimensions

Package Type	Pocket BTM Length (mm)	Pocket BTM Width (mm)	Pocket Depth (mm)	Index Hole Pitch (mm)	Pocket Pitch (mm)	Index Hole Diameter (mm)	Index Hole to Tape Edge (mm)	Index Hole to Pocket Center (mm)	Tape Width (mm)
	A0	B0	K0	P0	P1	D0	E	F	W
STQFN 14L 2.0 mm x 2.2 mm 0.4P COL	2.2	2.35	0.8	4	4	1.5	1.75	3.5	8

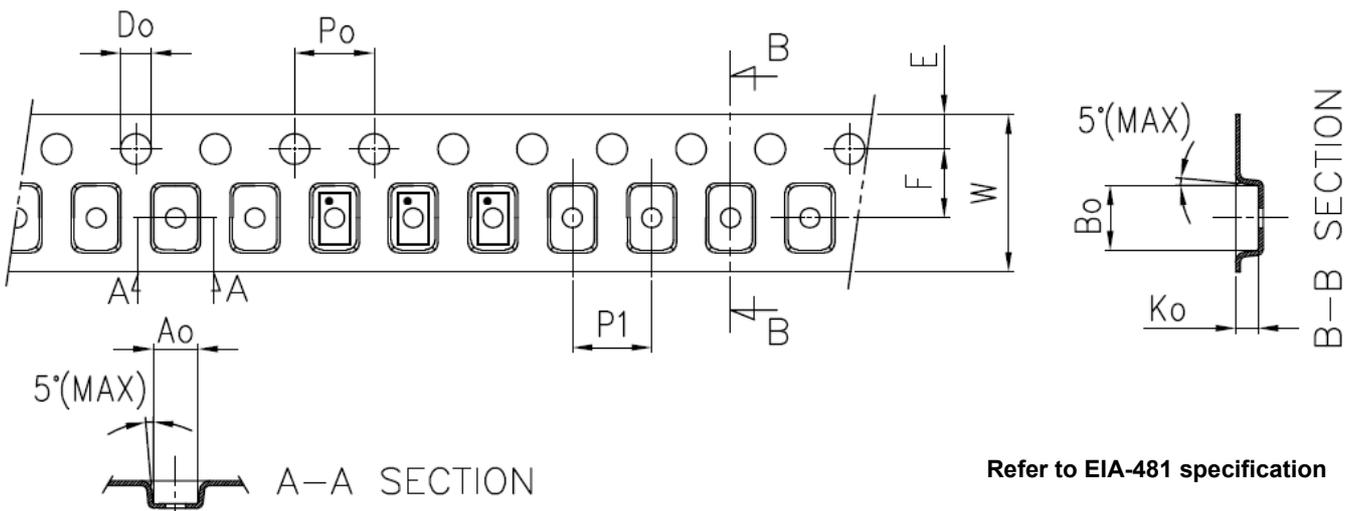

---

## Glossary

### A

ACK	Acknowledge bit
ACMP	Analog Comparator

### B

BG	Bandgap
----	---------

### C

CLK	Clock
CNT	Counter

### D

DFF	D Flip-Flop
DLY	Delay

### E

ES	Electrical Specifications
ESD	Electrostatic discharge

### F

FSM	Finite State Machine
-----	----------------------

### G

GPI	General Purpose Input
GPIO	General Purpose Input/Output
GPO	General Purpose Output

### I

IN	Input
IO	Input/Output

### L

LB	Low Bandwidth
LSB	Least Significant Bit
LUT	Look Up Table

### M

MSB	Most Significant Bit
MUX	Multiplexer

**N**

nRST	Reset
NVM	Non-Volatile Memory

**O**

OD	Open-drain
OE	Output Enable
OSC	Oscillator
OTP	One Time Programmable
OUT	Output

**P**

PD	Power-Down
PGen	Pattern Generator
POR	Power-On Reset
PP	Push-pull
PWR	Power
P DLY	Programmable Delay

**R**

R/W	Read/Write
-----	------------

**S**

SCL	I <sup>2</sup> C Clock Input
SDA	I <sup>2</sup> C Data Input/Output

**V**

V <sub>REF</sub>	Voltage Reference
------------------	-------------------

**W**

WS	Wake and Sleep Controller
----	---------------------------

## Revision History

Revision	Date	Description
1.02	Jan 23, 2026	Updated Electrostatic Discharge Ratings table Corrected figure Internal Macrocell States during POR Sequence Changed the Current Source connection in ACMP1 Block Diagram Added note to Matrix OE IO Structure Diagram (for IOs 6 and 7) Added note to I <sup>2</sup> C Specifications table Fixed typos
1.01	Aug 20, 2025	Updated Ordering Information Corrected part number Fixed typos
1.00	Jan 30, 2025	Initial release

## IMPORTANT NOTICE AND DISCLAIMER

RENESAS ELECTRONICS CORPORATION AND ITS SUBSIDIARIES (“RENESAS”) PROVIDES TECHNICAL SPECIFICATIONS AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES “AS IS” AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT OF THIRD-PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for developers who are designing with Renesas products. You are solely responsible for (1) selecting the appropriate products for your application, (2) designing, validating, and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements. These resources are subject to change without notice. Renesas grants you permission to use these resources only to develop an application that uses Renesas products. Other reproduction or use of these resources is strictly prohibited. No license is granted to any other Renesas intellectual property or to any third-party intellectual property. Renesas disclaims responsibility for, and you will fully indemnify Renesas and its representatives against, any claims, damages, costs, losses, or liabilities arising from your use of these resources. Renesas' products are provided only subject to Renesas' Terms and Conditions of Sale or other applicable terms agreed to in writing. No use of any Renesas resources expands or otherwise alters any applicable warranties or warranty disclaimers for these products.

(Disclaimer Rev.1.01)

### Corporate Headquarters

TOYOSU FORESIA, 3-2-24 Toyosu,  
Koto-ku, Tokyo 135-0061, Japan  
[www.renesas.com](http://www.renesas.com)

### Trademarks

Renesas and the Renesas logo are trademarks of Renesas Electronics Corporation. All trademarks and registered trademarks are the property of their respective owners.

### Contact Information

For further information on a product, technology, the most up-to-date version of a document, or your nearest sales office, please visit [www.renesas.com/contact-us/](http://www.renesas.com/contact-us/).