

To our customers,

Old Company Name in Catalogs and Other Documents

On April 1st, 2010, NEC Electronics Corporation merged with Renesas Technology Corporation, and Renesas Electronics Corporation took over all the business of both companies. Therefore, although the old company name remains in this document, it is a valid Renesas Electronics document. We appreciate your understanding.

Renesas Electronics website: <http://www.renesas.com>

April 1st, 2010
Renesas Electronics Corporation

Issued by: Renesas Electronics Corporation (<http://www.renesas.com>)

Send any inquiries to <http://www.renesas.com/inquiry>.

Notice

1. All information included in this document is current as of the date this document is issued. Such information, however, is subject to change without any prior notice. Before purchasing or using any Renesas Electronics products listed herein, please confirm the latest product information with a Renesas Electronics sales office. Also, please pay regular and careful attention to additional and different information to be disclosed by Renesas Electronics such as that disclosed through our website.
2. Renesas Electronics does not assume any liability for infringement of patents, copyrights, or other intellectual property rights of third parties by or arising from the use of Renesas Electronics products or technical information described in this document. No license, express, implied or otherwise, is granted hereby under any patents, copyrights or other intellectual property rights of Renesas Electronics or others.
3. You should not alter, modify, copy, or otherwise misappropriate any Renesas Electronics product, whether in whole or in part.
4. Descriptions of circuits, software and other related information in this document are provided only to illustrate the operation of semiconductor products and application examples. You are fully responsible for the incorporation of these circuits, software, and information in the design of your equipment. Renesas Electronics assumes no responsibility for any losses incurred by you or third parties arising from the use of these circuits, software, or information.
5. When exporting the products or technology described in this document, you should comply with the applicable export control laws and regulations and follow the procedures required by such laws and regulations. You should not use Renesas Electronics products or the technology described in this document for any purpose relating to military applications or use by the military, including but not limited to the development of weapons of mass destruction. Renesas Electronics products and technology may not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable domestic or foreign laws or regulations.
6. Renesas Electronics has used reasonable care in preparing the information included in this document, but Renesas Electronics does not warrant that such information is error free. Renesas Electronics assumes no liability whatsoever for any damages incurred by you resulting from errors in or omissions from the information included herein.
7. Renesas Electronics products are classified according to the following three quality grades: “Standard”, “High Quality”, and “Specific”. The recommended applications for each Renesas Electronics product depends on the product’s quality grade, as indicated below. You must check the quality grade of each Renesas Electronics product before using it in a particular application. You may not use any Renesas Electronics product for any application categorized as “Specific” without the prior written consent of Renesas Electronics. Further, you may not use any Renesas Electronics product for any application for which it is not intended without the prior written consent of Renesas Electronics. Renesas Electronics shall not be in any way liable for any damages or losses incurred by you or third parties arising from the use of any Renesas Electronics product for an application categorized as “Specific” or for which the product is not intended where you have failed to obtain the prior written consent of Renesas Electronics. The quality grade of each Renesas Electronics product is “Standard” unless otherwise expressly specified in a Renesas Electronics data sheets or data books, etc.
 - “Standard”: Computers; office equipment; communications equipment; test and measurement equipment; audio and visual equipment; home electronic appliances; machine tools; personal electronic equipment; and industrial robots.
 - “High Quality”: Transportation equipment (automobiles, trains, ships, etc.); traffic control systems; anti-disaster systems; anti-crime systems; safety equipment; and medical equipment not specifically designed for life support.
 - “Specific”: Aircraft; aerospace equipment; submersible repeaters; nuclear reactor control systems; medical equipment or systems for life support (e.g. artificial life support devices or systems), surgical implantations, or healthcare intervention (e.g. excision, etc.), and any other applications or purposes that pose a direct threat to human life.
8. You should use the Renesas Electronics products described in this document within the range specified by Renesas Electronics, especially with respect to the maximum rating, operating supply voltage range, movement power voltage range, heat radiation characteristics, installation and other product characteristics. Renesas Electronics shall have no liability for malfunctions or damages arising out of the use of Renesas Electronics products beyond such specified ranges.
9. Although Renesas Electronics endeavors to improve the quality and reliability of its products, semiconductor products have specific characteristics such as the occurrence of failure at a certain rate and malfunctions under certain use conditions. Further, Renesas Electronics products are not subject to radiation resistance design. Please be sure to implement safety measures to guard them against the possibility of physical injury, and injury or damage caused by fire in the event of the failure of a Renesas Electronics product, such as safety design for hardware and software including but not limited to redundancy, fire control and malfunction prevention, appropriate treatment for aging degradation or any other appropriate measures. Because the evaluation of microcomputer software alone is very difficult, please evaluate the safety of the final products or system manufactured by you.
10. Please contact a Renesas Electronics sales office for details as to environmental matters such as the environmental compatibility of each Renesas Electronics product. Please use Renesas Electronics products in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive. Renesas Electronics assumes no liability for damages or losses occurring as a result of your noncompliance with applicable laws and regulations.
11. This document may not be reproduced or duplicated, in any form, in whole or in part, without prior written consent of Renesas Electronics.
12. Please contact a Renesas Electronics sales office if you have any questions regarding the information contained in this document or Renesas Electronics products, or if you have any other inquiries.

(Note 1) “Renesas Electronics” as used in this document means Renesas Electronics Corporation and also includes its majority-owned subsidiaries.

(Note 2) “Renesas Electronics product(s)” means any product developed or manufactured by or for Renesas Electronics.

384-/360-OUTPUT TFT-LCD SOURCE DRIVER (COMPATIBLE WITH 256 GRAY SCALES, mini-LVDS INTERFACE SUPPORTED)

DESCRIPTION

The μ PD160010 is a source driver for TFT-LCDs that supports the display of 256 gray scales and employs mini-LVDS interface. Which can realize a full-color display of 16,777,216 colors by output of 256 values γ -corrected by an internal D/A converter and 10-by-2 external power modules. Because the output dynamic range is as large as $V_{SS2} + 0.2\text{ V}$ to $V_{DD2} - 0.2\text{ V}$, level inversion operation of the LCD's common electrode is rendered unnecessary. Also, to be able to deal with dot-line inversion, n-line inversion, this source driver is equipped with a built-in 8-bit D/A converter circuit whose odd output pins and even output pins respectively output gray scale voltages of differing polarity. Because of the incorporation of mini-LVDS interface, the data transfer speed has improved and the amount of wiring on the PCB has been significantly reduced.

Remark "mini-LVDS" is the technology with Texas Instruments applied LVDS technology and developed.
(LVDS: Low Voltage Differential Signaling)

FEATURES

- Differential interface: CLK, gray scale data,
- CMOS interface: STHR(L), R/L, STB, SB, POL, O_{sel} , V_{sel1} , V_{sel2} , SRC, ORC, RxBIAS1, RxBIAS2
- 384/360 outputs (O_{sel})
- Capable of outputting 256 values by means of 10-by-2 external power modules (20 units) and a D/A converter
- Logic power supply voltage (V_{DD1}): 2.7 to 3.6V
- Driver power supply voltage (V_{DD2}): 10.0 to 16.5V
- High-speed data transfer: $f_{CLK} = 190\text{ MHz MAX.}$ (internal data transfer speed when operating at $V_{DD1} = 2.7\text{ V}$)
- Output dynamic range: $V_{SS2} + 0.2\text{ V}$ to $V_{DD2} - 0.2\text{ V}$
- Apply for dot-line inversion, n-line inversion
- Output voltage polarity inversion function (POL)


★ ORDERING INFORMATION

Part Number	Package
μ PD160010N-xxx	TCP (TAB package)
μ PD160010NL-xxx	COF (COF package)

Remark The TCP/COF's external shape is customized. To order the required shape, please contact one of our sales representatives.


The information in this document is subject to change without notice. Before using this document, please confirm that this is the latest version.
Not all products and/or types are available in every country. Please check with an NEC Electronics sales representative for availability and additional information.

★ 1. BLOCK DIAGRAM

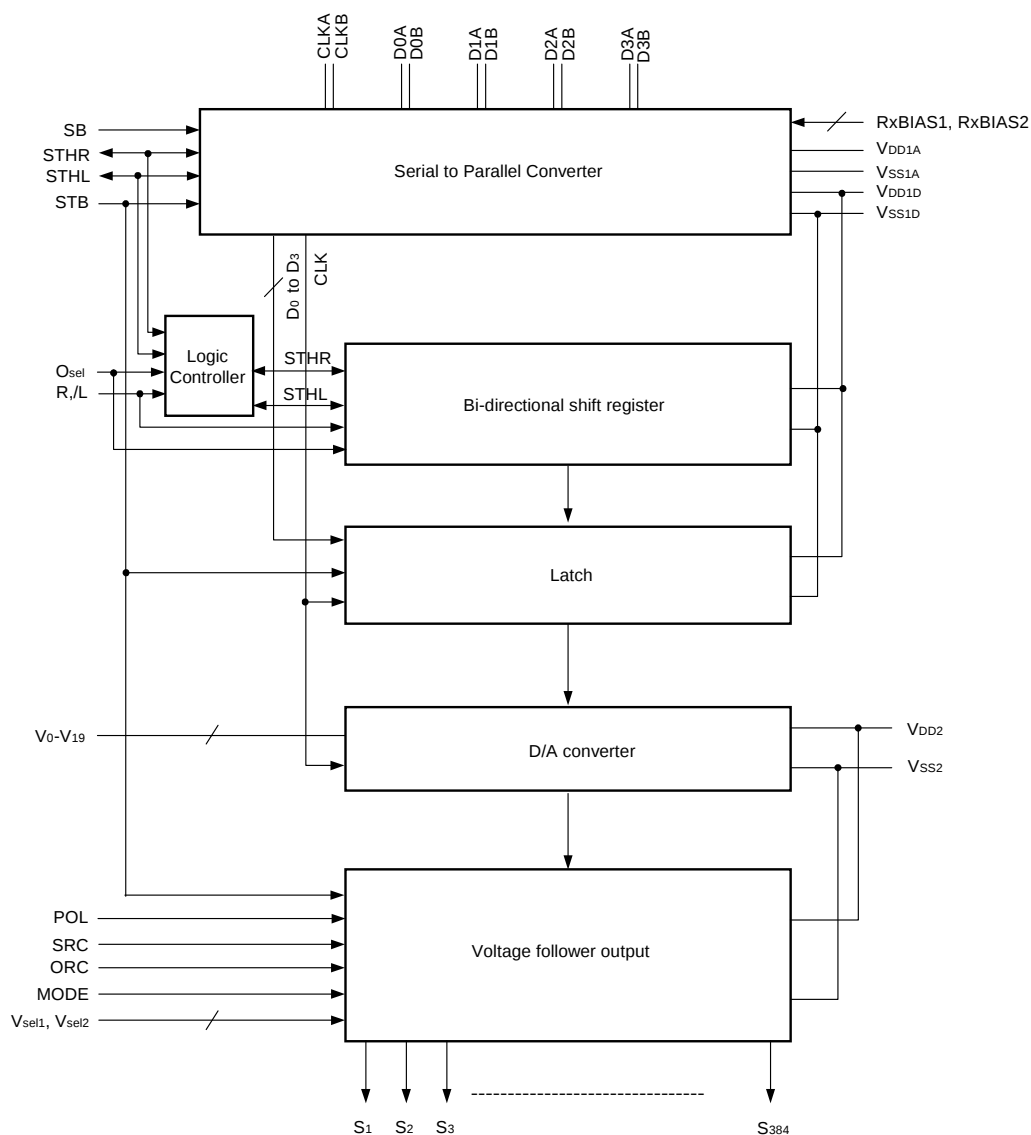


Remark /xxx indicates active low signals.

2. RELATIONSHIP BETWEEN OUTPUT CIRCUIT AND D/A CONVERTER

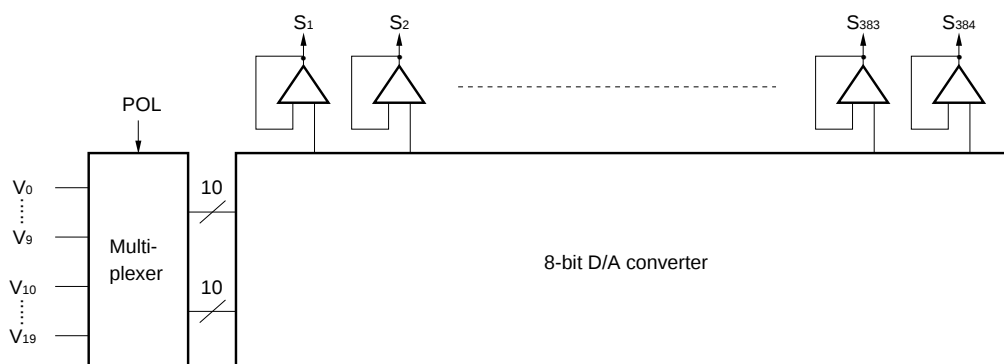

3. PIN CONFIGURATION (μPD160010NL-xxx:COF, Copper Foil Surface, Face-down)

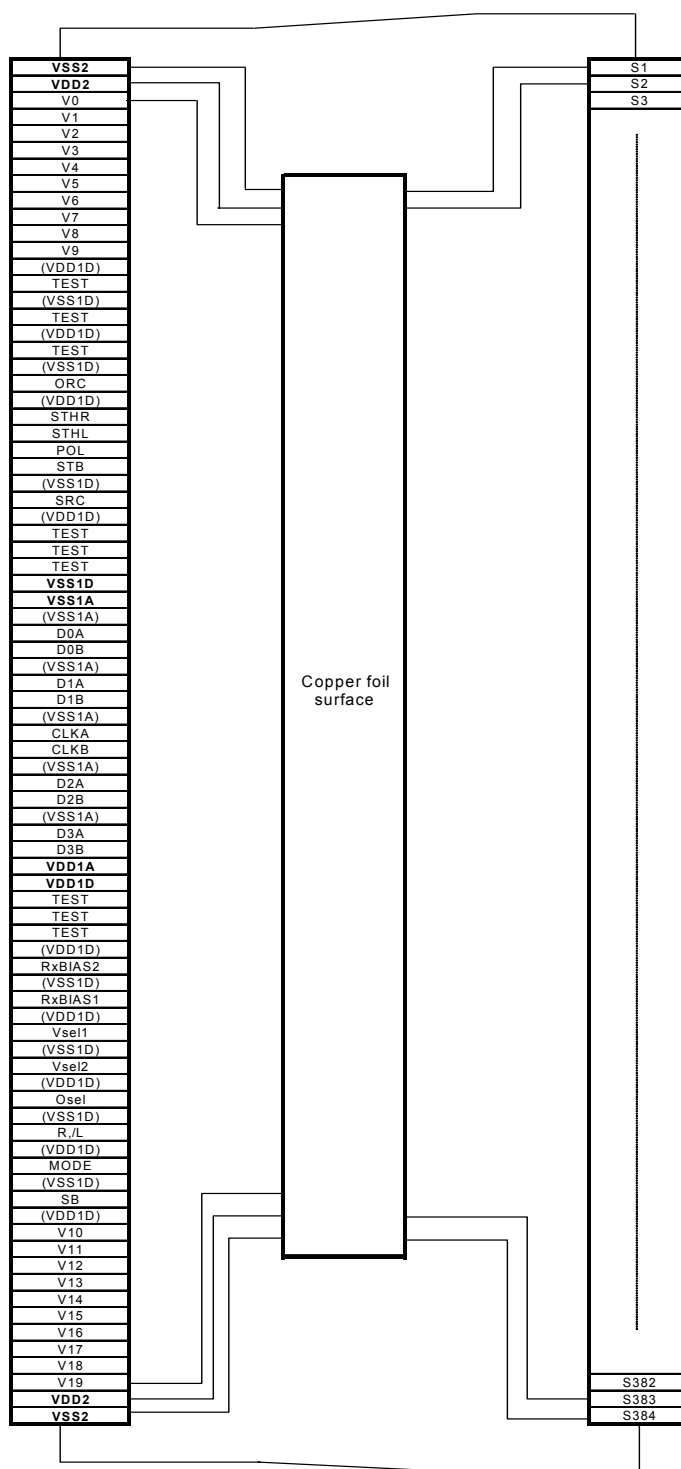

Remarks 1. This figure does not specify the COF package.

2. (VDD1D) and (VSS1D) is available for supply to logic input terminal. Please don't use these pins for power supply terminal with current.

(VSS1A) must be connected to analog GND on PCB.

4. PIN FUNCTIONS

(1/2)

Pin Symbol	Pin Name	I/O	Description															
S ₁ to S ₃₈₄	Driver	Output	The D/A converted 256-gray-scale analog voltage is output.															
D0A, D0B	Gray scale data	Input (mini-LVDS)	Display data with gray-scale data (8-bit) and control signal (RST = reset). Refer to Table 4–1 .															
D1A, D1B																		
D2A, D2B																		
D3A, D3B																		
CLKA, CLKB	Shift clock	Input (mini-LVDS)	Shift clock. Refer to Table 4–1 .															
R,/L	Shift direction control	Input (CMOS)	The shift direction control pin of shift register. The shift directions of the shift registers are as follows. R,/L = H (right shift): STHR input, S ₁ →S ₃₈₄ , STHL output R,/L = L (left shift): STHL input, S ₃₈₄ →S ₁ , STHR output															
STHR	Right shift start pulse	I/O (CMOS)	This is the start pulse I/O pin when connected in cascade. Loading of display data starts when a high level is read. For right shift, STHR is input and STHL is output. For left shift, STHL is input and STHR is output.															
STHL	Left shift start pulse																	
STB	Latch	Input (CMOS)	Change the input mode, latched the registered data and transfer to DAC at the rising edge. And supplied voltage to LCD pixel is output at falling edge.															
POL	Polarity	Input (CMOS)	Control the polarity of the output. Input of the POL signal is allowed the setup time (t ₁₄) with respect to STB's rising edge. Refer to Table 4–3 .															
SB	Bus-line set-back	Input (CMOS)	Change the data order of mini-LVDS input. Refer to Table 4–1 . Input “L” level to this pin.															
RxBIAS1, RxBIAS2	mini-LVDS receiver bias voltage control	Input (CMOS)	This pin controls the bias current of mini-LVDS receiver circuit. Please refer to the following table. <table><tr><td>RxBIAS1</td><td>RxBIAS2</td><td>I_{BIAS}</td></tr><tr><td>L</td><td>L</td><td>I₁ (Low power)</td></tr><tr><td>L</td><td>H</td><td>I₂</td></tr><tr><td>H</td><td>L</td><td>I₃</td></tr><tr><td>H</td><td>H</td><td>I₄ (High power)</td></tr></table>	RxBIAS1	RxBIAS2	I _{BIAS}	L	L	I ₁ (Low power)	L	H	I ₂	H	L	I ₃	H	H	I ₄ (High power)
RxBIAS1	RxBIAS2	I _{BIAS}																
L	L	I ₁ (Low power)																
L	H	I ₂																
H	L	I ₃																
H	H	I ₄ (High power)																
O _{sel}	Number of output pins select pin	Input (CMOS)	This pin selects the number of output pins. O _{sel} = L: 384-output mode O _{sel} = H: 360-output mode Output pins S ₁₈₁ through S ₂₀₄ are invalid in 360-output mode.															
SRC	Slew-rate control	Input (CMOS)	SRC = H: High-slew-rate mode (large current consumption) SRC = L: Low-slew-rate mode (small current consumption)															
ORC	Output resistance control	Input (CMOS)	ORC = H: Low output resistance mode ORC = L: High output resistance mode															
MODE	Output reset control	Input (CMOS)	MODE = H: Output reset MODE = L: No output reset															

(2/2)

Pin Symbol	Pin Name	I/O	Description															
V _{sel1} , V _{sel2}	V _{DD2} selector	Input (CMOS)	This pin controls the bias current of output amplifier. Logic input to V_{sel1} and V_{sel2} have a dependence on V_{DD2} and load condition and so on. Output waveform simulation should be done before decision. <table><tr><td>V_{sel1}</td><td>V_{sel2}</td><td>V_{DD2} Range (reference)</td></tr><tr><td>L</td><td>L</td><td>10.5 V TYP.</td></tr><tr><td>L</td><td>H</td><td>12.5 V TYP.</td></tr><tr><td>H</td><td>L</td><td>16.0 V TYP.</td></tr><tr><td>H</td><td>H</td><td>Non-assign</td></tr></table>	V _{sel1}	V _{sel2}	V _{DD2} Range (reference)	L	L	10.5 V TYP.	L	H	12.5 V TYP.	H	L	16.0 V TYP.	H	H	Non-assign
V _{sel1}	V _{sel2}	V _{DD2} Range (reference)																
L	L	10.5 V TYP.																
L	H	12.5 V TYP.																
H	L	16.0 V TYP.																
H	H	Non-assign																
V ₀ to V ₁₉	γ -corrected power supplies	–	Input the γ -corrected power supplies from outside. Make sure to maintain the following relationships. During the gray scale voltage output, be sure to keep the gray scale level power supply at a constant level. $V_{DD2} - 0.2 \text{ V} \geq V_0 > V_1 > V_2 > V_3 > V_4 > V_5 > V_6 > V_7 > V_8 > V_9 \geq 0.5 V_{DD2}$ $0.5 V_{DD2} \geq V_{10} > V_{11} > V_{12} > V_{13} > V_{14} > V_{15} > V_{16} > V_{17} > V_{18} > V_{19} \geq V_{SS2} + 0.2 \text{ V}$															
V _{DD1D}	Low-voltage logic power supply	–	2.7 to 3.6 V V_{DD1D} and V_{DD1A} should be same electric potential.															
V _{DD1A}	Low-voltage analog power supply	–	2.7 to 3.6 V V_{DD1D} and V_{DD1A} should be same electric potential.															
V _{DD2}	Driver power supply	–	10.0 to 16.5 V															
V _{SS1D}	Low-voltage logic ground	–	Ground for internal logic circuit. Please wire V_{SS1D} and V_{SS1A} in external circuit boards.															
V _{SS1A}	Low-voltage analog ground	–	Ground for internal mini-LVDS receiver circuit. Please wire V_{SS1D} and V_{SS1A} in external circuit boards.															
V _{SS2}	Driver ground	–	Ground for internal high voltage circuit.															
TEST	TEST	Input (CMOS)	Please leave these pins open in normal operation mode.															

- Cautions**
1. The power start sequence must be V_{DD1}, logic input, and V_{DD2} & V₀-V₁₉ in that order. Reverse this sequence to shut down.
 2. To stabilize the supply voltage, please be sure to insert a 0.47 μF bypass capacitor between V_{DD1}-V_{SS1} and V_{DD2}-V_{SS2}. Furthermore, for increased precision of the D/A converter, insertion of a bypass capacitor of about 0.01 μF is also advised between the γ-corrected power supply terminals (V₀, V₁, V₂,..., V₁₉) and V_{SS2}.

Table 4-1. Function (Bus-line Set-Back)

Pin Name	SB = L
D0A	D0(+)
D0B	D0(-)
D1A	D1(+)
D1B	D1(-)
CLKA	CLK(+)
CLKB	CLK(-)
D2A	D2(+)
D2B	D2(-)
D3A	D3(+)
D3B	D3(-)

Remark Suffix "+" indicates positive polarity and "-" indicates negative polarity at each differential signal input pair.

Table 4-2. Function (R,/L and STHR(L))

R,/L	STHR	STHL	Shift Direction
H (Right shift)	IN	OUT	S ₁ → S ₃₈₄
L (Left shift)	OUT	IN	S ₃₈₄ → S ₁

Table 4-3. Function (POL and γ -corrected power supplies)

POL	Odd Numbered Output	Even Numbered Output
H	V ₁₀ -V ₁₉	V ₀ -V ₉
L	V ₀ -V ₉	V ₁₀ -V ₁₉

5. RELATIONSHIP BETWEEN INPUT DATA AND OUTPUT VOLTAGE VALUE

μPD160010 incorporates a 8-bit D/A converter whose odd output pins and even output pins output respectively gray scale voltages of differing polarity with respect to the LCD's counter electrode (common electrode) voltage. The D/A converter consists of ladder resistors and switches.

Figure 5-1 shows the relationship between the driving voltages such as liquid-crystal driving voltages V_{DD2} , V_{SS2} and common electrode potential V_{COM} , and γ -corrected voltages V_0 - V_{19} and the input data. Be sure to maintain the voltage relationships of below.

$$V_{DD2} - 0.2 \text{ V} \geq V_0 > V_1 > V_2 > V_3 > V_4 > V_5 > V_6 > V_7 > V_8 > V_9 \geq 0.5 V_{DD2}$$

$$0.5 V_{DD2} \geq V_{10} > V_{11} > V_{12} > V_{13} > V_{14} > V_{15} > V_{16} > V_{17} > V_{18} > V_{19} \geq V_{SS2} + 0.2 \text{ V}$$

Figures 5-2 shows γ -corrected power supply and ladder resistors ratio and figure 5-3 shows the relationship between the input data and the output data.

Figure 5-1. Relationship between Input Data and γ -corrected Power Supplies


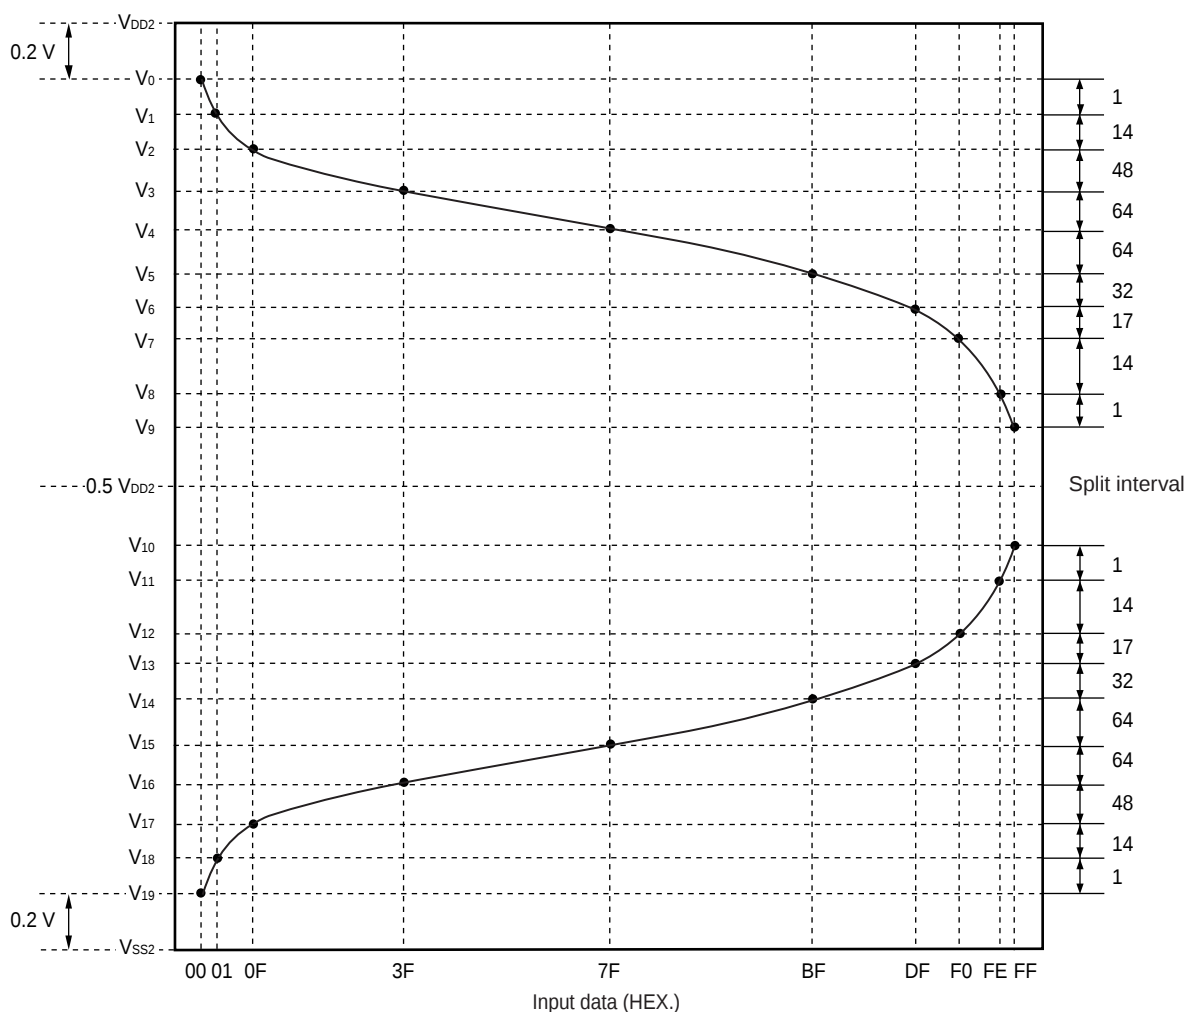


Figure 5-2. γ -corrected Power Supply and Ladder Resistors Ratio

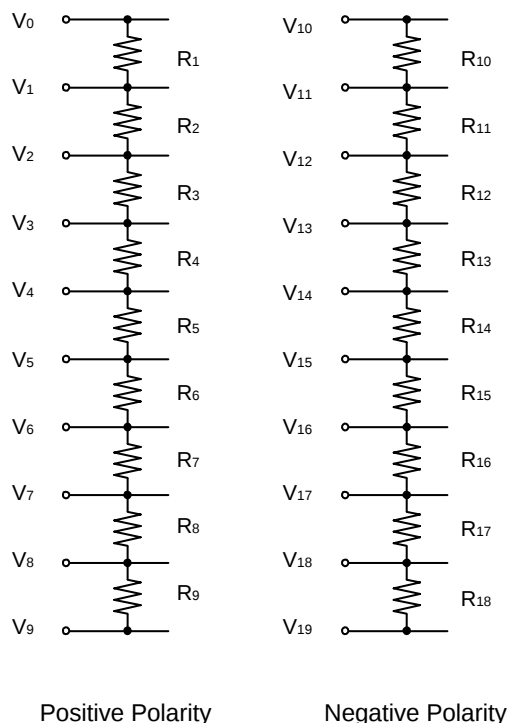

- R₁, R₁₈: r₀
- R₂, R₁₇: r₁ to r₁₄
- R₃, R₁₆: r₁₅ to r₆₂
- R₄, R₁₅: r₆₃ to r₁₂₆
- R₅, R₁₄: r₁₂₇ to r₁₉₀
- R₆, R₁₃: r₁₉₁ to r₂₂₂
- R₇, R₁₂: r₂₂₃ to r₂₃₉
- R₈, R₁₁: r₂₄₀ to r₂₅₃
- R₉, R₁₀: r₂₅₄

R _n	Ratio
R ₁ , R ₁₈	173
R ₂ , R ₁₇	1475
R ₃ , R ₁₆	2419
R ₄ , R ₁₅	2083
R ₅ , R ₁₄	1940
R ₆ , R ₁₃	1219
R ₇ , R ₁₂	794
R ₈ , R ₁₁	1373
R ₉ , R ₁₀	525

m	Ratio	m	Ratio	m	Ratio	m	Ratio
r0	173	r64	38	r128	29	r192	34
r1	155	r65	37	r129	29	r193	34
r2	142	r66	37	r130	29	r194	35
r3	131	r67	37	r131	29	r195	35
r4	122	r68	37	r132	29	r196	35
r5	114	r69	36	r133	29	r197	35
r6	107	r70	36	r134	29	r198	35
r7	102	r71	36	r135	29	r199	36
r8	97	r72	36	r136	29	r200	36
r9	93	r73	35	r137	29	r201	36
r10	89	r74	35	r138	29	r202	37
r11	85	r75	35	r139	29	r203	37
r12	82	r76	35	r140	29	r204	37
r13	79	r77	35	r141	29	r205	37
r14	77	r78	34	r142	29	r206	38
r15	74	r79	34	r143	29	r207	38
r16	72	r80	34	r144	29	r208	38
r17	70	r81	34	r145	29	r209	39
r18	69	r82	34	r146	29	r210	39
r19	67	r83	34	r147	29	r211	39
r20	65	r84	33	r148	29	r212	40
r21	64	r85	33	r149	29	r213	40
r22	62	r86	33	r150	29	r214	40
r23	61	r87	33	r151	29	r215	41
r24	60	r88	33	r152	30	r216	41
r25	59	r89	33	r153	30	r217	41
r26	58	r90	33	r154	30	r218	42
r27	57	r91	32	r155	30	r219	42
r28	56	r92	32	r156	30	r220	42
r29	55	r93	32	r157	30	r221	43
r30	54	r94	32	r158	30	r222	43
r31	53	r95	32	r159	30	r223	43
r32	52	r96	32	r160	30	r224	44
r33	51	r97	32	r161	30	r225	44
r34	51	r98	32	r162	30	r226	44
r35	50	r99	31	r163	30	r227	45
r36	49	r100	31	r164	30	r228	45
r37	49	r101	31	r165	30	r229	46
r38	48	r102	31	r166	30	r230	46
r39	47	r103	31	r167	30	r231	46
r40	47	r104	31	r168	31	r232	47
r41	46	r105	31	r169	31	r233	47
r42	46	r106	31	r170	31	r234	48
r43	45	r107	31	r171	31	r235	48
r44	45	r108	31	r172	31	r236	49
r45	44	r109	30	r173	31	r237	50
r46	44	r110	30	r174	31	r238	50
r47	43	r111	30	r175	31	r239	52
r48	43	r112	30	r176	31	r240	53
r49	43	r113	30	r177	32	r241	55
r50	42	r114	30	r178	32	r242	57
r51	42	r115	30	r179	32	r243	59
r52	41	r116	30	r180	32	r244	62
r53	41	r117	30	r181	32	r245	66
r54	41	r118	30	r182	32	r246	71
r55	40	r119	30	r183	32	r247	78
r56	40	r120	30	r184	33	r248	86
r57	40	r121	30	r185	33	r249	98
r58	39	r122	30	r186	33	r250	114
r59	39	r123	30	r187	33	r251	138
r60	39	r124	30	r188	33	r252	178
r61	38	r125	30	r189	33	r253	258
r62	38	r126	29	r190	34	r254	525
r63	38	r127	29	r191	34		

Figure 5-3. Relationship between Input Data and Output Voltage (1/2)

(Output voltage) $V_{DD2} - 0.2\text{ V} \geq V_0 > V_1 > V_2 > V_3 > V_4 > V_5 > V_6 > V_7 > V_8 > V_9 \geq 0.5 V_{DD2}$

Data	Output Voltage	Data	Output Voltage	Data	Output Voltage	Data	Output Voltage
00H	V0	40H	V64	80H	V128	C0H	V192
01H	V1	41H	V65	81H	V129	C1H	V193
02H	V2	42H	V66	82H	V130	C2H	V194
03H	V3	43H	V67	83H	V131	C3H	V195
04H	V4	44H	V68	84H	V132	C4H	V196
05H	V5	45H	V69	85H	V133	C5H	V197
06H	V6	46H	V70	86H	V134	C6H	V198
07H	V7	47H	V71	87H	V135	C7H	V199
08H	V8	48H	V72	88H	V136	C8H	V200
09H	V9	49H	V73	89H	V137	C9H	V201
0AH	V10	4AH	V74	8AH	V138	CAH	V202
0BH	V11	4BH	V75	8BH	V139	CBH	V203
0CH	V12	4CH	V76	8CH	V140	COH	V204
0DH	V13	4DH	V77	8DH	V141	CDH	V205
0EH	V14	4EH	V78	8EH	V142	CEH	V206
0FH	V15	4FH	V79	8FH	V143	CFH	V207
10H	V16	50H	V80	90H	V144	D0H	V208
11H	V17	51H	V81	91H	V145	D1H	V209
12H	V18	52H	V82	92H	V146	D2H	V210
13H	V19	53H	V83	93H	V147	D3H	V211
14H	V20	54H	V84	94H	V148	D4H	V212
15H	V21	55H	V85	95H	V149	D5H	V213
16H	V22	56H	V86	96H	V150	D6H	V214
17H	V23	57H	V87	97H	V151	D7H	V215
18H	V24	58H	V88	98H	V152	D8H	V216
19H	V25	59H	V89	99H	V153	D9H	V217
1AH	V26	5AH	V90	9AH	V154	DAH	V218
1BH	V27	5BH	V91	9BH	V155	DBH	V219
1CH	V28	5CH	V92	9CH	V156	DOH	V220
1DH	V29	5DH	V93	9DH	V157	DDH	V221
1EH	V30	5EH	V94	9EH	V158	DEH	V222
1FH	V31	5FH	V95	9FH	V159	DFH	V223
20H	V32	60H	V96	A0H	V160	E0H	V224
21H	V33	61H	V97	A1H	V161	E1H	V225
22H	V34	62H	V98	A2H	V162	E2H	V226
23H	V35	63H	V99	A3H	V163	E3H	V227
24H	V36	64H	V100	A4H	V164	E4H	V228
25H	V37	65H	V101	A5H	V165	E5H	V229
26H	V38	66H	V102	A6H	V166	E6H	V230
27H	V39	67H	V103	A7H	V167	E7H	V231
28H	V40	68H	V104	A8H	V168	E8H	V232
29H	V41	69H	V105	A9H	V169	E9H	V233
2AH	V42	6AH	V106	AAH	V170	EAH	V234
2BH	V43	6BH	V107	ABH	V171	EBH	V235
2CH	V44	6CH	V108	ACH	V172	ECH	V236
2DH	V45	6DH	V109	ADH	V173	EDH	V237
2EH	V46	6EH	V110	AEH	V174	EEH	V238
2FH	V47	6FH	V111	AFH	V175	EFH	V239
30H	V48	70H	V112	B0H	V176	FOH	V240
31H	V49	71H	V113	B1H	V177	F1H	V241
32H	V50	72H	V114	B2H	V178	F2H	V242
33H	V51	73H	V115	B3H	V179	F3H	V243
34H	V52	74H	V116	B4H	V180	F4H	V244
35H	V53	75H	V117	B5H	V181	F5H	V245
36H	V54	76H	V118	B6H	V182	F6H	V246
37H	V55	77H	V119	B7H	V183	F7H	V247
38H	V56	78H	V120	B8H	V184	F8H	V248
39H	V57	79H	V121	B9H	V185	F9H	V249
3AH	V58	7AH	V122	BAH	V186	FAH	V250
3BH	V59	7BH	V123	BBH	V187	FBH	V251
3CH	V60	7CH	V124	BOH	V188	FDH	V252
3DH	V61	7DH	V125	BDH	V189	FEH	V253
3EH	V62	7EH	V126	BEH	V190	FFH	V254
3FH	V63	7FH	V127	BFH	V191		

Figure 5-3. Relationship between Input Data and Output Voltage (2/2)

(Output voltage) $0.5 V_{DD2} \geq V_{10} > V_{11} > V_{12} > V_{13} > V_{14} > V_{15} > V_{16} > V_{17} > V_{18} > V_{19} \geq V_{SS2} + 0.2 V$

Data	Output Voltage		Data	Output Voltage		Data	Output Voltage		Data	Output Voltage					
00H	V0'	V19	40H	V64'	V16+(V15-V16) X	38 / 2083	80H	V128'	V15+(V14-V15) X	29 / 1940	00H	V192'	V14+(V13-V14) X	34 / 1219	
01H	V1"	V18	41H	V65'	V16+(V15-V16) X	76 / 2083	81H	V129'	V15+(V14-V15) X	58 / 1940	01H	V193'	V14+(V13-V14) X	68 / 1219	
02H	V2'	V18+(V17-V18) X	155 / 1475	42H	V66'	V16+(V15-V16) X	113 / 2083	82H	V130'	V15+(V14-V15) X	87 / 1940	02H	V194'	V14+(V13-V14) X	102 / 1219
03H	V3'	V18+(V17-V18) X	297 / 1475	43H	V67'	V16+(V15-V16) X	150 / 2083	83H	V131'	V15+(V14-V15) X	116 / 1940	03H	V195'	V14+(V13-V14) X	137 / 1219
04H	V4'	V18+(V17-V18) X	428 / 1475	44H	V68'	V16+(V15-V16) X	187 / 2083	84H	V132'	V15+(V14-V15) X	145 / 1940	04H	V196'	V14+(V13-V14) X	172 / 1219
05H	V5'	V18+(V17-V18) X	560 / 1475	45H	V69'	V16+(V15-V16) X	224 / 2083	85H	V133'	V15+(V14-V15) X	174 / 1940	05H	V197'	V14+(V13-V14) X	207 / 1219
06H	V6'	V18+(V17-V18) X	694 / 1475	46H	V70'	V16+(V15-V16) X	260 / 2083	86H	V134'	V15+(V14-V15) X	203 / 1940	06H	V198'	V14+(V13-V14) X	242 / 1219
07H	V7'	V18+(V17-V18) X	771 / 1475	47H	V71"	V16+(V15-V16) X	296 / 2083	87H	V135'	V15+(V14-V15) X	232 / 1940	07H	V199'	V14+(V13-V14) X	277 / 1219
08H	V8'	V18+(V17-V18) X	873 / 1475	48H	V72'	V16+(V15-V16) X	332 / 2083	88H	V136'	V15+(V14-V15) X	261 / 1940	08H	V200'	V14+(V13-V14) X	313 / 1219
09H	V9'	V18+(V17-V18) X	970 / 1475	49H	V73'	V16+(V15-V16) X	368 / 2083	89H	V137'	V15+(V14-V15) X	290 / 1940	09H	V201'	V14+(V13-V14) X	349 / 1219
0AH	V10'	V18+(V17-V18) X	1063 / 1475	4AH	V74'	V16+(V15-V16) X	403 / 2083	8AH	V138'	V15+(V14-V15) X	319 / 1940	0AH	V202'	V14+(V13-V14) X	385 / 1219
0BH	V11'	V18+(V17-V18) X	1152 / 1475	4BH	V75'	V16+(V15-V16) X	438 / 2083	8BH	V139'	V15+(V14-V15) X	348 / 1940	0BH	V203'	V14+(V13-V14) X	422 / 1219
0CH	V12'	V18+(V17-V18) X	1237 / 1475	4CH	V76'	V16+(V15-V16) X	473 / 2083	8CH	V140'	V15+(V14-V15) X	377 / 1940	0CH	V204'	V14+(V13-V14) X	459 / 1219
0DH	V13'	V18+(V17-V18) X	1319 / 1475	4DH	V77'	V16+(V15-V16) X	508 / 2083	8DH	V141'	V15+(V14-V15) X	406 / 1940	0DH	V205'	V14+(V13-V14) X	496 / 1219
0EH	V14'	V18+(V17-V18) X	1398 / 1475	4EH	V78'	V16+(V15-V16) X	543 / 2083	8EH	V142'	V15+(V14-V15) X	435 / 1940	0EH	V206'	V14+(V13-V14) X	533 / 1219
0FH	V15'	V17	4FH	V79'	V16+(V15-V16) X	577 / 2083	8FH	V143'	V15+(V14-V15) X	464 / 1940	0FH	V207'	V14+(V13-V14) X	571 / 1219	
10H	V16'	V17+(V16-V17) X	74 / 2419	50H	V80'	V16+(V15-V16) X	611 / 2083	90H	V144'	V15+(V14-V15) X	493 / 1940	00H	V208'	V14+(V13-V14) X	609 / 1219
11H	V17'	V17+(V16-V17) X	146 / 2419	51H	V81"	V16+(V15-V16) X	645 / 2083	91H	V145'	V15+(V14-V15) X	522 / 1940	01H	V209'	V14+(V13-V14) X	647 / 1219
12H	V18'	V17+(V16-V17) X	216 / 2419	52H	V82'	V16+(V15-V16) X	679 / 2083	92H	V146'	V15+(V14-V15) X	551 / 1940	02H	V210'	V14+(V13-V14) X	686 / 1219
13H	V19'	V17+(V16-V17) X	285 / 2419	53H	V83'	V16+(V15-V16) X	713 / 2083	93H	V147'	V15+(V14-V15) X	580 / 1940	03H	V211'	V14+(V13-V14) X	725 / 1219
14H	V20'	V17+(V16-V17) X	352 / 2419	54H	V84'	V16+(V15-V16) X	747 / 2083	94H	V148'	V15+(V14-V15) X	609 / 1940	04H	V212'	V14+(V13-V14) X	764 / 1219
15H	V21'	V17+(V16-V17) X	417 / 2419	55H	V85'	V16+(V15-V16) X	780 / 2083	95H	V149'	V15+(V14-V15) X	638 / 1940	05H	V213'	V14+(V13-V14) X	804 / 1219
16H	V22'	V17+(V16-V17) X	481 / 2419	56H	V86'	V16+(V15-V16) X	813 / 2083	96H	V150'	V15+(V14-V15) X	667 / 1940	06H	V214'	V14+(V13-V14) X	844 / 1219
17H	V23'	V17+(V16-V17) X	543 / 2419	57H	V87'	V16+(V15-V16) X	846 / 2083	97H	V151'	V15+(V14-V15) X	696 / 1940	07H	V215'	V14+(V13-V14) X	884 / 1219
18H	V24'	V17+(V16-V17) X	604 / 2419	58H	V88'	V16+(V15-V16) X	879 / 2083	98H	V152'	V15+(V14-V15) X	725 / 1940	08H	V216'	V14+(V13-V14) X	925 / 1219
19H	V25'	V17+(V16-V17) X	664 / 2419	59H	V89'	V16+(V15-V16) X	912 / 2083	99H	V153'	V15+(V14-V15) X	755 / 1940	09H	V217'	V14+(V13-V14) X	966 / 1219
1AH	V26'	V17+(V16-V17) X	723 / 2419	5AH	V90'	V16+(V15-V16) X	945 / 2083	9AH	V154'	V15+(V14-V15) X	785 / 1940	0AH	V218'	V14+(V13-V14) X	1007 / 1219
1BH	V27'	V17+(V16-V17) X	781 / 2419	5BH	V91'	V16+(V15-V16) X	978 / 2083	9BH	V155'	V15+(V14-V15) X	815 / 1940	0BH	V219'	V14+(V13-V14) X	1049 / 1219
1CH	V28'	V17+(V16-V17) X	838 / 2419	5CH	V92'	V16+(V15-V16) X	1010 / 2083	9CH	V156'	V15+(V14-V15) X	845 / 1940	0CH	V220'	V14+(V13-V14) X	1091 / 1219
1DH	V29'	V17+(V16-V17) X	894 / 2419	5DH	V93'	V16+(V15-V16) X	1042 / 2083	9DH	V157'	V15+(V14-V15) X	875 / 1940	0DH	V221'	V14+(V13-V14) X	1133 / 1219
1EH	V30'	V17+(V16-V17) X	949 / 2419	5EH	V94'	V16+(V15-V16) X	1074 / 2083	9EH	V158'	V15+(V14-V15) X	905 / 1940	0EH	V222'	V14+(V13-V14) X	1176 / 1219
1FH	V31'	V17+(V16-V17) X	1003 / 2419	5FH	V95'	V16+(V15-V16) X	1106 / 2083	9FH	V159'	V15+(V14-V15) X	935 / 1940	0FH	V223'	V13	
20H	V32'	V17+(V16-V17) X	1056 / 2419	60H	V96'	V16+(V15-V16) X	1138 / 2083	90H	V160'	V15+(V14-V15) X	965 / 1940	00H	V224'	V13+(V12-V13) X	43 / 794
21H	V33'	V17+(V16-V17) X	1108 / 2419	61H	V97'	V16+(V15-V16) X	1170 / 2083	91H	V161'	V15+(V14-V15) X	995 / 1940	01H	V225'	V13+(V12-V13) X	87 / 794
22H	V34'	V17+(V16-V17) X	1159 / 2419	62H	V98'	V16+(V15-V16) X	1202 / 2083	92H	V162'	V15+(V14-V15) X	1025 / 1940	02H	V226'	V13+(V12-V13) X	131 / 794
23H	V35'	V17+(V16-V17) X	1210 / 2419	63H	V99'	V16+(V15-V16) X	1234 / 2083	93H	V163'	V15+(V14-V15) X	1055 / 1940	03H	V227'	V13+(V12-V13) X	175 / 794
24H	V36'	V17+(V16-V17) X	1260 / 2419	64H	V100'	V16+(V15-V16) X	1265 / 2083	94H	V164'	V15+(V14-V15) X	1085 / 1940	04H	V228'	V13+(V12-V13) X	220 / 794
25H	V37'	V17+(V16-V17) X	1309 / 2419	65H	V101'	V16+(V15-V16) X	1296 / 2083	95H	V165'	V15+(V14-V15) X	1115 / 1940	05H	V229'	V13+(V12-V13) X	265 / 794
26H	V38'	V17+(V16-V17) X	1358 / 2419	66H	V102'	V16+(V15-V16) X	1327 / 2083	96H	V166'	V15+(V14-V15) X	1145 / 1940	06H	V230'	V13+(V12-V13) X	311 / 794
27H	V39'	V17+(V16-V17) X	1406 / 2419	67H	V103'	V16+(V15-V16) X	1358 / 2083	97H	V167'	V15+(V14-V15) X	1175 / 1940	07H	V231'	V13+(V12-V13) X	357 / 794
28H	V40'	V17+(V16-V17) X	1453 / 2419	68H	V104'	V16+(V15-V16) X	1389 / 2083	98H	V168'	V15+(V14-V15) X	1205 / 1940	08H	V232'	V13+(V12-V13) X	403 / 794
29H	V41'	V17+(V16-V17) X	1500 / 2419	69H	V105'	V16+(V15-V16) X	1420 / 2083	99H	V169'	V15+(V14-V15) X	1235 / 1940	09H	V233'	V13+(V12-V13) X	450 / 794
2AH	V42'	V17+(V16-V17) X	1546 / 2419	6AH	V106'	V16+(V15-V16) X	1451 / 2083	9AH	V170'	V15+(V14-V15) X	1267 / 1940	0AH	V234'	V13+(V12-V13) X	497 / 794
2BH	V43'	V17+(V16-V17) X	1592 / 2419	6BH	V107'	V16+(V15-V16) X	1482 / 2083	9BH	V171'	V15+(V14-V15) X	1298 / 1940	0BH	V235'	V13+(V12-V13) X	545 / 794
2CH	V44'	V17+(V16-V17) X	1637 / 2419	6CH	V108'	V16+(V15-V16) X	1513 / 2083	9CH	V172'	V15+(V14-V15) X	1329 / 1940	0CH	V236'	V13+(V12-V13) X	593 / 794
2DH	V45'	V17+(V16-V17) X	1682 / 2419	6DH	V109'	V16+(V15-V16) X	1544 / 2083	9DH	V173'	V15+(V14-V15) X	1360 / 1940	0DH	V237'	V13+(V12-V13) X	642 / 794
2EH	V46'	V17+(V16-V17) X	1726 / 2419	6EH	V110'	V16+(V15-V16) X	1574 / 2083	9EH	V174'	V15+(V14-V15) X	1391 / 1940	0EH	V238'	V13+(V12-V13) X	692 / 794
2FH	V47'	V17+(V16-V17) X	1770 / 2419	6FH	V111'	V16+(V15-V16) X	1604 / 2083	9FH	V175'	V15+(V14-V15) X	1422 / 1940	0FH	V239'	V13+(V12-V13) X	742 / 794
30H	V48'	V17+(V16-V17) X	1813 / 2419	70H	V112'	V16+(V15-V16) X	1634 / 2083	90H	V176'	V15+(V14-V15) X	1453 / 1940	00H	V240'	V12	
31H	V49'	V17+(V16-V17) X	1856 / 2419	71H	V113'	V16+(V15-V16) X	1664 / 2083	91H	V177'	V15+(V14-V15) X	1484 / 1940	01H	V241'	V12+(V11-V12) X	53 / 1373
32H	V50'	V17+(V16-V17) X	1899 / 2419	72H	V114'	V16+(V15-V16) X	1694 / 2083	92H	V178'	V15+(V14-V15) X	1516 / 1940	02H	V242'	V12+(V11-V12) X	108 / 1373
33H	V51'	V17+(V16-V17) X	1941 / 2419	73H	V115'	V16+(V15-V16) X	1724 / 2083	93H	V179'	V15+(V14-V15) X	1548 / 1940	03H	V243'	V12+(V11-V12) X	165 / 1373
34H	V52'	V17+(V16-V17) X	1983 / 2419	74H	V116'	V16+(V15-V16) X	1754 / 2083	94H	V180'	V15+(V14-V15) X	1580 / 1940	04H	V244'	V12+(V11-V12) X	224 / 1373
35H	V53'	V17+(V16-V17) X	2024 / 2419	75H	V117'	V16+(V15-V16) X	1784 / 2083	95H	V181'	V15+(V14-V15) X	1612 / 1940	05H	V245'	V12+(V11-V12) X	286 / 1373
36H	V54'	V17+(V16-V17) X	2065 / 2419	76H	V118'	V16+(V15-V16) X	1814 / 2083	96H	V182'	V15+(V14-V15) X	1644 / 1940	06H	V246'	V12+(V11-V12) X	352 / 1373
37H	V55'	V17+(V16-V17) X	2105 / 2419	77H	V119'	V16+(V15-V16) X	1844 / 2083	97H	V183'	V15+(V14-V15) X	1676 / 1940	07H	V247'	V12+(V11-V12) X	423 / 1373
38H	V56'	V17+(V16-V17) X	2146 / 2419	78H	V120'	V16+(V15-V16) X	1874 / 2083	98H	V184'	V15+(V14-V15) X	1708 / 1940	08H	V248'	V12+(V11-V12) X	501 / 1373
39H	V57'	V17+(V16													


6. FUNCTION DESCRIPTION

6.1 Input Data Mapping

Display data and control data (RST) are input to D_{0(+/-)} to D_{3(+/-)}.

Data mapping is changed in response to the mode, and the mode is changed by STB.

<Data Input Mode>

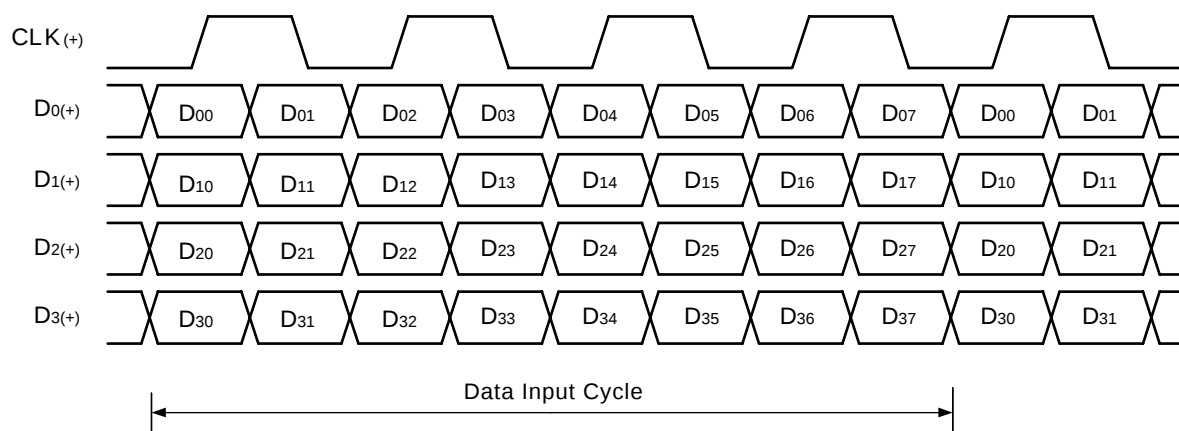

6.2 Composition of Display Data

MSB				LSB			
Dn7	Dn6	Dn5	Dn4	Dn3	Dn2	Dn1	Dn0

Remark n = 0 to 3

6.3 Relation between Display Data and Output Number

This relationship is irrespective of R,/L condition.

(1) In case of 384 channel output

(a) Right shift (R,/L = H)

Output	S ₁	S ₂	S ₃	→	S ₃₈₂	S ₃₈₃	S ₃₈₄
Display Data	D ₀₀ to D ₀₇	D ₁₀ to D ₁₇	D ₂₀ to D ₂₇	→	D ₁₀ to D ₁₇	D ₂₀ to D ₂₇	D ₃₀ to D ₃₇

(b) Left shift (R,/L = L)

Output	S ₃₈₄	S ₃₈₃	S ₃₈₂	→	S ₃	S ₂	S ₁
Display Data	D ₃₀ to D ₃₇	D ₂₀ to D ₂₇	D ₁₀ to D ₁₇	→	D ₂₀ to D ₂₇	D ₁₀ to D ₁₇	D ₀₀ to D ₀₇

(2) In case of 360 channel output

(a) Right shift (R,/L = H)

Output	S ₁	S ₂	S ₃	→	S ₁₈₀	S ₁₈₁ to S ₂₀₄	S ₂₀₅	→	S ₃₈₂	S ₃₈₃	S ₃₈₄
Display Data	D ₀₀ to D ₀₇	D ₁₀ to D ₁₇	D ₂₀ to D ₂₇	→	D ₃₀ to D ₃₇	NA	D ₀₀ to D ₀₇	→	D ₁₀ to D ₁₇	D ₂₀ to D ₂₇	D ₃₀ to D ₃₇

Remark NA: Non-assign

(b) Left shift (R,/L = L)

Output	S ₃₈₄	S ₃₈₃	S ₃₈₂	→	S ₂₀₅	S ₂₀₄ to S ₁₈₁	S ₁₈₀	→	S ₃	S ₂	S ₁
Display Data	D ₃₀ to D ₃₇	D ₂₀ to D ₂₇	D ₁₀ to D ₁₇	→	D ₀₀ to D ₀₇	NA	D ₃₀ to D ₃₇	→	D ₂₀ to D ₂₇	D ₁₀ to D ₁₇	D ₀₀ to D ₀₇

Remark NA: Non-assign

6.4 Cascade


Multiple chips can be used in a cascade connection.

- Input STHR(L) pad at lead (head) chip is fixed to H.
- Input STHR(L) after secondary chips are connected from output STHR(L) at foregoing chip.
- Output STHR(L) of final stage driver IC can support current load up to ±1.0 mA (MAX.) by using pull-up or pull-down resistor.

6.5 Taking in the Display Data

- (1) The lead (head) chip is set to control signal input mode (so called control mode), and the receivers at $D_{0(+/-)}$ and $CLK_{(+/-)}$ of all chips are activated by rising edge of STB.
- (2) Input the reset (RST) signal as L to $D_{0(+/-)}$. This RST should be kept over 200 ns after rising of STB.
- (3) RST as H is input to $D_{0(+/-)}$ and H width should be over 50 ns and also over 3 CLK cycles.
- (4) Input the RST as L to $D_{0(+/-)}$ and then changed to the data input mode function.
By the way, input STB again when a second RST is necessary.
- (5) Data sampling starts at the rising edge of CLK after reading of "RST = L".
- (6) At the same time data sampling starts, internal counter starts counting the data cycle for $STHR(L)$ signal generation.
- (7) After data sampling is finished, the receivers turn OFF.
- (8) After the receivers turn OFF, keep the timing for more than 5 CLK cycles until STB is applied.
- (9) Figure 6–1 shows the rough timing chart from application of STB to the start of data sampling.

Figure 6–1 Timing from Start to Sampling (reference)

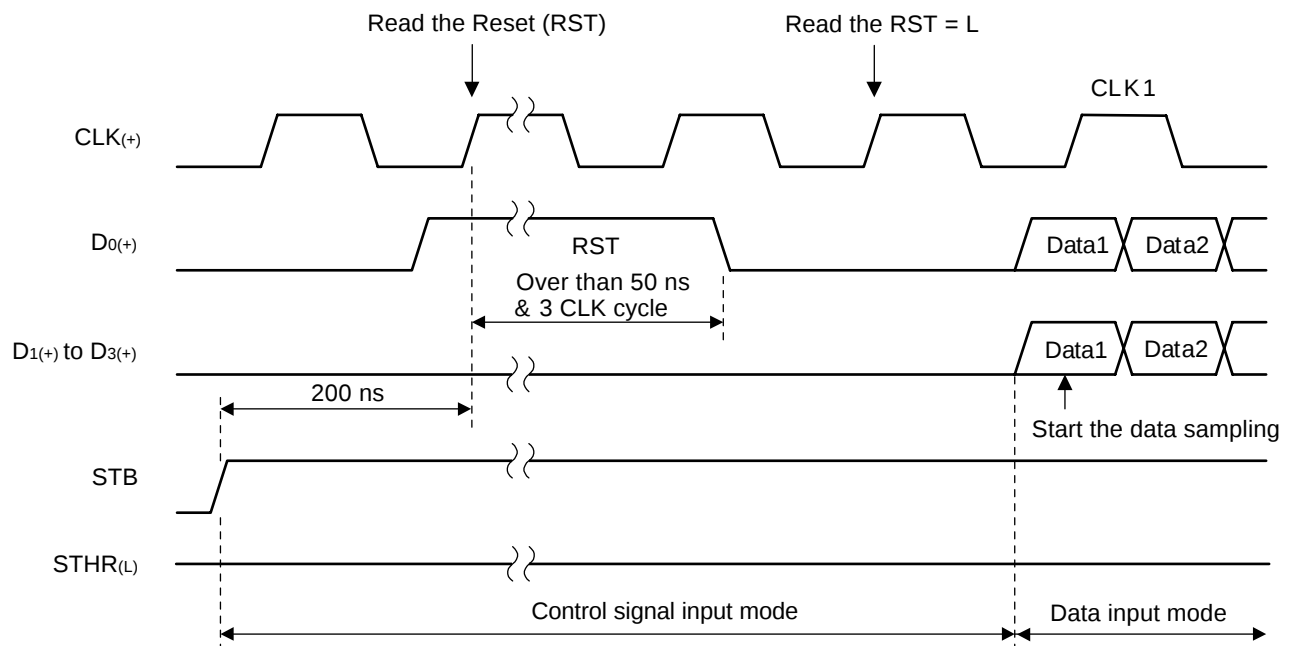

7. ELECTRICAL SPECIFICATIONS

Absolute Maximum Ratings ($T_A = 25^\circ\text{C}$, $V_{SS1} = V_{SS2} = 0\text{ V}$)

Parameter	Symbol	Ratings	Unit
Logic power supply voltage	V_{DD1}	-0.5 to +4.0	V
Driver power supply voltage	V_{DD2}	-0.5 to +18.0	V
Logic input voltage	V_{I1}	-0.5 to $V_{DD1} + 0.5$	V
Logic output voltage	V_{O1}	-0.5 to $V_{DD1} + 0.5$	V
Logic output current	I_O	± 1.0	mA
Driver input voltage	V_{I2}	-0.5 to $V_{DD2} + 0.5$	V
Driver output voltage	V_{O2}	-0.5 to $V_{DD2} + 0.5$	V
Operating ambient temperature	T_A	-10 to +90	$^\circ\text{C}$
Storage temperature	T_{stg}	-55 to +125	$^\circ\text{C}$

Caution Product quality may suffer if the absolute maximum rating is exceeded even momentarily for any parameter. That is, the absolute maximum ratings are rated values at which the product is on the verge of suffering physical damage, and therefore the product must be used under conditions that ensure that the absolute maximum ratings are not exceeded.

Recommended Operating Range ($T_A = -10$ to $+90^\circ\text{C}$, $V_{SS1} = V_{SS2} = 0\text{ V}$)

Parameter	Symbol	Condition	MIN.	TYP.	MAX.	Unit
Logic power supply voltage	V_{DD1}		2.7	3.0	3.6	V
Driver power supply voltage	V_{DD2}		10.0	15.4	16.5	V
CMOS high-level input voltage	V_{IH}	STHR(L), R,/L, STB,	$0.7 V_{DD1}$		V_{DD1}	V
CMOS low-level input voltage	V_{IL}	SB, POL, O _{sel} , RxBIAS1, RxBIAS2, SRC, ORC, V _{sel1} , V _{sel2}	0		$0.3 V_{DD1}$	V
mini-LVDS input voltage (Center)	V_I	$V_{DD1} = 3.0\text{ V}$, $V_{ID} = 200\text{ mV}$	$0.3 + (V_{ID}/2)$		$(V_{DD1} - 1.2) - (V_{ID}/2)$	V
mini-LVDS differential voltage range (Amplitude: peak to peak)	V_{ID}	$V_{DD1} = 3.0\text{ V}$, $V_I = 1.7\text{ V}$	200		600	mV
γ -corrected voltage	$V_0 - V_9$		$0.5 V_{DD2}$		$V_{DD2} - 0.2$	V
	$V_{10} - V_{19}$		0.2		$0.5 V_{DD2}$	V
Driver output voltage	V_{OUT}		0.2		$V_{DD2} - 0.2$	V
Clock frequency	f_{CLK}	CLKA, CLKB, $T_A = 25^\circ\text{C}$, $V_{DD1} = 3.0\text{ V}$, $V_{ID} = 200\text{ mV}$, $V_I = 1.7\text{ V}$		159	190	MHz

Electrical Characteristics (T_A = 25 °C, V_{DD1} = 3.0 V, V_{DD2} = 13.0 V, V_{SS1} = V_{SS2} = 0 V)


Parameter	Symbol	Condition	MIN.	TYP.	MAX.	Unit
Input leakage current	I _{IL}	STHR(L), R./L, STB, SB, POL, O _{sel} , RxBIAS1, RxBIAS2, SRC, ORC, V _{sel1} , V _{sel2} , CLKA, CLKB, D0A, D0B to D3A, D3B			± 1.0	μA
γ-corrected resistor value	R _γ	V ₀ -V ₉ = V ₁₀ -V ₁₉	7.8	12.0	16.3	kΩ
Driver output current	I _{VOH}	V _X = V _{DD2} - 0.2 V, V _{OUT} = V _X - 1.0 V ^{Note1} , low output resistance mode (ORC = H)		- 334	- 200	μA
	I _{VOL}	V _X = V _{SS2} + 0.2 V, V _{OUT} = V _X + 1.0 V ^{Note1} , low output resistance mode (ORC = H)	360	527		μA
Output swing voltage difference deviation ^{Note2}	ΔV _{P-P 1}	Input: 00H to 3FH		± 10	± 20	mV
	ΔV _{P-P 2}	Input: 40H to 7FH, 80H to BFH		± 7	± 15	mV
	ΔV _{P-P 3}	Input: C0H to FFH		± 4	± 10	mV
Output swing voltage average deviation ^{Note3}	AV _O	Input: 3FH, 7FH, BFH		± 16	± 20	mV
Logic dynamic current consumption	I _{DD11}	Checked, f _{STB} = 100 kHz (PW = 500 ns), f _{CLK} = 159 MHz, V _{DD1} = 3.6 V			7.50	mA
Logic static current consumption	I _{DD12}	No CLK & Input, V _{DD1} = 3.6 V			4.50	mA
Driver dynamic current consumption	I _{DD21}	Raster pattern, V _{DD2} = 16.5 V, f _{STB} = 100 kHz (PW = 500 ns), with no load			30.0	mA
Driver static current consumption	I _{DD22}	Raster pattern, V _{DD2} = 16.5 V, Input: FFH, with no load			30.0	mA

- ★ **Notes1.** V_X refers to the output voltage of analog output pins S₁ to S₃₈₄.
V_{OUT} refers to the voltage applied to analog output pins S₁ to S₃₈₄.
- Amplitude offset when all of output ports out same data.
 - Deviation of averaged amplitude offset value between chips.

Switching Characteristics ($T_A = 25\text{ }^{\circ}\text{C}$, $V_{DD1} = 3.0\text{ V}$, $V_{DD2} = 13.0\text{ V}$, $V_{SS1} = V_{SS2} = 0\text{ V}$)

Parameter	Symbol	Condition	MIN.	TYP.	MAX.	Unit
Start pulse delay time	t_1	$C_L = 50\text{ pF}$	6	15	22	ns
Driver output delay time	t_2	$R_L = 7\text{ k}\Omega$, $C_L = 65\text{ pF}$		2.1	2.5	μs
	t_3	Refer to <Test Condition >		3.9	5.0	μs
	t_4			1.3	2.5	μs
	t_5			3.4	5.0	μs
Input capacitance	C_{i1}	CMOS interface, STHR(L)		10	15	pF
	C_{i2}	mini-LVDS interface, Except STHR(L), V ₀ -V ₁₉		5	10	pF

<Test Condition>

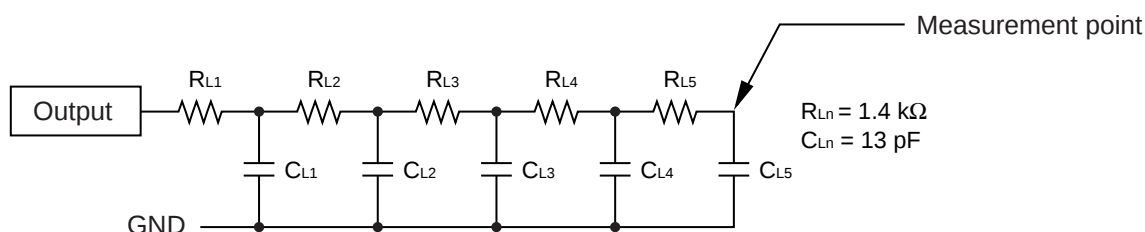

Timing Requirements ($T_A = 25\text{ }^{\circ}\text{C}$, $V_{DD1} = 3.0\text{ V}$, $V_{SS1} = 0\text{ V}$, $t_r = t_f = 0.5\text{ ns}$)

Parameter	Symbol	Condition	MIN.	TYP.	MAX.	Unit
Clock pulse width	t_6		5.2	6.2		ns
Clock pulse high period	t_7		2.1	2.6		ns
Clock pulse low period	t_8		2.1	2.6		ns
Data setup time	t_9		1.0			ns
Data hold time	t_{10}		1.0			ns
Start pulse setup time	t_{11}		0			ns
STB pulse width	t_{13}		200			ns
POL setup time	t_{14}		-5.0			ns
RST high period	t_{16}		50.0			ns
			3			CLK
Receiver OFF to STB timing	t_{17}		5			CLK
STB to RST input time	t_{18}		200			ns


Remark Unless otherwise specified, V_{IH} and V_{IL} of the CMOS signals are defined as $V_{IH} = 0.7 V_{DD1}$, $V_{IL} = 0.3 V_{DD1}$.

Switching Characteristic Waveform (R_L/L = H)

Unless otherwise specified, V_{IH} and V_{IL} of the CMOS signals are defined as V_{IH} = 0.7 V_{DD1}, V_{IL} = 0.3 V_{DD1}.

Also, unless otherwise specified, V_{IH} and V_{IL} of the mini-LVDS signals are defined as V_{IH} = V_{IL} = V_I (Center of V_{ID}).

(Clock and display data numbers are examples when W-SXGA+ is used.)

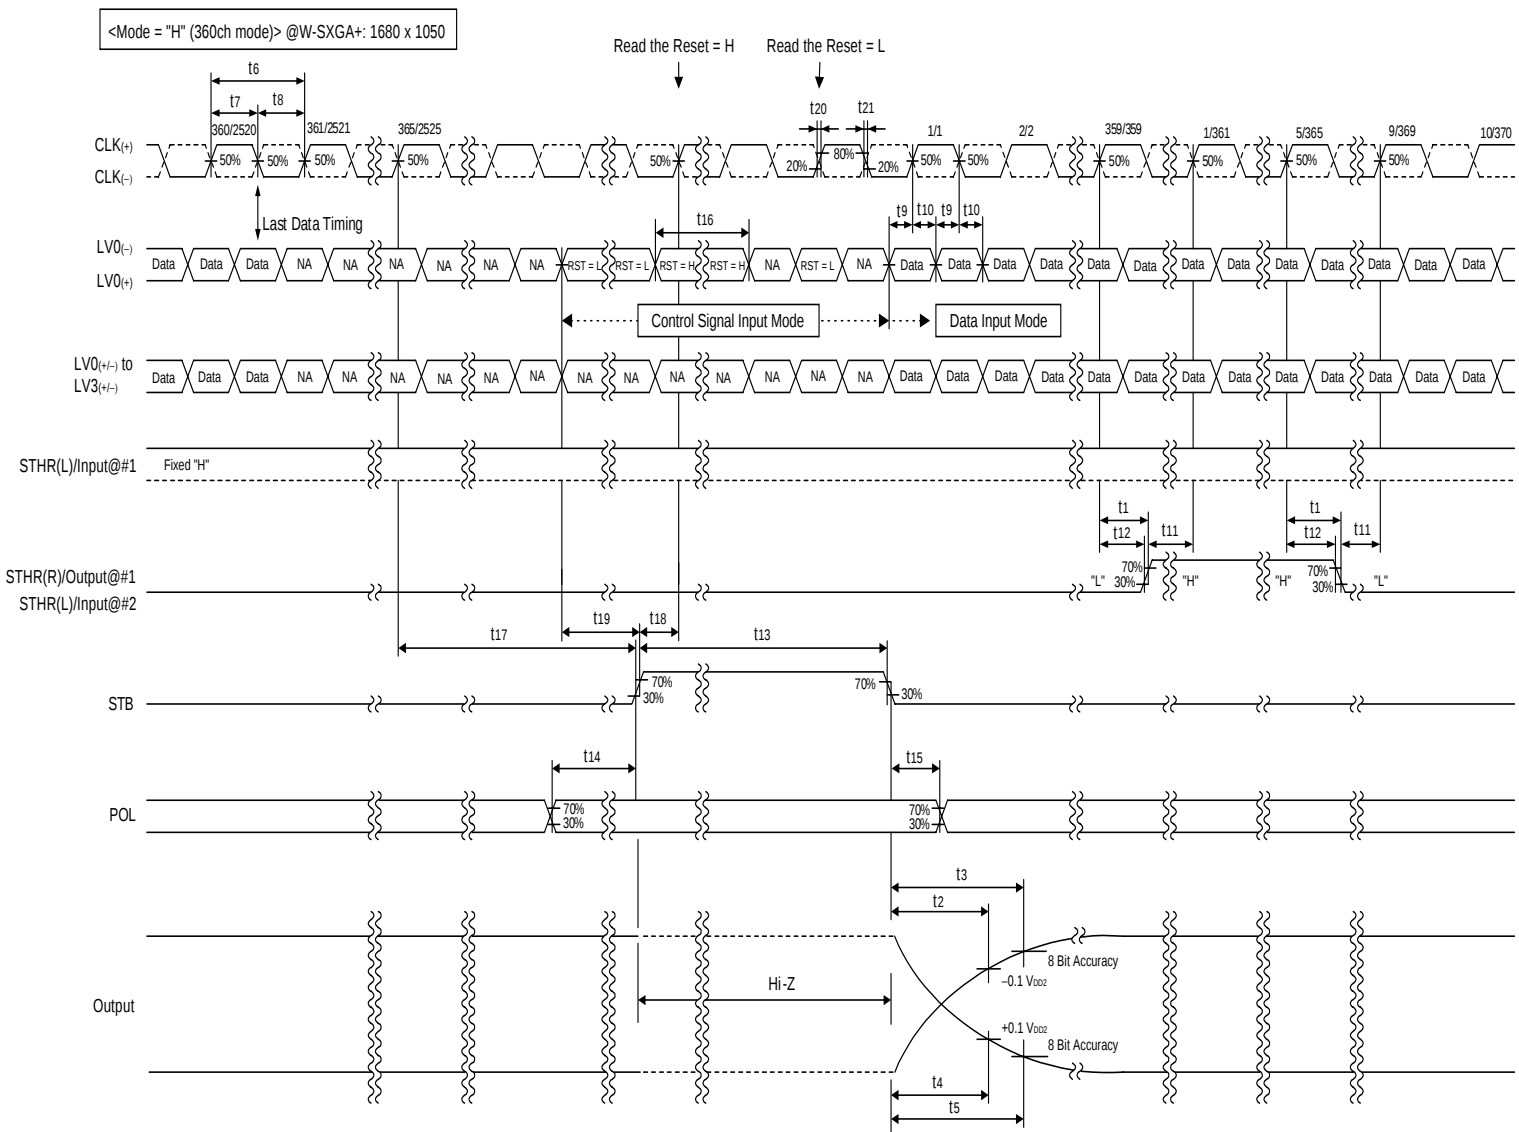

★ 8. RECOMMENDED MOUNTING CONDITIONS

The following conditions must be met for mounting conditions of the μPD160010.

For more details, refer to the

[Semiconductor Device Mount Manual] (<http://www.necel.com/pkg/en/mount/index.html>)

Please consult with our sales offices in case other mounting process is used, or in case the mounting is done under different conditions.

μPD160010N-xxx: TCP (TAB Package)

Mounting Condition	Mounting Method	Condition
Thermocompression	Soldering	Heating tool 300 to 350°C, heating for 2 to 3 sec, pressure 100g (per solder).
	ACF (Adhesive Conductive Film)	Temporary bonding 70 to 100°C, pressure 3 to 8 kg/cm ² , time 3 to 5 sec. Real bonding 165 to 180°C pressure 25 to 45 kg/cm ² , time 30 to 40 sec. (When using the anisotropy conductive film SUMIZAC1003 of Sumitomo Bakelite, Ltd.)

Caution To find out the detailed conditions for mounting the ACF part, please contact the ACF manufacturing company. Be sure to avoid using two or more mounting methods at a time.

NOTES FOR CMOS DEVICES

① **VOLTAGE APPLICATION WAVEFORM AT INPUT PIN**

Waveform distortion due to input noise or a reflected wave may cause malfunction. If the input of the CMOS device stays in the area between V_{IL} (MAX) and V_{IH} (MIN) due to noise, etc., the device may malfunction. Take care to prevent chattering noise from entering the device when the input level is fixed, and also in the transition period when the input level passes through the area between V_{IL} (MAX) and V_{IH} (MIN).

② **HANDLING OF UNUSED INPUT PINS**

Unconnected CMOS device inputs can be cause of malfunction. If an input pin is unconnected, it is possible that an internal input level may be generated due to noise, etc., causing malfunction. CMOS devices behave differently than Bipolar or NMOS devices. Input levels of CMOS devices must be fixed high or low by using pull-up or pull-down circuitry. Each unused pin should be connected to V_{DD} or GND via a resistor if there is a possibility that it will be an output pin. All handling related to unused pins must be judged separately for each device and according to related specifications governing the device.

③ **PRECAUTION AGAINST ESD**

A strong electric field, when exposed to a MOS device, can cause destruction of the gate oxide and ultimately degrade the device operation. Steps must be taken to stop generation of static electricity as much as possible, and quickly dissipate it when it has occurred. Environmental control must be adequate. When it is dry, a humidifier should be used. It is recommended to avoid using insulators that easily build up static electricity. Semiconductor devices must be stored and transported in an anti-static container, static shielding bag or conductive material. All test and measurement tools including work benches and floors should be grounded. The operator should be grounded using a wrist strap. Semiconductor devices must not be touched with bare hands. Similar precautions need to be taken for PW boards with mounted semiconductor devices.

④ **STATUS BEFORE INITIALIZATION**

Power-on does not necessarily define the initial status of a MOS device. Immediately after the power source is turned ON, devices with reset functions have not yet been initialized. Hence, power-on does not guarantee output pin levels, I/O settings or contents of registers. A device is not initialized until the reset signal is received. A reset operation must be executed immediately after power-on for devices with reset functions.

Reference Documents

NEC Semiconductor Device Reliability/Quality Control System (C10983E)

Quality Grades On NEC Semiconductor Devices (C11531E)

- The information in this document is current as of March 2004. The information is subject to change without notice. For actual design-in, refer to the latest publications of NEC Electronics data sheets or data books, etc., for the most up-to-date specifications of NEC Electronics products. Not all products and/or types are available in every country. Please check with an NEC Electronics sales representative for availability and additional information.
- No part of this document may be copied or reproduced in any form or by any means without the prior written consent of NEC Electronics. NEC Electronics assumes no responsibility for any errors that may appear in this document.
- NEC Electronics does not assume any liability for infringement of patents, copyrights or other intellectual property rights of third parties by or arising from the use of NEC Electronics products listed in this document or any other liability arising from the use of such products. No license, express, implied or otherwise, is granted under any patents, copyrights or other intellectual property rights of NEC Electronics or others.
- Descriptions of circuits, software and other related information in this document are provided for illustrative purposes in semiconductor product operation and application examples. The incorporation of these circuits, software and information in the design of a customer's equipment shall be done under the full responsibility of the customer. NEC Electronics assumes no responsibility for any losses incurred by customers or third parties arising from the use of these circuits, software and information.
- While NEC Electronics endeavors to enhance the quality, reliability and safety of NEC Electronics products, customers agree and acknowledge that the possibility of defects thereof cannot be eliminated entirely. To minimize risks of damage to property or injury (including death) to persons arising from defects in NEC Electronics products, customers must incorporate sufficient safety measures in their design, such as redundancy, fire-containment and anti-failure features.
- NEC Electronics products are classified into the following three quality grades: "Standard", "Special" and "Specific".

The "Specific" quality grade applies only to NEC Electronics products developed based on a customer-designated "quality assurance program" for a specific application. The recommended applications of an NEC Electronics product depend on its quality grade, as indicated below. Customers must check the quality grade of each NEC Electronics product before using it in a particular application.

"Standard": Computers, office equipment, communications equipment, test and measurement equipment, audio and visual equipment, home electronic appliances, machine tools, personal electronic equipment and industrial robots.

"Special": Transportation equipment (automobiles, trains, ships, etc.), traffic control systems, anti-disaster systems, anti-crime systems, safety equipment and medical equipment (not specifically designed for life support).

"Specific": Aircraft, aerospace equipment, submersible repeaters, nuclear reactor control systems, life support systems and medical equipment for life support, etc.

The quality grade of NEC Electronics products is "Standard" unless otherwise expressly specified in NEC Electronics data sheets or data books, etc. If customers wish to use NEC Electronics products in applications not intended by NEC Electronics, they must contact an NEC Electronics sales representative in advance to determine NEC Electronics' willingness to support a given application.

(Note)

- (1) "NEC Electronics" as used in this statement means NEC Electronics Corporation and also includes its majority-owned subsidiaries.
- (2) "NEC Electronics products" means any product developed or manufactured by or for NEC Electronics (as defined above).