

To our customers,

Old Company Name in Catalogs and Other Documents

On April 1st, 2010, NEC Electronics Corporation merged with Renesas Technology Corporation, and Renesas Electronics Corporation took over all the business of both companies. Therefore, although the old company name remains in this document, it is a valid Renesas Electronics document. We appreciate your understanding.

Renesas Electronics website: <http://www.renesas.com>

April 1st, 2010
Renesas Electronics Corporation

Issued by: Renesas Electronics Corporation (<http://www.renesas.com>)

Send any inquiries to <http://www.renesas.com/inquiry>.

Notice

1. All information included in this document is current as of the date this document is issued. Such information, however, is subject to change without any prior notice. Before purchasing or using any Renesas Electronics products listed herein, please confirm the latest product information with a Renesas Electronics sales office. Also, please pay regular and careful attention to additional and different information to be disclosed by Renesas Electronics such as that disclosed through our website.
2. Renesas Electronics does not assume any liability for infringement of patents, copyrights, or other intellectual property rights of third parties by or arising from the use of Renesas Electronics products or technical information described in this document. No license, express, implied or otherwise, is granted hereby under any patents, copyrights or other intellectual property rights of Renesas Electronics or others.
3. You should not alter, modify, copy, or otherwise misappropriate any Renesas Electronics product, whether in whole or in part.
4. Descriptions of circuits, software and other related information in this document are provided only to illustrate the operation of semiconductor products and application examples. You are fully responsible for the incorporation of these circuits, software, and information in the design of your equipment. Renesas Electronics assumes no responsibility for any losses incurred by you or third parties arising from the use of these circuits, software, or information.
5. When exporting the products or technology described in this document, you should comply with the applicable export control laws and regulations and follow the procedures required by such laws and regulations. You should not use Renesas Electronics products or the technology described in this document for any purpose relating to military applications or use by the military, including but not limited to the development of weapons of mass destruction. Renesas Electronics products and technology may not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable domestic or foreign laws or regulations.
6. Renesas Electronics has used reasonable care in preparing the information included in this document, but Renesas Electronics does not warrant that such information is error free. Renesas Electronics assumes no liability whatsoever for any damages incurred by you resulting from errors in or omissions from the information included herein.
7. Renesas Electronics products are classified according to the following three quality grades: “Standard”, “High Quality”, and “Specific”. The recommended applications for each Renesas Electronics product depends on the product’s quality grade, as indicated below. You must check the quality grade of each Renesas Electronics product before using it in a particular application. You may not use any Renesas Electronics product for any application categorized as “Specific” without the prior written consent of Renesas Electronics. Further, you may not use any Renesas Electronics product for any application for which it is not intended without the prior written consent of Renesas Electronics. Renesas Electronics shall not be in any way liable for any damages or losses incurred by you or third parties arising from the use of any Renesas Electronics product for an application categorized as “Specific” or for which the product is not intended where you have failed to obtain the prior written consent of Renesas Electronics. The quality grade of each Renesas Electronics product is “Standard” unless otherwise expressly specified in a Renesas Electronics data sheets or data books, etc.
 - “Standard”: Computers; office equipment; communications equipment; test and measurement equipment; audio and visual equipment; home electronic appliances; machine tools; personal electronic equipment; and industrial robots.
 - “High Quality”: Transportation equipment (automobiles, trains, ships, etc.); traffic control systems; anti-disaster systems; anti-crime systems; safety equipment; and medical equipment not specifically designed for life support.
 - “Specific”: Aircraft; aerospace equipment; submersible repeaters; nuclear reactor control systems; medical equipment or systems for life support (e.g. artificial life support devices or systems), surgical implantations, or healthcare intervention (e.g. excision, etc.), and any other applications or purposes that pose a direct threat to human life.
8. You should use the Renesas Electronics products described in this document within the range specified by Renesas Electronics, especially with respect to the maximum rating, operating supply voltage range, movement power voltage range, heat radiation characteristics, installation and other product characteristics. Renesas Electronics shall have no liability for malfunctions or damages arising out of the use of Renesas Electronics products beyond such specified ranges.
9. Although Renesas Electronics endeavors to improve the quality and reliability of its products, semiconductor products have specific characteristics such as the occurrence of failure at a certain rate and malfunctions under certain use conditions. Further, Renesas Electronics products are not subject to radiation resistance design. Please be sure to implement safety measures to guard them against the possibility of physical injury, and injury or damage caused by fire in the event of the failure of a Renesas Electronics product, such as safety design for hardware and software including but not limited to redundancy, fire control and malfunction prevention, appropriate treatment for aging degradation or any other appropriate measures. Because the evaluation of microcomputer software alone is very difficult, please evaluate the safety of the final products or system manufactured by you.
10. Please contact a Renesas Electronics sales office for details as to environmental matters such as the environmental compatibility of each Renesas Electronics product. Please use Renesas Electronics products in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive. Renesas Electronics assumes no liability for damages or losses occurring as a result of your noncompliance with applicable laws and regulations.
11. This document may not be reproduced or duplicated, in any form, in whole or in part, without prior written consent of Renesas Electronics.
12. Please contact a Renesas Electronics sales office if you have any questions regarding the information contained in this document or Renesas Electronics products, or if you have any other inquiries.

(Note 1) “Renesas Electronics” as used in this document means Renesas Electronics Corporation and also includes its majority-owned subsidiaries.

(Note 2) “Renesas Electronics product(s)” means any product developed or manufactured by or for Renesas Electronics.

Phase-out/Discontinued

**EP-750068CU-R,
EP-750068GT-R**

EMULATION PROBE

The export of this product from Japan is prohibited without governmental license. To export or re-export this product from a country other than Japan may also be prohibited without a license from that country. Please call an NEC sales representative.

The information in this document is subject to change without notice.

No part of this document may be copied or reproduced in any form or by any means without the prior written consent of NEC Corporation. NEC Corporation assumes no responsibility for any errors which may appear in this document.

NEC Corporation does not assume any liability for infringement of patents, copyrights or other intellectual property rights of third parties by or arising from use of a device described herein or any other liability arising from use of such device. No license, either express, implied or otherwise, is granted under any patents, copyrights or other intellectual property rights of NEC Corporation or of others.

Phase-out/Discontinued

[MEMO]

PREFACE

Intended Readership

This manual is intended for use by users performing debugging on the μ PD750068 subseries using the IE-75001-R + IE-75300-R-EM and EP-750068CU-R/EP-750068GT-R.

Remark The IE-75001-R is a product equivalent to the IE-75000-R (maintenance product) with the IE-75000-R-EM removed. The IE-75000-R can be substituted for the IE-75001-R. In this case, replace the IE-75000-R-EM incorporated in the IE-75000-R with the IE-75300-R-EM.

Purpose

This manual provides an understanding of the method for connecting the EP-750068CU-R/EP-750068GT-R to the IE-75001-R + IE-75300-R-EM and methods for setting mask options.

Organization

The contents of this manual can be roughly divided under the following general headings.

- General description
- Methods for connecting this product
- Methods for setting mask options

Using this Manual

Before reading this manual, be sure to read the manual for the IE-75001-R or IE-75300-R-EM and get a thorough understanding of the configuration and functions of the debugging system.

Unless there are any particular differences, the EP-750068CU-R is described in this manual as a representative product. When using this as the EP-750068GT-R manual, "EP-750068CU-R" should be read as "EP-750068GT-R".

When using the IE-75000-R as an in-circuit emulator, "IE-75001-R" should be read as "IE-75000-R". Unless otherwise specified, "IE-75001-R" means "IE-75001-R + IE-75300-R-EM".

- When desiring to understand general **EP-750068CU-R** or **EP-750068GT-R** functions and connection methods:
 - Read this manual in the order of the table of contents.
- When desiring to understand the operating environment, configuration and object devices:
 - Read **CHAPTER 1 GENERAL DESCRIPTION**.
- When desiring to understand the connection method in detail:
 - Read **CHAPTER 2 CONNECTIONS**.
- When desiring to understand the mask option setting method:
 - Read **CHAPTER 3 SETTING MASK OPTIONS**.

Legend

- Note : Explains important points in the text.
Caution : Contains important information that is of special importance.
Remark : Provides supplementary explanations.

Related Documents

- IE-75000-R/IE-75001-R User's Manual (Document No.: EEU-1416)
- IE-75300-R-EM User's Manual (Document No.: EEU-1493)

Confirmation of Package Contents

The following items are included in the EP-750068CU-R/EP-750068GT-R packing box. Check the items carefully. If any item is missing or damaged, be sure to contact an NEC sales representative or an authorized dealer.

- | | |
|--|---|
| • Emulation Probe | 1 |
| • Adaptor Board | 1 |
| • User's Manual (This Manual) | 1 |
| • Spacer (with 2 screws) Note 1 | 1 |
| • Installation Screws Note 2 | 2 |
| • Conversion socket Note 3 (provided with EP-750068CU-R) | 1 |
| • Flexible board Note 3 (provided with EP-750068GT-R: EV-9500GT-42) | 2 |

- Notes** 1. Used to connect the adaptor board and the IE-75000-R-EM.
2. Used to connect the emulation probe and the IE-75001-R.
3. Used to connect the emulation probe and the target system.

CONTENTS

CHAPTER 1 GENERAL DESCRIPTION	1
1.1 Operating Environment.....	1
1.2 Configuration	2
1.3 Target Devices	5
 CHAPTER 2 CONNECTIONS	 7
2.1 Connection of the IE-75001-R and the Target System	7
2.2 Power ON and OFF Sequence	14
2.3 Removing Emulation Probe from the Target System	15
 CHAPTER 3 SETTING MASK OPTIONS	 17
3.1 Setting the Ports 4 and 5 Mask Option	17
 APPENDIX EMULATION PROBE PIN CORRESPONDENCE TABLE	 19

[MEMO]


CHAPTER 1 GENERAL DESCRIPTION

This chapter gives an outline of the EP-750068CU-R.

1.1 Operating Environment

The EP-750068CU-R is a probe set designed for connection with the IE-75001-R and the target system. By using the EP-750068CU-R in such connections, a debugging environment for the μ PD750068 subseries is created, making comprehensive debugging of the target system hardware and software possible. See **CHAPTER 2 CONNECTIONS** for concerning concrete connection methods.

Figure 1-1. Connection to the IE-75001-R and Target System

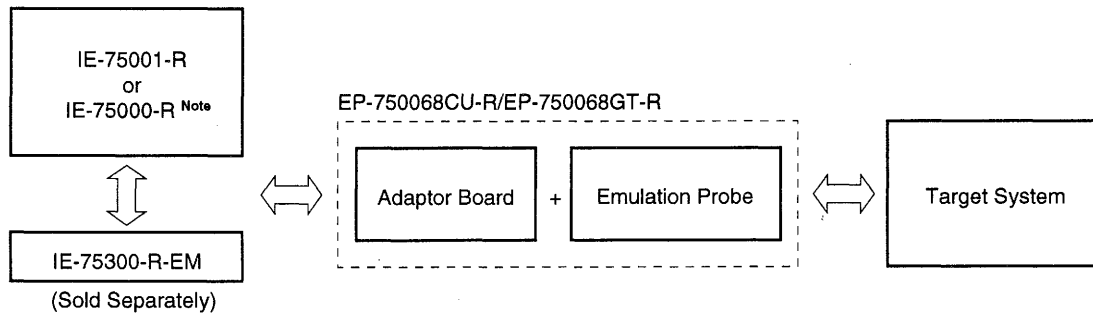

Note Replace the IE-75000-R-EM incorporated in the IE-75000-R with the IE-75300-R-EM.

1.2 Configuration

The EP-750068CU-R is a set consisting of a emulation probe and an adaptor board.

(1) Emulation probe

The emulation probe is configured from the following 3 components.

- **42-pin CU probe or 42-pin GT probe**

This connects the IE-75001-R and the target system.

- **Ground clip**

This connects to the target system's GND. This makes the GND potential of the IE-75001-R and the target system the same, and protects the system against static electricity and noise.

- **External sense clips**


This consists of 8 sense clips. These clips are used to monitor the IC pin voltage level of the target system.

(2) Adaptor board

The adaptor board is used to connect the emulation probe and the emulation board (IE-75300-R-EM). The adaptor board also includes functions to set mask options. For details, see **CHAPTER 3 SETTING MASK OPTIONS**.

Figure 1-2. Emulation Probe

(a) EP-750068CU-R

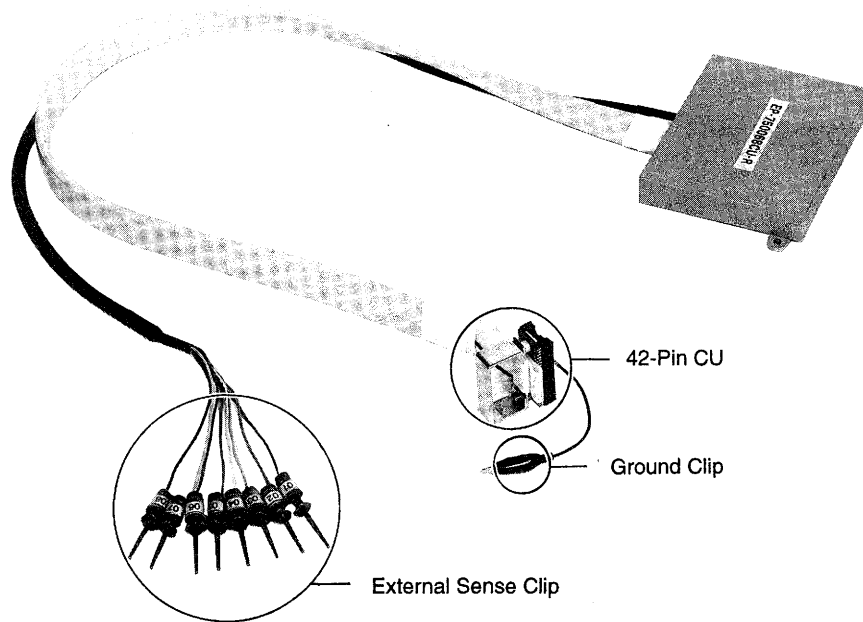

(b) EP-750068GT-R

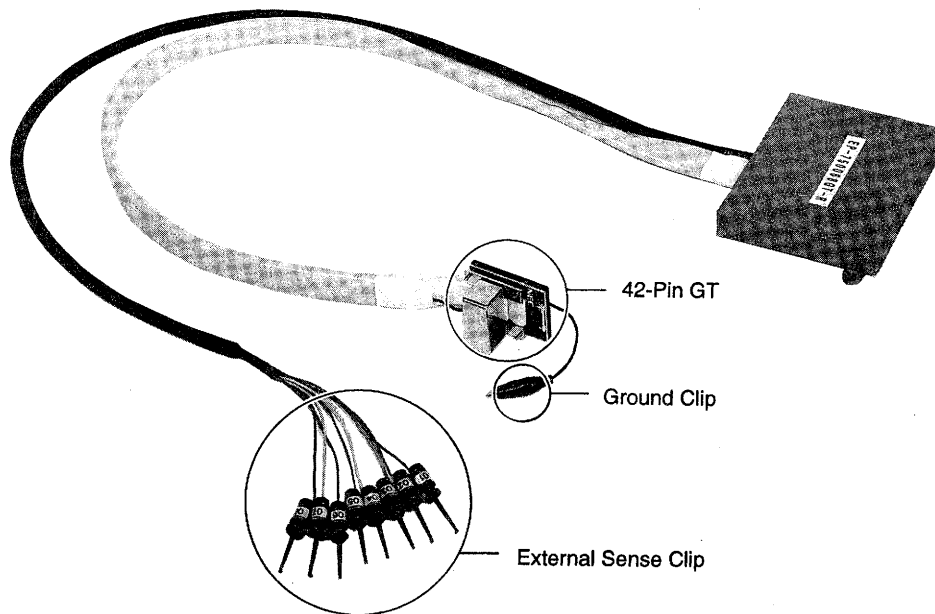
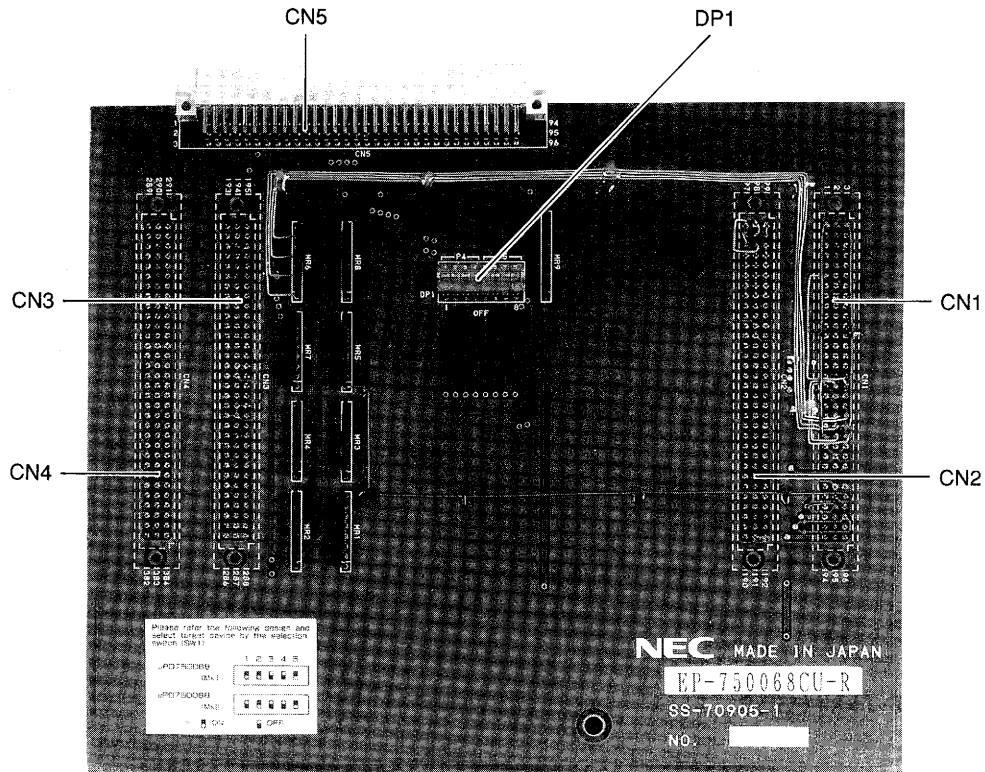
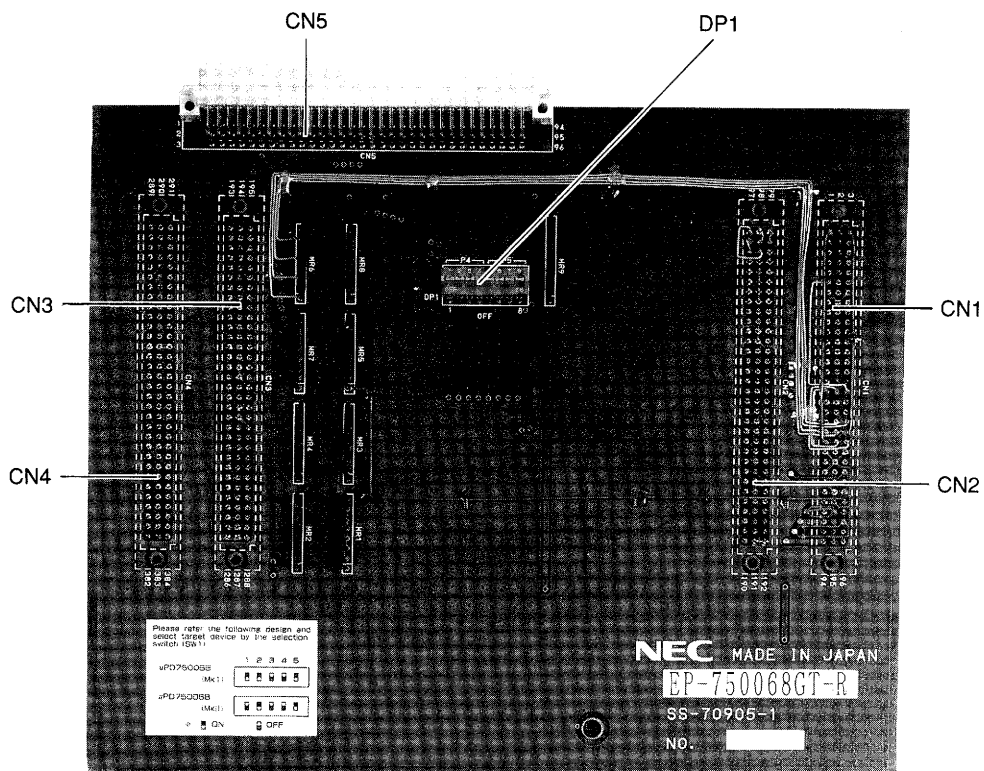


Figure 1-3. Adaptor Board**(a) EP-750068CU-R****(b) EP-750068GT-R**

1.3 Target Devices

The EP-750068CU-R is used in emulation of the following target devices (as of October 1995).

- μ PD750064CU Note
- μ PD750064GT Note
- μ PD750066CU Note
- μ PD750066GT Note
- μ PD750068CU Note
- μ PD750068GT Note
- μ PD75P0076CU Note
- μ PD75P0076GT Note

Note Under development

[MEMO]

CHAPTER 2 CONNECTIONS

This chapter explains about the methods for connecting the EP-750068CU-R, the sequence for switching on/off its power, and the method used to disconnect the emulation probe from the target system of the EP-750068CU-R.

2.1 Connection of the IE-75001-R and the Target System

The connection procedure is outlined as follows.

- (1) Connecting the IE-75300-R-EM and the adaptor board
- (2) Connecting the IE-75001-R and the emulation probe
- (3) Connecting the emulation probe and the target system
- (4) Connecting the external sense clip (if the external sense clip is used)
- (5) Switching on the power

Next, details of each item in the connection procedure are explained.


(1) Connecting the IE-75300-R-EM and the adaptor board

Connect the adaptor board to the IE-75300-R-EM.

- <1> While placing a spacer between the IE-75300-R-EM and the adaptor board, connect the connectors CN1 to CN4 of the IE-75300-R-EM and the connectors CN1 to CN4 of the adaptor board.
- <2> Fasten the spacer between the IE-75300-R-EM and the adaptor board using the spacer installation screws.
- <3> Switch off the power of the IE-75001-R.
- <4> Take off the 6 screws on the top of the IE-75001-R unit, then open the unit's top cover.
- <5> Pull the card pullers on both ends of the board forward and pull out the IE-75000-R-BK ^{Note}.
- <6> Screw the IE-75300-R-EM to the IE-75000-R-BK together.
- <7> Replace the IE-75000-R-BK screwed together with the IE-75300-R-EM to the original position of the IE-75001-R.


Note In the case of the IE-75000-R, the IE-75000-R-EM and IE-75000-R-BK are installed being screwed together. Therefore, pull out the IE-75000-R-BK from the main unit in the above sequence <3>→<4>→<5>, remove the screws and pull off the IE-75000-R-EM before following steps <1>→<2>→<6>→<7>.

Figure 2-1. Connecting the IE-75300-R-EM and the Adaptor Board

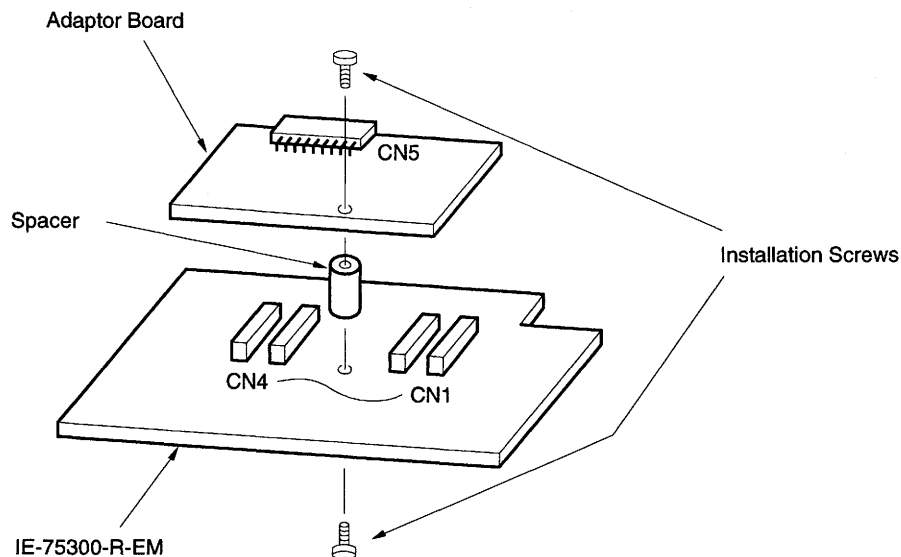

(2) Connecting the IE-75001-R and the emulation probe

- <1> Connect the emulation probe to the emulation probe DIN connector (CN5 of the adaptor board) on the top of the IE-75001-R.
- <2> After connection, be sure to fasten the emulation probe to the IE-75001-R with the installation screws provided.

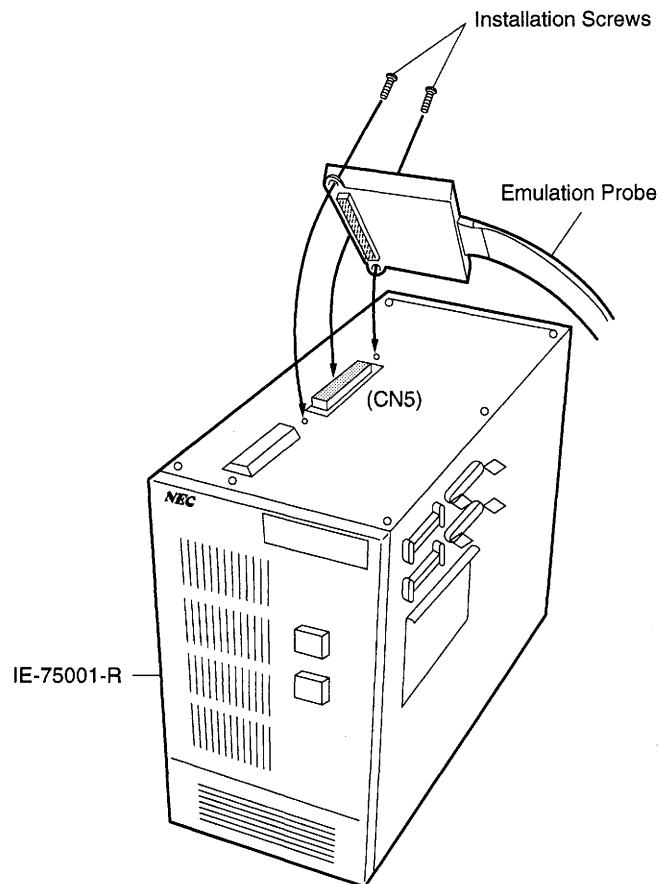Figure 2-2. Connecting the IE-75001-R and the Emulation Probe

(3) Connecting the emulation probe and the target system


Connect the emulation probe to the target system by the following procedure.

- Cautions**
1. Before connecting the emulation probe to the target system, be sure to connect the ground clip first. Otherwise, the IE-75001-R could be damaged by static electricity, etc.
 2. When making connections, be careful not to reverse the pins. If connections are incorrect, it could damage the IE-75001-R.


(a) If the EP-750068CU-R is used

- <1> Switch off the power of the target system.
- <2> Solder the shrink DIP socket to the target system.
- <3> Connect the emulation probe's ground clip to the ground (GND) pin of the target system.
- <4> Align the No. 1 pin of the 42-pin CU at the end of the emulation probe with that of the shrink DIP socket of <2> soldered into the target system, then insert the emulation probe.


Figure 2-3. 42-Pin CU Emulation Probe Connection

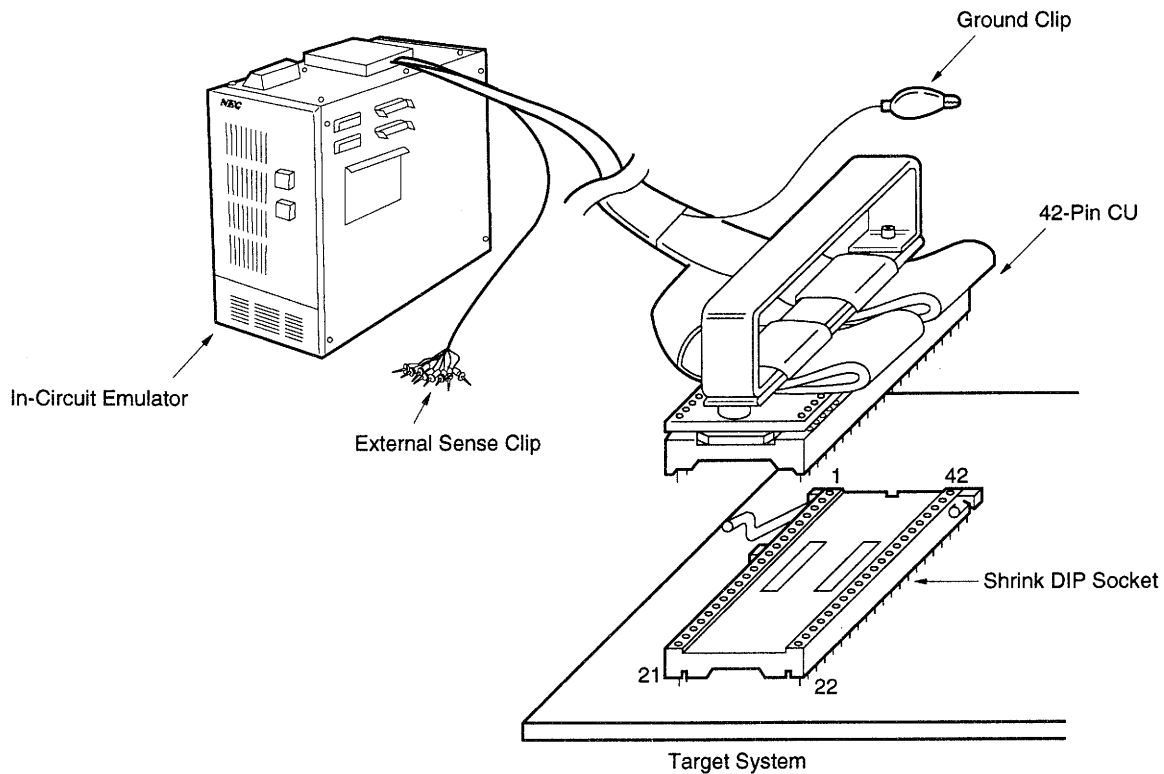

- (b) If the EP-750068GT-R is used
- <1> Switch off the target system's power supply.
 - <2> Solder the flexible board (EV-9500GT-42) to the target system with the face upside.

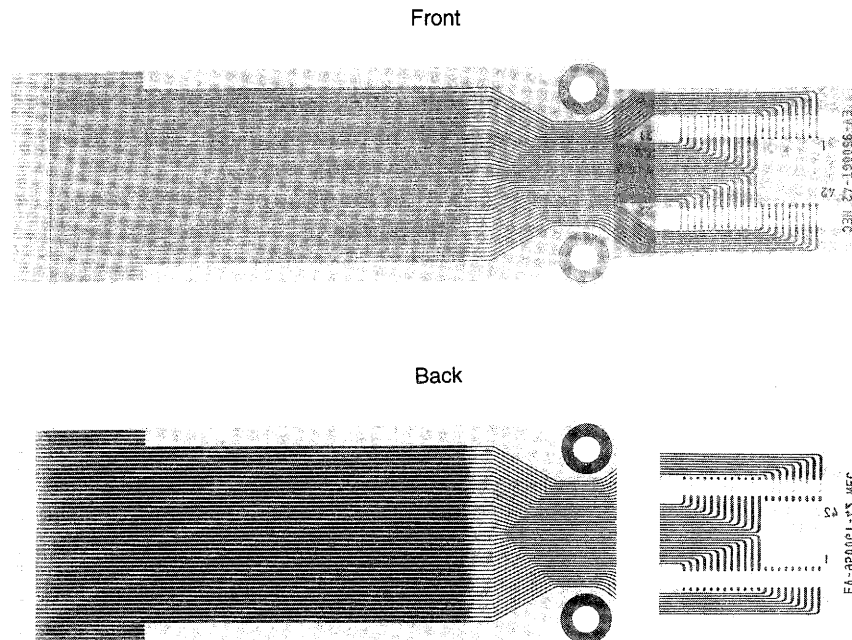Figure 2-4. Flexible Board

- <3> Connect the emulation probe's ground clip to the ground (GND) pin of the target system.
- <4> Connect the flexible board of <2> to the connector at the end of the emulation probe with the solder-plated face downside.

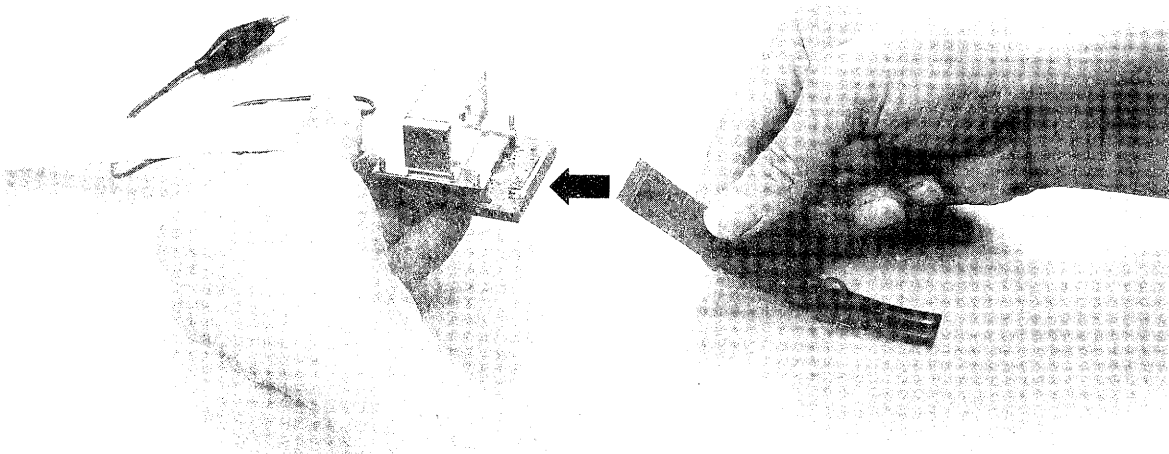Figure 2-5. 42-Pin GT Emulation Probe Connection

(4) Connecting the external sense clip

The emulation probe is provided with 8 external sense clips which can trace hardware signals on the target system in real time.

Since the external sense clips are directly connected to the input buffer HCT244 inside the in-circuit emulator unit, they have TTL level inputs.


The 8 external sense clips are normally input signal lines. However, by setting the OUT command on the in-circuit emulator, the signal line of external sense clip 1 can be used as an external trigger output signal line in the case of an event (see the in-circuit emulator manual for details).

- Cautions**
- 1. Connect the external sense clip to a TTL level signal line only. Otherwise, it will not detect the high level and low level accurately. Also, depending on the voltage level, the IE-75001-R's sensor could be damaged.**
 - 2. Before using external sense clip 1 as an external trigger output, ensure that external sense clip 1 is not connected to the signal output line. Or a fault may result.**

Connect the external sense clip by the following procedure if it is used.

- <1> Switch off the power of the target system first, then that of the IE-75001-R.
- <2> Install the IC clip (commercially available) on the IC which is to be traced in the target system.
- <3> Connect the external sense clip to the IC clip installed.
- <4> Switch on the power to the IE-75001-R first, then that of the target system.

Figure 2-6. Connecting the External Sense Clip

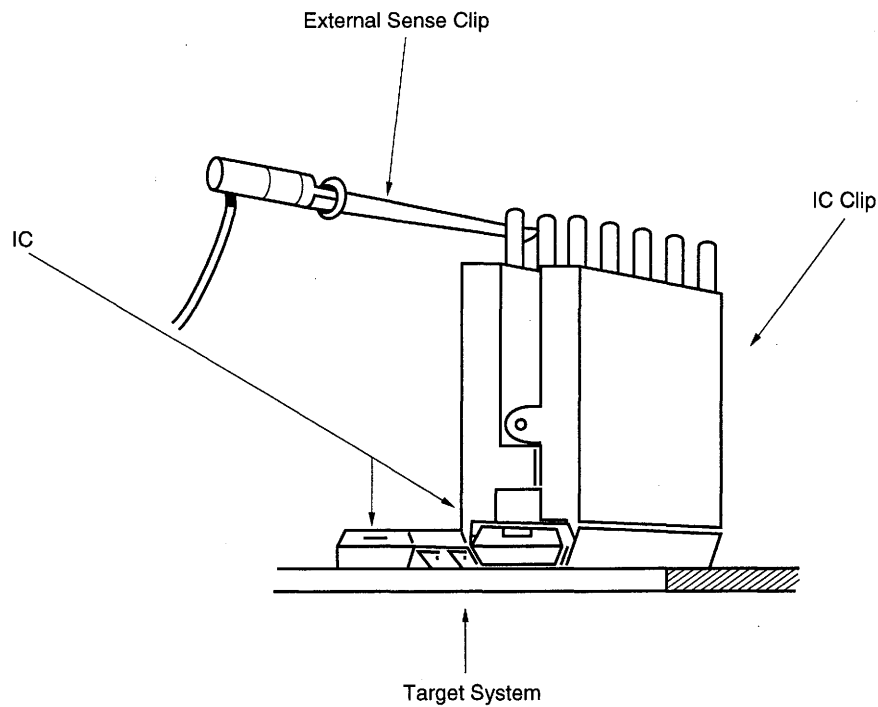

Remark If an external sense clip is connected, be sure to use an IC clip as possible. This helps prevent from faulty contact and improves operability.

2.2 Power ON and OFF Sequence

After the connection of the emulation probe to the target system has been completed, switch on the power. The sequence for switching on/off is shown below.

Caution Be sure to follow the correct sequence for switching the power ON and OFF. Otherwise, the IE-75001-R could be damaged.

(1) If the IE-75001-R is connected to the target system


- Power ON sequence
 - <1> Switch on the power of the IE-75001-R.
 - <2> Switch on the power of the target system.
- Power OFF sequence
 - <1> Switch off the power of the target system.
 - <2> Switch off the power of the IE-75001-R.

2.3 Removing Emulation Probe from the Target System

Remove the emulation probe from the target system by the following procedure.


- (a) If using the EP-750068CU-R
- <1> Switch off the power of the target system.
 - <2> Switch off the power of the IE-75001-R.
 - <3> Lift the shrink DIP socket lever.
 - <4> Pull out vertically the extractor at the end of the emulation probe, and remove the emulation probe from the shrink DIP socket.

Figure 2-7. 42-Pin CU Emulation Probe Removal

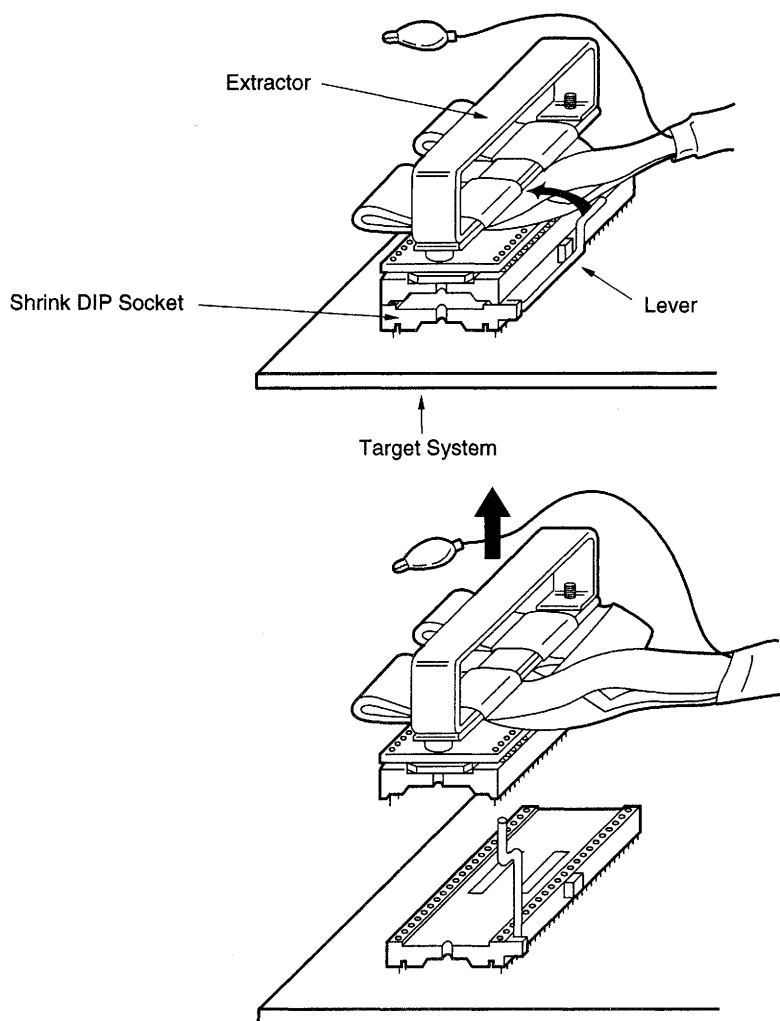

- (b) If using the EP-750068GT-R
- <1> Switch off the power of the target system.
 - <2> Switch off the power of the IE-75001-R.
 - <3> Remove the flexible board from the connector at the end of the emulation probe.

Figure 2-8. 42-Pin GT Emulation Probe Removal

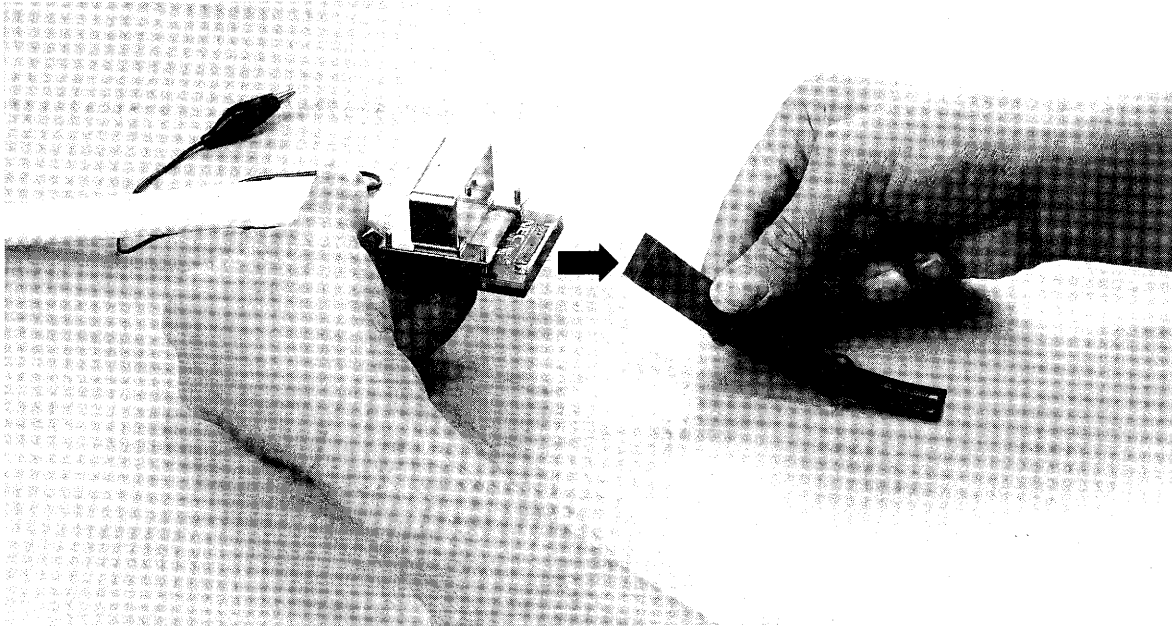


CHAPTER 3 SETTING MASK OPTIONS

3.1 Setting the Ports 4 and 5 Mask Option


The DP1 switch on the adaptor board is for the ports 4 and 5 mask option setting. When these switches are ON, pull-up resistors (68 k Ω) are connected.

At shipping time, the DP1 switches are set in the OFF position.

Figure 3-1. DP1 Switch Arrangement Diagram

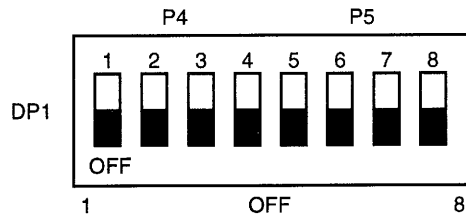

SW • bit	Signal Name	SW • bit	Signal Name
DP1 - 1	→ P40	DP1 - 5	→ P50
- 2	→ P41	- 6	→ P51
- 3	→ P42	- 7	→ P52
- 4	→ P43	- 8	→ P53

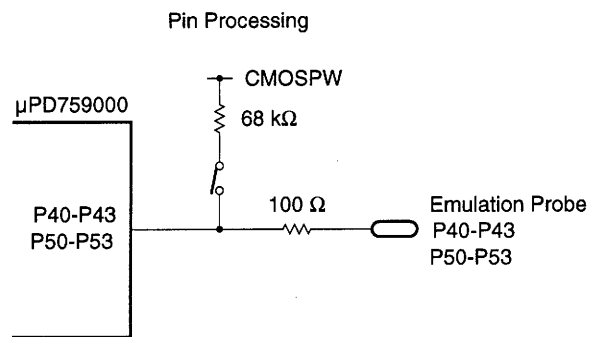

[MEMO]

APPENDIX EMULATION PROBE PIN CORRESPONDENCE TABLE

(1/2)

CN5 Pin No.	Emulation Probe	Signal Name	CN5 Pin No.	Emulation Probe	Signal Name	CN5 Pin No.	Emulation Probe	Signal Name
1	GND	GND	25	NC	NC	49	7	P32
2	GND	GND	26			50	8	P31
3	EXT0	EXT0	27			51	9	P30
4	EXT1	EXT1	28			52	10	AV _{ss}
5	EXT2	EXT2	29			53	NC	NC
6	EXT3	EXT3	30			54		
7	EXT4	EXT4	31			55		
8	EXT5	EXT5	32	32	P01/ $\overline{\text{SCK}}$	56		
9	EXT6	EXT6	33	33	P00/INT4	57		
10	EXT7	EXT7	34	34	P53	58		
11	NC	NC	35	35	P52	59		
12			36	36	P51	60		
13			37	37	P50	61		
14			38	38	P43	62		
15			39	39	P42	63		
16			40	40	P41	64		
17			41	41	P40	65		
18			42	42	V _{ss}	66		
19			43	1	XT1	67		
20			44	2	XT2	68		
21			45	3	$\overline{\text{RESET}}$	69		
22			46	4	X1	70		
23			47	5	X2	71		
24			48	6	P33	72		

- Remarks**
- If the IE-75001-R is used, the emulation probe is connected to it using the CN5 connector.
 - Symbols and numbers in the emulation probe column mean as follows.
 - GND : Ground clip (GND)
 - EXT0 to EXT7 : External sense clip No. 1 to No. 8
 - 1 to 42 : Pin No. of 42-pin CU or 42-pin GT at the end of emulation probe
 - NC : No Connection

(2/2)

CN5 Pin No.	Emulation Probe	Signal Name	CN5 Pin No.	Emulation Probe	Signal Name	CN5 Pin No.	Emulation Probe	Signal Name
73	NC	NC	81	18	P110/AN0	89	26	P13/TI0
74	11	P63/KR3/AN7	82	19	AV _{REF}	90	27	P12/INT2/TI1
75	12	P62/KR2/AN6	83	20	IC	91	28	P11/INT1
76	13	P61/KR1/AN5	84	21	V _{DD}	92	29	P10/INT0
77	14	P60/KR0/AN4	85	22	P23/BUZ	93	30	P03/SI/SB1
78	15	P113/AN3	86	23	P22/PCL	94	31	P02/SO/SB0
79	16	P112/AN2	87	24	P21/PTO1	95	GND	GND
80	17	P111/AN1	88	25	P20/PTO0	96	GND	GND

- Remarks**
1. If the IE-75001-R is used, the emulation probe is connected to it using the CN5 connector.
 2. Symbols and numbers in the emulation probe column mean as follows.
 - GND : Ground clip (GND)
 - EXT0 to EXT7 : External sense clips No.1 to No.8
 - 1 to 42 : Pin No. of 42-pin CU or 42-pin GT at the end of emulation probe
 - NC : No Connection

NEC

Facsimile Message

Although NEC has taken all possible steps to ensure that the documentation supplied to our customers is complete, bug free and up-to-date, we readily accept that errors may occur. Despite all the care and precautions we've taken, you may encounter problems in the documentation. Please complete this form whenever you'd like to report errors or suggest improvements to us.

From:

Name

Company

Tel.

FAX

Address

Thank you for your kind support.

North America

NEC Electronics Inc.
Corporate Communications Dept.
Fax: +1-800-729-9288

Hong Kong, Philippines, Oceania

NEC Electronics Hong Kong Ltd.
Fax: +852-2886-9022/9044

Asian Nations except Philippines

NEC Electronics Singapore Pte. Ltd.
Fax: +65-250-3583

Europe

NEC Electronics (Europe) GmbH
Technical Documentation Dept.
Fax: +49-211-6503-274

Korea

NEC Electronics Hong Kong Ltd.
Seoul Branch
Fax: +82-2-551-0451

Japan

NEC Corporation
Semiconductor Solution Engineering Division
Technical Information Support Dept.
Fax: +81-44-548-7900

South America

NEC do Brasil S.A.
Fax: +55-11-889-1689

Taiwan

NEC Electronics Taiwan Ltd.
Fax: +886-2-719-5951

I would like to report the following error/make the following suggestion:

Document title: _____

Document number: _____ Page number: _____

If possible, please fax the referenced page or drawing.

Document Rating	Excellent	Good	Acceptable	Poor
Clarity	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Technical Accuracy	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Organization	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Phase-out/Discontinued

Phase-out/Discontinued