

# DA9062 / i.MX 7 Demonstration Kit


Dear Customer,

Thank you for evaluating the Dialog DA9062 / i.MX 7 Demonstration Kit. This kit showcases the Dialog DA9062 reference design for the i.MX 7 family of processors.

## Quick Start Instructions

To start the board:

1. Connect the micro-USB cable on the top board (The 'CPU Board') to a USB port or a 5.0 V supply. You might find that this cable has already been connected. **Important:** be careful not to disturb or damage the LCD screen cable when inserting the micro-USB plug.
2. Turn on the supply. Both green LEDs should now be lit.
3. Press the small button nearest to the USB cable as shown in the figure below. Hold the button for approximately 1.5 seconds.

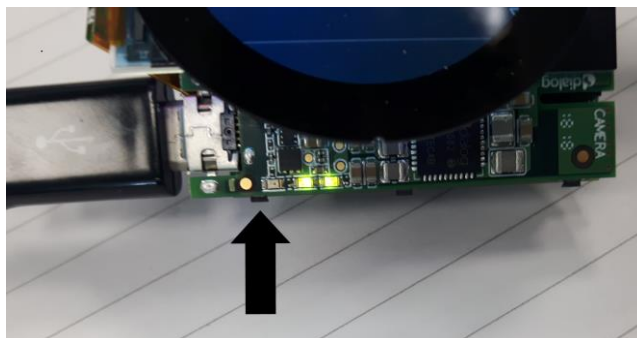

4. When the button is released, the system should boot. The Android home-screen should be displayed after a short while. This might take 2-3 minutes.


## Optional

For a debug port:

5. Before starting the system, connect the second USB cable (on the lower 'IO Board') to a PC USB port. This will create two COM ports.
6. Open a terminal program such as PuTTY or uCon. Connect to the *lowest* of the two new COM ports. 115.2 kbits/s, 8 bits, parity = none, Stop bits = 1.
7. An OS root prompt can then be obtained by pressing ENTER.

## Troubleshooting

1. Green LEDs are not lit: Please check the 5.0 V USB supply.
2. LEDs are lit but there is no LCD display:
  - a. Check that the top and bottom boards are correctly mated.
  - b. Check that the two LCD cables are both correctly connected. The two connectors on the rear of the PCB should be fully inserted and quite straight, as shown in the figure below.

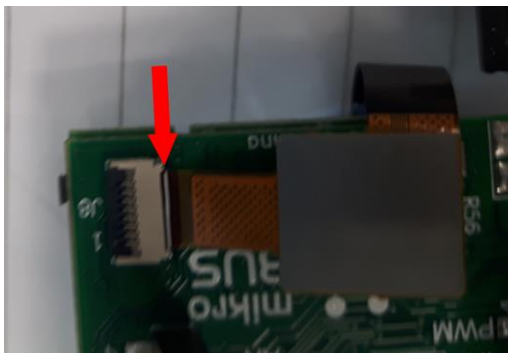

- c. The two DIP switches should not be changed from their default positions: Switch #1 = ON; Switch #2 = OFF.

## Further Information

Application notes, board design source files (schematic and PCB layout) and OS binary / patch files are available at <https://www.dialog-semiconductor.com/power-solutions-nxpr-imx-application-processor-family/imx7s> .

If you have any questions about using this demonstration kit, then please contact your Field Applications Engineer or contact us via the Dialog Support Site, <http://www.dialog-semiconductor.com/support>.

Yours Sincerely,

Dialog Applications Engineering Team

## Status Definitions

Status	Definition
DRAFT	The content of this document is under review and subject to formal approval, which may result in modifications or additions.
APPROVED or unmarked	The content of this document has been approved for publication.

## RoHS Compliance

Dialog Semiconductor's suppliers certify that its products are in compliance with the requirements of Directive 2011/65/EU of the European Parliament on the restriction of the use of certain hazardous substances in electrical and electronic equipment. RoHS certificates from our suppliers are available on request.