

RZ/T2H Group

RZ/T2H Evaluation Board User's Manual

RZ/T Series for Real-Time Control

RZ Family

64-Bit & 32-Bit Arm[®]-Based High-End MPUs

All information contained in these materials, including products and product specifications, represents information on the product at the time of publication and is subject to change by Renesas Electronics Corp. without notice. Please review the latest information published by Renesas Electronics Corp. through various means, including the Renesas Electronics Corp. website (<http://www.renesas.com>).

Notice

1. Descriptions of circuits, software and other related information in this document are provided only to illustrate the operation of semiconductor products and application examples. You are fully responsible for the incorporation or any other use of the circuits, software, and information in the design of your product or system. Renesas Electronics disclaims any and all liability for any losses and damages incurred by you or third parties arising from the use of these circuits, software, or information.
2. Renesas Electronics hereby expressly disclaims any warranties against and liability for infringement or any other claims involving patents, copyrights, or other intellectual property rights of third parties, by or arising from the use of Renesas Electronics products or technical information described in this document, including but not limited to, the product data, drawings, charts, programs, algorithms, and application examples.
3. No license, express, implied or otherwise, is granted hereby under any patents, copyrights or other intellectual property rights of Renesas Electronics or others.
4. You shall be responsible for determining what licenses are required from any third parties, and obtaining such licenses for the lawful import, export, manufacture, sales, utilization, distribution or other disposal of any products incorporating Renesas Electronics products, if required.
5. You shall not alter, modify, copy, or reverse engineer any Renesas Electronics product, whether in whole or in part. Renesas Electronics disclaims any and all liability for any losses or damages incurred by you or third parties arising from such alteration, modification, copying or reverse engineering.
6. Renesas Electronics products are classified according to the following two quality grades: "Standard" and "High Quality". The intended applications for each Renesas Electronics product depends on the product's quality grade, as indicated below.

"Standard": Computers; office equipment; communications equipment; test and measurement equipment; audio and visual equipment; home electronic appliances; machine tools; personal electronic equipment; industrial robots; etc.

"High Quality": Transportation equipment (automobiles, trains, ships, etc.); traffic control (traffic lights); large-scale communication equipment; key financial terminal systems; safety control equipment; etc.

Unless expressly designated as a high reliability product or a product for harsh environments in a Renesas Electronics data sheet or other Renesas Electronics document, Renesas Electronics products are not intended or authorized for use in products or systems that may pose a direct threat to human life or bodily injury (artificial life support devices or systems; surgical implantations; etc.), or may cause serious property damage (space system; undersea repeaters; nuclear power control systems; aircraft control systems; key plant systems; military equipment; etc.). Renesas Electronics disclaims any and all liability for any damages or losses incurred by you or any third parties arising from the use of any Renesas Electronics product that is inconsistent with any Renesas Electronics data sheet, user's manual or other Renesas Electronics document.

7. No semiconductor product is absolutely secure. Notwithstanding any security measures or features that may be implemented in Renesas Electronics hardware or software products, Renesas Electronics shall have absolutely no liability arising out of any vulnerability or security breach, including but not limited to any unauthorized access to or use of a Renesas Electronics product or a system that uses a Renesas Electronics product. RENESAS ELECTRONICS DOES NOT WARRANT OR GUARANTEE THAT RENESAS ELECTRONICS PRODUCTS, OR ANY SYSTEMS CREATED USING RENESAS ELECTRONICS PRODUCTS WILL BE INVULNERABLE OR FREE FROM CORRUPTION, ATTACK, VIRUSES, INTERFERENCE, HACKING, DATA LOSS OR THEFT, OR OTHER SECURITY INTRUSION ("Vulnerability Issues"). RENESAS ELECTRONICS DISCLAIMS ANY AND ALL RESPONSIBILITY OR LIABILITY ARISING FROM OR RELATED TO ANY VULNERABILITY ISSUES. FURTHERMORE, TO THE EXTENT PERMITTED BY APPLICABLE LAW, RENESAS ELECTRONICS DISCLAIMS ANY AND ALL WARRANTIES, EXPRESS OR IMPLIED, WITH RESPECT TO THIS DOCUMENT AND ANY RELATED OR ACCOMPANYING SOFTWARE OR HARDWARE, INCLUDING BUT NOT LIMITED TO THE IMPLIED WARRANTIES OF MERCHANTABILITY, OR FITNESS FOR A PARTICULAR PURPOSE.
8. When using Renesas Electronics products, refer to the latest product information (data sheets, user's manuals, application notes, "General Notes for Handling and Using Semiconductor Devices" in the reliability handbook, etc.), and ensure that usage conditions are within the ranges specified by Renesas Electronics with respect to maximum ratings, operating power supply voltage range, heat dissipation characteristics, installation, etc. Renesas Electronics disclaims any and all liability for any malfunctions, failure or accident arising out of the use of Renesas Electronics products outside of such specified ranges.
9. Although Renesas Electronics endeavors to improve the quality and reliability of Renesas Electronics products, semiconductor products have specific characteristics, such as the occurrence of failure at a certain rate and malfunctions under certain use conditions. Unless designated as a high reliability product or a product for harsh environments in a Renesas Electronics data sheet or other Renesas Electronics document, Renesas Electronics products are not subject to radiation resistance design. You are responsible for implementing safety measures to guard against the possibility of bodily injury, injury or damage caused by fire, and/or danger to the public in the event of a failure or malfunction of Renesas Electronics products, such as safety design for hardware and software, including but not limited to redundancy, fire control and malfunction prevention, appropriate treatment for aging degradation or any other appropriate measures. Because the evaluation of microcomputer software alone is very difficult and impractical, you are responsible for evaluating the safety of the final products or systems manufactured by you.
10. Please contact a Renesas Electronics sales office for details as to environmental matters such as the environmental compatibility of each Renesas Electronics product. You are responsible for carefully and sufficiently investigating applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive, and using Renesas Electronics products in compliance with all these applicable laws and regulations. Renesas Electronics disclaims any and all liability for damages or losses occurring as a result of your noncompliance with applicable laws and regulations.
11. Renesas Electronics products and technologies shall not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable domestic or foreign laws or regulations. You shall comply with any applicable export control laws and regulations promulgated and administered by the governments of any countries asserting jurisdiction over the parties or transactions.
12. It is the responsibility of the buyer or distributor of Renesas Electronics products, or any other party who distributes, disposes of, or otherwise sells or transfers the product to a third party, to notify such third party in advance of the contents and conditions set forth in this document.
13. This document shall not be reprinted, reproduced or duplicated in any form, in whole or in part, without prior written consent of Renesas Electronics.
14. Please contact a Renesas Electronics sales office if you have any questions regarding the information contained in this document or Renesas Electronics products.

(Note1) "Renesas Electronics" as used in this document means Renesas Electronics Corporation and also includes its directly or indirectly controlled subsidiaries.

(Note2) "Renesas Electronics product(s)" means any product developed or manufactured by or for Renesas Electronics.

(Rev.5.0-1 October 2020)

Corporate Headquarters

TOYOSU FORESIA, 3-2-24 Toyosu,
Koto-ku, Tokyo 135-0061, Japan
www.renesas.com

Trademarks

Renesas and the Renesas logo are trademarks of Renesas Electronics Corporation. All trademarks and registered trademarks are the property of their respective owners.

Contact information

For further information on a product, technology, the most up-to-date version of a document, or your nearest sales office, please visit:
www.renesas.com/contact/.

General Precautions in the Handling of Microprocessing Unit and Microcontroller Unit Products

The following usage notes are applicable to all Microprocessing unit and Microcontroller unit products from Renesas. For detailed usage notes on the products covered by this document, refer to the relevant sections of the document as well as any technical updates that have been issued for the products.

1. Precaution against Electrostatic Discharge (ESD)

A strong electrical field, when exposed to a CMOS device, can cause destruction of the gate oxide and ultimately degrade the device operation. Steps must be taken to stop the generation of static electricity as much as possible, and quickly dissipate it when it occurs. Environmental control must be adequate. When it is dry, a humidifier should be used. This is recommended to avoid using insulators that can easily build up static electricity. Semiconductor devices must be stored and transported in an anti-static container, static shielding bag or conductive material. All test and measurement tools including work benches and floors must be grounded. The operator must also be grounded using a wrist strap. Semiconductor devices must not be touched with bare hands. Similar precautions must be taken for printed circuit boards with mounted semiconductor devices.

2. Processing at power-on

The state of the product is undefined at the time when power is supplied. The states of internal circuits in the LSI are indeterminate and the states of register settings and pins are undefined at the time when power is supplied. In a finished product where the reset signal is applied to the external reset pin, the states of pins are not guaranteed from the time when power is supplied until the reset process is completed. In a similar way, the states of pins in a product that is reset by an on-chip power-on reset function are not guaranteed from the time when power is supplied until the power reaches the level at which resetting is specified.

3. Input of signal during power-off state

Do not input signals or an I/O pull-up power supply while the device is powered off. The current injection that results from input of such a signal or I/O pull-up power supply may cause malfunction and the abnormal current that passes in the device at this time may cause degradation of internal elements. Follow the guideline for input signal during power-off state as described in your product documentation.

4. Handling of unused pins

Handle unused pins in accordance with the directions given under handling of unused pins in the manual. The input pins of CMOS products are generally in the high-impedance state. In operation with an unused pin in the open-circuit state, extra electromagnetic noise is induced in the vicinity of the LSI, an associated shoot-through current flows internally, and malfunctions occur due to the false recognition of the pin state as an input signal become possible.

5. Clock signals

After applying a reset, only release the reset line after the operating clock signal becomes stable. When switching the clock signal during program execution, wait until the target clock signal is stabilized. When the clock signal is generated with an external resonator or from an external oscillator during a reset, ensure that the reset line is only released after full stabilization of the clock signal. Additionally, when switching to a clock signal produced with an external resonator or by an external oscillator while program execution is in progress, wait until the target clock signal is stable.

6. Voltage application waveform at input pin

Waveform distortion due to input noise or a reflected wave may cause malfunction. If the input of the CMOS device stays in the area between V_{IL} (Max.) and V_{IH} (Min.) due to noise, for example, the device may malfunction. Take care to prevent chattering noise from entering the device when the input level is fixed, and also in the transition period when the input level passes through the area between V_{IL} (Max.) and V_{IH} (Min.).

7. Prohibition of access to reserved addresses

Access to reserved addresses is prohibited. The reserved addresses are provided for possible future expansion of functions. Do not access these addresses as the correct operation of the LSI is not guaranteed.

8. Differences between products

Before changing from one product to another, for example to a product with a different part number, confirm that the change will not lead to problems. The characteristics of a microprocessing unit or microcontroller unit products in the same group but having a different part number might differ in terms of internal memory capacity, layout pattern, and other factors, which can affect the ranges of electrical characteristics, such as characteristic values, operating margins, immunity to noise, and amount of radiated noise. When changing to a product with a different part number, implement a system-evaluation test for the given product.

Renesas RZ/T2H Evaluation Board Disclaimer

By using this RZ/T2H Evaluation Board, the User accepts the following terms, which are in addition to, and control in the event of disagreement, with Renesas' General Terms and Conditions available at <https://www.renesas.com/us/en/legal-notices>.

The RZ/T2H Evaluation Board is not guaranteed to be error free, and the entire risk as to the results and performance of the RZ/T2H Evaluation Board is assumed by the User. The RZ/T2H Evaluation Board is provided by Renesas on an "as is" basis without warranty of any kind whether express or implied, including but not limited to the implied warranties of good workmanship, fitness for a particular purpose, title, merchantability, and non-infringement of intellectual property rights. Renesas expressly disclaims any implied warranty.

Renesas does not consider the RZ/T2H Evaluation Board to be a finished product and therefore the RZ/T2H Evaluation Board may not comply with some requirements applicable to finished products, including, but not limited to recycling, restricted substances and electromagnetic compatibility regulations. Refer to Certifications section, for information about certifications and compliance information for the RZ/T2H Evaluation Board. It is the product User's responsibility to make sure the kit meets any local requirements applicable to their region.

Renesas or its affiliates shall in no event be liable for any loss of profit, loss of data, loss of contract, loss of business, damage to reputation or goodwill, any economic loss, any reprogramming or recall costs (whether the foregoing losses are direct or indirect) nor shall Renesas or its affiliates be liable for any other direct or indirect special, incidental or consequential damages arising out of or in relation to the use of this RZ/T2H Evaluation Board, even if Renesas or its affiliates have been advised of the possibility of such damages.

Renesas has used reasonable care in preparing the information included in this document, but Renesas does not warrant that such information is error free nor does Renesas guarantee an exact match for every application or parameter to part numbers designated by other vendors listed herein. The information provided in this document is intended solely to enable the use of Renesas products. No express or implied license to any intellectual property right is granted by this document or in connection with the sale of Renesas products. Renesas reserves the right to make changes to specifications and product descriptions at any time without notice. Renesas assumes no liability for any damages incurred by you resulting from errors in or omissions from the information included herein. Renesas cannot verify, and assumes no liability for, the accuracy of information available on another company's website.

Precautions

This product is only intended for use in a laboratory environment under ambient temperature and humidity conditions. A safe separation distance should be used between this and any sensitive equipment. Its use outside the laboratory, classroom, study area, or similar such area invalidates conformity with the protection requirements of the Electromagnetic Compatibility Directive and could lead to prosecution.

The product generates, uses, and can radiate radio frequency energy and may cause harmful interference to radio communications. There is no guarantee that interference will not occur in a particular installation. If this equipment causes harmful interference to radio or television reception, which can be determined by turning the equipment off or on, you are encouraged to try to correct the interference by one or more of the following measures:

- Ensure attached cables do not lie across the equipment.
- Reorient the receiving antenna.
- Increase the distance between the equipment and the receiver.
- Connect the equipment into an outlet on a circuit different from that which the receiver is connected.
- Power down the equipment when not in use.
- Consult the dealer or an experienced radio/TV technician for help.

Note: It is recommended that wherever possible shielded interface cables are used.

The product is potentially susceptible to certain EMC phenomena. To mitigate against them it is recommended that the following measures be undertaken:

- The user is advised that mobile phones should not be used within 10 m of the product when in use.
- The user is advised to take ESD precautions when handling the equipment.

The Evaluation Kit does not represent an ideal reference design for an end product and does not fulfil the regulatory standards for an end product.

Proprietary Notice

All text, graphics, photographs, trademarks, logos, artwork, and computer code, collectively known as content, contained in this document is owned, controlled, or licensed by or to Renesas, and is protected by trade dress, copyright, patent and trademark laws, and other intellectual property rights and unfair competition laws. Except as expressly provided herein, no part of this document or content may be copied, reproduced, republished, posted, publicly displayed, encoded, translated, transmitted, or distributed in any other medium for publication or distribution or for any commercial enterprise, without prior written consent from Renesas.

How to Use This Manual

1. Purpose and Target Readers

The intention of this manual is to assist users in understanding the hardware functionality and electrical characteristics of the evaluation board in overview. The target users of this manual are engineers designing sample code that runs on the platform of the evaluation board, with the use of various peripheral devices.

Though this manual includes an overview of the functionality of the evaluation board, it is not intended to be a guide for embedded programming or hardware design.

Particular attention should be paid to the precautionary notes when using the manual. These notes occur within the body of the text, at the end of each section, and in the Handling Precautions section.

The revision history summarizes the locations of revisions and additions. It does not list all revisions. Refer to the text of the manual for details.

The following documents apply to the RZ/T2H Evaluation Board. Be sure to refer to the latest versions of these documents. The newest versions of the listed documents are available on the Renesas Electronics Web site.

Document Type	Description	Document Title	Document No.
User's manual	Explanation of the hardware specifications of the evaluation board	RZ/T2H Evaluation Board User's Manual	R20UT5405EJ (this manual)
Quick start guide	Explanation of the flow from turning on the power to confirming initial operation	RZ/T2H Evaluation Board Quick Start Guide	R20QS0055EJ
User's manual for the hardware	Hardware specifications (pin assignments, memory maps, peripheral function specifications, electrical characteristics, timing charts) and descriptions of operation	RZ/T2H and RZ/N2H Groups User's Manual: Hardware	R01UH1039EJ

2. List of Abbreviations and Acronyms

Abbreviation	Full Form
ADC	Analog-to-Digital Converter
bps	bits per second
CAN	Controller Area Network
CPU	Central Processing Unit
DIP	Dual In-line Package
DNF	Do Not Fit
EEPROM	Electrically Erasable Programmable Read Only Memory
ESC	EtherCAT Slave Controller
ESD	Electrostatic Discharge
EtherCAT	Ethernet for Control Automation Technology
GPT	General PWM Timer
I ² C (IIC)	Philips™ Inter-Integrated Circuit Connection Bus
J-Link™	SEGGER debug probe
J-Link™ OB	SEGGER On-board debug probe
IRQ	Interrupt Request
LCD	Liquid Crystal Display
LED	Light Emitting Diode
MAC	Media Access Control
MCU	Micro Controller Unit
MPU	Micro Processor Unit
MTU	Multi-Function Timer Pulse Unit
n/a (NA)	Not Applicable
n/c (NC)	Not Connected
OTG	On-The-Go
OTP	One-Time Programmable (Memory)
PC	Personal Computer
PCB	Printed Circuit Board
POE	Port Output Enable
POEG	Port Output Enable for GPT
PWM	Pulse Width Modulation
RAM	Random Access Memory
RGMII	Reduced Gigabit Media-Independent Interface
RMII	Reduced Media-Independent Interface
ROM	Read Only Memory
SCI	Serial Communications Interface
SEI	System Error Interrupt
SPI	Serial Peripheral Interface
UART	Universal Asynchronous Receiver/Transmitter
USB	Universal Serial Bus

Table of Contents

1. Overview.....	9
1.1 Purpose.....	9
1.2 Features.....	9
1.3 Board Specifications	10
2. Power Supply	13
2.1 Specifications of Power Supply	13
2.2 Methods for Turning the Power On and Off.....	13
2.3 Connectors for Current Measurement	14
3. Board Layout	15
3.1 Component Layouts.....	15
3.2 Board Dimensions.....	17
3.3 Arrangement of Components.....	17
4. Connections.....	18
4.1 Internal Connections of the Board	18
4.2 Connections in the Debugging Environment	19
5. List of RZ/T2H Pin Functions	20
6. Circuitry for Configuration	63
6.1 Types of Configuration Circuits.....	63
6.2 Configuration at Shipment	64
6.3 Configuration by Switches	65
6.3.1 Mode Setting Switch SW14.....	65
6.3.2 Signal Function Selection Switches SW1, SW2, SW4 to SW8, SW15, SW17, and SW18	66
6.4 Configuration by Jumper Blocks	71
6.4.1 I/O Power Selection Jumper Blocks CN9, CN37 to CN40, CN77, and CN78	71
6.4.2 Debugging Function Selection Jumper Block CN62.....	72
6.4.3 RS485 Interface Communication Mode Selection Jumper Blocks CN56 and CN57	72
6.4.4 PCIe Reset Signal Control Jumper Block CN73.....	72
6.4.5 Current Measurement Jumper Blocks CN29, CN30, CN35, CN36, and CN81 to CN87.....	73
6.5 Configuration by Option Links.....	74
6.5.1 Settings by Solder Bridges and Trace Cuts	74
6.5.2 Settings by 0-Ω and Other Resistors	75
7. User Circuits	76
7.1 Reset Circuit	76
7.2 Clock Circuit.....	76
7.3 Switches.....	77
7.4 LEDs	78
7.5 Potentiometer.....	79
7.6 Pmod™	80
7.7 Grove	83
7.8 QWIIC	85
7.9 mikroBUS™	86
7.10 USB-to-Serial Conversion.....	88
7.11 SPI Memory	89
7.12 LPDDR4.....	92
7.13 SD and eMMC	93

7.14	CAN.....	96
7.15	RS485 Interface	97
7.16	USB.....	98
7.17	Ethernet System	100
7.18	PCIe	106
7.19	LCD Interface.....	112
7.20	Serial Host Interface	115
7.21	Pin Headers	116
7.22	Test Pins	135
8.	Developing Code	137
8.1	Overview	137
8.2	Supported Modes.....	137
8.3	Address Spaces.....	137
9.	Usage Notes	138
9.1	Handling of the XTALSEL Pin.....	138
9.2	Use of the RGB-HDMI Conversion Board	138
10.	Support	139
11.	Appendix.....	140

1. Overview

1.1 Purpose

This evaluation board (hereafter referred to as this board) is an evaluation tool for a Renesas microprocessor. This manual describes the technical elements of the hardware of this board in detail. The method for installing software and the debugging environment are explained in the quick start guide.

1.2 Features

This board has the following features.

- Programming of a Renesas microprocessor
- Debugging of user code
- User circuits for switches, LEDs, and potentiometers

This board is equipped with all of the circuits that are required for operating the microprocessor.

1.3 Board Specifications

Table 1-1 and Table 1-2 list the board specifications.

Table 1-1 Board Specifications (1)

Item	Specification
Microprocessor	Part No.: R9A09G077M44GBG*1
	Package: 729-pin FCBGA
	On-chip memory: 2 Mbytes of RAM
On-board memory	OctaFlash: 512 Mbits
	QSPI serial flash memory: 128 Mbits
	I ² C EEPROM: 16 Kbits
	LPDDR4: 8 Gbytes
	eMMC: 32 Gbytes
Input clocks	RZ/T2H main: 25 MHz
	PCIe: 25 MHz
	USB-to-serial conversion IC: 12 MHz
Power supplies	Power inputs: 15-V/3-A USB PD supporting Type-C® connector (CN46) 15-V/3-A power jack (CN47) for the AC adapter 24-V/3-A bipolar terminal block (CN90)
	Power-supply IC: 24-V input, 15-V output
	Power-supply IC: 15-V input, 12-V output
	Power-supply IC: 15-V input, 5-V output
	Power-supply IC: 5-V input, 3.3-V output
	Power-supply IC: 5-V input, 1.8-V output
	Power-supply IC: 5-V input, 1.1-V output
	Power-supply IC: 5-V input, 0.8-V output
	Power-supply IC: 5-V input, 2.5-V output (for Ethernet PHY)
	Power-supply IC: 5-V input, 1.0-V output (for Ethernet PHY)
Debugging interfaces	MIPI-10: 1.27-mm pitch, 10-pin box header (CN60)
	MIPI-20: 1.27-mm pitch, 20-pin box header (CN61)
	J-Link™ OB: USB Micro-B (CN14)
Slide switch	Power-supply switch: Single-pole double-throw type × 1 (SW16)
DIP switches	Mode setting: 8 switches × 1
	Signal selection: 10 switches × 4, 8 switches × 4, 6 switches × 1, and 2 switches × 1
	User switch: 4 switches × 1
Push switches	Reset switch × 1
	User switch × 3
Potentiometer (for A/D conversion)	Single-turn type (10 kΩ)

LEDs	For the power supply: (yellow) × 1 and (green) × 1
	For the user: (green) × 6, (yellow) × 1, and (red) × 2 Among the above, (green) × 4 and (red) × 1 are also used for indicating the EtherCAT status.
	Ethernet status: (green) × 4 and (yellow) × 4 (built in to each RJ-45)
	J-Link™ OB status: (yellow) × 1
Ethernet ports	Connectors: RJ-45 × 4 (CN1, CN44, CN45, and CN59)
	PHY: Single-channel PHY × 4
USB	USB function: USB Mini-B (CN79)
	USB host: USB Type-A (CN80)
	USB OTG: USB Micro-AB (CN33)

Notes: 1. Evaluation of the one-time programmable memory (OTP) is not possible with the device mounted on this product.

Table 1-2 Board Specifications (2)

Item	Specification
CAN	Connector*: 2.54-mm pitch, 3 pins × 1 (CN55)
	CAN transceiver × 1
RS485	Connector*: 10 pins × 1 (CN58)
	RS485 transceiver × 1
	External RS485 expansion connector: 2.54-mm pitch, 8 pins × 1 (CN12)
USB-to-serial conversion interface	Connector: USB Mini-B (CN34)
	Driver: FT2232HQ
Pmod™	PMOD-2A, 6A: 12-pin connector (CN50)
	PMOD-3A: 12-pin connector (CN49)
mikroBUS™	2.54-mm pitch, 8 pins × 2 (CN53 and CN54)
Grove	2.00-mm pitch, 4 pins × 2 (CN48 and CN51)
QWIIC	1.00-mm pitch, 4 pins × 1 (CN52)
Serial host interface	2.54-mm pitch, 14 pins × 1 (CN64)
LCDC	45-pin FPC connector × 1 (CN15)
SD	SD card slot × 1 (CN31) and microSD card slot × 1 (CN16)
PCIe	The selectable configurations are 1 lane × 2 ports or 2 lanes × 1 port and root complex or endpoint.
	Connectors: 1 lane × 1 (CN8), 4 lanes × 1 (CN32, with only 2 lanes actually in use)
Pin headers (2.54-mm pitch)	ENCIF: 30 pins × 2 (CN2 and CN3), 22 pins × 1 (CN10)
	DSMIF: 30 pins × 3 (CN18, CN21, and CN22), 10 pins × 1 (CN19)
	GPT: 36 pins × 3 (CN24, CN25, and CN26)
	ETHSW: 10 pins × 1 (CN20)
	GMAC: 6 pins × 1 (CN23)
	External bus*: 40 pins × 2 (CN13 and CN17)
	ADC: 10 pins × 2 (CN41 and CN42), 12 pins × 1 (CN43)

Note: The connector is not mounted on the product as shipped.

2. Power Supply

2.1 Specifications of Power Supply

This board has a USB Type-C® connector (CN46), a power jack (CN47), and a bipolar terminal block (CN90). Power can be supplied from any one of these. Table 2-1 lists the specifications of power supply.

Table 2-1 Specifications of Power Supply

Connector	Specifications and Supply Voltage
CN46	USB power delivery (USB PD) supporting USB Type-C®, 15-V/3-A DC*1
CN47	2.0-mm center-positive power jack, 15-V/3-A DC*2
CN90	5.08-mm pitch bipolar terminal block, 24-V/3-A DC*3

- Notes:
1. When supplying power through CN46, always use an AC adapter for USB supporting 15 V/3 A.
 2. Though some of our boards, such as Renesas Starter Kit, require a 12-V or 5-V power supply, in the case of supplying power to this board through CN47, always use a 15-V/3-A power supply and do not connect a 12-V or 5-V power supply.
 3. When supplying power through CN90, always use a stabilized power source that is capable of supplying 24 V/3 A.

2.2 Methods for Turning the Power On and Off

This board is equipped with a power switch (POWER_SW slide switch). When turning the power on, connect the power to CN46, CN47, or CN90 with the power switch turned off, and then turn the power switch on to start the power supply. To end the supply of power, turn the power switch off and then disconnect the power cable from CN46, CN47, or CN90. Figure 2-1 shows the arrangement and manipulation method of the power switch.

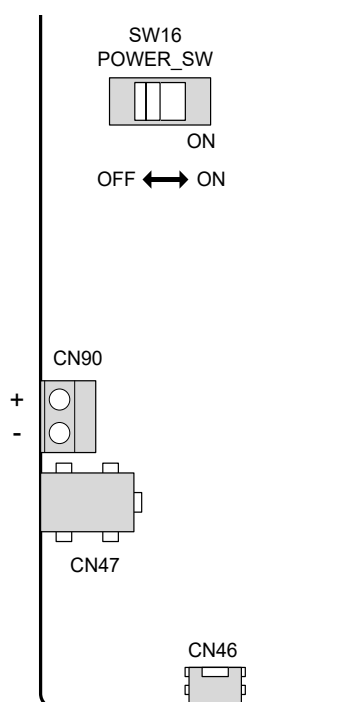


Figure 2-1 Arrangement and Method of Manipulating the Power Switch

2.3 Connectors for Current Measurement

This board has connectors for measuring currents, and each current value can be measured by inserting an ammeter between pins 1-2 of the given connector. Table 2-2 is a list of the connectors for measuring currents.

Table 2-2 List of Connectors for Current Measurement


Connector	Purpose
CN30*	For measuring the current of the power supply (CPU0V8) line input to the 0.8-V power supply of the RZ/T2H
CN29	For measuring the current of the power supply (CPU1V1) line input to the 1.1-V power supply of the RZ/T2H
CN35	For measuring the current of the power supply (CPU1V8) line input to the 1.8-V power supply of the RZ/T2H
CN36	For measuring the current of the power supply (CPU3V3) line input to the 3.3-V power supply of the RZ/T2H
CN81	For measuring the current of the power supply (CPU_VCC1833_0) line input to the VCC1833_0 power supply of the RZ/T2H
CN82	For measuring the current of the power supply (CPU_VCC1833_1) line input to the VCC1833_1 power supply of the RZ/T2H
CN83	For measuring the current of the power supply (CPU_VCC1833_2) line input to the VCC1833_2 power supply of the RZ/T2H
CN84	For measuring the current of the power supply (CPU_VCC1833_3) line input to the VCC1833_3 power supply of the RZ/T2H
CN85	For measuring the current of the power supply (CPU_VCC1833_4) line input to the VCC1833_4 power supply of the RZ/T2H
CN86	For measuring the current of the power supply (CPU_VCC1833_5) line input to the VCC1833_5 power supply of the RZ/T2H
CN87	For measuring the current of the power supply (CPU_VCC1833_6) line input to the VCC1833_6 power supply of the RZ/T2H

Note: This is a 4-pin connector. To measure the current, insert an ammeter between pins 1-3 and 2-4.

3. Board Layout

3.1 Component Layouts


Figure 3-1 and Figure 3-2 show the component layouts on the top and on the soldered side of this board.

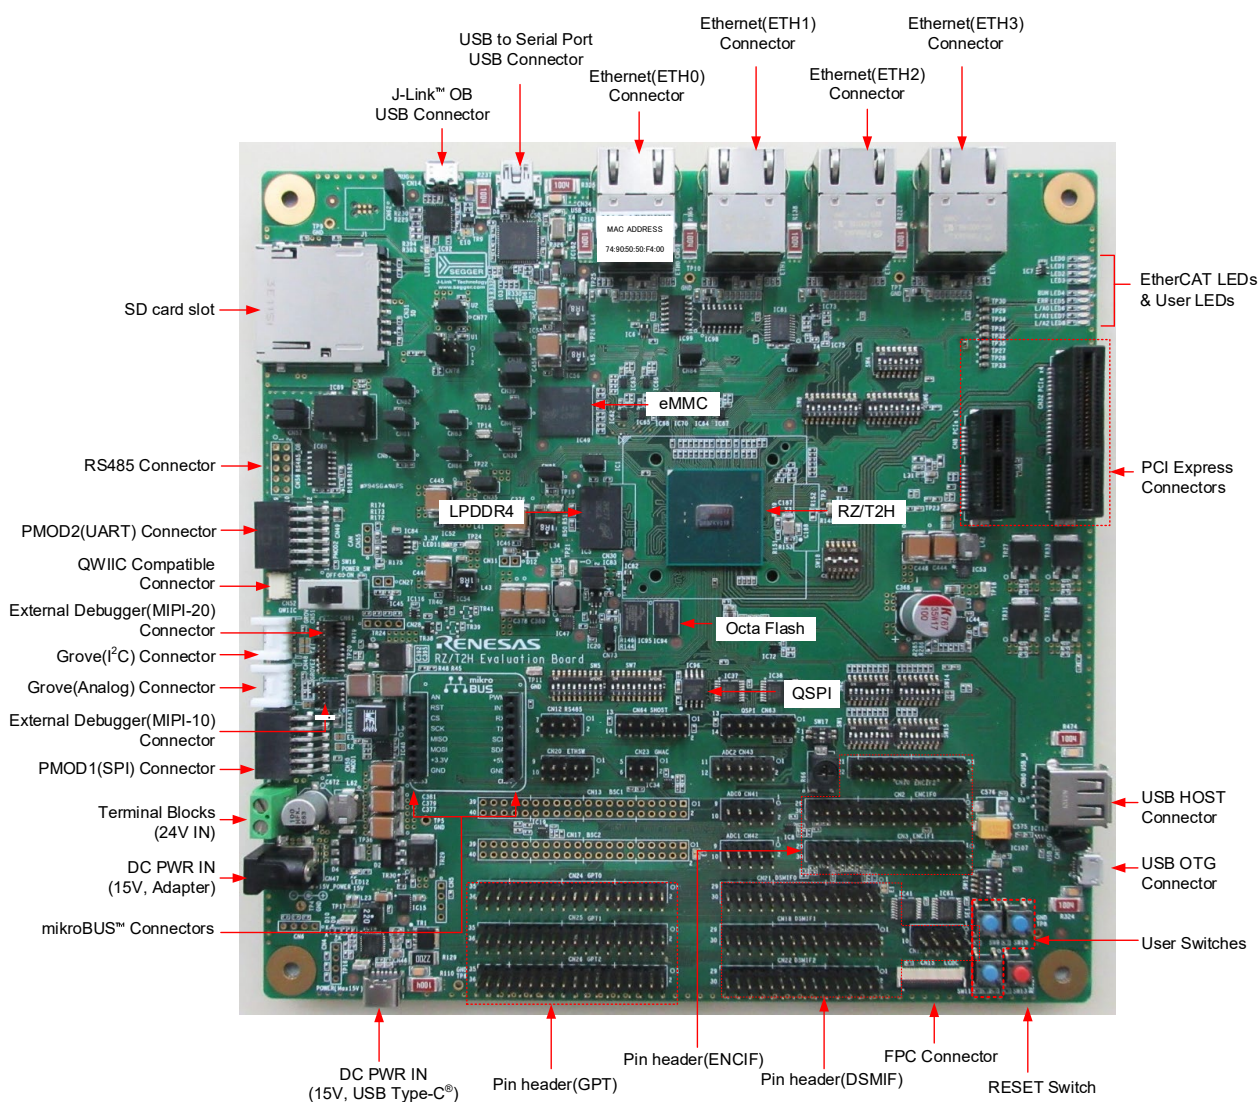

Notes: 1. For the details of each function, refer to chapter 7.

2. The MAC address shown in the figure is an example. Use a unique MAC address when running Ethernet software.

Figure 3-1 Board Layout (Top Side)

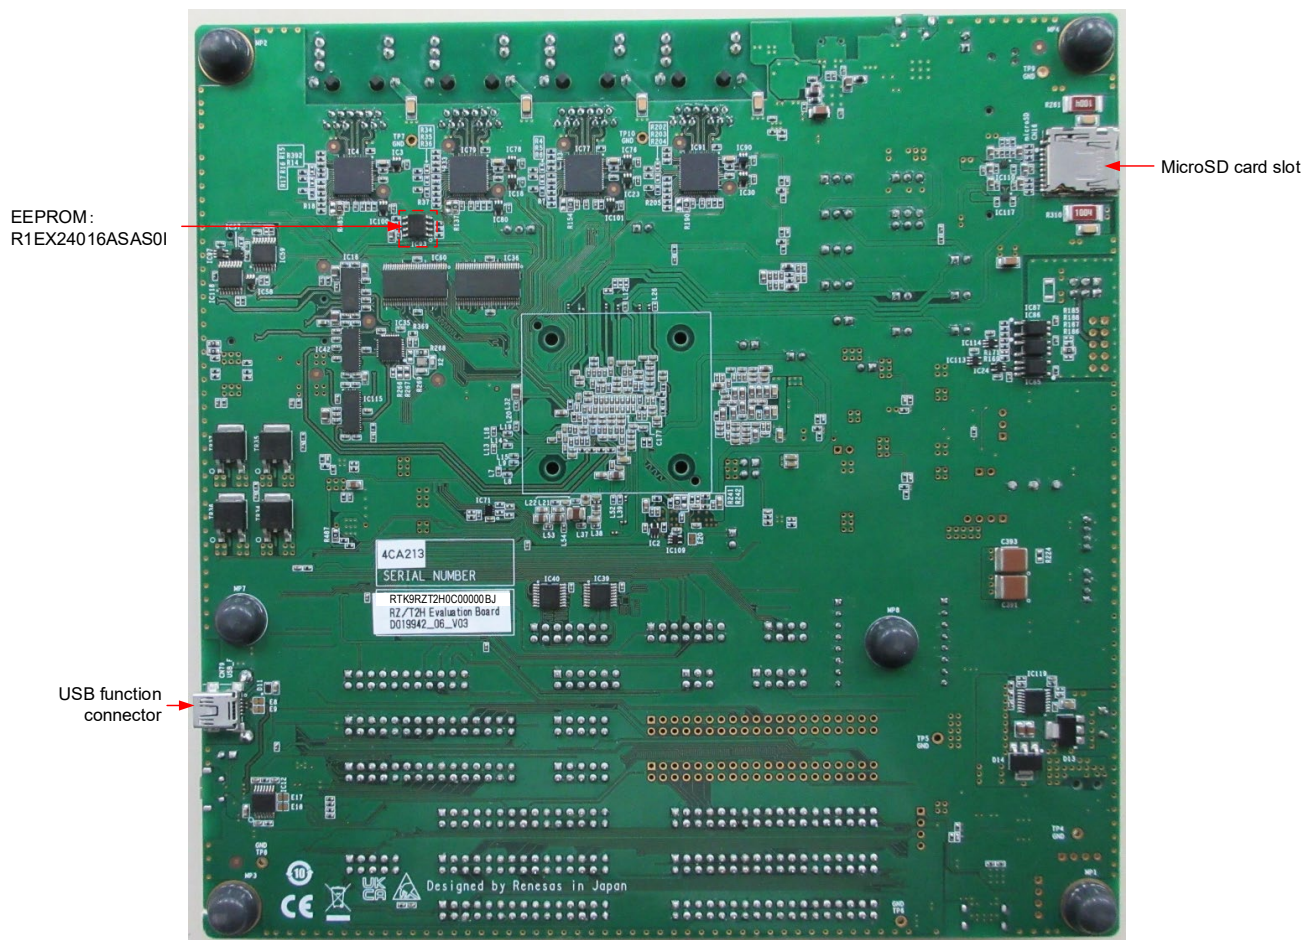

Note: The serial number (3KA0162) is an example.

Figure 3-2 Board Layout (Soldered Side)

4. Connections

4.1 Internal Connections of the Board

Figure 4-1 shows the connections between components of this board and the RZ/T2H.

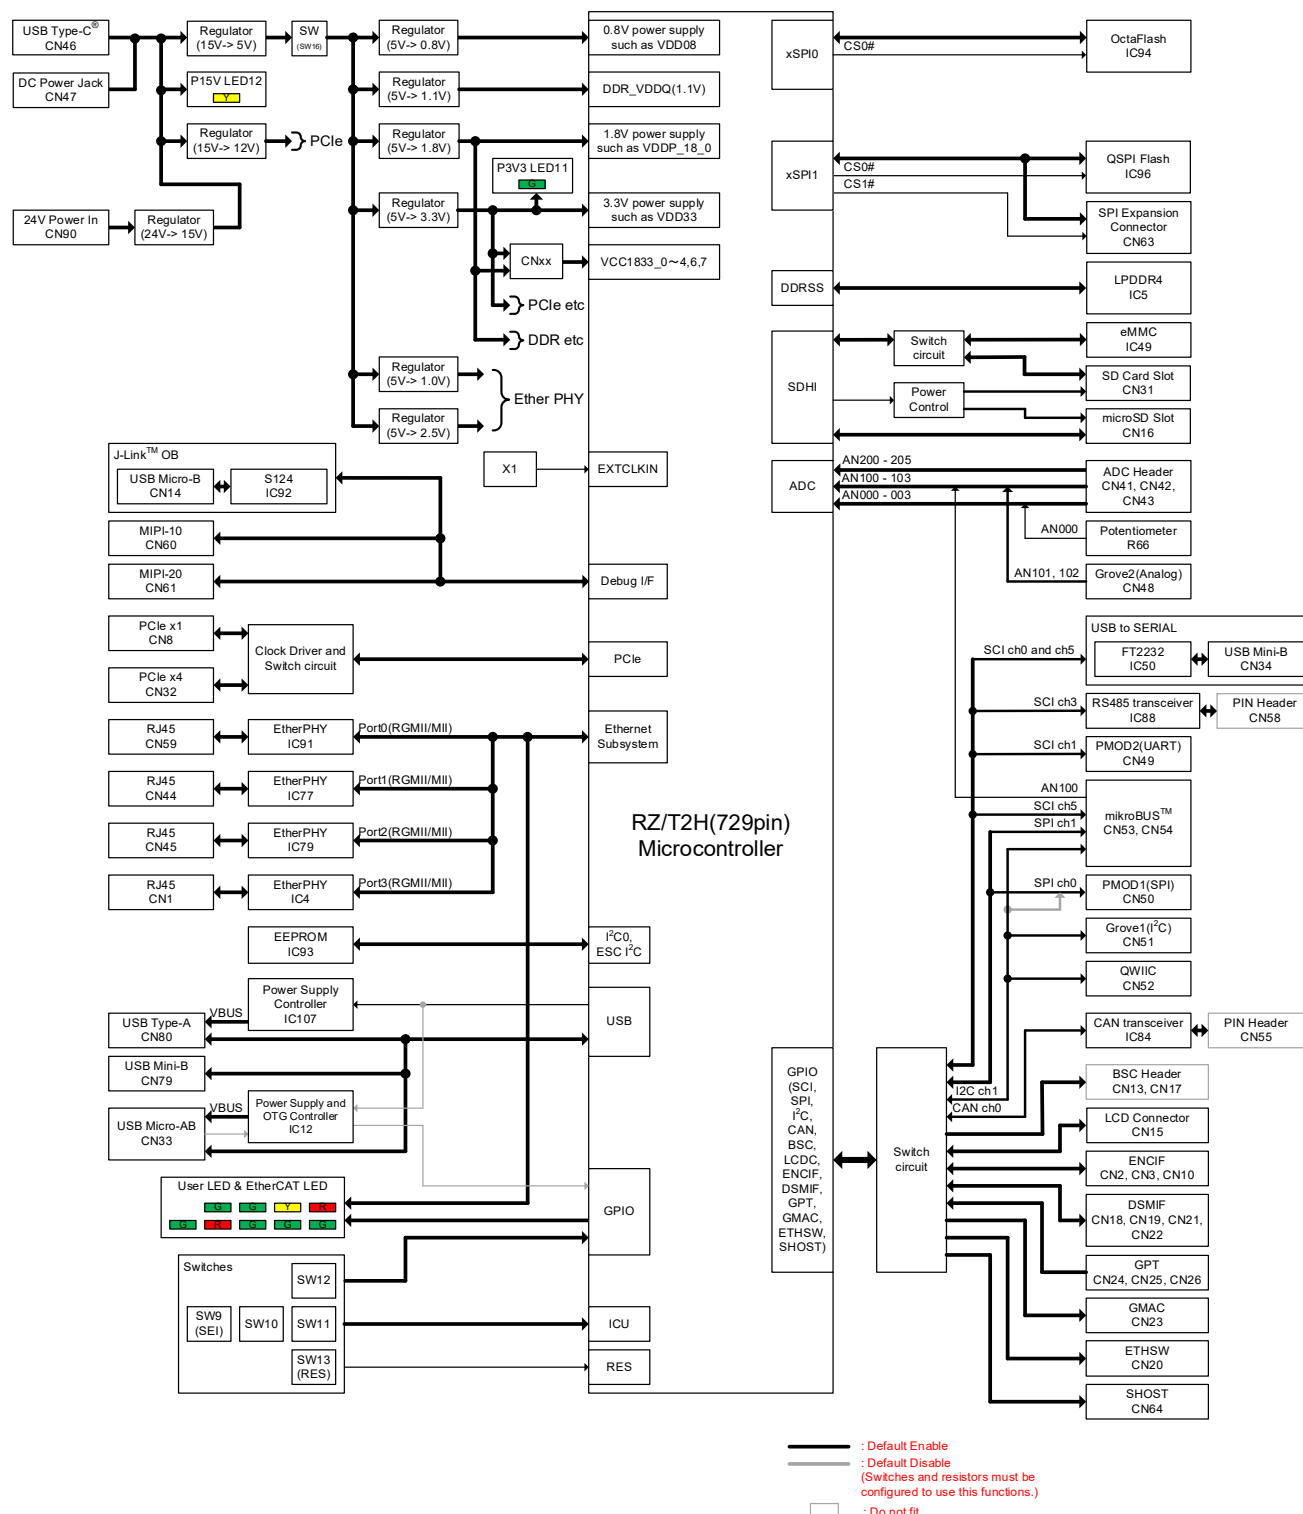


Figure 4-1 Internal Connections of the Board

4.2 Connections in the Debugging Environment

Figure 4-2 shows the connection between this board, the emulator, and the host PC. Figure 4-3 shows the connection between this board and the host PC when J-Link™ OB on this board is used.

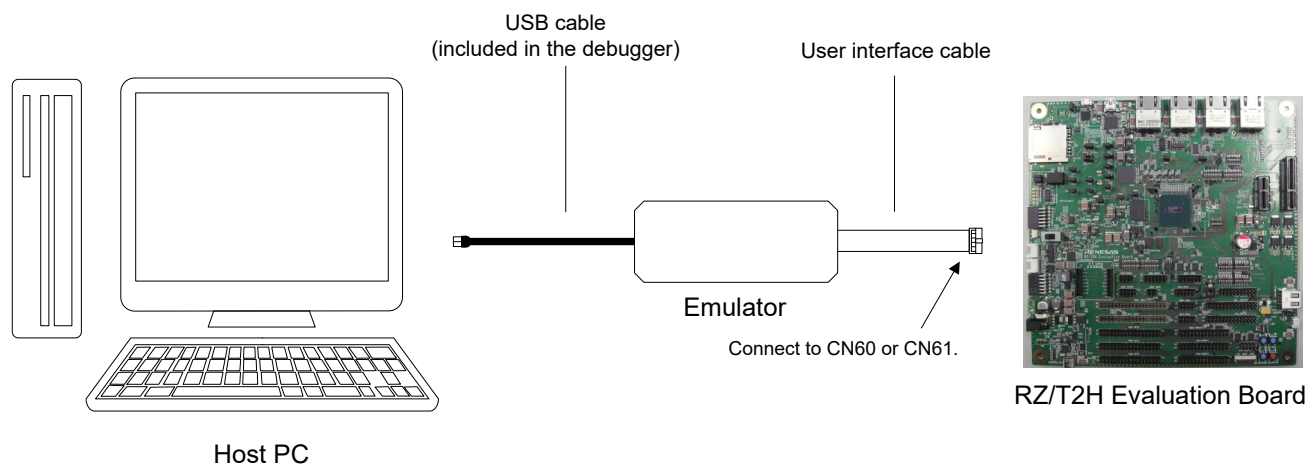


Figure 4-2 Connections in the Debugging Environment (with an Emulator)

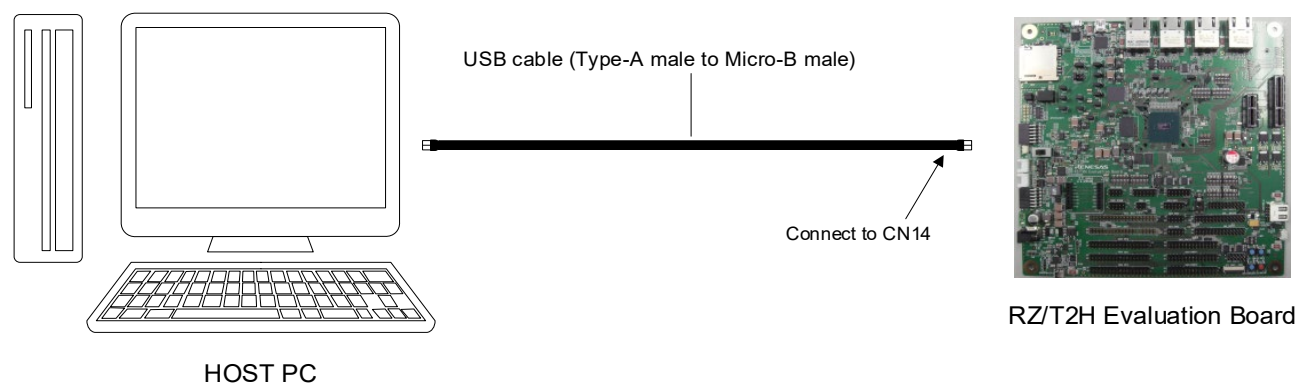


Figure 4-3 Connections in the Debugging Environment (with J-Link™ OB)

5. List of RZ/T2H Pin Functions

Table 5-1 to Table 5-27 are lists of the functions of RZ/T2H pins used on this board. **Text in bold blue type** in the tables indicates the settings at the time of shipment of the board and the functions available with those settings. However, a signal that is connected to multiple connectors can be used in only one of the connectors at a time.

Table 5-1 List of RZ/T2H Pin Function Selections (1)

Pin No.	Pin Name	Pin Function	Description	Connector	Remarks
A1	VSS				
A2	P11_4/IRQ7/DE1/MCLK31/HDSL09_SMPL	MCLK31	Clock of DSMIF	CN18-5	
A3	P11_6/GTIOC05_0A/TST_OUT00/HDSL09_SEL1	P11_6	GPIO/SSL for use with PMOD1	CN50-10	
		GTIOC05_0A	Input capture/output compare/PWM output pin	CN25-27	
A4	P11_7/GTIOC05_0B/SI00#/HDSL09_MISO1	GTIOC05_0B	Input capture/output compare/PWM output pin	CN25-28	
A5	P10_1/IRQ7/WAIT#/MTIOC7D/GTIOC04_2B/GTIOC10_2B/SCK0/MDAT72/DISP_DATAR1/SI14#/HDSL08_LINK	WAIT#	Wait signal of external bus	CN17-34	
		MDAT72	Data of DSMIF	CN22-14	
		DISP_DATAR1	Display data R1	CN15-40	
A6	P10_6/IRQ0/A3/MTIOC0B/GTIOC05_0A/DE0/MCLK21/DISP_DATAR6/HDSL08_MOSI1/POUTA	A3	Address A3 of external bus	CN13-7	
		MCLK21	Clock of DSMIF	CN21-25	
		DISP_DATAR6	Display data R6	CN15-35	
A7	P14_0/IRQ5/A0/GTIOC06_4B/ETHSW_PTPOUT2/ESC_SYNC0/DE3/MCLK42/HDSL11_SMPL	A0	Address A0 of external bus	CN13-1	
		GTIOC06_4B	Input capture/output compare/PWM output pin	CN26-12	
		ETHSW_PTPOUT2	Timer pulse output from ETHSW	CN20-5	
		DE3	DE of RS485		SW1-4: OFF
A8	P13_6/D30/GTIOC06_3B/GTIOC04_3A/SS3#/CTS3#/RTS3#/SPI_SSL23/MCLK41/ENCIFDO13/TXDE09/HDSL10_MOSI2	D30	Data D30 of external bus	CN17-30	
		GTIOC06_3B	Input capture/output compare/PWM output pin	CN26-10	
		ENCIFDO13	Data output from ENCIF	CN10-6	
A9	P14_4/DACK/POE4#/GTIOC06_1B/GTIOC09_1B/GTIOC06_3A/CMTW0_TIC0/ESC_IRQ/SS4#/CTS4#/RTS4#/SD1_WP/DISP_DATAG4/MBX_HINT#/ENCIFDO00/TXDE00/HDSL11_MOSI1	DACK	DMA acknowledge	CN13-26	
		DISP_DATAG4	Display data G4	CN15-29	
		ENCIFDO00	Data output from ENCIF	CN2-7	
A10	P14_7/IRQ9/POE11#/GTIOC09_3A/CMTW0_TOC1/ESC_I2CDATA/IIC_SDA0/SD0_IOVS/MCLK32/SI02#/HDSL11_MISO2	MCLK32	Clock of DSMIF	CN18-3	
A11	P16_2/SCK5/MDAT51/SI03#/HDSL12_MOSI2	MDAT51	Data of DSMIF	CN18-26	

A12	P16_4/IRQ11/GTETRGSB/ESC_LIN KACT1/TXD5/SDA5/MOSI5/TST_O UT04/HDSL13_SMPL	TXD5	TXD5 of USB-to-serial conversion		SW8-7: ON, SW8-8: OFF
		TXD5	TX for use with mikroBUS™	CN54-4	SW8-7: OFF, SW8-8: ON
A13	P17_0/IRQ12/GTIOC03_1B/SD1_D ATA1/SIO5#/HDSL13_MOSI1	SD1_DATA1	Data DAT1 of SD1	CN16-8	
A14	P17_5/A7/DACK/GTADSM00_1/GT ETRGC/CMTW1_TOC0/SCK0/CAN TX0/SD1_WP/TST_OUT07/HDSL14 _LINK	P17_5	GMAC reset of Ethernet port 2		SW6-1: OFF, SW6-2: ON, SW6-3: OFF
		A7	Address A7 of external bus	CN13-17	SW6-1: ON, SW6-2: OFF
A15	P19_4/GTIOC07_2A/TST_OUT10/H DSL15_MOSI1	GTIOC07_2A	Input capture/output compare/PWM output pin	CN26-19	
A16	P19_5/GTIOC07_2B/SI10#/HDSL15 _CLK2	GTIOC07_2B	Input capture/output compare/PWM output pin	CN26-20	
A17	P20_1/MDV/ETH0_TXD0	MDV	MDV setting input		
		ETH0_TXD0	TXD0 of Ethernet port 0		
A18	P20_0/ETH0_TXCLK/HDSL15_MO SI2	ETH0_TXCLK	TXCLK of Ethernet port 0		
A19	P21_3/ETH0_RXDV/DUEI13/HDSL 00_CLK2	ETH0_RXDV	RXDV of Ethernet port 0		
A20	P23_1/GTIOC06_1A/ESC_IRQ/DUE I00/HDSL02_LINK	P23_1	Control of user LED0		SW8-9: ON, SW8-10: OFF
		GTIOC06_1A	Input capture/output compare/PWM output pin	CN26-5	SW8-9: OFF, SW8-10: ON
A21	P23_3/GTIOC06_2A/ESC_I2CCLK/I C_SCL0/SIO0#/HDSL02_CLK1	GTIOC06_2A	Input capture/output compare/PWM output pin	CN26-7	SW6-7: OFF, SW6-8: ON
		ESC_I2CCLK	SCL of EEPROM		SW6-7: ON, SW6-8: OFF
A22	P23_2/GTIOC06_1B/ESC_RESETO UT#/TST_OUT00/HDSL02_SMPL	GTIOC06_1B	Input capture/output compare/PWM output pin	CN26-6	
A23	P24_6/MD0/ETH1_TXD0	MD0	MD0 setting input		
		ETH1_TXD0	TXD0 of Ethernet port 1		
A24	P25_2/MDW1/ETH1_TXEN	MDW1	MDW1 setting input		
		ETH1_TXEN	TXEN of Ethernet port 1		
A25	P26_3/ETHSW_PHYLINK1/ESC_P HYLINK1/HDSL04_SMPL	ETHSW_PHYLI NK1/ESC_PHY LINK1	PHYLINK of Ethernet port 1		
A26	P25_1/MDW0/ETH1_TXD3/CANTX DP0	MDW0	MDW1 setting input		
		ETH1_TXD3	TXD3 of Ethernet port 1		
A27	VSS				

Table 5-2 List of RZ/T2H Pin Function Selections (2)

Pin No.	Pin Name	Pin Function	Description	Connector	Remarks
B1	P10_3/IRQ2/RD#/MTCLKD/MTIOC2B/GTIOC04_3B/GTIOC10_3B/TXD0/SDA0/MOSI0/MDAT10/MDAT00/DISP_DATAR3/ENCIFOE04/DEE04/HDSL08_CLK1	RD#	RD# of external bus	CN13-39	
		GTIOC04_3B	Input capture/output compare/PWM output pin	CN25-22	
		DISP_DATAR3	Display data R3	CN15-38	
B2	P10_2/IRQ1/CS0#/MTCLKC/MTIOC2A/GTIOC04_3A/GTIOC10_3A/RXD0/SCL0/MISO0/MCLK10/MCLK00/DISP_DATAR2/ENCIFCK04/SCKE04/HDSL08_SMPL	CS0#	CS0# of external bus	CN13-32	
		GTIOC04_3A	Input capture/output compare/PWM output pin	CN25-21	
		DISP_DATAR2	Display data R2	CN15-39	
B3	P10_5/A2/MTIOC1B/MTIOC0A/GTIOC04_4B/CTS0#/MDAT11/MDAT01/DISP_DATAR5/ENCIFDI04/RXDE04/HDSL08_MISO1	A2	Address A2 of external bus	CN13-5	
		GTIOC04_4B	Input capture/output compare/PWM output pin	CN25-24	
		DISP_DATAR5	Display data R5	CN15-36	
B4	P11_5/MDAT31/DUEI00/HDSL09_CLK1	MDAT31	Data of DSMIF	CN18-6	
B5	P10_4/IRQ3/A1/MTIOC1A/GTIOC04_4A/SS0#/CTS0#/RTS0#/MCLK11/MCLK01/DISP_DATAR4/ENCIFDO04/TXDE04/HDSL08_SEL1	A1	Address A1 of external bus	CN13-3	
		GTIOC04_4A	Input capture/output compare/PWM output pin	CN25-23	
		DISP_DATAR4	Display data R4	CN15-37	
B6	P12_4/IRQ1/D20/GTIOC05_3A/CMTW1_TIC0/RXD2/SCL2/MISO2/SD0_DATA2/MCLK02/ENCIFCK05/SCKE05/HDSL09_MOSI2	D20	Data D20 of external bus	CN17-8	SW2-1: ON, SW2-2: OFF
		GTIOC05_3A	Input capture/output compare/PWM output pin	CN25-33	
		RXD2	RXD2 of RS485	CN12-3	
		ENCIFCK05	Clock of ENCIF	CN2-20	
		SD0_DATA2	Data DAT2 of eMMC		SW2-1: ON, SW2-2: ON
		SD0_DATA2	Data DAT2 of SD0	CN31-9	SW2-1: OFF, SW2-2: ON
B7	P13_5/IRQ4/D29/GTIOC06_3A/TXD3/SDA3/MOSI3/SPI_SSL32/MDAT40/ENCIFOE13/DEE09/HDSL10_MISO2	D29	Data D29 of external bus	CN17-28	
		GTIOC06_3A	Input capture/output compare/PWM output pin	CN26-9	
		TXD3	TXD3 of RS485		SW1-4: OFF
		ENCIFOE13	ENCIF output enable	CN10-4	
B8	P13_4/D28/GTIOC03_3B/RXD3/SCL3/MISO3/SPI_SSL31/MCLK40/ENCIFCK13/SCKE09/HDSL10_SEL2	D28	Data D28 of external bus	CN17-26	SW1-4: ON
		ENCIFCK13	Clock of ENCIF	CN10-2	
		RXD3	RXD3 of RS485		SW1-4: OFF
B9	P14_6/IRQ8/POE10#/GTIOC06_2B/GTIOC09_2B/CMTW0_TIC1/ESC_I2CCLK/DE4/IIC_SCL0/SD0_PWEN/DISP_DATAG6/TST_OUT02/HDSL11_SEL2	DE4	DE4 of RS485	CN12-8	
		DISP_DATAG6	Display data G6	CN15-27	
B10	VSS				
B11	P16_1/DE5/MCLK51/TST_OUT03/HDSL12_MISO2	MCLK51	Clock of DSMIF	CN18-25	

B12	P16_3/IRQ10/GTETRGS/ESC_LIN KACT0/RXD5/SCL5/MISO5/DUEI04 /HDSL13_LINK	P16_3/IRQ10	WAKE# of PCIe x1 connector	CN8-B11	SW8-5: OFF, SW8-6: ON
		IRQ10	INT for use with PMOD2	CN49-7	
		RXD5	RX for use with mikroBUS™	CN54-3	
		RXD5	RXD5 of USB-to-serial conversion		SW8-5: ON, SW8-6: OFF
B13	P17_1/IRQ13/GTIOC03_2A/SD1_D ATA2/DUEI06/HDSL13_CLK2	SD1_DATA2	Data DAT2 of SD1	CN16-1	
B14	VSS				
B15	P18_2/SEI/A10/GTADSM03_0/GTI OC07_3B/ETH1_CRSGMAC1_MD C/SCK1/CANRX0/SD1_PWEN/MCL K10/DISP_DATAB3/HDSL14_MOSI 1	A10	Address A10 of external bus	CN13-23	
		DISP_DATAB3	Display data B3	CN15-22	
B16	P18_6/IRQ3/A14/GTIOC07_4A/GTA DSM05_0/CTS1#/CANRXDP1/MCL K12/DISP_DATAB7/ENCIFDO13/E NCIFDO14/TXDE09/TXDE10/HDSL 14_MOSI2	A14	Address A14 of external bus	CN13-33	
		GTIOC07_4A	Input capture/output compare/PWM output pin	CN26-23	
		DISP_DATAB7	Display data B7	CN15-18	
		ENCIFDO14	Data output from ENCIF	CN10-15	
B17	P20_5/ETH0_TXEN/DUEI11/HDSL0 0_LINK	ETH0_TXEN	TXEN of Ethernet port 0		
B18	VSS				
B19	P21_2/ETH0_RXD3/CANTXDP0/SI 12#/HDSL00_MOSI1	ETH0_RXD3	RXD3 of Ethernet port 0		
B20	P24_3/IRQ14/ESC_I2CCLK/IIC_SC L1/CANRX0/MCLK70/HDSL03_LIN K	CANRX0	RX of CAN interface		SW7-3: OFF, SW7-4: ON
		MCLK70	Clock of DSMIF	CN22-17	SW7-3: ON, SW7-4: OFF
B21	P23_6/ETHSW_LPIO/MDAT60/SIO1 #/HDSL02_MOSI1	MDAT60	Data of DSMIF	CN22-8	
B22	VSS				
B23	P26_1/GMAC1_MDC/ETHSW_MDC /ESC_MDC/CANRXDP1/HDSL03_ MOSI2	GMAC1_MDC/E THSW_MDC/ES C_MDC	MDC of Ethernet port 3		
B24	P26_2/GMAC1_MDIO/ETHSW_MDI O/ESC_MDIO/CANTXDP1/HDSL04 _LINK	GMAC1_MDIO/ ETHSW_MDIO/ ESC_MDIO	MDIO of Ethernet port 3		
B25	P25_0/MD2/ETH1_TXD2/CANRXD P0	MD2	MD2 setting input		
		ETH1_TXD2	TXD2 of Ethernet port 1		
B26	P25_3/ETH1_RXCLK/DUEI03/HDS L03_SEL1	ETH1_RXCLK	RXCLK of Ethernet port 1		
B27	P28_3/GTIOC08_2A/SPI_SSL11/TS T_OUT06/HDSL05_CLK2	GTIOC08_2A	Input capture/output compare/PWM output pin	CN26-31	

Table 5-3 List of RZ/T2H Pin Function Selections (3)

Pin No.	Pin Name	Pin Function	Description	Connector	Remarks
C1	P11_1/IRQ4/ESC_LED RUN/TXD1/SDA1/MOSI1/MDAT22/DUEI15/HDSL08_MISO2	TXD1	TXD for use with PMOD2	CN49-2	
		MDAT22	Data of DSMIF	CN21-24	
C2	P09_5/D14/MTIOC6D/GTIOC04_0B/GTIOC10_0B/MDAT70/DISP_HSYNC/TST_OUT13/HDSL07_CLK2	D14	Data D14 of external bus	CN17-33	
		GTIOC04_0B	Input capture/output compare/PWM output pin	CN25-16	
		DISP_HSYNC	HSYNC of display output	CN15-14	
C3	P11_2/IRQ5/SS1#/CTS1#/RTS1#/MCLK30/TST_OUT15/HDSL08_MOSI2	RTS1#	RTS for use with PMOD2	CN49-4	
		MCLK30	Clock of DSMIF	CN18-7	
C4	P10_7/IRQ9/A4/MTIC5U/GTIOC05_0B/GTIOC00_3A/SCK1/MDAT21/DISP_DATAR7/HDSL08_CLK2/POUTB	IRQ9	IRQ of SPI expansion connector	CN63-13	
		A4	Address A4 of external bus	CN13-9	
		MDAT21	Data of DSMIF	CN21-26	
		DISP_DATAR7	Display data R7	CN15-34	
C5	P11_0/IRQ13/A5/GTIOC00_3B/ESC_RESETOUT#/RXD1/SCL1/MISO1/MCLK22/DISP_DATAG0/HDSL08_SEL2/POUTZ	A5	Address A5 of external bus	CN13-13	SW6-3: OFF, SW6-4: ON, SW6-5: OFF
		RXD1	RXD for use with PMOD2	CN49-3	
		DISP_DATAG0	Display data G0	CN15-33	
		ESC_RESETOUT#	ESC_RESETOUT# of Ethernet port 0 or port 1		SW6-3: OFF, SW6-4: OFF, SW6-5: ON
			ESC_RESETOUT# of Ethernet port 2		SW6-2: OFF, SW6-3: ON, SW6-4: OFF, SW6-5: OFF
			ESC_RESETOUT# of Ethernet port 0, port 1, or port 2		SW6-2: OFF, SW6-3: ON, SW6-4: OFF, SW6-5: ON
C6	VSS				
C7	P13_0/D24/GTIOC02_3A/DE2/SPI_RSPCK3/SD0_DATA6/MCLK00/ENCIFCK12/ENCIFCK03/SCKE08/SCKE03/HDSL10_SEL1	D24	Data D24 of external bus	CN17-16	SW2-1: ON, SW2-2: OFF
		GTIOC02_3A	Input capture/output compare/PWM output pin	CN24-33	
		DE2	DE2 of RS485	CN12-7	
		ENCIFCK12	Clock of ENCIF	CN10-3	
		SD0_DATA6	Data DAT6 of eMMC		SW2-1: ON, SW2-2: ON
C8	P13_7/IRQ14/D31/GTIOC06_4A/GTIOC04_3B/CTS3#/MDAT41/ENCIFDI13/RXDE09/HDSL11_LINK	D31	Data D31 of external bus	CN17-32	
		GTIOC06_4A	Input capture/output compare/PWM output pin	CN26-11	
		ENCIFDI13	Data input to ENCIF	CN10-8	
C9	P14_1/RD/WR#/GTIOC06_0A/GTIOC09_0A/GTIOC05_3A/RTCAT1HZ/SCK4/SD0_CD/MDAT42/DISP_DATAG1/DUEI02/HDSL11_CLK1	RD/WR#	RD/WR# of external bus	CN13-38	
		DISP_DATAG1	Display data G1	CN15-32	

C10	P14_2/BS#/GTIOC06_0B/GTIOC09_0B/GTIOC05_3B/RXD4/SCL4/MISO4/SD0_WP/DISP_DATAG2/ENCIFCK00/SCKE00/HDSL11_SEL1	BS#	BS# of external bus	CN13-30	
		RXD4	RXD4 of RS485	CN12-4	
		DISP_DATAG2	Display data G2	CN15-31	
		ENCIFCK00	Clock of ENCIF	CN2-3	
C11	P14_5/TEND/POE8#/GTIOC06_2A/GTIOC09_2A/GTIOC06_3B/CMTW0_TOC0/ESC_RESETOUT#/CTS4#/DISP_DATAG5/ENCIFDI00/RXDE00/HDSL11_CLK2	TEND	End of DMA transfer	CN13-40	
		DISP_DATAG5	Display data G5	CN15-28	
		ENCIFDI00	Data input to ENCIF	CN2-9	
C12	P16_6/GTIOC03_0B/SD1_CMD/DUEI05/HDSL13_SEL1	SD1_CMD	CMD of SD1	CN16-3	
C13	P17_3/IRQ15/GTETRGA/SIO6#/HDSL13_MISO2	P17_3	CLKREQ output from PCIe x4 connector	CN32-B12	SW15-1: OFF
		IRQ15	PRSENT2 input to PCIe x4 connector	CN32-B17, CN32-B31	SW15-1: ON
C14	P19_2/GTIOC07_1A/SIO9#/HDSL15_SEL1	GTIOC07_1A	Input capture/output compare/PWM output pin	CN26-17	
C15	P19_3/GTIOC07_1B/DUEI10/HDSL15_MISO1	GTIOC07_1B	Input capture/output compare/PWM output pin	CN26-18	
C16	P18_7/IRQ4/A15/GTIOC07_4B/GTADSM05_1/ETHSW_PTPOUT3/ESC_SYNC1/DE1/CANTXDP1/MDAT12/ENCIFDI13/ENCIFDI14/RXDE09/RXDE10/HDSL15_LINK	A15	Address A15 of external bus	CN13-35	
		GTIOC07_4B	Input capture/output compare/PWM output pin	CN26-24	
		ETHSW_PTPOUT3	Timer pulse output from ETHSW	CN20-7	
		ENCIFDI14	Data input to ENCIF	CN10-17	
C17	P20_3/ETH0_TXD2/CANRX0	ETH0_TXD2	TXD2 of Ethernet port 0		
C18	P20_6/ETH0_RXCLK/TST_OUT11/HDSL00_SMPL	ETH0_RXCLK	RXCLK of Ethernet port 0		
C19	P21_4/GMAC0_MDC/ETHSW_MDC/ESC_MDC/CANRX1/TST_OUT13/HDSL00_SEL2	GMAC0_MDC/ETHSW_MDC/ESC_MDC	MDC of Ethernet port 0 or port 1		
			MDC of Ethernet port 2		SW2-6: ON
C20	P23_4/GTIOC06_2B/ESC_I2CDATA/IIC_SDA0/DUEI01/HDSL02_SEL1	GTIOC06_2B	Input capture/output compare/PWM output pin		SW6-9: OFF, SW6-10: ON
		ESC_I2CDATA	SDA of EEPROM		SW6-9: ON, SW6-10: OFF
C21	P23_5/ESC_LINKACT2/MCLK60/TST_OUT01/HDSL02_MISO1	ESC_LINKACT2	LINKACT2 control of LED8		SW7-5: OFF, SW7-6: ON
		MCLK60	Clock of DSMIF	CN22-7	SW7-5: ON, SW7-6: OFF
C22	P22_6/IRQ8/A19/GTETRGSB/GMAC0_PTPTRG1/ESC_LATCH1/DE5/CANTX1/SD0_WP/DUEI15/HDSL01_SEL2	IRQ8	IRQ of display output unit	CN15-4	SW2-1: ON, SW2-2: OFF
		GMAC0_PTPTRG1	PTPTRG1 of GMAC0	CN23-2	
		SD0_WP	WP of SD0	CN31-WP	SW2-1: OFF, SW2-2: ON
C23	P24_7/MD1/ETH1_TXD1	MD1	MD1 setting input		
		ETH1_TXD1	TXD1 of Ethernet port 1		
C24	P24_5/ETH1_TXCLK/HDSL03_CLK1	ETH1_TXCLK	TXCLK of Ethernet port 1		

C25	P26_4/ETH1_REFCLK/RMII1_REF CLK	ETH1_REFCLK	REFCLK of Ethernet port 1		
C26	P26_5/IRQ12/CANTX0/ENCIFCK01 /SCKE01/HDSL04_CLK1	IRQ12	Interrupt of Ethernet port 1		
C27	P27_7/IRQ4/GTIOC08_0A/ETHSW_TDMAOUT0/SPI_RSPCK1/DUEI05/HDSL05_CLK1	GTIOC08_0A	Input capture/output compare/PWM output pin	CN26-27	
		ETHSW_TDMA OUT0	TDMA timer output from ETHSW	CN20-4	

Table 5-4 List of RZ/T2H Pin Function Selections (4)

Pin No.	Pin Name	Pin Function	Description	Connector	Remarks
D1	P11_3/IRQ6/CTS1#/MDAT30/SI15#/HDSL09_LINK	CTS1#	CTS for use with PMOD2	CN49-1	
		MDAT30	Data of DSMIF	CN18-8	
D2	P09_4/D13/MTIOC6B/GTIOC04_0A/GTIOC10_0A/MCLK70/DISP_CLK/DUEI13/HDSL07_MOSI1	D13	Data D13 of external bus	CN17-31	
		GTIOC04_0A	Input capture/output compare/PWM output pin	CN25-15	
		DISP_CLK	Clock of display output	CN15-16	
D3	P09_6/D15/MTIOC7A/GTIOC04_1A/GTIOC10_1A/MCLK71/DISP_VSY NC/SI13#/HDSL07_SEL2	D15	Data D15 of external bus	CN17-35	
		MCLK71	Clock of DSMIF	CN22-15	
		DISP_VSYNC	VSYNC of display output	CN15-13	
D4	P10_0/IRQ4/WE1#/MTIOC7B/GTIOC04_2A/GTIOC10_2A/MCLK72/DISP_DATAR0/TST_OUT14/HDSL07_MOSI2	WE1#	WE1# of external bus	CN17-38	
		MCLK72	Clock of DSMIF	CN22-13	
		DISP_DATAR0	Display data R0	CN15-41	
D5	P09_7/WE0#/MTIOC7C/GTIOC04_1B/GTIOC10_1B/MDAT71/DISP_DE/DUEI14/HDSL07_MISO2	WE0#	WE0# of external bus	CN17-36	
		MDAT71	Data of DSMIF	CN22-16	
		DISP_DE	DE of display output	CN15-12	
D6	P12_6/D22/GTIOC05_4A/GTIOC01_3B/CMTW1_TIC1/SS2#/CTS2#/RTS2#/SD0_DATA4/MCLK10/ENCIFDO05/TXDE05/HDSL10_SMPL	D22	Data D22 of external bus	CN17-12	SW2-1: ON, SW2-2: OFF
		GTIOC05_4A	Input capture/output compare/PWM output pin	CN25-35	
		ENCIFDO05	Data output from ENCIF	CN2-24	
		SD0_DATA4	Data DAT4 of eMMC		SW2-1: ON, SW2-2: ON
D7	P12_0/D16/MTIC5V/GTIOC05_1A/CMTW0_TIC0/CANRX1/SD0_CLK/DUEI01/HDSL09_MOSI1	D16	Data D16 of external bus	CN17-37	SW2-1: ON, SW2-2: OFF
		GTIOC05_1A	Input capture/output compare/PWM output pin	CN25-29	
		SD0_CLK	CLK of eMMC		SW2-1: ON, SW2-2: ON
			CLK of SD0	CN31-5	SW2-1: OFF, SW2-2: ON
D8	VSS				
D9	P14_3/IRQ6/DREQ/POE0#/GTIOC06_1A/GTIOC09_1A/ESC_LINKACT2/TXD4/SDA4/MOSI4/SD1_CD/DISP_DTAG3/ENCIFOE00/DEE00/HDSL11_MISO1	DREQ	DMA request	CN13-28	
		DISP_DTAG3	Display data G3	CN15-30	
		ENCIFOE00	ENCIF output enable	CN2-5	
		TXD4	TXD4 of RS485	CN12-6	
D10	P15_6/IRQ1/GTIOC09_6B/MDAT42/ENCIFDO07/TXDE07/HDSL12_MOSI1	IRQ1	INT for use with mikroBUS™	CN54-2	
		MDAT42	Data of DSMIF	CN18-14	
D11	P16_0/IRQ2/CTS5#/MDAT50/TXDE07/DUEI03/HDSL12_SEL2	MDAT50	Data of DSMIF	CN18-28	
D12	VSS				

D13	P18_3/IRQ0/A11/GTADSM03_1/RT CAT1HZ/ETH1_COL/GMAC1_MDI O/RXD1/SCL1/MISO1/CANTX0/SD 1_IOVS/MDAT10/DISP_DATAB4/H DSL14_CLK2	A11	Address A11 of external bus	CN13-25	
		DISP_DATAB4	Display data B4	CN15-21	
D14	P19_0/GTIOC07_0A/DUEI09/HDSL 15_SMPL	GTIOC07_0A	Input capture/output compare/PWM output pin	CN26-15	
D15	P18_0/IRQ7/A8/TEND/GTADSM02_0/ ESC_LED RUN/SS0#/CTS0#/RTS 0#/CANRXDP0/SD1_PWEN/DISP_ DATAB1/TST_OUT08/HDSL14_SE L1	A8	Address A8 of external bus	CN13-19	SW8-3: OFF, SW8-4: ON
		DISP_DATAB1	Display data B1	CN15-24	
		ESC_LED RUN	LED RUN control of LED4		SW8-3: ON, SW8-4: OFF
D16	VSS				
D17	P21_7/ETH0_REFCLK/RMII0_REF CLK/CANTXDP1/HDSL01_LINK	ETH0_REFCLK	REFCLK of Ethernet port 0		
D18	P20_7/ETH0_RXD0/SI11#/HDSL00 _CLK1	ETH0_RXD0	RXD0 of Ethernet port 0		
D19	P21_6/ETHSW_PHYLINK0/ESC_P HYLINK0/CANRXDP1/HDSL00_MO SI2	ETHSW_PHYLI NK0/ESC_PHY LINK0	PHYLINK of Ethernet port 0		
D20	VSS				
D21	P22_1/GTETRGA/ETH0_TXER/TX D5/SDA5/MOSI5/CANTX0/HDSL01 _CLK1	ETH0_TXER	TXER of Ethernet port 0		
D22	P24_1/IRQ12/MCLK62/SI02#/HDSL 02_MISO2	MCLK62	Clock of DSMIF	CN22-3	
D23	P25_6/ETH1_RXD2/CANRX1/DUEI 04/HDSL03_CLK2	ETH1_RXD2	RXD2 of Ethernet port 1		
D24	VSS				
D25	P26_0/ETH1_RXDV/SI04#/HDSL03 _MISO2	ETH1_RXDV	RXDV of Ethernet port 1		
D26	P26_6/SEI/CS2#/ETH1_TXER/ESC _RESETOUT#/CANRX0/ENCIFOE0 1/DEE01/HDSL04_SEL1	ETH1_TXER	TXER of Ethernet port 1		
D27	P28_5/CANRX0/SPI_SSL13/MCLK7 1/ENCIFCK08/ENCIFCK00/SCKE08 /SCKE00/HDSL05_MISO2	ENCIFCK08	Clock of ENCIF	CN3-11	

Table 5-5 List of RZ/T2H Pin Function Selections (5)

Pin No.	Pin Name	Pin Function	Description	Connector	Remarks
E1	DDR_DQA12	DDR_DQA12	Data DQ_A[3] of LPDDR4		
E2	DDR_DQA9	DDR_DQA9	Data DQ_A[1] of LPDDR4		
E3	VSS				
E4	DDR_DQA13	DDR_DQA13	Data DQ_A[0] of LPDDR4		
E5	VSS				
E6	P12_7/IRQ2/D23/GTIOC05_4B/CM TW1_TOC1/CTS2#/SD0_DATA5/M DAT10/ENCIFDI05/RXDE05/HDSL1 0_CLK1	D23	Data D23 of external bus	CN17-14	SW2-1: ON, SW2-2: OFF
		GTIOC05_4B	Input capture/output compare/PWM output pin	CN25-36	
		ENCIFDI05	Data input to ENCIF	CN2-26	
		SD0_DATA5	Data DAT5 of eMMC		SW2-1: ON, SW2-2: ON
E7	P12_3/D19/GTIOC05_2B/CMTW0_TOC1/SCK2/CANTXDP1/SD0_DAT A1/HDSL09_MISO2	D19	Data D19 of external bus	CN17-6	SW2-1: ON, SW2-2: OFF
		GTIOC05_2B	Input capture/output compare/PWM output pin	CN25-32	
		SD0_DATA1	Data DAT1 of eMMC		SW2-1: ON, SW2-2: ON
			Data DAT1 of SD0	CN31-8	SW2-1: OFF, SW2-2: ON
E8	P12_2/D18/GTIOC05_2A/CMTW0_TIC1/CANRXDP1/SD0_DATA0/SIO1 #/HDSL09_SEL2	D18	Data D18 of external bus	CN17-4	SW2-1: ON, SW2-2: OFF
		GTIOC05_2A	Input capture/output compare/PWM output pin	CN25-31	
		SD0_DATA0	Data DAT0 of eMMC		SW2-1: ON, SW2-2: ON
			Data DAT0 of SD0	CN31-7	SW2-1: OFF, SW2-2: ON
E9	P15_7/SS5#/CTS5#/RTS5#/MCLK5 0/ENCIFDI07/RXDE07/HDSL12_CL K2	MCLK50	Clock of DSMIF	CN18-27	
E10	P15_1/GTIOC09_4A/MCLK40/ENCIF OE06/DEE06/HDSL12_LINK	MCLK40	Clock of DSMIF	CN18-17	
E11	P15_5/IRQ0/GTIOC09_6A/MCLK42/ ENCIFOE07/DEE07/HDSL12_MISO 1	MCLK42	Clock of DSMIF	CN18-13	
E12	P17_2/IRQ14/GTIOC03_2B/SD1_D ATA3/TST_OUT06/HDSL13_SEL2	SD1_DATA3	Data DAT3 of SD1	CN16-2	
E13	P18_1/IRQ15/A9/GTADSM02_1/GTIOC07_3A/ESC_LEDERR/CTS0#/C ANTXXDP0/SD1_IOVS/DISP_DATAB 2/SIO8#/HDSL14_MISO1	A9	Address A9 of external bus	CN13-21	SW8-1: OFF, SW8-2: ON
		DISP_DATAB2	Display data B2	CN15-23	
		ESC_LEDERR	LEDERR control of LED5		SW8-1: ON, SW8-2: OFF
E14	P19_1/GTIOC07_0B/TST_OUT09/H DSL15_CLK1	GTIOC07_0B	Input capture/output compare/PWM output pin	CN26-16	

E15	P17_7/WE3#/AH#/GTADSM01_1/CMTW1_TOC1/ETHSW_PTPOUT1/ESC_SYNC1/TXD0/SDA0/MOSI0/SD1_IOVS/DISP_DATAB0/DUEI08/HDSL14_CLK1	WE3#	WE3 of external bus	CN17-40	
		ETHSW_PTPOUT1	Timer pulse output from ETHSW	CN20-3	
		DISP_DATAB0	Display data B0	CN15-25	
E16	P19_6/MCLK52/HDSL15_SEL2	MCLK52	Clock of DSMIF	CN18-23	
E17	P20_2/ETH0_TXD1	ETH0_TXD1	TXD1 of Ethernet port 0		
E18	P21_0/ETH0_RXD1/DUEI12/HDSL00_SEL1	ETH0_RXD1	RXD1 of Ethernet port 0		
E19	P22_0/IRQ11/HDSL01_SMPL	IRQ11	MDINT of Ethernet port 0		
E20	P22_4/IRQ6/A21/GTETRGD/ETH0_COL/SS5#/CTS5#/RTS5#/CANTXD P0/TST_OUT14/HDSL01_MOSI1	ETH0_COL	COL of Ethernet port 0		
E21	P22_5/IRQ7/A20/GTETRGS/GMAC0_PTPTRG0/ESC_LATCH0/CTS5#/CANRX1/SD0_CD/SI14#/HDSL01_CLK2	P22_5/IRQ7	WAKE# of PCIe x4 connector	CN32-B11	SW2-1: ON, SW2-2: OFF
		IRQ7	Interrupt of SPI expansion connector	CN63-2	
		GMAC0_PTPTRG0	PTPTRG0 of GMAC0	CN23-1	
		SD0_CD	CD of SD0	CN31-CD	SW2-1: OFF, SW2-2: ON
E22	P22_2/A23/GTETRGB/ETH0_RXER/RXD5/SCL5/MISO5/CANRX0/HDSL01_SEL1	ETH0_RXER	RXER of Ethernet port 0		
E23	P25_4/ETH1_RXD0/TST_OUT03/HDSL03_MISO1	ETH1_RXD0	RXD0 of Ethernet port 1		
E24	P25_7/ETH1_RXD3/CANTX1/TST_OUT04/HDSL03_SEL2	ETH1_RXD3	RXD3 of Ethernet port 1		
E25	P28_4/GTIOC08_2B/SPI_SSL12/SI06#/HDSL05_SEL2	GTIOC08_2B	Input capture/output compare/PWM output pin	CN26-32	
E26	P28_1/IRQ6/GTIOC08_1A/ETHSW_TDMAOUT2/SPI_MISO1/SI05#/HDSL05_MISO1	GTIOC08_1A	Input capture/output compare/PWM output pin	CN26-29	
		ETHSW_TDMAOUT2	TDMA timer output from ETHSW	CN20-8	
E27	P28_6/CANTX0/MDAT71/ENCIFOE08/ENCIFOE00/DEE08/DEE00/HDSL05_MOSI2	ENCIFOE08	ENCIF output enable	CN3-13	

Table 5-6 List of RZ/T2H Pin Function Selections (6)

Pin No.	Pin Name	Pin Function	Description	Connector	Remarks
F1	VSS				
F2	DDR_DQA8	DDR_DQA8	Data DQ_A[7] of LPDDR4		
F3	DDR_DQA11	DDR_DQA11	Data DQ_A[2] of LPDDR4		
F4	DDR_DQA14	DDR_DQA14	Data DQ_A[4] of LPDDR4		
F5	DDR_DQSA_C1	DDR_DQSA_C1	DQS0_A_C of LPDDR4		
F6	P13_3/D27/GTIOC03_3A/SCK3/SPI_SSL30/MDAT01/ENCIFDI12/ENCIFDI03/RXDE08/RXDE03/HDSL10_CLK2	D27	Data D27 of external bus	CN17-24	
		ENCIFDI12	Data input to ENCIF	CN10-9	
F7	P13_1/D25/GTIOC02_3B/SPI_MOSI3/SD0_DATA7/MDAT00/ENCIFOE12/ENCIFOE03/DEE08/DEE03/HDSL10_MISO1	D25	Data D25 of external bus	CN17-18	SW2-1: ON, SW2-2: OFF
		GTIOC02_3B	Input capture/output compare/PWM output pin	CN24-34	
		ENCIFOE12	ENCIF output enable	CN10-5	
		SD0_DATA7	Data DAT7 of eMMC		SW2-1: ON, SW2-2: ON
F8	P13_2/IRQ3/D26/SPI_MISO3/SD0_RST#/MCLK01/ENCIFDO12/ENCIFDO03/TXDE08/TXDE03/HDSL10_MOSI1	D26	Data D26 of external bus	CN17-22	SW2-1: ON, SW2-2: OFF
		ENCIFDO12	Data output from ENCIF	CN10-7	
		SD0_RST#	Reset of eMMC		SW2-1: ON, SW2-2: ON
F9	P15_4/GTIOC09_5B/MDAT41/ENCIFCK07/SCKE07/HDSL12_SEL1	MDAT41	Data of DSMIF	CN18-16	
F10	VSS				
F11	P15_2/GTIOC09_4B/MDAT40/ENCIFDO06/TXDE06/HDSL12_SMPL	MDAT40	Data of DSMIF	CN18-18	
F12	P16_7/GTIOC03_1A/SD1_DATA0/TST_OUT05/HDSL13_MISO1	SD1_DATA0	Data DAT0 of SD1	CN16-7	
F13	P17_6/WE2#/GTADSM01_0/GTETRGD/CMTW1_TIC1/ETHSW_PTPOUT0/ESC_SYNC0/RXD0/SCL0/MISO0/SD1_PWEN/DISP_DATAG7/SIO7#/HDSL14_SMPL	WE2#	WE2# of external bus	CN17-20	
		ETHSW_PTPOUT0	Timer pulse output from ETHSW	CN20-1	
		DISP_DATAG7	Display data G7	CN15-26	
F14	VSS				
F15	P18_4/IRQ1/A12/GTIOC07_3A/GTADSM04_0/ESC_LEDSTER/TXD1/SDA1/MOSI1/CANRX1/MCLK11/DISP_DATAB5/ENCIFCK13/ENCIFCK14/SCKE09/SCKE10/HDSL14_SEL2	A12	Address A12 of external bus	CN13-27	
		GTIOC07_3A	Input capture/output compare/PWM output pin	CN26-21	
		DISP_DATAB5	Display data B5	CN15-20	
		ENCIFCK14	Clock of ENCIF	CN10-11	
F16	P19_7/MDAT52/HDSL15_MISO2	MDAT52	Data of DSMIF	CN18-24	
F17	P20_4/ETH0_TXD3/CANTX0	ETH0_TXD3	TXD3 of Ethernet port 0		
F18	VSS				
F19	P24_0/IRQ11/ETHSW_LPI2/MDAT61/TST_OUT02/HDSL02_SEL2	MDAT61	Data of DSMIF	CN22-6	

F20	P22_3/IRQ5/A22/GTETRGC/ETH0_CRS/SCK5/CANRXDP0/DUEI14/HDSL01_MISO1	ETH0_CRS	CRS of Ethernet port 0		
F21	P24_2/IRQ13/MDAT62/HDSL02_MOSI2	MDAT62	Data of DSMIF	CN22-4	
F22	VSS				
F23	P25_5/ETH1_RXD1/SI03#/HDSL03_MOSI1	ETH1_RXD1	RXD1 of Ethernet port 1		
F24	P28_0/IRQ5/GTIOC08_0B/ETHSW_TDMAOUT1/SPI_MOSI1/TST_OUT05/HDSL05_SEL1	ETHSW_TDMAOUT1	TDMA timer output from ETHSW	CN20-6	
		GTIOC08_0B	Input capture/output compare/PWM output pin	CN26-28	
F25	P27_5/MTIOC1A/GTIOC08_4A/GTIOC02_2A/TXD0/SDA0/MOSI0/SPI_SSL00/HSPI_IO3/ENCIFDO14/TXD E10/HDSL05_LINK	GTIOC08_4A	Input capture/output compare/PWM output pin	CN26-35	SW4-7: OFF, SW4-8: ON
		HSPI_IO3	IO3 of SHOSTIF	CN64-9	
		TXD0	TXD0 of USB-to-serial conversion		SW4-7: ON, SW4-8: OFF
F26	VSS				
F27	P27_3/MTIOC2A/GTIOC08_3A/GTIOC02_1A/GMAC1_PTPTRG1/SCK0/CANRXDP1/SPI_MOSI0/HSPI_IO1/ENCIFCK14/SCKE10/HDSL04_MISO2	GTIOC08_3A	Input capture/output compare/PWM output pin	CN26-33	
		GMAC1_PTPTRG1	PTPTRG1 of GMAC1	CN23-4	
		HSPI_IO1	IO1 of SHOSTIF	CN64-11	

Table 5-7 List of RZ/T2H Pin Function Selections (7)

Pin No.	Pin Name	Pin Function	Description	Connector	Remarks
G1	DDR_DQA15	DDR_DQA15	Data DQ_A[5] of LPDDR4		
G2	VSS				
G3	DDR_DQA10	DDR_DQA10	Data DQ_A[6] of LPDDR4		
G4	DDR_DMIA1	DDR_DMIA1	DMI_A[0] of LPDDR4		
G5	DDR_DQSA_T1	DDR_DQSA_T1	DQS0_A_T of LPDDR4		
G6	DDR_VDDQ				
G7	P12_5/D21/GTIOC05_3B/GTIOC01_3A/CMTW1_TOC0/TXD2/SDA2/MOSI2/SD0_DATA3/MDAT02/ENCIFOE05/DEE05/HDSL10_LINK	D21	Data D21 of external bus	CN17-10	SW2-1: ON, SW2-2: OFF
		GTIOC05_3B	Input capture/output compare/PWM output pin	CN25-34	
		TXD2	TXD2 of RS485	CN12-5	
		ENCIFOE05	ENCIF output enable	CN2-22	
		SD0_DATA3	Data DAT3 of eMMC		SW2-1: ON, SW2-2: ON
			Data DAT3 of SD0	CN31-1	SW2-1: OFF, SW2-2: ON
G8	P12_1/D17/MTIC5W/GTIOC05_1B/CMTW0_TOC0/CANTX1/SD0_CMD/TST_OUT01/HDSL09_CLK2	D17	Data D17 of external bus	CN17-39	SW2-1: ON, SW2-2: OFF
		GTIOC05_1B	Input capture/output compare/PWM output pin	CN25-30	
		SD0_CMD	CMD of eMMC		SW2-1: ON, SW2-2: ON
			CMD of SD0	CN31-2	SW2-1: OFF, SW2-2: ON
G9	P15_0/GTIOC09_3B/MDAT32/ENCIFCK06/SCKE06/HDSL11_MOSI2	MDAT32	Data of DSMIF	CN18-4	
G10	VSS				
G11	P15_3/GTIOC09_5A/MCLK41/ENCIFDI06/RXDE06/HDSL12_CLK1	MCLK41	Clock of DSMIF	CN18-15	
G12	P16_5/GTIOC03_0A/SD1_CLK/SI04#/HDSL13_CLK1	SD1_CLK	CLK of SD1	CN16-5	
G13	P17_4/A6/DREQ/GTADSM00_0/GTETRGB/CMTW1_TIC0/DE0/CANRX0/SD1_CD/DUEI07/HDSL13_MOSI2	A6	Address A6 of external bus	CN13-15	SW2-3: OFF
		SD1_CD	CD of SD1	CN16-9	SW2-3: ON
G14	VSS				
G15	P18_5/IRQ2/A13/GTIOC07_3B/GTADSM04_1/SS1#/CTS1#/RTS1#/CANTX1/MDAT11/DISP_DATAB6/ENCIFOE13/ENCIFOE14/DEE09/DEE10/HDSL14_MISO2	A13	Address A13 of external bus	CN13-31	
		GTIOC07_3B	Input capture/output compare/PWM output pin	CN26-22	
		DISP_DATAB6	Display data B6	CN15-19	
		ENCIFOE14	ENCIF output enable	CN10-13	
G16	P21_5/GMAC0_MDIO/ETHSW_MDIO/ESC_MDIO/CANTX1/SI13#/HDSL00_MISO2	GMAC0_MDIO/ETHSW_MDIO/ESC_MDIO	MDIO of Ethernet port 0 or port 1		
			MDIO of Ethernet port 2		SW2-6: ON
G17	P21_1/ETH0_RXD2/CANRXDP0/TST_OUT12/HDSL00_MISO1	ETH0_RXD2	RXD2 of Ethernet port 0		

G18	VSS				
G19	P23_7/ETHSW_LPI1/MCLK61/DUEI02/HDSL02_CLK2	MCLK61	Clock of DSMIF	CN22-5	
G20	P23_0/IRQ10/A17/GTIOC06_0B/ETH1_COL/ETHSW_TDMAOUT3/ESC_LINKACT1/CANTXDP1/SI15#/HDSL01_MOSI2	GTIOC06_0B	Input capture/output compare/PWM output pin	CN26-4	SW5-7: ON, SW5-8: OFF
		ESC_LINKACT1	LINKACT1 control of LED7		SW5-7: OFF, SW5-8: ON
G21	P22_7/IRQ9/A18/GTIOC06_0A/ETH1_CRS/ETHSW_TDMAOUT2/ESC_LINKACT0/CANRXDP1/TST_OUT15/HDSL01_MISO2	GTIOC06_0A	Input capture/output compare/PWM output pin	CN26-3	SW5-9: ON, SW5-10: OFF
		ESC_LINKACT0	LINKACT0 control of LED6		SW5-9: OFF, SW5-10: ON
G22	P24_4/IRQ15/ESC_I2CDATA/IIC_SDA1/CANTX0/MDAT70/HDSL03_SMPL	CANTX0	TX of CAN interface		SW7-1: OFF, SW7-2: ON
		MDAT70	Data of DSMIF	CN22-18	SW7-1: ON, SW7-2: OFF
G23	P27_0/IRQ1/CS5#/ETH1_CRS/CANTXDP0/SPI_SSL02/HSPI_INT#/ENCIFDI01/RXDE01/HDSL04_MOSI1	ETH1_CRS	CRS of Ethernet port 1		SW4-1: ON, SW4-2: OFF
		CS5#	CS5# of external bus	CN13-20	SW4-1: OFF, SW4-2: ON
		HSPI_INT#	INT# of SHOSTIF	CN64-2	
G24	P27_1/IRQ2/GTIOC02_0A/ETH1_COL/CANRX1/SPI_SSL03/HSPI_CS#/HDSL04_CLK2	ETH1_COL	COL of Ethernet port 1		SW4-3: ON, SW4-4: OFF
		HSPI_CS#	CS# of SHOSTIF	CN64-4	SW4-3: OFF, SW4-4: ON
G25	P28_2/IRQ7/GTIOC08_1B/ETHSW_TDMAOUT3/SPI_SSL10/DUEI06/HDSL05_MOSI1	GTIOC08_1B	Input capture/output compare/PWM output pin	CN26-30	
		ETHSW_TDMAOUT3	TDMA timer output from ETHSW	CN20-10	
G26	P27_2/IRQ3/GTIOC02_0B/GMAC1_PTPTRG0/ESC_LEDERR/CANTX1/SPI_RSPCK0/HSPI_IO0/HDSL04_SEL2	IRQ3	MDINT of Ethernet port 3		
		GMAC1_PTPTRG0	PTPTRG0 of GMAC1	CN23-3	
		HSPI_IO0	IO0 of SHOSTIF	CN64-12	
G27	P27_6/MTIOC1B/GTIOC08_4B/GTIOC02_2B/HSPI_CK/ENCIFDI14/RXDE10/HDSL05_SMPL	GTIOC08_4B	Input capture/output compare/PWM output pin	CN26-36	
		HSPI_CK	Clock of SHOSTIF	CN64-3	

Table 5-8 List of RZ/T2H Pin Function Selections (8)

Pin No.	Pin Name	Pin Function	Description	Connector	Remarks
H1	DDR_DQA6	DDR_DQA6	Data DQ_A[9] of LPDDR4		
H2	DDR_DQA5	DDR_DQA5	Data DQ_A[15] of LPDDR4		
H3	VSS				
H4	VSS				
H5	VSS				
H6	DDR_VDDQ				
H7	VSS				
H8	VSS				
H9	VDDP_18_33				
H10	VSS				
H11	VDDP_18_6				
H12	VDDP_18_33				
H13	VSS				
H14	VDDP_18_7				
H15	VSS				
H16	VDDP_18_33				
H17	VSS				
H18	VDDP_18_0				
H19	VSS				
H20	VDDP_18_1				
H21	VDD1833_1				
H22	P26_7/IRQ0/CS3#/ETH1_RXER/ES C_LEDSTER/CANRXDP0/SPI_SSL01/ENCIFDO01/TXDE01/HDSL04_MISO1	ETH1_RXER	RXER of Ethernet port 1		
H23	P28_7/CANRXDP0/MCLK72/ENCIFDO08/ENCIFDO00/TXDE08/TXDE00/HDSL06_LINK	ENCIFDO08	Data output from ENCIF	CN3-15	
H24	VSS				
H25	P29_0/CANTXDP0/MDAT72/ENCIFDI08/ENCIFDI00/RXDE08/RXDE00/HDSL06_SMPL	ENCIFDI08	Data input to ENCIF	CN3-17	
H26	P27_4/MTIOC2B/GTIOC08_3B/GTIOC02_1B/RXD0/SCL0/MISO0/CAN TXDP1/SPI_MISO0/HSPI_IO2/ENCIFOE14/DEE10/HDSL04_MOSI2	GTIOC08_3B	Input capture/output compare/PWM output pin	CN26-34	SW4-5: OFF, SW4-6: ON
		HSPI_IO2	IO2 of SHOSTIF	CN64-10	
		RXD0	RXD0 of USB-to-serial conversion		SW4-5: ON, SW4-6: OFF
H27	P29_3/GTIOC09_1A/ETH2_TXD1/ENCIFDO09/TXDE09/HDSL06_MISO1	ETH2_TXD1	TXD1 of Ethernet port 2		SW2-7: ON
		ENCIFDO09	Data output from ENCIF	CN3-16	SW2-7: OFF

Table 5-9 List of RZ/T2H Pin Function Selections (9)

Pin No.	Pin Name	Pin Function	Description	Connector	Remarks
J1	DDR_DQA4	DDR_DQA4	Data DQ_A[14] of LPDDR4		
J2	VSS				
J3	DDR_DMIA0	DDR_DMIA0	DMI_A[1] of LPDDR4		
J4	DDR_DQA7	DDR_DQA7	Data DQ_A[8] of LPDDR4		
J5	DDR_DQSA_C0	DDR_DQSA_C0	DQS1_A_C of LPDDR4		
J6	DDR_VDDQ				
J7	VDD33				
J8	VSS				
J9	VDD1833_6				
J10	AVDD18A_TSU				
J11	VDD33				
J12	VSS				
J13	VDD1833_7				
J14	VSS				
J15	VDD33				
J16	VSS				
J17	VDD1833_0				
J18	VSS				
J19	VDDP_18_33				
J20	VSS				
J21	VDD1833_1				
J22	P30_5/GTIOC09_6A/GMAC2_MDC/ETHSW_MDC/ESC_MDC/SPI_RSPCK3/DUEI07/HDSL07_MISO1	GMAC2_MDC/ETHSW_MDC/ESC_MDC	MDC of Ethernet port 2		SW2-6: OFF
J23	P29_6/GTIOC09_2B/ETH2_TXEN/SPI_SSL22/ENCIFOE10/DEE10/HDSL06_SEL2	ETH2_TXEN	TXEN of Ethernet port 2		SW2-7: ON
		ENCIFOE10	ENCIF output enable	CN3-23	SW2-7: OFF
J24	P30_7/IRQ14/ETHSW_PHYLINK2/ESC_PHYLINK2/SPI_MISO3/SD1_IOVS/MCLK30/SI07#/HDSL07_CLK2	ETHSW_PHYLINK2/ESC_PHYLINK2	LINK of Ethernet port 2		
J25	P29_1/GTIOC09_0A/ETH2_TXCLK/ENCIFCK09/SCKE09/HDSL06_CLK1	ETH2_TXCLK	TXCLK of Ethernet port 2		SW2-7: ON
		ENCIFCK09	Clock of ENCIF	CN3-12	SW2-7: OFF
J26	P31_1/IRQ13/GTETRGSB/ETH2_RXER/SPI_SSL31/HDSL07_MISO2	IRQ13	MDINT of Ethernet port 2		
J27	P30_3/IRQ11/GTIOC09_5A/ETH2_RXD3/SPI_MISO2/ENCIFDO11/TXDE11/HDSL07_CLK1	ETH2_RXD3	RXD3 of Ethernet port 2		SW2-7: ON
		ENCIFDO11	Data output from ENCIF	CN3-24	SW2-7: OFF

Table 5-10 List of RZ/T2H Pin Function Selections (10)

Pin No.	Pin Name	Pin Function	Description	Connector	Remarks
K1	DDR_DQA2	DDR_DQA2	Data DQ_A[10] of LPDDR4		
K2	DDR_DQA0	DDR_DQA0	Data DQ_A[11] of LPDDR4		
K3	DDR_DQA1	DDR_DQA1	Data DQ_A[12] of LPDDR4		
K4	DDR_DQA3	DDR_DQA3	Data DQ_A[13] of LPDDR4		
K5	DDR_DQSA_T0	DDR_DQSA_T0	DQS1_A_T of LPDDR4		
K6	VSS				
K7	VDD33				
K8	VSS				
K9	VDD1833_6				
K10	DVDD08A_TSU				
K11	VDD33				
K12	VSS				
K13	VDD1833_7				
K14	VSS				
K15	VDD33				
K16	VSS				
K17	VDD1833_0				
K18	VDD33				
K19	VDD33				
K20	VDDP_18_2				
K21	P30_6/GTIOC09_6B/GMAC2_MDIO/ /ETHSW_MDIO/ESC_MDIO/SPI_M OSI3/TST_OUT07/HDSL07_MOSI1	GMAC2_MDIO/ ETHSW_MDIO/ ESC_MDIO	MDIO of Ethernet port 2		SW2-6: OFF
K22	VSS				
K23	P29_2/GTIOC09_0B/ETH2_TXD0/E NCIFOE09/DEE09/HDSL06_SEL1	ETH2_TXD0	TXD0 of Ethernet port 2		SW2-7: ON
		ENCIFOE09	ENCIF output enable	CN3-14	SW2-7: OFF
K24	P30_4/GTIOC09_5B/ETH2_RXDV/ ENCIFDI11/RXDE11/HDSL07_SEL 1	ETH2_RXDV	RXDV of Ethernet port 2		SW2-7: ON
		ENCIFDI11	Data input to ENCIF	CN3-26	SW2-7: OFF
K25	P30_1/GTIOC09_4A/ETH2_RXD1/E NCIFCK11/SCKE11/HDSL07_LINK	ETH2_RXD1	RXD1 of Ethernet port 2		SW2-7: ON
		ENCIFCK11	Clock of ENCIF	CN30-20	SW2-7: OFF
K26	VSS				
K27	P30_0/GTIOC09_3B/ETH2_RXD0/E NCIFDI10/RXDE10/HDSL06_MOSI 2	ETH2_RXD0	RXD0 of Ethernet port 2		SW2-7: ON
		ENCIFDI10	Data input to ENCIF	CN30-27	SW2-7: OFF

Table 5-11 List of RZ/T2H Pin Function Selections (11)

Pin No.	Pin Name	Pin Function	Description	Connector	Remarks
L1	VSS				
L2	DDR_CAA1	DDR_CAA1	CA_A[0] of LPDDR4		
L3	VSS				
L4	VSS				
L5	VSS				
L6	DDR_CKEA1	DDR_CKEA1	CKE_A[1] of LPDDR4		
L7	VSS				
L8	VDD18_PLL2				
L9	VDD08_PLL2				
L10	VSS				
L11	VDD18_PLL3				
L12	VSS_PLL3				
L13	VDD08_PLL3				
L14	VSS				
L15	VSS				
L16	VSS				
L17	VSS				
L18	VSS				
L19	VSS				
L20	VDD1833_2				
L21	VDD1833_2				
L22	P29_4/IRQ8/GTIOC09_1B/ETH2_TXD2/SPI_SSL20/ENCIFDI09/RXDE09/HDSL06_MOSI1	ETH2_TXD2	TXD2 of Ethernet port 2		SW2-7: ON
		ENCIFDI09	Data input to ENCIF	CN3-18	SW2-7: OFF
L23	P29_5/IRQ9/GTIOC09_2A/ETH2_TXD3/SPI_SSL21/ENCIFCK10/SCKE10/HDSL06_CLK2	ETH2_TXD3	TXD3 of Ethernet port 2		SW2-7: ON
		ENCIFCK10	Clock of ENCIF	CN3-21	SW2-7: OFF
L24	P31_0/ETH2_REFCLK/RMII2_REFCLK/GTETRGS0A/SPI_SSL30/HDSL07_SEL2	ETH2_REFCLK	REFCLK of Ethernet port 2		
L25	P29_7/GTIOC09_3A/ETH2_RXCLK/SPI_SSL23/ENCIFDO10/TXDE10/HDSL06_MISO2	ETH2_RXCLK	RXCLK of Ethernet port 2		SW2-7: ON
		ENCIFDO10	Data output from ENCIF	CN3-25	SW2-7: OFF
L26	P30_2/IRQ10/GTIOC09_4B/ETH2_RXD2/SPI_MOSI2/ENCIFOE11/DEE11/HDSL07_SMPL	ETH2_RXD2	RXD2 of Ethernet port 2		SW2-7: ON
		ENCIFOE11	ENCIF output enable	CN3-22	SW2-7: OFF
L27	P32_6/GTIOC10_2A/GTIOC01_2A/SPI_SSL10/ENCIFCK11/SCKE11/HDSL09_SMPL	GTIOC01_2A	Input capture/output compare/PWM output pin	CN24-19	
		SPI_SSL10	CS for use with mikroBUS™	CN53-3	

Table 5-12 List of RZ/T2H Pin Function Selections (12)

Pin No.	Pin Name	Pin Function	Description	Connector	Remarks
M1	DDR_CKA_C	DDR_CKA_C	CK_A_C of LPDDR4		
M2	DDR_CAA3	DDR_CAA3	CA_A[1] of LPDDR4		
M3	DDR_CAA4	DDR_CAA4	CA_A[3] of LPDDR4		
M4	DDR_CSA0	DDR_CSA0	CS_A[0] of LPDDR4		
M5	DDR_CSA1	DDR_CSA1	CS_A[1] of LPDDR4		
M6	DDR_CKEA0	DDR_CKEA0	CKE_A[0] of LPDDR4		
M7	VSS				
M8	VSS_PLL2				
M9	VDD08				
M10	VSS				
M11	VDD08				
M12	VSS				
M13	VDD08				
M14	VSS				
M15	VDD08				
M16	VSS				
M17	VDD08				
M18	VSS				
M19	VDD08_PLL0				
M20	VSS				
M21	VSS				
M22	P32_2/GTIOC10_0A/GTIOC01_0A/ SPI_SSL03/ENCIFCK10/SCKE10/H DSL08_SEL2	P32_2	Control of user LED1		SW5-1: OFF, SW5-2: ON
			SD1 power selection		SW5-1: ON, SW5-2: OFF, SW5-3: ON, SW5-4: OFF
M23	P32_1/SPI_SSL02/ENCIFDI15/ENC IFDI01/RXDE11/RXDE01/HDSL08_ CLK2	ENCIFDI15	Data input to ENCIF	CN10-18	
M24	VSS				
M25	P32_0/SPI_SSL01/ENCIFDO15/EN CIFDO01/TXDE11/TXDE01/HDSL0 8_MOSI1	ENCIFDO15	Data output from ENCIF	CN10-16	
M26	P31_7/GMAC2_PTPTRG1/SPI_SSL 00/ENCIFOE15/ENCIFOE01/DEE11 /DEE01/HDSL08_MISO1	GMAC2_PTPT RG1	PTPTRG1 of GMAC2	CN23-6	
		SPI_SSL00	SSL for use with PMOD1	CN50-1	
		ENCIFOE15	ENCIF output enable	CN10-14	
M27	P32_5/GTIOC10_1B/GTIOC01_1B/ SPI_MISO1/ENCIFDI10/RXDE10/H DSL09_LINK	GTIOC01_1B	Input capture/output compare/PWM output pin	CN24-18	
		SPI_MISO1	MISO for use with mikroBUS™	CN53-5	

Table 5-13 List of RZ/T2H Pin Function Selections (13)

Pin No.	Pin Name	Pin Function	Description	Connector	Remarks
N1	DDR_CKA_T	DDR_CKA_T	CK_A_T of LPDDR4		
N2	VSS				
N3	DDR_CAA2	DDR_CAA2	CA_A[2] of LPDDR4		
N4	VSS				
N5	DDR_CAA5	DDR_CAA5	CA_A[5] of LPDDR4		
N6	VSS				
N7	DDR_VDDQ				
N8	DDR_VAA				
N9	VSS				
N10	VDD08				
N11	VSS				
N12	VDD08				
N13	VSS				
N14	VDD08				
N15	VSS				
N16	VDD08				
N17	VSS				
N18	VDD08				
N19	VSS_PLL0				
N20	VDD18_PLL0				
N21	VSS				
N22	P32_4/GTIOC10_1A/GTIOC01_1A/ SPI_MOSI1/ENCIFDO10/TXDE10/H DSL08_MOSI2	GTIOC01_1A	Input capture/output compare/PWM output pin	CN24-17	
		SPI_MOSI1	MOSI for use with mikroBUS™	CN53-6	
N23	P32_3/GTIOC10_0B/GTIOC01_0B/ SPI_RSPCK1/ENCIFOE10/DEE10/ HDSL08_MISO2	P32_3	GMAC_RESETOUT3# of Ethernet port 3		
		SPI_RSPCK1	SCK for use with mikroBUS™	CN53-4	
N24	P32_7/GTIOC10_2B/GTIOC01_2B/ SPI_SSL11/ENCIFOE11/DEE11/HD SL09_CLK1	GTIOC01_2B	Input capture/output compare/PWM output pin	CN24-20	
N25	P31_4/DREQ/POE8#/ETH2_CRS/ THSW_PTPOUT2/ESC_SYNC0/SPI _RSPCK0/SPI_SSL30/MCLK81/MD AT31/HSPI_IO6/ENCIFDO09/TXDE 09/HDSL08_SMPL/POUTB	ETH2_CRS	CRS of Ethernet port 2		SW2-7: ON
		MCLK81	Clock of DSMIF	CN22-25	SW2-7: OFF
		HSPI_IO6	IO6 of SHOSTIF	CN64-6	
		SPI_RSPCK0	SCK for use with PMOD1	CN50-4	SW2-7: OFF E3: Short- circuit, E5: Open- circuit

N26	P31_3/POE4#/ETH2_RXER/ETHS W_TDMAOUT1/ESC_LEDERR/SPI _SSL33/MDAT80/MCLK31/HSPI_IO 5/ENCIFOE09/DEE09/HDSL08_LIN K	ETH2_RXER	RXER of Ethernet port 2		SW2-7: ON
		MDAT80	Data of DSMIF	CN22-28	SW2-7: OFF
		HSPI_IO5	IO5 of SHOSTIF	CN64-7	
N27	P31_2/POE0#/ETH2_TXER/SPI_SS L32/MCLK80/MDAT30/HSPI_IO4/E NCIFCK09/SCKE09/HDSL07_MOSI 2/POUTA	ETH2_TXER	TXER of Ethernet port 2		SW2-7: ON
		MCLK80	Clock of DSMIF	CN22-27	SW2-7: OFF
		HSPI_IO4	IO4 of SHOSTIF	CN64-8	

Table 5-14 List of RZ/T2H Pin Function Selections (14)

Pin No.	Pin Name	Pin Function	Description	Connector	Remarks
P1	VSS				
P2	DDR_CKEB1	DDR_CKEB1	CKE_B[1] of LPDDR4		
P3	DDR_CAB0	DDR_CAB0	CA_B[2] of LPDDR4		
P4	DDR_CAA0	DDR_CAA0	CA_A[4] of LPDDR4		
P5	DDR_VDDQ				
P6	VSS				
P7	DDR_RESET_N	DDR_RESET_N	RESET_N of LPDDR4		
P8	DDR_ATEST	DDR_ATEST			NC
P9	VDD08				
P10	VSS				
P11	VDD08				
P12	VSS				
P13	VDD08				
P14	VSS				
P15	VDD08				
P16	VSS				
P17	VDD08				
P18	VSS				
P19	VSS				
P20	VSS				
P21	VDDP_18_33				
P22	VSS				
P23	P33_1/GTIOC10_3B/SPI_SSL13/M DAT82/ENCIFDI11/RXDE11/HDSL09_MISO1	MDAT82	Data of DSMIF	CN22-24	
P24	P33_0/GTIOC10_3A/SPI_SSL12/M CLK82/ENCIFDO11/TXDE11/HDSL09_SEL1	MCLK82	Clock of DSMIF	CN22-23	
P25	P31_6/A16/TEND/POE11#/GMAC2_PTPTRG0/ETHSW_TDMAOUT0/ESC_LED RUN/SPI_MISO0/MDAT32/ENCIFCK15/ENCIFCK01/SCKE11/SCKE01/HDSL08_SEL1	GMAC2_PTPTRG0	PTPTRG0 of GMAC2	CN23-5	
		ENCIFCK15	Clock of ENCIF	CN10-12	
		SPI_MISO0	MISO for use with PMOD1	CN50-3	E2: Short-circuit, E4: Open-circuit
P26	P31_5/DACK/POE10#/ETH2_COL/ETHSW_PTPOUT3/ESC_SYNC1/SPI_MOSI0/SPI_SSL31/MDAT81/MCLK32/HSPI_IO7/ENCIFDI09/RXDE09/HDSL08_CLK1/POUTZ	ETH2_COL	COL of Ethernet port 2		SW2-7: ON
		SPI_MOSI0	MOSI for use with PMOD1	CN50-2	SW2-7: OFF
		MDAT81	Data of DSMIF	CN22-26	
		HSPI_IO7	IO7 of SHOSTIF	CN64-5	
P27	P34_4/CS2#/GTADSM05_0/GTIOC03_2A/ETH3_RXD3/RXD3/SCL3/MISO3/SPI_SSL22/SD1_IOVS/ADTRG0#/ENCIFDO07/TXDE07/HDSL10_MOSI1	ETH3_RXD3	RXD3 of Ethernet port 3		SW2-8: ON
		CS2#	CS2# of external bus	CN13-34	SW2-8: OFF
		ENCIFDO07	Data output from ENCIF	CN3-6	

Table 5-15 List of RZ/T2H Pin Function Selections (15)

Pin No.	Pin Name	Pin Function	Description	Connector	Remarks
R1	DDR_CKB_T	DDR_CKB_T	CK_B_T of LPDDR4		
R2	DDR_CKEB0	DDR_CKEB0	CKE_B[0] of LPDDR4		
R3	VSS				
R4	VSS				
R5	DDR_VDDQ				
R6	VSS				
R7	DDR_DTEST	DDR_DTEST			NC
R8	DDR_ZN	DDR_ZN			120-Ω pull-down
R9	VSS				
R10	VDD08				
R11	VSS				
R12	VDD08				
R13	VSS				
R14	VDD08				
R15	VSS				
R16	VDD08				
R17	VSS				
R18	VDD08				
R19	VDDP_18_X				
R20	VDD33				
R21	VSS				
R22	P34_1/A23/GTADSM03_1/GTIOC03_0B/ETH3_RXD0/SPI_MISO2/ENCIFDI06/RXDE06/HDSL10_CLK1	ETH3_RXD0	RXD0 of Ethernet port 3		SW2-8: ON
		A23	Address A23 of external bus	CN13-18	SW2-8: OFF
		ENCIFDI06	Data input to ENCIF	CN3-9	
R23	P34_6/ETH3_REFCLK/RMII3_REFCLK/CS5#/ETH1_RXER/ESC_I2CDATA/IIC_SDA1/SPI_RSPCK3/ADTRG2#/DUEI08/HDSL10_SEL2	ETH3_REFCLK	REFCLK of Ethernet port 3		
R24	P33_2/A16/GTADSM00_0/ETH3_TXCLK/SCK1/SPI_RSPCK1/SPI_SSL30/MCLK50/ENCIFCK01/SCKE01/HDSL09_MOSI1	ETH3_TXCLK	TXCLK of Ethernet port 3		SW2-8: ON
		A16	Address A16 of external bus	CN13-4	SW2-8: OFF
		ENCIFCK01	Clock of ENCIF	CN2-2	
R25	P33_6/IRQ15/A20/GTADSM02_0/ETH3_TXD3/TXD2/SDA2/MOSI2/SPI_SSL11/SPI_SSL00/MCLK52/ENCIFCK06/SCKE06/HDSL09_MOSI2	ETH3_TXD3	TXD3 of Ethernet port 3		SW2-8: ON
		A20	Address A20 of external bus	CN13-12	SW2-8: OFF
		ENCIFCK06	Clock of ENCIF	CN3-3	
R26	P33_7/A21/GTADSM02_1/ETH3_TXEN/SPI_RSPCK2/MDAT52/ENCIFOE06/DEE06/HDSL10_LINK	ETH3_TXEN	TXEN of Ethernet port 3		SW2-8: ON
		A21	Address A21 of external bus	CN13-14	SW2-8: OFF
		ENCIFOE06	ENCIF output enable	CN3-5	
R27	P34_5/CS3#/GTADSM05_1/GTIOC03_2B/ETH3_RXDV/ESC_I2CCLK/TXD3/SDA3/MOSI3/IIC_SCL1/SPI_SSL23/ADTRG1#/ENCIFDI07/RXDE07/HDSL10_CLK2	ETH3_RXDV	RXDV of Ethernet port 3		SW2-8: ON
		CS3#	CS3# of external bus	CN13-36	SW2-8: OFF
		ENCIFDI07	Data input to ENCIF	CN3-8	

Table 5-16 List of RZ/T2H Pin Function Selections (16)

Pin No.	Pin Name	Pin Function	Description	Connector	Remarks
T1	DDR_CKB_C	DDR_CKB_C	CK_B_C of LPDDR4		
T2	DDR_CAB1	DDR_CAB1	CA_B[0] of LPDDR4		
T3	DDR_VDDQ				
T4	DDR_CAB2	DDR_CAB2	CA_B[3] of LPDDR4		
T5	DDR_CAB5	DDR_CAB5	CA_B[1] of LPDDR4		
T6	DDR_CSB0	DDR_CSB0	CS_B[0] of LPDDR4		
T7	VSS				
T8	VSS				
T9	VDD08				
T10	VSS				
T11	VDD08				
T12	VSS				
T13	VDD08				
T14	VSS				
T15	VDD08				
T16	VSS				
T17	VDD08				
T18	VSS				
T19	VDD33_X				
T20	VSS				
T21	VDD1833_3				
T22	VDDP_18_3				
T23	P34_2/A24/GTADSM04_0/GTIOC03_1A/ETH3_RXD1/SPI_SSL20/ENCIFCK07/SCKE07/HDSL10_SEL1	ETH3_RXD1	RXD1 of Ethernet port 3		SW2-8: ON
		A24	Address A24 of external bus	CN13-22	SW2-8: OFF
		ENCIFCK07	Clock of ENCIF	CN3-2	
T24	VSS				
T25	P33_5/IRQ14/A19/GTADSM01_1/ETH3_TXD2/RXD2/SCL2/MISO2/SPI_SSL10/SPI_MISO0/MDAT51/ENCIFDI01/RXDE01/HDSL09_MISO2	ETH3_TXD2	TXD2 of Ethernet port 3		SW2-8: ON
		A19	Address A19 of external bus	CN13-10	SW2-8: OFF
		ENCIFDI01	Data input to ENCIF	CN2-8	
T26	P35_1/TEND/GTADSM07_0/ETH3_CRS/SPI_SSL30/SPI_MISO1/MCLK90/DUEI09/HDSL11_LINK	ETH3_CRS	CRS of Ethernet port 3		SW2-8: ON
		MCLK90	Clock of DSMIF	CN19-7	SW2-8: OFF
T27	XTALSEL	XTALSEL	Selection of EXTCLKIN or XTAL and EXTAL		

Table 5-17 List of RZ/T2H Pin Function Selections (17)

Pin No.	Pin Name	Pin Function	Description	Connector	Remarks
U1	DDR_CAB3	DDR_CAB3	CA_B[4] of LPDDR4		
U2	VSS				
U3	DDR_CAB4	DDR_CAB4	CA_B[5] of LPDDR4		
U4	DDR_DQB0	DDR_DQB0	DQ_B[12] of LPDDR4		
U5	VSS				
U6	DDR_CSB1	DDR_CSB1	CS_B[1] of LPDDR4		
U7	VSS				
U8	VSS				
U9	VSS				
U10	VDD08				
U11	VSS				
U12	VDD08				
U13	VSS_PLL1				
U14	VSS_PLL4				
U15	VSS				
U16	VDD08				
U17	VSS				
U18	VSS				
U19	VSS				
U20	VSS				
U21	VDD1833_3				
U22	P35_6/GTADSM09_1/TXD4/SDA4/MOSI4/SPI_SSL12/MDAT92/SI10#/HDSL11_MOSI1	P35_6	User DIP switch SW3		SW1-3: ON
		MDAT92	Data of DSMIF	CN19-4	SW1-3: OFF
U23	P34_3/A25/GTADSM04_1/GTIOC03_1B/ETH3_RXD2/SPI_SSL21/SD1_PWEN/ENCIFOE07/DEE07/HDSL10_MISO1	ETH3_RXD2	RXD2 of Ethernet port 3		SW2-8: ON
		A25	Address A25 of external bus	CN13-24	SW2-8: OFF
		ENCIFOE07	ENCIF output enable	CN3-4	
U24	P33_4/IRQ13/A18/GTADSM01_0/ETH3_TXD1/TXD1/SDA1/MOSI1/SPI_MISO1/SPI_MOSI0/MCLK51/PCIE_RSTOUT1B/ENCIFDO01/TXDE01/HDSL09_SEL2	ETH3_TXD1	TXD1 of Ethernet port 3		SW2-8: ON
		A18	Address A18 of external bus	CN13-8	SW2-8: OFF
		ENCIFDO01	Data output from ENCIF	CN2-6	
		PCIE_RSTOUT1B	Reset output from PCIe x1 connector	CN8-A11	SW2-8: OFF, SW15-2: ON
U25	P33_3/IRQ12/A17/GTADSM00_1/ETH3_TXD0/RXD1/SCL1/MISO1/SPI_MOSI1/SPI_RSPCK0/MDAT50/PCIE_RSTOUT0B/ENCIFOE01/DEE01/HDSL09_CLK2	ETH3_TXD0	TXD0 of Ethernet port 3		SW2-8: ON
		A17	Address A17 of external bus	CN13-6	SW2-8: OFF
		ENCIFOE01	ENCIF output enable	CN2-4	
		PCIE_RSTOUT0B	Reset output from PCIe x4 connector	CN32-A11	SW2-8: OFF, SW15-1: ON
U26	VSS				
U27	EXTCLKIN	EXTCLKIN	Connection of crystal oscillator		SW1-1: ON

Table 5-18 List of RZ/T2H Pin Function Selections (18)

Pin No.	Pin Name	Pin Function	Description	Connector	Remarks
V1	DDR_DQB2	DDR_DQB2	DQ_B[11] of LPDDR4		
V2	DDR_DQB1	DDR_DQB1	DQ_B[13] of LPDDR4		
V3	VSS				
V4	DDR_DQB3	DDR_DQB3	DQ_B[14] of LPDDR4		
V5	DDR_DQSB_T0	DDR_DQSB_T0	DQS1_B_T of LPDDR4		
V6	VSS				
V7	VSS				
V8	VSS				
V9	VDD1833_4				
V10	VDD33				
V11	VDDP_18_4				
V12	VDDP_18_5				
V13	VDD18_PLL1				
V14	VDD18_PLL4				
V15	VDD08				
V16	VSS				
V17	OTPVDD08				
V18	VSS				
V19	PCIE_VDD08A_L0				
V20	VSS				
V21	VSS				
V22	P35_3/GTADSM08_0/SPI_SSL32/SPI_MOSI1/MCLK91/ADTRG0#/SI09#/HDSL11_CLK1	P35_3	User DIP switch SW0		SW1-3: ON
		MCLK91	Clock of DSMIF	CN19-5	SW1-3: OFF
V23	P34_0/A22/GTADSM03_0/GTIOC03_0A/ETH3_RXCLK/SPI_MOSI2/ENCIFDO06/TXDE06/HDSL10_SMPL	ETH3_RXCLK	RXCLK of Ethernet port 3		SW2-8: ON
		A22	Address A22 of external bus	CN13-16	SW2-8: OFF
		ENCIFDO06	Data output from ENCIF	CN3-7	
V24	P35_5/GTADSM09_0/RXD4/SCL4/MISO4/SPI_RSPCK1/MCLK92/TST_OUT10/HDSL11_MISO1	P35_5	User DIP switch SW2		SW1-3: ON
		MCLK92	Clock of DSMIF	CN19-3	SW1-3: OFF
V25	P35_0/DACK/GTADSM06_1/ETH3_RXER/SPI_MISO3/SI08#/HDSL10_MOSI2	ETH3_RXER	RXER of Ethernet port 3		SW2-8: ON
V26	VSS				
V27	XTAL	XTAL	Connection of crystal resonator		SW1-1: OFF

Table 5-19 List of RZ/T2H Pin Function Selections (19)

Pin No.	Pin Name	Pin Function	Description	Connector	Remarks
W1	VSS				
W2	DDR_DQB4	DDR_DQB4	DQ_B[10] of LPDDR4		
W3	DDR_DQB7	DDR_DQB7	DQ_B[9] of LPDDR4		
W4	DDR_DMIB0	DDR_DMIB0	DMI_B[1] of LPDDR4		
W5	DDR_DQSB_C0	DDR_DQSB_C0	DQS1_B_C of LPDDR4		
W6	VSS				
W7	VSS				
W8	VSS				
W9	VDD1833_4				
W10	VDD33				
W11	VDDP_18_33				
W12	VDDP_18_33				
W13	VDD08_PLL1				
W14	VDD08_PLL4				
W15	VSS				
W16	VSS				
W17	OTPVDD18				
W18	VSS				
W19	PCIE_VDD08A_L0				
W20	VSS				
W21	VSS				
W22	VSS				
W23	P34_7/IRQ14/DREQ/GTADSM06_0/ ETH3_TXER/ESC_RESETOUT#/SP I_MOSI3/TST_OUT08/HDLSL10_MIS O2	ETH3_TXER	TXER of Ethernet port 3		SW2-8: ON
W24	P35_4/GTADSM08_1/SPI_SSL33/S PI_SSL11/MDAT91/ADTRG1#/DUEI 10/HDLSL11_SEL1	P35_4	User DIP switch SW1		SW1-3: ON
		MDAT91	Data of DSMIF	CN19-6	SW1-3: OFF
W25	P35_2/GTADSM07_1/ETH3_COL/S PI_SSL31/SPI_SSL10/MDAT90/AD TRG2#/TST_OUT09/HDLSL11_SMP L	ETH3_COL	COL of Ethernet port 3		SW2-8: ON
		MDAT90	Data of DSMIF	CN19-8	SW2-8: OFF
W26	VSS				
W27	EXTAL	EXTAL	Connection of crystal resonator		SW1-1: OFF

Table 5-20 List of RZ/T2H Pin Function Selections (20)

Pin No.	Pin Name	Pin Function	Description	Connector	Remarks
Y1	DDR_DQB6	DDR_DQB6	DQ_B[15] of LPDDR4		
Y2	DDR_VDDQ				
Y3	DDR_DQB5	DDR_DQB5	DQ_B[8] of LPDDR4		
Y4	VSS				
Y5	VSS				
Y6	VSS				
Y7	VSS				
Y8	VSS				
Y9	VSS				
Y10	VSS				
Y11	VSS				
Y12	VDD33				
Y13	VDD33				
Y14	VDD1833_5				
Y15	VDD1833_5				
Y16	VSS				
Y17	USB_USVDD18				
Y18	USB_USVDD33				
Y19	PCIE_VDD08A_L1				
Y20	PCIE_VDD18A_L1				
Y21	PCIE_VDD18A_L0				
Y22	VSS				
Y23	VSS				
Y24	VSS				
Y25	VSS				
Y26	VSS				
Y27	VSS				

Table 5-21 List of RZ/T2H Pin Function Selections (21)

Pin No.	Pin Name	Pin Function	Description	Connector	Remarks
AA1	DDR_DQB8	DDR_DQB8	DQ_B[5] of LPDDR4		
AA2	VSS				
AA3	DDR_DQB15	DDR_DQB15	DQ_B[4] of LPDDR4		
AA4	VSS				
AA5	DDR_DQSB_T1	DDR_DQSB_T1	DQS0_B_T of LPDDR4		
AA6	VSS				
AA7	P06_5/IRQ11/GTETRGC/IIC_SDA1/XSPI0_IO7/HDSL05_SEL1	XSPI0_IO7	Data IO7 of XSPI0		
AA8	P05_1/IRQ3/XSPI0_CKP/DUEI06/HDSL04_SMPL	XSPI0_CKP	Clock CKP of XSPI0		
AA9	P05_2/IRQ4/IIC_SCL2/XSPI0_CKN/TST_OUT06/HDSL04_CLK1	P05_2	CLKREQ of PCIe x1 connector		SW15-2: OFF, E20: Short-circuit
		IRQ4	PRSNT of PCIe x1 connector		SW15-2: ON, E20: Short-circuit
		XSPI0_CKN	Clock CKN of XSPI0		
AA10	P05_0/IRQ2/MTIOC6C/MTIOC0B/GTIOC03_4B/IIC_SDA1/ENCIFDI03/RXDE03/HDSL04_LINK	GTIOC03_4B	Input capture/output compare/PWM output pin	CN25-12	
		IIC_SDA1	SDA of I2C	CN15-1, CN51-2, CN52-3, CN54-6	
				CN50-4	E3: Open-circuit, E5: Short-circuit
		ENCIFDI03	Data input to ENCIF	CN2-18	
AA11	VSS				
AA12	P04_2/MTIOC7C/GTIOC03_1B/CM TW0_TOC1/DUEI05/HDSL03_MISO1	MTIOC7C	PWM for use with mikroBUS™	CN54-1	
		GTIOC03_1B	Input capture/output compare/PWM output pin	CN25-6	
AA13	P02_2/IRQ9/MTIOC6A/MTIOC1A/GTIOC01_4A/ETH3_CRS/IIC_SDA2/XSPI1_IO6/MCLK22/USB_VBUSEN/ENCIFDO01/TXDE01/HDSL01_MISO2	GTIOC01_4A	Input capture/output compare/PWM output pin	CN24-23	SW1-6: OFF
		MCLK22	Clock of DSMIF	CN21-23	
		XSPI1_IO6	IO6 of SPI expansion connector	CN63-6	SW1-6: ON
AA14	VSS				
AA15	VSS				
AA16	USB_USDVDD				
AA17	USB_USVDD18				
AA18	USB_USVDD33				
AA19	PCIE_VDD08A_L1				

AA20	PCIE_VDD18A_L1				
AA21	PCIE_VDD18A_L0				
AA22	AVSS_ADC0				
AA23	AVDD_ADC0				
AA24	AVSSIO_ADC0				
AA25	AVSSIO_ADC0				
AA26	AN002	AN002	Input to A/D converter (AN002)	CN41-6	
AA27	AN000	AN000	Input to potentiometer		SW17-1: ON, SW17-2: OFF
			Input to A/D converter (AN000)	CN41-2	SW17-1: OFF, SW17-2: ON

Table 5-22 List of RZ/T2H Pin Function Selections (22)

Pin No.	Pin Name	Pin Function	Description	Connector	Remarks
AB1	DDR_DQB14	DDR_DQB14	DQ_B[6] of LPDDR4		
AB2	DDR_DQB9	DDR_DQB9	DQ_B[1] of LPDDR4		
AB3	DDR_DMIB1	DDR_DMIB1	DMI_B[0] of LPDDR4		
AB4	DDR_DQB10	DDR_DQB10	DQ_B[0] of LPDDR4		
AB5	DDR_DQSB_C1	DDR_DQSB_C1	DQS0_B_C of LPDDR4		
AB6	BSCANP	BSCANP	Boundary scan enable		
AB7	P06_3/IRQ9/GTETRGA/IIC_SDA0/XSPI0_IO5/TST_OUT09/HDSL05_S MPL	XSPI0_IO5	Data IO5 of XSPI0		
AB8	P06_4/IRQ10/GTETRGA/IIC_SCL1/XSPI0_IO6/SI09#/HDSL05_CLK1	XSPI0_IO6	Data IO6 of XSPI0		
AB9	P07_7/IIC_SCL0/XSPI0_WP0#/MCLK10/ENCIFDO05/TXDE05/HDSL06_CLK1	MCLK10	Clock of DSMIF	CN21-17	
AB10	P03_4/IRQ14/D12/MTCLKB/MTIOC8D/GTIOC02_3B/GTADSM09_1/CM TW1_TOC1/RTCAT1HZ/IIC_SDA1/ ENCIFOE02/DEE02/HDSL02_MISO 2	D12	Data D12 of external bus	CN17-27	
		ENCIFOE02	ENCIF output enable	CN2-13	
AB11	P03_3/IRQ13/D11/MTCLKA/MTIOC8C/GTIOC02_3A/GTADSM09_0/CM TW1_TIC1/IIC_SCL1/ENCIFCK02/S CKE02/HDSL02_SEL2	D11	Data D11 of external bus	CN17-25	
		ENCIFCK02	Clock of ENCIF	CN2-11	
AB12	P03_7/MTIOC6B/MTIOC1B/GTIOC03_0A/CMTW0_TIC0/DUEI04/HDSL03_SMPL	GTIOC03_0A	Input capture/output compare/PWM output pin	CN25-3	
AB13	P02_1/IRQ8/MTCLKD/MTIOC0D/GTIOC01_3B/ETH3_RXER/IIC_SCL2/XSPI1_IO5/MDAT21/ENCIFOE01/DEE01/HDSL01_SEL2	XSPI1_IO5	IO5 of SPI expansion connector	CN63-7	SW1-6: ON
		GTIOC01_3B	Input capture/output compare/PWM output pin	CN24-22	SW1-6: OFF
AB14	P01_3/MTIOC6D/MTIC5U/GTIOC01_0B/GTIOC04_0B/XSPI1_DS/TST_OUT02/HDSL01_SMPL	GTIOC01_0B	Input capture/output compare/PWM output pin	CN24-16	
AB15	P00_5/MTIOC4D/MTIOC8C/GTIOC00_2B/USB_VBUSEN/SI01#/HDSL00_MOSI1	GTIOC00_2B	Input capture/output compare/PWM output pin	CN24-8	
AB16	USB_USDVDD				
AB17	VSS				
AB18	VSS				
AB19	VSS				
AB20	VSS				
AB21	PCIE_VDD18A_CMN				
AB22	AVSS_ADC1				
AB23	AVDD_ADC1				
AB24	AVDDIO_ADC0				

AB25	AVDDREF_ADC0				
AB26	AN001	AN001	Input to A/D converter (AN001)	CN41-4	
AB27	AN003	AN003	Input to A/D converter (AN003)	CN41-8	

Table 5-23 List of RZ/T2H Pin Function Selections (23)

Pin No.	Pin Name	Pin Function	Description	Connector	Remarks
AC1	DDR_DQB12	DDR_DQB12	DQ_B[3] of LPDDR4		
AC2	VSS				
AC3	DDR_DQB13	DDR_DQB13	DQ_B[2] of LPDDR4		
AC4	DDR_DQB11	DDR_DQB11	DQ_B[7] of LPDDR4		
AC5	VSS				
AC6	P06_1/XSPI0_IO3/SI08#/HDSL04_MOSI2	XSPI0_IO3	Data IO3 of XSPI0		
AC7	P07_6/IIC_SDA2/XSPI0_ECS1#/MDAT02/ENCIFOE05/DEE05/HDSL06_SMPL	MDAT02	Data of DSMIF	CN21-4	
AC8	P07_4/IIC_SDA1/XSPI0_INT1#/MDAT01/ENCIFDI04/ENCIFDI12/RXDE04/RXDE08/HDSL05_MOSI2	MDAT01	Data of DSMIF	CN21-6	
AC9	P03_2/IRQ12/D10/MTIOC4D/MTIOC1A/GTIOC02_2B/GTADSM08_1/CMTW1_TOC0/ENCIFDI02/RXDE02/HDSL02_CLK2	D10	Data D10 of external bus	CN17-23	
		GTIOC02_2B	Input capture/output compare/PWM output pin	CN24-32	
AC10	P03_1/D9/MTIOC4B/MTIOC1B/GTIOC02_2A/GTADSM08_0/CMTW1_TOC0/ENCIFDO02/TXDE02/HDSL02_MOSI1	D9	Data D9 of external bus	CN17-21	
		GTIOC02_2A	Input capture/output compare/PWM output pin	CN24-31	
AC11	P04_7/IRQ1/MTIOC6A/MTIOC0A/GTIOC03_4A/IIC_SCL1/ENCIFDO03/TXDE03/HDSL03_MOSI2	GTIOC03_4A	Input capture/output compare/PWM output pin	CN25-11	
		IIC_SCL1	SCL of I2C	CN15-2, CN51-1, CN52-4, CN54-5	
		ENCIFDO03	Data output from ENCIF	CN2-16	
AC12	P03_5/IRQ15/MTIOC3A/MTIC5W/GTIOC02_4A/IIC_SCL2/ENCIFDO02/TXDE02/HDSL02_MOSI2	GTIOC02_4A	Input capture/output compare/PWM output pin	CN24-35	
		ENCIFDO02	Data output from ENCIF	CN2-15	
AC13	P01_7/MTIOC7D/MTIOC0B/GTIOC01_2B/GTIOC04_2B/XSPI1_IO3/SI03#/HDSL01_MOSI1	XSPI1_IO3	IO3 of QSPI and SPI expansion connector	CN63-9	SW1-6: ON
		GTIOC04_2B	Input capture/output compare/PWM output pin	CN25-20	SW1-6: OFF
AC14	P02_0/IRQ7/MTCLKC/MTIOC0C/GTIOC01_3A/ETH3_TXER/IIC_SDA1/XSPI1_IO4/MCLK21/ENCIFCK01/SCKE01/HDSL01_CLK2	XSPI1_IO4	IO4 of SPI expansion connector	CN63-8	SW1-6: ON
		GTIOC01_3A	Input capture/output compare/PWM output pin	CN24-21	SW1-6: OFF
AC15	P00_2/IRQ1/D2/MTIOC4A/GTIOC00_1A/ETH3_CRS/ADTRG0#/USB_EXICEN/SI00#/HDSL00_CLK1	D2	Data D2 of external bus	CN17-5	SW1-5: OFF
		GTIOC00_1A	Input capture/output compare/PWM output pin	CN24-5	
		USB_EXICEN	Control of USB_OTG power supply IC		SW1-5: ON

AC16	VSS				
AC17	USB_TXRTUNE	USB_TXRTUNE	200-Ω pull-down		
AC18	VSS				
AC19	PCIE_REFCLK_N1	PCIE_REFCLK_N1	Reference clock of PCIe ch1		
AC20	PCIE_REFCLK_P0	PCIE_REFCLK_P0	Reference clock of PCIe ch0		
AC21	PCIE_VDD18A_CMN				
AC22	AVDD_ADC2				
AC23	AVDDIO_ADC2				
AC24	AVDDIO_ADC1				
AC25	AVDDREF_ADC1				
AC26	AN103	AN103	Input to A/D converter (AN103)	CN42-8	
AC27	AN100	AN100	Input to A/D converter (AN100)	CN42-2	SW18-1: ON, SW18-2: OFF
			Input to A/D converter for use with mikroBUS™	CN53-1	SW18-1: OFF, SW18-2: ON

Table 5-24 List of RZ/T2H Pin Function Selections (24)

Pin No.	Pin Name	Pin Function	Description	Connector	Remarks
AD1	MDX	MDX	MDX setting input		
AD2	P08_6/SEI/CKIO/GTIOC08_3A/GTE TRGSB/IIC_SDA1/SD1_IOVS/MDA T02/MCLK11/DUEI11/HDSL06_MO SI2	SEI	Switch SW9 of SEI		SW2-3: OFF, E1: Short-circuit, E7: Short-circuit
		CKIO	CKIO of external bus	CN17-2	SW2-3: OFF
		MCLK11	Clock of DSMIF	CN21-15	SW2-3: OFF, E7: Short-circuit
		SD1_IOVS	SD1 power selection		SW2-3: ON, SW5-3: OFF, SW5-4: ON
AD3	P08_3/TCK/SI10#/HDSL06_CLK2	TCK	TCK of debugging interface	CN60-4 CN61-4	
AD4	RESN	RESN	Reset input		
AD5	P08_2/TDI/TST_OUT10/HDSL06_M OS1	TDI	TDI of debugging interface	CN60-8 CN61-8	
AD6	P05_6/XSPI0_IO0/SI07#/HDSL04_ CLK2	XSPI0_IO0	Data IO0 of XSPI0		
AD7	P08_0/RTCAT1HZ/IIC_SDA0/XSPI0 _WP1#/MDAT10/MBX_HINT#/ENC I FDI05/RXDE05/HDSL06_SEL1	MDAT10	Data of DSMIF	CN21-18	
AD8	VSS				
AD9	P02_6/D6/MTIOC3D/MTIOC8B/GT I OC02_0B/GTADSM06_1/CMTW0_ T OC0/SD0_IOVS/MDAT00/HDSL02_ CLK1/POUTB	D6	Data D6 of external bus	CN17-15	SW2-1: ON, SW2-2: OFF
		GTIOC02_0B	Input capture/output compare/PWM output pin	CN24-28	
		SD0_IOVS	SD0 power selection		SW2-1: OFF, SW2-2: ON
AD10	P04_6/IRQ0/MTCLKD/MTIOC0D/G TIOC03_3B/CMTW1_TOC1/IIC_ SD A0/ADTRG2#/MBX_HINT#/ENCIFO E03/DEE03/HDSL03_MISO2	ENCIFOE03	ENCIF output enable	CN2-14	
		GTIOC03_3B	Input capture/output compare/PWM output pin	CN25-10	
AD11	P02_5/D5/MTIOC3B/MTIOC8A/GT I OC02_0A/GTADSM06_0/CMTW0_ T IC0/IIC_SCL0/SD0_PWEN/MCLK00 /HDSL02_SMPL/POUTA	D5	Data D5 of external bus	CN17-13	SW2-1: ON, SW2-2: OFF
		GTIOC02_0A	Input capture/output compare/PWM output pin	CN24-27	
		SD0_PWEN	SD0 power enable		SW2-1: OFF, SW2-2: ON
AD12	VSS				
AD13	P01_6/MTIOC7B/MTIOC0A/GTIOC 01_2A/GTIOC04_2A/XSPI1_IO2/TS T_OUT03/HDSL01_MISO1	XSPI1_IO2	IO2 of QSPI and SPI expansion connector	CN63-10	SW1-6: ON
		GTIOC04_2A	Input capture/output compare/PWM output pin	CN25-19	SW1-6: OFF
AD14	P01_2/MTIOC6B/MTIOC8B/GTIOC 01_0A/GTIOC04_0A/XSPI1_CS1#/ DUEI02/HDSL01_LINK	XSPI1_CS1#	CS1# of SPI expansion connector	CN63-4	SW1-6: ON
		GTIOC01_0A	Input capture/output compare/PWM output pin	CN24-15	SW1-6: OFF

AD15	P00_1/IRQ0/D1/MTIOC3D/GTIOC0_0_0B/ETH3_RXER/USB_OVRCUR/TST_OUT00/HDSL00_SMPL	D1	Data D1 of external bus	CN17-3	SW1-5: OFF
		GTIOC00_0B	Input capture/output compare/PWM output pin	CN24-4	
		USB_OVRCUR	OVRCUR input for USB host interface		SW1-5: ON
AD16	USB_VUBUSIN	USB_VUBUSIN	VBUSIN of USB function interface	CN79-1	SW7-7: OFF, SW7-8: ON
			VBUSIN of USB_OTG	CN33-1	SW7-7: ON, SW7-8: OFF
AD17	USB_OTG_ID	USB_OTG_ID	ID of USB_OTG	CN33-4	
AD18	VSS				
AD19	PCIE_REFCLK_P1	PCIE_REFCLK_P1	Reference clock of PCIe ch1		
AD20	PCIE_REFCLK_N0	PCIE_REFCLK_N0	Reference clock of PCIe ch0		
AD21	VSS				
AD22	AVSS_ADC2				
AD23	AVSSIO_ADC2				
AD24	AVSSIO_ADC1				
AD25	AVSSIO_ADC1				
AD26	AN102	AN102	Input to A/D converter (AN102)	CN42-6	SW18-5: ON, SW18-6: OFF
			Input to A/D converter (AN102) of Grove2	CN48-2	SW18-5: OFF, SW18-6: ON
AD27	AN101	AN101	Input to A/D converter (AN101)	CN42-4	SW18-3: ON, SW18-4: OFF
			Input to A/D converter (AN101) of Grove2	CN48-1	SW18-3: OFF, SW18-4: ON

Table 5-25 List of RZ/T2H Pin Function Selections (25)

Pin No.	Pin Name	Pin Function	Description	Connector	Remarks
AE1	P09_0/IIC_SDA2/MCLK12/SI11#/HDSL07_SMPL	P09_0	GPIO for use with PMOD2	CN49-9	
			Control status1 of USB_OTG		E17: Short
		MCLK12	Clock of DSMIF	CN21-13	
AE2	P09_2/MCLK20/TST_OUT12/HDSL07_SEL1	MCLK20	Clock of DSMIF	CN21-27	
AE3	P08_5/IRQ8/RSTOUT#/GTETRGSA/IIC_SCL1/SD1_PWEN/MCLK02/HDSL06_MISO2	P08_5	Control of user LED3		SW2-3: OFF
		SD1_PWEN	SD1 power enable		SW2-3: ON
AE4	P08_4/TDO/HDSL06_SEL2	TDO	TDO of debugging interface	CN60-6, CN61-6	
AE5	P06_0/XSPI0_IO2/TST_OUT08/HDSL04_MISO2	XSPI0_IO2	Data IO2 of XSPI0		
AE6	P06_2/IRQ8/IIC_SCL0/XSPI0_IO4/DUEI09/HDSL05_LINK	XSPI0_IO4	Data IO4 of XSPI0		
AE7	P05_7/XSPI0_IO1/DUEI08/HDSL04_SEL2	XSPI0_IO1	Data IO1 of XSPI0		
AE8	P07_3/POE11#/IIC_SCL1/XSPI0_INTO#/MCLK01/ENCIFDO04/ENCIFDO12/TXDE04/TXDE08/HDSL05_MISO2	MCLK01	Clock of DSMIF	CN21-5	
AE9	P02_7/D7/MTIOC4A/MTIC5U/GTIOC02_1A/GTADSM07_0/CMTW0_TIC1/MCLK01/HDSL02_SEL1/POUTZ	D7	Data D7 of external bus	CN17-17	
		GTIOC02_1A	Input capture/output compare/PWM output pin	CN24-29	
AE10	P03_0/D8/MTIOC4C/MTIC5V/GTIOC02_1B/GTADSM07_1/CMTW0_TO C1/MDAT01/HDSL02_MISO1	D8	Data D8 of external bus	CN17-19	
		GTIOC02_1B	Input capture/output compare/PWM output pin	CN24-30	
AE11	P04_0/MTIOC6D/GTIOC03_0B/CM TW0_TOC0/TST_OUT04/HDSL03_CLK1	P04_0	IRQOUT# of external bus	CN13-37	
		GTIOC03_0B	Input capture/output compare/PWM output pin	CN25-4	
AE12	P02_4/IRQ11/POE0#/IIC_SDA0/MDAT20/USB_EXICEN/MBX_HINT#/HDSL02_LINK	MBX_HINT#	HINT# of SHOSTIF	CN64-13	
AE13	P01_5/MTIOC7C/MTIC5W/GTIOC01_1B/GTIOC04_1B/XSPI1_IO1/DUEI03/HDSL01_SEL1	XSPI1_IO1	IO1 of QSPI and SPI expansion connector	CN63-11	SW1-6: ON
		GTIOC04_1B	Input capture/output compare/PWM output pin	CN25-18	SW1-6: OFF
AE14	P00_7/IRQ5/MTCLKB/MTIOC1B/GTIOC00_3B/IIC_SDA0/USB_EXICEN/ENCIFOE00/ENCIFOE04/DEE00/DEE04/HDSL00_SEL2	IRQ5	INT for use with PMOD1	CN50-7	
		GTIOC00_3B	Input capture/output compare/PWM output pin	CN24-10	
		ENCIFOE04	ENCIF output enable	CN2-23	

AE15	P00_0/SEI/D0/MTIOC3B/GTIOC00_0A/ETH3_TXER/USB_VBUSEN/DUEI00/HDSL00_LINK	D0	Data D0 of external bus	CN17-1	SW1-5: OFF
		GTIOC00_0A	Input capture/output compare/PWM output pin	CN24-3	
		USB_VBUSEN	VBUS control for USB host interface		SW1-5: ON, SW7-9: OFF, SW7-10: ON
			VBUS control of USB_OTG		SW1-5: ON, SW7-9: ON, SW7-10: OFF
AE16	VSS				
AE17	VSS				
AE18	VSS				
AE19	VSS				
AE20	VSS				
AE21	VSS				
AE22	VSS				
AE23	VSS				
AE24	VSS				
AE25	AVSSIO_ADC2				
AE26	AN202	AN202	Input to A/D converter (AN202)	CN43-5	
AE27	AN201	AN201	Input to A/D converter (AN201)	CN43-3	

Table 5-26 List of RZ/T2H Pin Function Selections (26)

Pin No.	Pin Name	Pin Function	Description	Connector	Remarks
AF1	P09_3/MDAT20/SI12#/HDSL07_MISO1	MDAT20	Data of DSMIF	CN21-28	
AF2	P08_7/IRQ0/A0/GTIOC08_3B/IIC_SCL2/IIC_SCL1/MDAT11/TST_OUT11/HDSL07_LINK	P08_7	RESET for use with PMOD2	CN49-8	
		IRQ0	Interrupt of user SW11		
		MDAT11	Data of DSMIF	CN21-16	
AF3	TRST#	TRSTN	TRST of debugging interface		
AF4	P07_1/IRQ14/POE8#/IIC_SCL0/XSPIO_RST00/MCLK00/ENCIFCK04/ENCIFCK12/SCKE04/SCKE08/HDSL05_CLK2	MCLK00	Clock of DSMIF	CN21-7	
AF5	P05_5/XSPI0_DS/TST_OUT07/HDSL04_MOSI1	XSPI0_DS	DS of XSPI0		
AF6	VSS				
AF7	P06_7/IRQ12/POE4#/GTETRGD/GMAC1_MDC/IIC_SCL2/HDSL05_MISO1	P06_7	Control of user LED2		
AF8	P07_0/IRQ13/GMAC1_MDIO/IIC_SDA2/XSPI0_RESET1#/HDSL05_MOSI1	XSPI0_RESET1#	RESET1# of XSPI0		
AF9	P04_5/SEI/MTCLKC/MTIOC0C/GTIOC03_3A/CMTW1_TIC1/IIC_SCL0/ADTRG1#/ENCIFCK03/SCKE03/HDSL03_SEL2	GTIOC03_3A	Input capture/output compare/PWM output pin	CN25-9	
		ENCIFCK03	Clock of ENCIF	CN2-12	
AF10	VSS				
AF11	P04_1/MTIOC7A/GTIOC03_1A/CMTW0_TIC1/SI04#/HDSL03_SEL1	P04_1	RST for use with mikroBUS™	CN53-2	
		GTIOC03_1A	Input capture/output compare/PWM output pin	CN25-5	
AF12	P02_3/IRQ10/MTIOC6C/MTIOC1B/GTIOC01_4B/ETH3_COL/IIC_SCL0/IIC_SCL2/XSPI1_IO7/MDAT22/USB_OVRCUR/ENCIFDI01/RXDE01/HDSL01_MOSI2	GTIOC01_4B	Input capture/output compare/PWM output pin	CN24-24	SW1-6: OFF
		XSPI1_IO7	IO7 of SPI expansion connector	CN63-5	SW1-6: ON
AF13	P01_0/IRQ6/MTIOC3A/MTIOC1A/GTIOC00_4A/GTIOC00_2B/IIC_SCL1/XSPI1_CKP/ENCIFDO00/ENCIFDO04/TXDE00/TXDE04/HDSL00_MISO2	GTIOC00_4A	Input capture/output compare/PWM output pin	CN24-11	SW1-6: OFF
		ENCIFDO04	Data output from ENCIF	CN2-25	
		XSPI1_CKP	CKP of QSPI and SPI expansion connector	CN63-3	SW1-6: ON
AF14	VSS				
AF15	P00_4/IRQ3/D4/MTIOC4B/GTIOC00_2A/ADTRG2#/TST_OUT01/HDSL00_MISO1	D4	Data D4 of external bus	CN17-9	
		GTIOC00_2A	Input capture/output compare/PWM output pin	CN24-7	
AF16	VSS				
AF17	USB_QDP	USB_QDP	Input/output of USB DP		
AF18	VSS				

AF19	PCIE_RXDN_L1	PCIE_RXDN_L1	Receive data of PCIe ch1 (x1)	CN8-A17	SW15-2: ON
			Receive data of PCIe ch1 (x4)	CN32-A22	SW15-2: OFF
AF20	PCIE_RXDN_L0	PCIE_RXDN_L0	Receive data of PCIe ch0 (x4)	CN32-A17	
AF21	VSS				
AF22	PCIE_TXDN_L1	PCIE_TXDN_L1	Transmit data of PCIe ch1 (x1)	CN8-B15	SW15-2: ON
			Transmit data of PCIe ch1 (x4)	CN32-B20	SW15-2: OFF
AF23	PCIE_TXDN_L0	PCIE_TXDN_L0	Transmit data of PCIe ch0 (x4)	CN32-B15	
AF24	VSS				
AF25	AVDDREF_ADC2				
AF26	AN204	AN204	Input to A/D converter (AN204)	CN43-9	
AF27	AN200	AN200	Input to A/D converter (AN200)	CN43-1	

Table 5-27 List of RZ/T2H Pin Function Selections (27)

Pin No.	Pin Name	Pin Function	Description	Connector	Remarks
AG1	VSS				
AG2	P09_1/MDAT12/DUEI12/HDSL07_C LK1	P09_1	GPIO for use with PMOD2	CN49-10	
			Control status2 of USB_OTG		E18: Short
		MDAT12	Data of DSMIF	CN21-14	
AG3	P08_1/TMS/DUEI10/HDSL06_MISO 1	TMS	TMS of debugging interface	CN60-2, CN61-2	
AG4	P05_3/IRQ5/XSPI0_CS0#/SI06#/HDSL04_SEL1	XSPI0_CS0#	CS# of OctaFlash		
AG5	P07_2/IRQ15/POE10#/IIC_SDA0/XSPI0_RST01#/MDAT00/ENCIFOE04/ENCIFOE12/DEE04/DEE08/HDSL05_SEL2	MDAT00	Data of DSMIF	CN21-8	
AG6	P07_5/IIC_SCL2/XSPI0_ECS0#/MCLK02/ENCIFCK05/SCKE05/HDSL06_LINK	MCLK02	Clock of DSMIF	CN21-3	SW5-5: ON, SW5-6: OFF
		XSPI0_ECS0#	ECS# of OctaFlash		SW5-5: OFF, SW5-6: ON
AG7	P05_4/IRQ6/IIC_SDA2/XSPI0_CS1#/DUEI07/HDSL04_MISO1	XSPI0_CS1#	CS# to HyperRAM		
AG8	P06_6/MDD/XSPI0_RESET0#	MDD	MDD setting		
		XSPI0_RESET0 #	RESET# to OctaFlash		
AG9	P03_6/MTIOC3C/MTIOC1A/GTIOC02_4B/IIC_SDA2/ENCIFDI02/RXDE02/HDSL03_LINK	GTIOC02_4B	Input capture/output compare/PWM output pin	CN24-36	
		ENCIFDI02	Data input to ENCIF	CN2-17	
AG10	P04_3/MTIOC7B/GTIOC03_2A/CM TW1_TIC0/TST_OUT05/HDSL03_MOSI1	P04_3	RESET for use with PMOD1	CN50-8	
		GTIOC03_2A	Input capture/output compare/PWM output pin	CN25-7	
AG11	P04_4/MTIOC7D/GTIOC03_2B/CM TW1_TOC0/ADTRG0#/SI05#/HDSL03_CLK2	P04_4	GPIO for use with PMOD1	CN50-9	
		GTIOC03_2B	Input capture/output compare/PWM output pin	CN25-8	
AG12	P01_1/MTIOC3C/MTIOC8A/GTIOC00_4B/XSPI1_CS0#/MCLK20/ENCIFDI00/ENCIFDI04/RXDE00/RXDE04/HDSL00_MOSI2	GTIOC00_4B	Input capture/output compare/PWM output pin	CN24-12	SW1-6: OFF
		ENCIFDI04	Data input to ENCIF	CN2-27	
		XSPI1_CS0#	CS# of QSPI		SW1-6: ON
AG13	P01_4/MTIOC7A/MTIC5V/GTIOC01_1A/GTIOC04_1A/XSPI1_IO0/SI02#/HDSL01_CLK1	GTIOC04_1AB	Input capture/output compare/PWM output pin	CN25-17	SW1-6: OFF
		XSPI1_IO0	IO0 of QSPI and SPI expansion connector	CN63-12	SW1-6: ON
AG14	P00_6/IRQ4/MTCLKA/MTIOC8D/GTIOC00_3A/IIC_SCL0/USB_OVRCUR/ENCIFCK00/ENCIFCK04/SCKE00/SCKE04/HDSL00_CLK2	GTIOC00_3A	Input capture/output compare/PWM output pin	CN24-9	
		ENCIFCK04	Clock of ENCIF	CN2-21	

AG15	P00_3/IRQ2/D3/MTIOC4C/GTIOC00_1B/ETH3_COL/ADTRG1#/DUEI01/HDSL00_SEL1	IRQ2/ADTRG1#	User switch SW10/ ADTRG switch		
		D3	Data D3 of external bus	CN17-7	
		GTIOC00_1B	Input capture/output compare/PWM output pin	CN24-6	
AG16	VSS				
AG17	USB_QDM	USB_QDM	Input/output of USB DM		
AG18	VSS				
AG19	PCIE_RXDP_L1	PCIE_RXDP_L1	Receive data of PCIe ch1 (x1)	CN8-A16	SW15-2: ON
			Receive data of PCIe ch1 (x4)	CN32-A21	SW15-2: OFF
AG20	PCIE_RXDP_L0	PCIE_RXDP_L0	Receive data of PCIe ch0 (x4)	CN32-A16	
AG21	VSS				
AG22	PCIE_TXDP_L1	PCIE_TXDP_L1	Transmit data of PCIe ch1 (x1)	CN8-B14	SW15-2: ON
			Transmit data of PCIe ch1 (x4)	CN32-B19	SW15-2: OFF
AG23	PCIE_TXDP_L0	PCIE_TXDP_L0	Transmit data of PCIe ch0 (x4)	CN32-B14	
AG24	VSS				
AG25	AN205	AN205	Input to A/D converter (AN205)	CN43-11	
AG26	AN203	AN203	Input to A/D converter (AN203)	CN43-7	
AG27	VSS				

6. Circuitry for Configuration

6.1 Types of Configuration Circuits

Since multiple functions are assigned to single pins and each function has to be selected for use in the RZ/T2H, the functions to be used should be selected through the following methods on this board.

(1) Switches

DIP switches SW1, SW2, SW4 to SW8, SW14, SW15, SW17, and SW18 are mounted for selecting functions.

(2) Jumper blocks

CN9, CN29, CN30, CN35 to CN40, CN56, CN57, CN62, CN73, CN77, CN78, and CN81 to CN87 are mounted for selecting functions.

(3) Option links

The option links are as follows:

— Solder bridges and trace cuts

A solder bridge consists of two pads, which are insulated from each other at the time of shipment. Conduction can be set up for such pads by connecting them with solder or the like. A trace cut is a thin copper trace that connects two pads and sets up conduction between them. Such pads can be insulated from each other by cutting the trace between the pads.

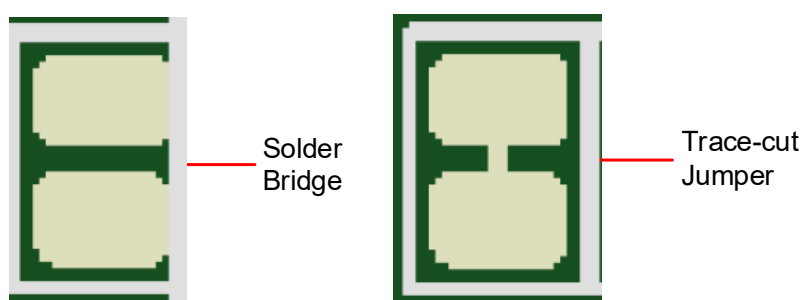


Figure 6-1 Solder Bridge and Trace Cut

— 0-Ω and other resistors

A different function can be selected by switching the factory state of a 0-Ω resistor or other resistor between mounted and not mounted.

The subsequent sections describe which peripheral functions of the multi-functional RZ/T2H signals are enabled or disabled through the settings of switches, jumper blocks, and option links. The connection information for ICs and headers other than the RZ/T2H will also be shown. **Text in bold blue type** in the tables indicates the initial state of the configuration on the board as shipped. For the positions of switches, jumper blocks, and option links, refer to "3.3 Arrangement of Components".

The settings of switches or jumper blocks should be changed only when the power is turned off.

When removing soldered components, do not apply a soldering iron to the board for more than 5 seconds. This time restriction is to avoid any damage to components mounted nearby on the board.

When modifying an option link, always check the related option links to ensure that no signal contention or short circuit has occurred. Most of the RZ/T2H pins have multiplexed functions and some of the peripheral functions must be used exclusively of each other. Refer to the RZ/T2H and RZ/N2H Groups User's Manual: Hardware and this board's schematics for further information.

6.2 Configuration at Shipment

Figure 6-2 shows the state of switch settings and jumper block settings for the configuration at the time of shipment.

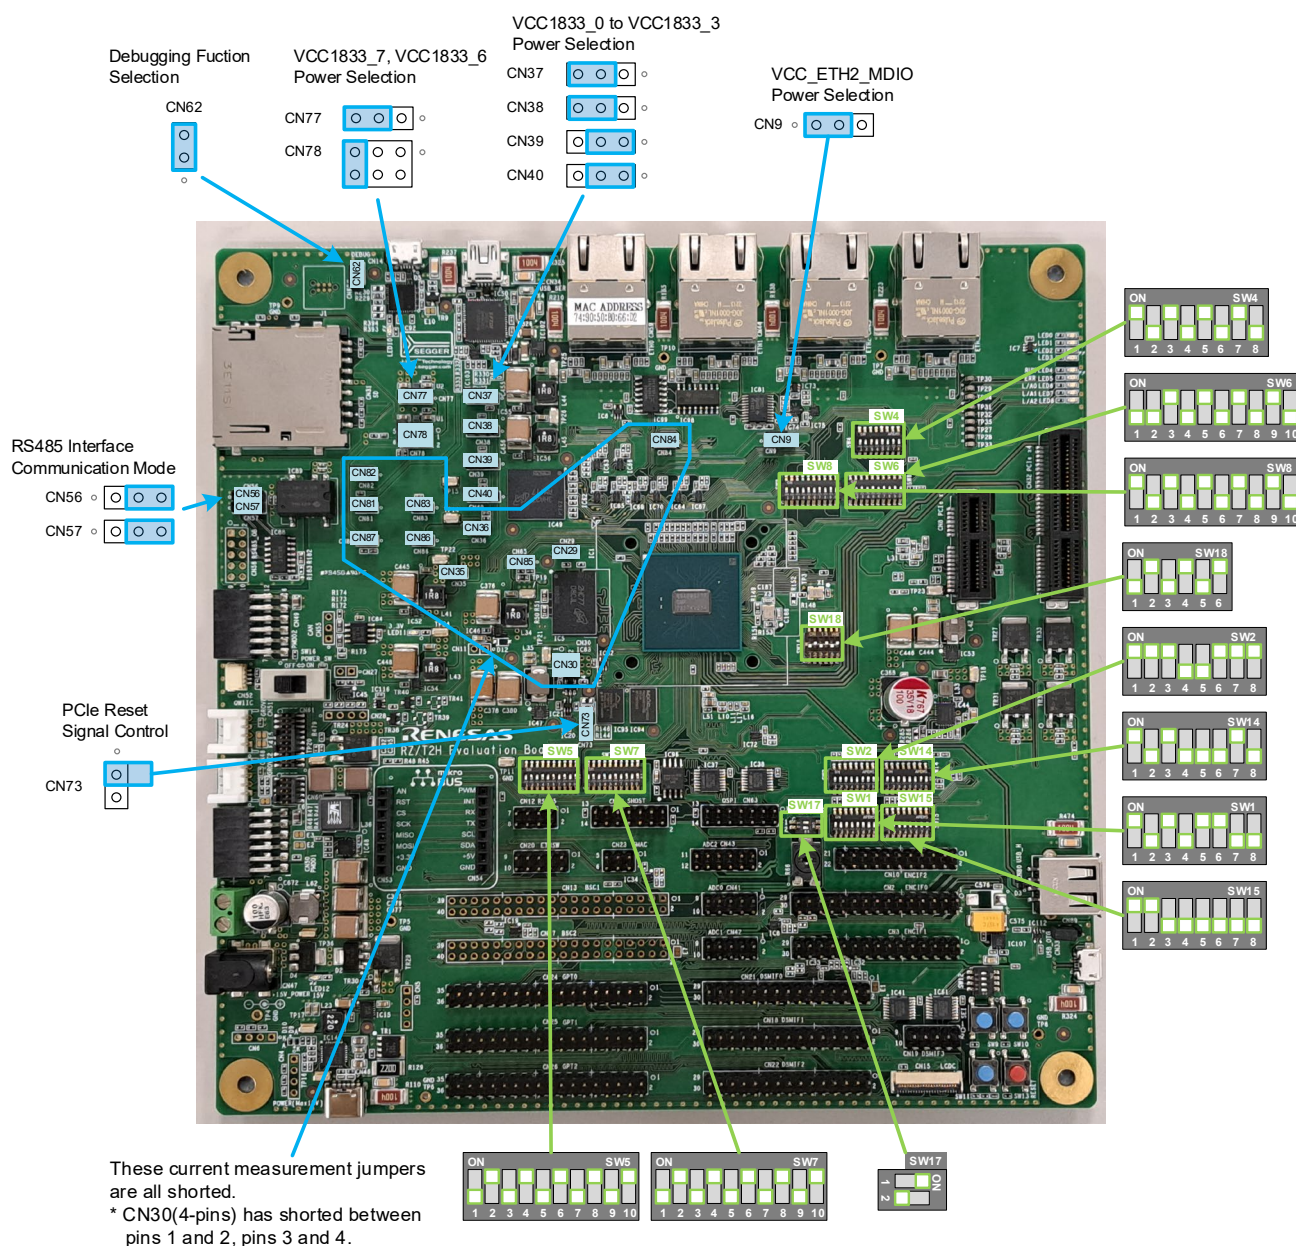


Figure 6-2 Switch Settings and Jumper Block Settings at Shipment

6.3 Configuration by Switches

This board is equipped with DIP switches SW1, SW2, SW4 to SW8, SW14, SW15, SW17, and SW18 for selecting functions. The functions set by individual switches are explained below.

6.3.1 Mode Setting Switch SW14

SW14 is used to set the mode pins of the RZ/T2H. Table 6-1 lists the settings of SW14.

Table 6-1 Functions of Mode Setting Switch SW14

No.	Setting		Function
SW14-1 MD0	OFF	MD0 = H	The operating mode of the RZ/T2H is selected with the combination of SW14-1, SW14-2, and SW14-3 (MD0, MD1, and MD2). SW14-6 (MDV) should be selected according to these settings. For details, see Table 6-2.
	ON	MD0 = L	
SW14-2 MD1	OFF	MD1 = H	
	ON	MD1 = L	
SW14-3 MD2	OFF	MD2 = H	
	ON	MD2 = L	
SW14-4 MDW0	OFF	MDW0 = H	The number of ATCM wait cycles of CPU0 in the Cortex-R52 is 1 wait cycle.
	ON	MDW0 = L	The number of ATCM wait cycles of CPU0 in the Cortex-R52 is 0 wait cycles.
SW14-5 MDW1	OFF	MDW1 = H	The number of ATCM wait cycles of CPU1 in the Cortex-R52 is 1 wait cycle.
	ON	MDW1 = L	The number of ATCM wait cycles of CPU1 in the Cortex-R52 is 0 wait cycles.
SW14-6 MDV*	OFF	MDV = H	The power-supply voltage of the boot peripheral is 3.3 V.
	ON	MDV = L	The power-supply voltage of the boot peripheral is 1.8 V.
SW14-7 MDD	OFF	MDD = H	JTAG mode = JTAG authentication in hash mode
	ON	MDD = L	JTAG mode = Normal mode
SW14-8	Unused		— (At the time of shipment = OFF)

Note: This setting may have to be changed to suit the operating mode. It is "Don't care" in SCI (UART) boot mode and USB boot mode.

Table 6-2 SW14-1, SW14-2, SW14-3, and SW14-6 (MD0, MD1, MD2, and MDV) and RZ/T2H Operating Mode

SW14-3 (MD2)	SW14-2 (MD1)	SW14-1 (MD0)	SW14-6 (MDV)	Operating Mode
ON	ON	ON	OFF (3.3 V)	xSPI0 boot mode (x1 boot serial flash)
ON	ON	OFF	OFF (3.3 V)	xSPI0 boot mode (x8 boot serial flash)*
ON	OFF	ON	OFF (3.3 V)	xSPI1 boot mode (x1 boot serial flash)
ON	OFF	OFF	OFF (3.3 V)	eSD boot mode
OFF	ON	ON	ON (1.8 V)	eMMC boot mode
OFF	ON	OFF	—	SCI (UART) boot mode
OFF	OFF	ON	—	USB boot mode
OFF	OFF	OFF	—	Reserved (setting prohibited)

Note: This setting is prohibited because OctaFlash is mounted.

6.3.2 Signal Function Selection Switches SW1, SW2, SW4 to SW8, SW15, SW17, and SW18

SW1, SW2, SW4 to SW8, SW15, SW17, and SW18 are used to select the functions of the signal lines. Table 6-3 to Table 6-12 list the settings of SW1, SW2, SW4 to SW8, SW15, SW17, and SW18.

Table 6-3 Signal Function Selection Switch SW1

No.	Setting	Function
SW1-1	OFF	XTALSEL = H The resonator is selected as the clock input to the RZ/T2H.
	ON	XTALSEL = L The oscillator is selected as the clock input to the RZ/T2H.
SW1-2	Unused	— (At the time of shipment = OFF)
SW1-3	OFF	P35_3 to P35_6 are connected to DSMIF3 (CN19).
	ON	P35_3 to P35_6 are used as inputs to user DIP switches.
SW1-4	OFF	P13_4, P13_5, and P14_0 are used as RXD3, TXD3, and DE3 of the RS485.
	ON	P13_4, P13_5, and P14_0 are connected to ENCIF2 (CN10), GPT2 (CN26), BSC1 (CN13), BSC2 (CN17), and ETHSW (CN20).
SW1-5	OFF	P00_0 to P00_2 are connected to GPT0 (CN24) and BSC2 (CN17).
	ON	P00_0 to P00_2 are used as control signals for the USB power-supply IC.
SW1-6	OFF	P01_0 to P01_2, P01_4 to P01_7, and P02_0 to P02_3 are connected to ENCIF0 (CN2), GPT0 (CN24), GPT1 (CN25), and DSMIF0 (CN21).
	ON	P01_0 to P01_2, P01_4 to P01_7, and P02_0 to P02_3 are used as XSPI1 signals.
SW1-7	Unused	— (At the time of shipment = OFF)
SW1-8	Unused	— (At the time of shipment = OFF)

Table 6-4 Signal Function Selection Switch SW2

No.	Setting		Function
SW2-1, SW2-2	-1	-2	
	OFF	OFF	Setting prohibited
	OFF	ON	P12_0 to P12_5, P22_5, and P22_6 are connected to the SD card slot (CN31). P02_5 and P02_6 are used for controlling the power supply of the SD card.
	ON	OFF	P12_0 to P12_7, P13_0 to P13_2, P22_5, P22_6, P02_5, and P02_6 are connected to BSC2 (CN17), ENCIF0 (CN2), GPT1 (CN25), and the pin header (CN12) of the off-board RS485.
	ON	ON	P12_0 to P12_7 and P13_0 to P13_2 are connected to eMMC.
SW2-3	OFF		P17_4, P08_5, and P08_6 are connected to BSC1 (CN13), BSC2 (CN17), DSMIF0 (CN21), SEI (SW9), and LED3.
	ON		P17_4, P08_5, and P08_6 are used as SD1 control signals.
SW2-4	Unused		— (At the time of shipment = OFF)
SW2-5	Unused		— (At the time of shipment = OFF)
SW2-6	OFF		MDC and MDIO of Ethernet port 2 are connected to GMAC2 (P30_5 and P30_6).
	ON		MDC and MDIO of Ethernet port 2 are connected to GMAC0 (P21_4 and P21_5).
SW2-7	OFF		P29_1 to P29_7, P30_0 to P30_4, and P31_2 to P31_5 are connected to INCIF1 (CN3), SHOST (CN64), DSMIF2 (CN22), and PMOD1 (CN50).
	ON		P29_1 to P29_7, P30_0 to P30_4, and P31_2 to P31_5 are used as control signals for Ethernet port 2.
SW2-8	OFF		P27_2, P33_2 to P33_7, P34_0 to P34_5, P34_7, and P35_0 to P35_2 are used as GMAC (CN23), Serial Host Interface (CN64), ENCIF0 (CN2), BSC1 (CN13), DSMIF3 (CN19) and PCIE_RSTOUT.
	ON		P27_2, P33_2 to P33_7, P34_0 to P34_5, P34_7, and P35_0 to P35_2 are used as control signals for Ethernet port 3.

Table 6-5 Signal Function Selection Switch SW4

No.	Setting		Function
SW4-1, SW4-2	-1	-2	
	ON	OFF	P27_0 is used as ETH1_CRS.
	OFF	ON	P27_0 is used as HSPI_INT# of SHOST (CN64) or CS5# of CN13.
SW4-3, SW4-4	-3	-4	
	ON	OFF	P27_1 is used as ETH1_COL.
	OFF	ON	P27_1 is used as HSPI_CS# of SHOST (CN64).
SW4-5, SW4-6	-5	-6	
	ON	OFF	P27_4 is used as RXD0 of the USB-to-serial conversion.
	OFF	ON	P27_4 is used as HSPI_IO2 of SHOST (CN64) or GTIOC08_3B of GPT2 (CN26).
SW4-7, SW4-8	-7	-8	
	ON	OFF	P27_5 is used as TXD0 of the USB-to-serial conversion.
	OFF	ON	P27_5 is used as HSPI_IO3 of SHOST (CN64) or GTIOC08_4A of GPT2 (CN26).

Table 6-6 Signal Function Selection Switch SW5

No.	Setting		Function
SW5-1, SW5-2	-1	-2	
	ON	OFF	P32_2 is used as SD1_IOVS (SW5-3 needs to be set to ON).
	OFF	ON	P32_2 is used as USER_LED1.
SW5-3, SW5-4	-3	-4	
	ON	OFF	P32_2 is used as SD1_IOVS (SW5-1 needs to be set to ON).
	OFF	ON	When SW2-3=ON, P08_6 is used as SD1_IOVS.
SW5-5, SW5-6	-5	-6	
	ON	OFF	P07_5 is used as MCLK02 of DSMIF0 (CN21).
	OFF	ON	P07_5 is used as XSPI0_ECS# of OctaFlash.
SW5-7, SW5-8	-7	-8	
	ON	OFF	P23_0 is used as GTIOC06_0B of GPT2 (CN26).
	OFF	ON	P23_0 is used as ESC_LINKACT1.
SW5-9, SW5-10	-9	-10	
	ON	OFF	P22_7 is used as GTIOC06_0A of GPT2 (CN26).
	OFF	ON	P22_7 is used as ESC_LINKACT0.

Table 6-7 Signal Function Selection Switch SW6

No.	Setting			Function
SW6-1 to SW6-3	-1	-2	-3	
	ON	OFF	OFF	P17_5 is used as BSC_A7.
	OFF	ON	OFF	P17_5 is used as GMAC_RESETOUT2#.
	OFF	OFF	ON	P11_0 is used as ESC_RESETOUT2#.
SW6-4, SW6-5	-4		-5	
	ON		OFF	P11_0 is used as BSC_A5/LCDC_DATG0/PMOD2_RXD1.
	OFF		ON	P11_0 is used as ESC_RESETOUT01#.
SW6-6	Unused			— (At the time of shipment = OFF)
SW6-7, SW6-8	-7		-8	
	ON		OFF	P23_3 is used as ESC_I2CCLK.
	OFF		ON	P23_3 is used as GTIOC06_2A of GPT2 (CN26).
SW6-9, SW6-10	-9		-10	
	ON		OFF	P23_4 is used as ESC_I2CDATA.
	OFF		ON	P23_4 is used as GTIOC06_2B of GPT2 (CN26).

Table 6-8 Signal Function Selection Switch SW7

No.	Setting		Function
SW7-1, SW7-2	-1	-2	
	ON	OFF	P24_4 is used as MDAT70 of DSMIF2 (CN22).
	OFF	ON	P24_4 is used as CAN_TX.
SW7-3, SW7-4	-3	-4	
	ON	OFF	P24_3 is used as MCLK70 of DSMIF2 (CN22).
	OFF	ON	P24_3 is used as CAN_RX.
SW7-5, SW7-6	-5	-6	
	ON	OFF	P23_5 is used as MCLK60 of DSMIF2 (CN22).
	OFF	ON	P23_5 is used as ESC_LINKACT2.
SW7-7, SW7-8	-7	-8	
	ON	OFF	VUBUSIN is used for USB_OTG.
	OFF	ON	VUBUSIN is used as USB_Function.
SW7-9, SW7-10	-9	-10	
	ON	OFF	P00_0 is used as USB_OTG_VBUSEN.
	OFF	ON	P00_0 is used as USB_HF_VBUSEN.

Table 6-9 Signal Function Selection Switch SW8

No.	Setting		Function
SW8-1, SW8-2	-1	-2	
	ON	OFF	P18_1 is used as ESC_LED_ERR.
	OFF	ON	P18_1 is used as BSC_A9/LCDC_DATB2.
SW8-3, SW8-4	-3	-4	
	ON	OFF	P18_0 is used as ESC_LED_RUN.
	OFF	ON	P18_0 is used as BSC_A8/LCDC_DATB1.
SW8-5, SW8-6	-5	-6	
	ON	OFF	P16_3 is used as RXD5 of the USB-to-serial conversion.
	OFF	ON	P16_3 is used as MikroBUS_RXD5/IRQ10_D(PMOD)/PC1ex1_WAKE_GPIO.
SW8-7, SW8-8	-7	-8	
	ON	OFF	P16_4 is used as TXD5 of the USB-to-serial conversion.
	OFF	ON	P16_4 is used as MikroBUS_TXD5.
SW8-9, SW8-10	-9	-10	
	ON	OFF	P23_1 is used as USER_LED0.
	OFF	ON	P23_1 is used as GTIOC06_1A of GPT2 (CN26).

Table 6-10 Signal Function Selection Switch SW15

No.	Setting	Function
SW15-1	OFF	PCIe L0 is used as an endpoint.
	ON	PCIe L0 is used as a root complex.
SW15-2	OFF	PCIe L1 is used as an endpoint.
	ON	PCIe L1 is used as a root complex.
SW15-3	OFF	The PCIe function is used in a configuration of 2 lanes × 1 port.
	ON	The PCIe function is used in a configuration of 1 lane × 2 ports.
SW15-4	Unused	— (At the time of shipment = OFF)
SW15-5	OFF	The 12-V power supply of the PCIe x4 connector CN32 is OFF.
	ON	The 12-V power supply of the PCIe x4 connector CN32 is ON (when the x4 connector CN32 is used for the root complex).
SW15-6	OFF	The 3.3-V power supply of the PCIe x4 connector CN32 is OFF.
	ON	The 3.3-V power supply of the PCIe x4 connector CN32 is ON (when the x4 connector CN32 is used for the root complex).
SW15-7	OFF	The 3.3-V power supply of the PCIe x1 connector CN8 is OFF.
	ON	The 3.3-V power supply of the PCIe x1 connector CN8 is ON (when the x1 connector CN8 is used for the root complex).
SW15-8	OFF	The 12-V power supply of the PCIe x1 connector CN8 is OFF.
	ON	The 12-V power supply of the PCIe x1 connector CN8 is ON (when the x1 connector CN8 is used for the root complex).

Table 6-11 Signal Function Selection Switch SW17

No.	Setting		Function
SW17-1, SW17-2	-1	-2	
	ON	OFF	AN000 is connected to the potentiometer.
	OFF	ON	AN000 is connected to CN41.

Table 6-12 Signal Function Selection Switch SW18

No.	Setting		Function
SW18-1, SW18-2	-1	-2	
	ON	OFF	AN100 is connected to CN42.
	OFF	ON	AN100 is connected to mikroBUS™.
SW18-3, SW18-4	-3	-4	
	ON	OFF	AN101 is connected to CN42.
	OFF	ON	AN101 is connected to Grove2.
SW18-5, SW18-6	-5	-6	
	ON	OFF	AN102 is connected to CN42.
	OFF	ON	AN102 is connected to Grove2.

6.4 Configuration by Jumper Blocks

This board is equipped with jumper blocks CN9, CN29, CN30, CN35 to CN40, CN56, CN57, CN62, CN73, CN77, CN78, and CN81 to CN87 for selecting functions. The functions set by individual jumper blocks are explained below.

6.4.1 I/O Power Selection Jumper Blocks CN9, CN37 to CN40, CN77, and CN78

CN9, CN37 to CN40, CN77, and CN78 are used to select the power supply to the I/O power domain of the RZ/T2H and Ethernet PHY. The supply of voltage to each power supply selected by CN9, CN37 to CN40, CN77, or CN78 must comply with the standards or usage methods of the I/O devices connected to that power domain. Otherwise, malfunctions of the device may occur or permanent damages may be caused.

Table 6-13 I/O Power Selection Jumper Blocks CN9, CN37 to CN40, CN77, and CN78

No.	Setting	Function
CN9	1-2 are short-circuit	VCC1833_0 is supplied to VCC_ETH2_MDIO (SW2-6 is ON: When P21_4 and P21_5 are selected for MDIO).
	2-3 are short-circuit	VCC1833_2 is supplied to VCC_ETH2_MDIO (SW2-6 is OFF: When P30_5 and P30_6 are selected for MDIO).
CN37	1-2 are short-circuit	1.8-V power is supplied to VCC1833_0 (for Ethernet port 0).
	2-3 are short-circuit	3.3-V power is supplied to VCC1833_0 (for Ethernet port 0).
CN38	1-2 are short-circuit	1.8-V power is supplied to VCC1833_1 (for Ethernet port 1).
	2-3 are short-circuit	3.3-V power is supplied to VCC1833_1 (for Ethernet port 1).
CN39	1-2 are short-circuit	1.8-V power is supplied to VCC1833_2 (for Ethernet port 2).
	2-3 are short-circuit	3.3-V power is supplied to VCC1833_2 (for Ethernet port 2).
CN40	1-2 are short-circuit	1.8-V power is supplied to VCC1833_3 (for Ethernet port 3).
	2-3 are short-circuit	3.3-V power is supplied to VCC1833_3 (for Ethernet port 3).
CN77	1-2 are short-circuit	3.3-V power is supplied to VCC1833_7 (for SD1).
	2-3 are short-circuit	The output from the power-supply control IC for SD1 is supplied to VCC1833_7 (for SD1).
CN78	1-2 are short-circuit	3.3-V power is supplied to VCC1833_6 (for SD0).
	3-4 are short-circuit	The output from the power-supply control IC for SD0 is supplied to VCC1833_6 (for SD0).
	5-6 are short-circuit	1.8-V power is supplied to VCC1833_6 (for SD0).

6.4.2 Debugging Function Selection Jumper Block CN62

CN62 is used to enable or disable the on-board debugging function J-Link™ OB.

Table 6-14 Debugging Function Selection Jumper Block CN62

No.	Setting	Function
CN62	Open-circuit	The on-board debugging function J-Link™ OB is enabled.
	Short-circuit	The on-board debugging function J-Link™ OB is disabled. Connect an external emulator to either CN60 or CN61 at debugging.

6.4.3 RS485 Interface Communication Mode Selection Jumper Blocks CN56 and CN57

CN56 and CN57 are used to select the communication mode of the RS485 interface.

Table 6-15 RS485 Interface Communication Mode Selection Jumper Blocks CN56 and CN57

No.	Setting	Function
CN56, CN57	1-2 are short-circuit	Full-duplex communication
	2-3 are short-circuit	Half-duplex communication

6.4.4 PCIe Reset Signal Control Jumper Block CN73

CN73 is used to select whether the reset signal of the PCIe is included in the system reset factors.

Table 6-16 PCIe Reset Signal Control Jumper Block CN73

No.	Setting	Function
CN73	Open-circuit	A PCIe reset is not included in the system reset factors.
	Short-circuit	A PCIe reset is included in the system reset factors.

6.4.5 Current Measurement Jumper Blocks CN29, CN30, CN35, CN36, and CN81 to CN87

CN29, CN30, CN35, CN36, and CN81 to CN87 are jumper blocks for measuring the current drawn by the target device (RZ/T2H). When measuring the current, insert an ammeter between pins 1-2 of the corresponding jumper block (pins 1-2 and 3-4 in CN30).

Table 6-17 Current Measurement Jumper Blocks CN29, CN30, CN35, CN36, and CN81 to CN87

No.	Function	Function
CN29	Current of CPU1V1 is measured.	The jumper blocks are short-circuit at the time of shipment. To measure the current, make the relevant jumper block open-circuit and insert an ammeter between pins 1-2 (pins 1-2 and 3-4 for CN30).
CN30	Current of CPU0V8 is measured.	
CN35	Current of CPU1V8 is measured.	
CN36	Current of CPU3V3 is measured.	
CN81	Current of CPU_VCC1833_0 is measured.	
CN82	Current of CPU_VCC1833_1 is measured.	
CN83	Current of CPU_VCC1833_2 is measured.	
CN84	Current of CPU_VCC1833_3 is measured.	
CN85	Current of CPU_VCC1833_4 is measured.	
CN86	Current of CPU_VCC1833_5 is measured.	
CN87	Current of CPU_VCC1833_6 is measured.	

6.5 Configuration by Option Links

6.5.1 Settings by Solder Bridges and Trace Cuts

This board is equipped with solder bridges E4, E5, E17 and E18, and trace cuts E1 to E3, E6 to E10, and E20 for selecting functions. Table 6-18 lists the settings of each solder bridge and trace cut.

Table 6-18 Settings of Solder Bridges and Trace Cuts

No.	Setting	Function
E1	Open-circuit	SEI (SW9) is not input to P08_6.
	Short-circuit	SEI (SW9) is input to P08_6.
E2	Open-circuit	PMOD1 (CN50) is not used with the SPI interface.
	Short-circuit	PMOD1 (CN50) is used with the SPI interface. (In this case, E4 should be left open-circuit.)
E3	Open-circuit	PMOD1 (CN50) is not used with the SPI interface.
	Short-circuit	PMOD1 (CN50) is used with the SPI interface. (In this case, E5 should be left open-circuit.)
E4	Open-circuit	PMOD1 (CN50) is not used with the I²C interface.
	Short-circuit	PMOD1 (CN50) is used with the I ² C interface. (In this case, E2 should be left open-circuit.)
E5	Open-circuit	PMOD1 (CN50) is not to be used with the I²C interface.
	Short-circuit	PMOD1 (CN50) is used with the I ² C interface. (In this case, E3 should be left open-circuit.)
E6	Open-circuit	Setting prohibited
	Short-circuit	Pin 9 of CN60 (MIPI-10) is connected to the ground.
E7	Open-circuit	P08_6 is not connected to DSMIF0 (CN21) and SEI (SW9) (not used as a DSMIF signal or SEI).
	Short-circuit	P08_6 is connected to DSMIF0 (CN21) and SEI (SW9) (used as a DSMIF signal and SEI).
E8	Open-circuit	USB_DM is not connected to USB_OTG_DM.
	Short-circuit	USB_DM is connected to USB_OTG_DM.
E9	Open-circuit	USB_DP is not connected to USB_OTG_DP.
	Short-circuit	USB_DP is connected to USB_OTG_DP.
E10	Open-circuit	Setting prohibited
	Short-circuit	3.3-V power is supplied to the J-Link™ OB circuit.
E17	Open-circuit	USB_OTG_STATUS1 is not input to P09_0.
	Short-circuit	USB_OTG_STATUS1 is input to P09_0.
E18	Open-circuit	USB_OTG_STATUS2 is not input to P09_1.
	Short-circuit	USB_OTG_STATUS2 is input to P09_1.
E20	Open-circuit	P05_2 is not connected to CN8 (not used as a PCIe-related signal).
	Short-circuit	P05_2 is connected to CN8 (used as a PCIe-related signal).

6.5.2 Settings by 0-Ω and Other Resistors

The following 0-Ω and other resistors are or can be placed on this board, and the function to be used can be selected by changing the Fit/DNF state from the state as shipped. Table 6-19 lists the settings of 0-Ω and other resistors.

Table 6-19 Settings by 0-Ω and Other Resistors

No.	Setting	Function
R172 (0 Ω)	Fit	The termination resistor for CAN_H is enabled.
	DNF	The termination resistor for CAN_H is disabled.
R173 (0 Ω)	Fit	The termination resistor for CAN_L is enabled.
	DNF	The termination resistor for CAN_L is disabled.
R182 (0 Ω)	Fit	The DE signal is used in the RE control of the RS485.
	DNF	The DE signal is not used in the RE control of the RS485. In this case, install R183 (10-kΩ) and fix the RE signal to the low level.
R187 (0 Ω)	Fit	The 130-Ω termination resistor of RS485 A-B is enabled.
	DNF	The 130-Ω termination resistor of RS485 A-B is disabled.
R191 (33 Ω)	Fit	MII is used for the MAC-PHY interface of Ethernet port 0.
	DNF	RGMII is used for the MAC-PHY interface of Ethernet port 0.
R155 (33 Ω)	Fit	MII is used for the MAC-PHY interface of Ethernet port 1.
	DNF	RGMII is used for the MAC-PHY interface of Ethernet port 1.
R23 (33 Ω)*	Fit	MII is used for the MAC-PHY interface of Ethernet port 2.
	DNF	RGMII is used for the MAC-PHY interface of Ethernet port 2.
R486 (33 Ω)*	Fit	MII is used for the MAC-PHY interface of Ethernet port 3.
	DNF	RGMII is used for the MAC-PHY interface of Ethernet port 3.

Note: When installing a resistor, use a 1608-size (mm) chip resistor.

7. User Circuits

This chapter describes the circuits on the board for each of its functions.

The initial state of this board at the time of shipment is indicated by the **text in bold blue type** in the "Settings of Configuration Circuits" column of each of the signal connection tables. Refer to the details on the configuration circuits in chapter 6.

7.1 Reset Circuit

A reset signal can be generated by the power-on reset IC and RES switch on the board. Figure 7-1 shows the configuration of the reset circuit.

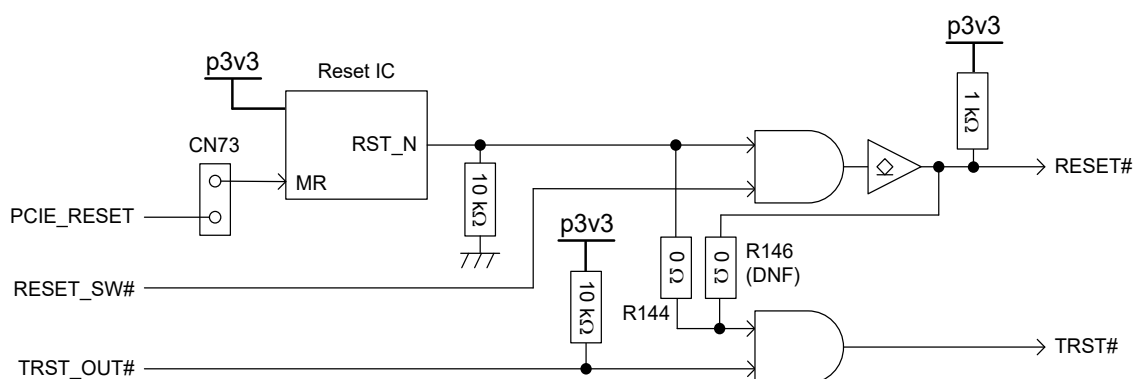


Figure 7-1 Configuration of Reset Circuit

7.2 Clock Circuit

Figure 7-2 shows the clock circuit for the RZ/T2H on this board. Table 7-1 lists the resonators.

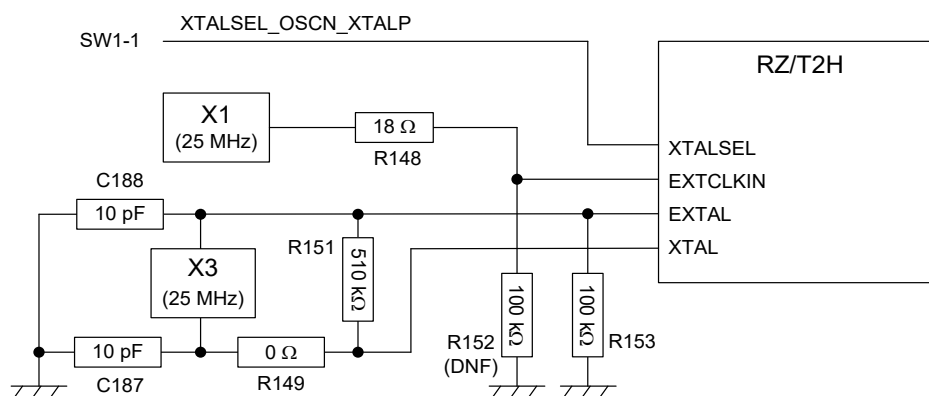


Figure 7-2 Configuration of Clock Circuit

Table 7-1 List of Resonators

Resonator	Function or Intended Use	State as Shipped	Frequency
X1	Clock for the RZ/T2H (oscillator)	Mounted	25 MHz
X2	Clock for the PCIe	Mounted	25 MHz
X3	Clock for the RZ/T2H	Mounted (disabled state)	25 MHz
X4	Clock for the USB-to-serial conversion IC	Mounted	12 MHz

7.3 Switches

This board is equipped with four push switches and 12 DIP switches in addition to the power switch described in section 2.2. Table 7-2 lists the functions and signal connections of the four push switches. Table 7-3 lists the functions and signal connections of user DIP switch SW12.

Among the DIP switches, SW14 is used for setting the mode of the RZ/T2H, and SW1, SW2, SW4 to SW8, SW15, SW17, and SW18 are used for selecting the functions of the signal lines. Refer to section 6.3 in which the switches are explained as part of the configuration circuitry of this board.

Table 7-2 Signal Connections of Push Switches

Switch	Function or Intended Use	MPU		Settings of Configuration Circuits
		Port	Pin	
RES (SW13)	Reset switch	RES#*	AD4	—
SEI (SW9)	User push switch, connected to SEI.	P08_6	AD2	SW2-3: OFF , E1: Short-circuit , E7: Short-circuit
SW10	User push switch, connected to IRQ2.	P00_3	AG15	—
SW11	User push switch, connected to IRQ0.	P08_7	AF2	—

Note: Connected via the reset circuit.

Table 7-3 Signal Connections of DIP Switch SW12 for User Control

Switch	Function or Intended Use	MPU		Settings of Configuration Circuits
		Port	Pin	
SW12-1	Connected to P35_3 for user control.	P35_3*	V22	SW1-3: ON
SW12-2	Connected to P35_4 for user control.	P35_4*	W24	SW1-3: ON
SW12-3	Connected to P35_5 for user control.	P35_5*	V24	SW1-3: ON
SW12-4	Connected to P35_6 for user control.	P35_6*	U22	SW1-3: ON

Note: Connected via the bus switch IC.

7.4 LEDs

This board is equipped with 20 LEDs. Table 7-4 lists the functions, colors, and signal connections of LEDs.

Table 7-4 Signal Connections of LEDs

LED	Color	Function or Intended Use	MPU		Settings of Configuration Circuits
			Port	Pin	
P15V (LED12)	Yellow	Indicator of the 15-V power-supply line	—	—	—
P3V3 (LED11)	Green	Indicator of the 3.3-V power-supply line	—	—	—
LED0	Green	User LED	P23_1* ¹	A20	SW8-9: ON, SW8-10: OFF
LED1	Green	User LED	P32_2* ¹	M22	SW5-1: OFF, SW5-2: ON
LED2	Yellow	User LED	P06_7	AF8	—
LED3	Red	User LED	P08_5* ²	AE3	SW2-3: OFF
LED4_ESC_RUN	Green	User LED or ESC_LED RUN	P18_0* ¹	D15	SW8-3: ON, SW8-4: OFF
LED5_ESC_ERR	Red	User LED or ESC_LED ERR	P18_1* ¹	E13	SW8-1: ON, SW8-2: OFF
LED6_ESC_L/A0	Green	User LED or ESC_LINKACT0	P22_7* ¹	G21	SW5-9: OFF, SW5-10: ON
LED7_ESC_L/A1	Green	User LED or ESC_LINKACT1	P23_0* ¹	G20	SW5-7: OFF, SW5-8: ON
LED8_ESC_L/A2	Green	User LED or ESC_LINKACT2	P23_5* ¹	C21	SW7-5: OFF, SW7-6: ON
LED10	Yellow	Indicator of J-Link™ OB	—	—	—
LED built in CN59	Green	Ethernet port 0 LED (Link)	—	—	—
LED built in CN59	Yellow	Ethernet port 0 LED (Activity)	—	—	—
LED built in CN44	Green	Ethernet port 1 LED (Link)	—	—	—
LED built in CN44	Yellow	Ethernet port 1 LED (Activity)	—	—	—
LED built in CN45	Green	Ethernet port 2 LED (Link)	—	—	—
LED built in CN45	Yellow	Ethernet port 2 LED (Activity)	—	—	—
LED built in CN1	Green	Ethernet port 3 LED (Link)	—	—	—
LED built in CN1	Yellow	Ethernet port 3 LED (Activity)	—	—	—

Notes: 1. Connected via DIP switches. If the factory settings are used, they can be used for controlling LEDs.

2. Connected via the bus switch IC.

7.5 Potentiometer

On this board, a 10-k Ω single-rotation potentiometer for evaluating the ADC is connected to AN000 (pin AA27) of the RZ/T2H. Figure 7-3 shows the configuration of the potentiometer circuit.

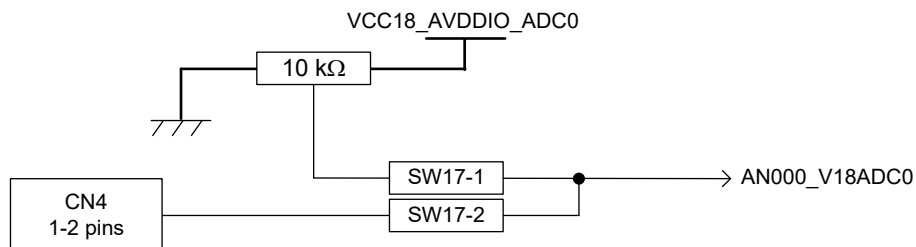


Figure 7-3 Configuration of Potentiometer Circuit

A potentiometer is installed to provide an easy way of supplying a variable analog input to the microprocessor. Note in advance that it will not guarantee the accuracy of the A/D converter.

7.6 Pmod™

This board is equipped with two connectors for Digilent Pmod™ interfaces so that compatible Pmod™ modules can be connected and evaluated. PMOD1 (CN50) supports the type 2A and 6A Pmod™ interfaces and PMOD2 (CN49) supports type 3A. Figure 7-4 shows the configuration of the Pmod™ interface circuits. Table 7-5 and Table 7-6 list the signal connections. Figure 7-5 shows the switch settings when using PMOD1 and PMOD2.

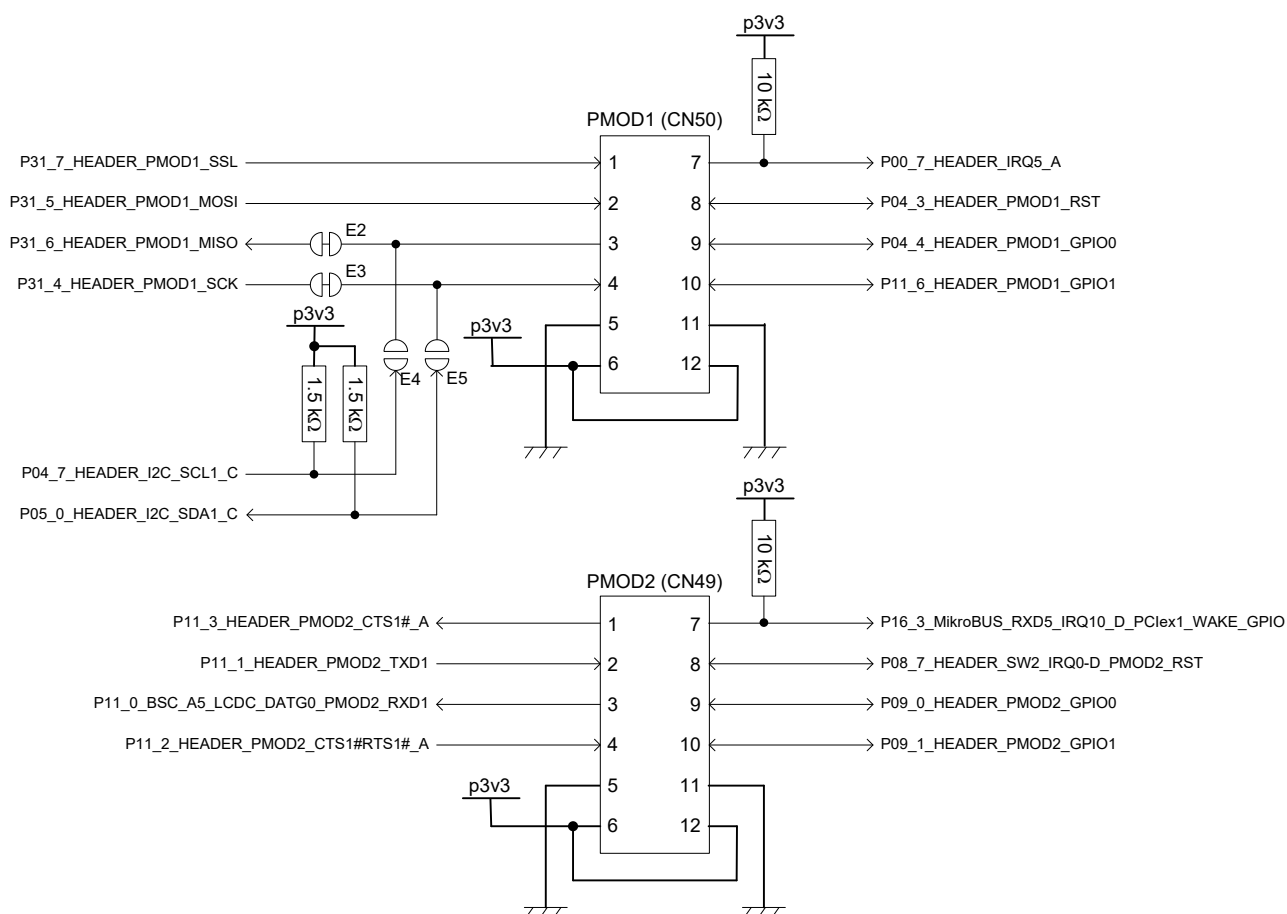


Figure 7-4 Configuration of Pmod™ Interface Circuits

Table 7-5 Signal Connections of PMOD1 Connector (CN50)

Pin	Signal Name	MPU		Settings of Configuration Circuits
		Port	Pin	
1	P31_7_HEADER_PMOD1_SSL	P31_7	M26	—
2	P31_5_HEADER_PMOD1_MOSI	P31_5*1	P26	SW2-7 : OFF
3	P31_6_HEADER_PMOD1_MISO	P31_6	P25	E2: Short-circuit, E4: Open-circuit
	P04_7_HEADER_I2C_SCL1_C	P04_7*2	AC11	E2: Open-circuit, E4: Short-circuit
4	P31_4_HEADER_PMOD1_SCK	P31_4*1	N25	SW2-7 : OFF, E3: Short-circuit, E5: Open-circuit
	P05_0_HEADER_I2C_SDA1_C	P05_0*2	AA10	E3: Open-circuit, E5: Short-circuit
5	GROUND	—	—	—
6	p3v3	—	—	—
7	P00_7_HEADER_IRQ5_A	P00_7	AE14	—
8	P04_3_HEADER_PMOD1_RST	P04_3	AG10	—
9	P04_4_HEADER_PMOD1_GPIO0	P04_4	AG11	—
10	P11_6_HEADER_PMOD1_GPIO1	P11_6	A3	—
11	GROUND	—	—	—
12	p3v3	—	—	—

Notes: 1. Connected via the bus switch IC.

2. To change the function, the setting of a solder bridge jumper has to be changed.

Table 7-6 Signal Connections of PMOD2 Connector (CN49)

Pin	Signal Name	MPU		Settings of Configuration Circuits
		Port	Pin	
1	P11_3_HEADER_PMOD2_CTS1#_A	P11_3	D1	—
2	P11_1_HEADER_PMOD2_TXD1	P11_1	C1	—
3	P11_0_BSC_A5_LCDC_DATG0_PMOD2_RXD1	P11_0*	C5	SW6-3 : OFF, SW6-4: ON, SW6-5: OFF
4	P11_2_HEADER_PMOD2_CTS1#RTS1#_A	P11_2	C3	—
5	GROUND	—	—	—
6	p3v3	—	—	—
7	P16_3_MikroBUS_RXD5_IRQ10_D_PClex1_WAKE_GPIO	P16_3*	B12	SW8-5 : OFF, SW8-6: ON
8	P08_7_HEADER_SW2_IRQ0-D_PMOD2_RST	P08_7	AF2	—
9	P09_0_HEADER_PMOD2_GPIO0	P09_0	AE1	—
10	P09_1_HEADER_PMOD2_GPIO1	P09_1	AG2	—
11	GROUND	—	—	—
12	p3v3	—	—	—

Note: Connected via SW6 or SW8.

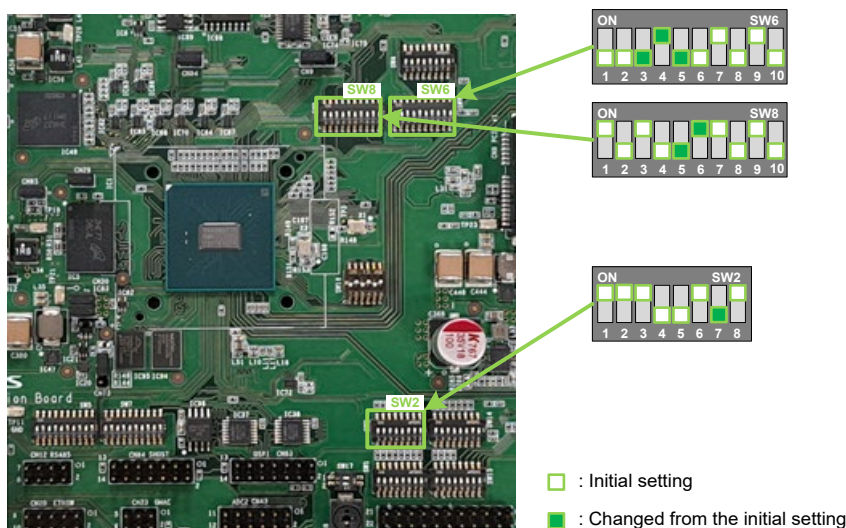


Figure 7-5 Switch Settings When Using PMOD1 and PMOD2

Note that the pin assignment for a Digilent Pmod™ connector differs in terms of numbering from that for a typical connector. Figure 7-6 shows the pin assignment for a Pmod™ connector. For details, refer to the Digilent Pmod™ Interface Specification.

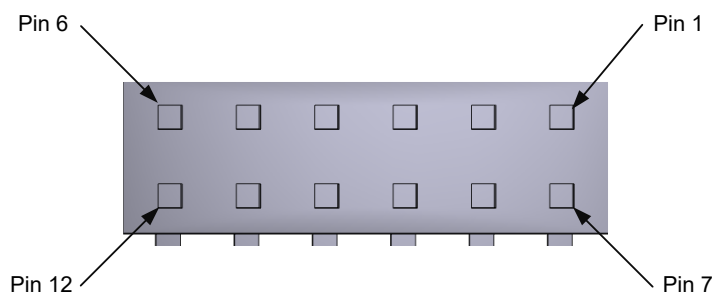


Figure 7-6 Pin Assignment for a Digilent Pmod™ Connector (Viewed from the Direction of Insertion)

7.7 Grove

This board is equipped with two connectors for Grove interfaces so that compatible Grove modules can be connected and evaluated. Figure 7-7 shows the configuration of the Grove interface circuits. Figure 7-8 shows the pin assignment for a Grove connector. Table 7-7 and Table 7-8 list the signal connections.

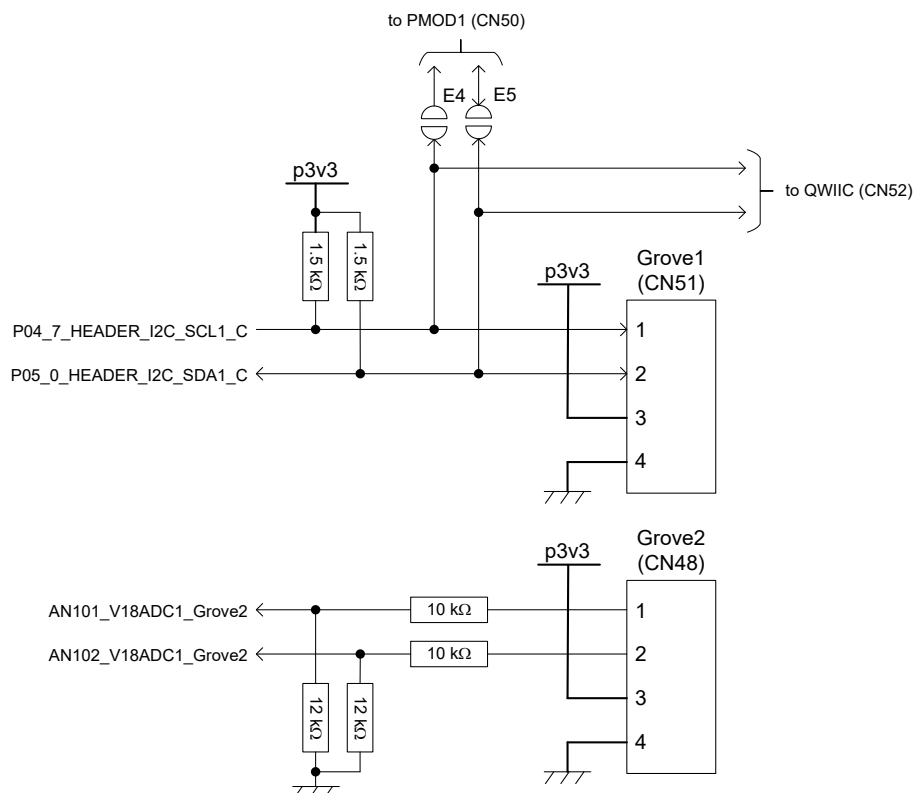


Figure 7-7 Configuration of Grove Interface Circuits

Table 7-7 Signal Connections of Grove1 Connector (CN51)

Pin	Signal Name	MPU		Settings of Configuration Circuits
		Port	Pin	
1	P04_7_HEADER_I2C_SCL1_C	P04_7*	AC11	—
2	P05_0_HEADER_I2C_SDA1_C	P05_0*	AA10	—
3	p3v3	—	—	—
4	GROUND	—	—	—

Note: Shared with QWIIC and other interfaces.

Table 7-8 Signal Connections of Grove2 Connector (CN48)

Pin	Signal Name	MPU		Settings of Configuration Circuits
		Port	Pin	
1	AN101_V18ADC1_Grove2	AN101*	AD27	SW18-3: OFF, SW18-4: ON
2	AN102_V18ADC1_Grove2	AN102*	AD26	SW18-5: OFF, SW18-6: ON
3	p3v3	—	—	—
4	GROUND	—	—	—

Note: Connected via SW18.

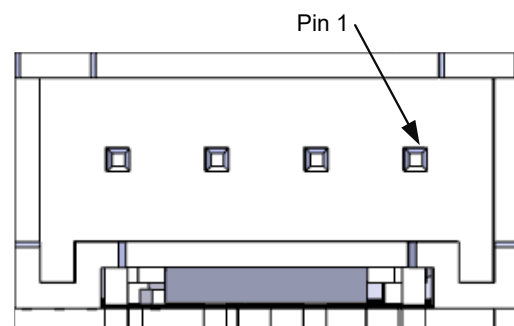


Figure 7-8 Pin Assignment for a Grove Connector (Viewed from the Direction of Insertion)

7.8 QWIIC

This board is equipped with a connector for the QWIIC interface so that a compatible QWIIC module can be connected and evaluated. Figure 7-9 shows the pin assignment for a QWIIC connector. Table 7-9 lists the signal connections.

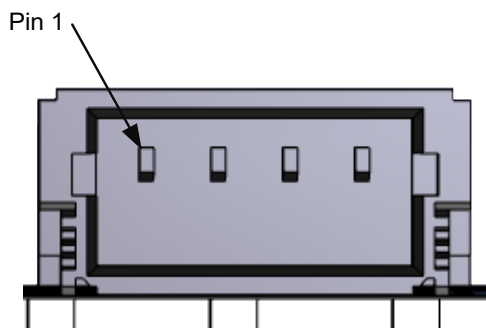


Figure 7-9 Pin Assignment for a QWIIC Connector (Viewed from the Direction of Insertion)

Table 7-9 Signal Connections of QWIIC Connector (CN52)

Pin	Signal Name	MPU		Settings of Configuration Circuits
		Port	Pin	
1	GROUND	—	—	—
2	p3v3	—	—	—
3	P05_0_HEADER_I2C_SDA1_C	P05_0*	AA10	—
4	P04_7_HEADER_I2C_SCL1_C	P04_7*	AC11	—

Note: Shared with Grove2 and other interfaces.

7.9 mikroBUS™

This board is equipped with two connectors for mikroBUS™ interfaces so that compatible mikroBUS™ modules can be connected and evaluated. Figure 7-10 shows the configuration of the mikroBUS™ interface circuits. Table 7-10 and Table 7-11 list the signal connections. Figure 7-11 shows the switch settings when using mikroBUS™.

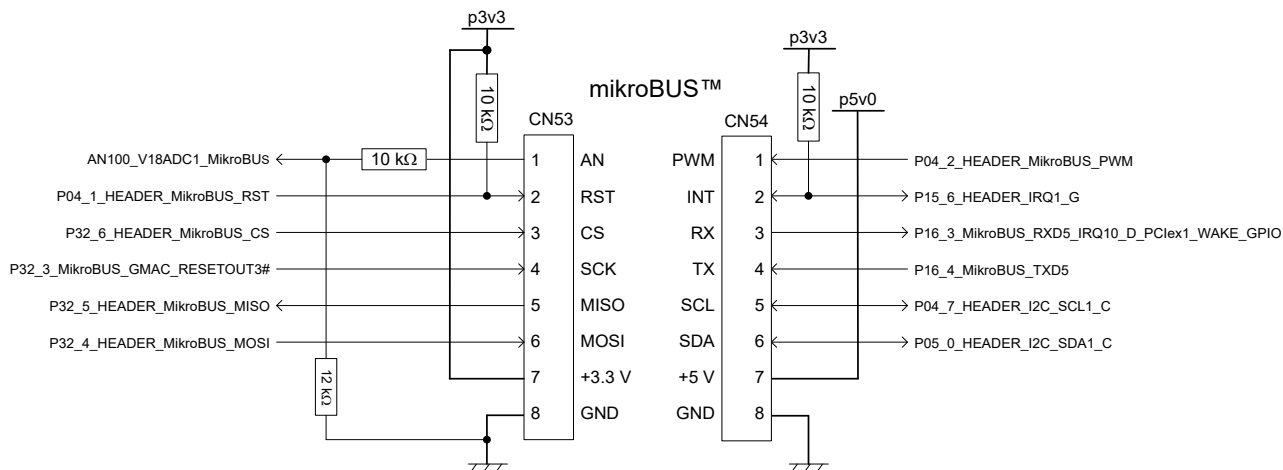


Figure 7-10 Configuration of mikroBUS™ Interface Circuits

Table 7-10 Signal Connections of mikroBUS™ Connector (CN53)

Pin	Signal Name	MPU		Settings of Configuration Circuits
		Port	Pin	
1	AN100_V18ADC1_MikroBUS	AN100*	AC27	SW18-1: OFF, SW18-2: ON
2	P04_1_HEADER_MikroBUS_RST	P04_1	AF11	—
3	P32_6_HEADER_MikroBUS_CS	P32_6	L27	—
4	P32_3_MikroBUS_GMAC_RESETOUT3#	P32_3	N23	—
5	P32_5_HEADER_MikroBUS_MISO	P32_5	M27	—
6	P32_4_HEADER_MikroBUS_MOSI	P32_4	N22	—
7	p3v3	—	—	—
8	GROUND	—	—	—

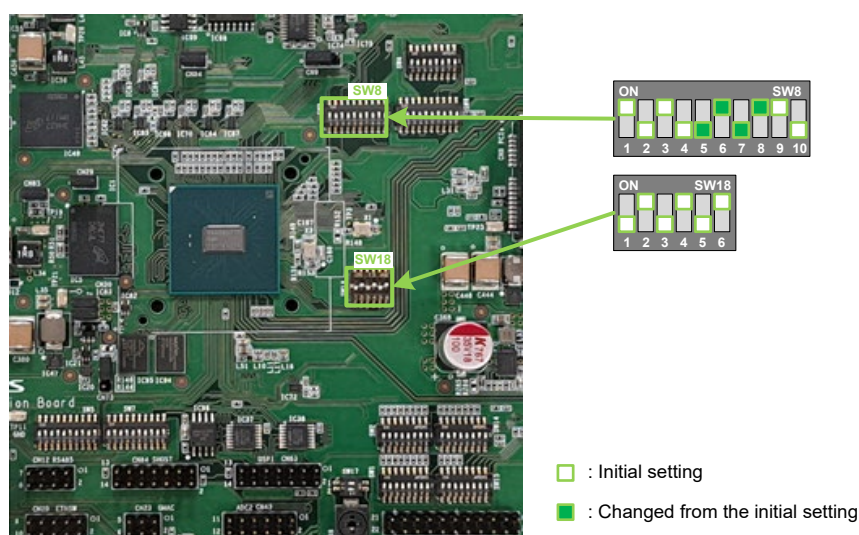
Note: Connected via SW18.

Table 7-11 Signal Connections of mikroBUS™ Connector (CN54)

Pin	Signal Name	MPU		Settings of Configuration Circuits
		Port	Pin	
1	P04_2_HEADER_MikroBUS_PWM	P04_2	AA12	—
2	P15_6_HEADER_IRQ1_G	P15_6	D10	—
3	P16_3_MikroBUS_RXD5_IRQ10_D_PClx1_WAKE_GPIO	P16_3*1	B12	SW8-5 : OFF, SW8-6: ON
4	P16_4_MikroBUS_TXD5	P16_4*1	A12	SW8-7: OFF, SW8-8: ON
5	P04_7_HEADER_I2C_SCL1_C	P04_7*2	AC11	—
6	P05_0_HEADER_I2C_SDA1_C	P05_0*2	AA10	—
7	p5v0	—	—	—
8	GROUND	—	—	—

Notes: 1. Connected via SW8.

2. Shared with Grove2 and other interfaces.

**Figure 7-11 Switch Settings When Using mikroBUS™**

7.10 USB-to-Serial Conversion

This board is equipped with a USB connector (CN34) for terminal output and an FT2232 for USB-to-serial conversion. Figure 7-12 shows the configuration of the USB-to-serial conversion circuit. Table 7-12 lists the signal connections.

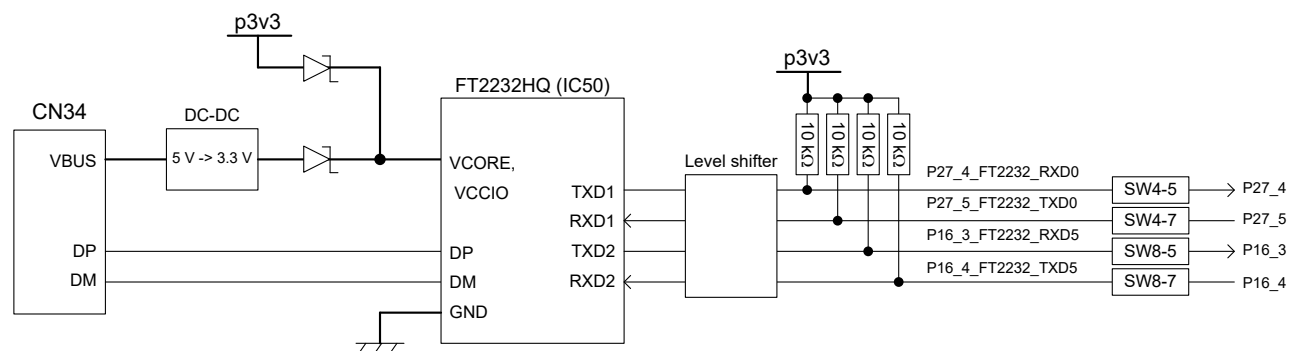


Figure 7-12 Configuration of USB-to-Serial Conversion Circuit

Table 7-12 Signal Connections of USB-to-Serial Conversion

Signal Name	Function or Intended Use	MPU		Settings of Configuration Circuits
		Port	Pin	
P27_4_FT2232_RXD0	UART data reception 1 for USB-to-serial conversion	P27_4*	H26	SW4-5: ON, SW4-6: OFF
P27_5_FT2232_TXD0	UART data transmission 1 for USB-to-serial conversion	P27_5*	F25	SW4-7: ON, SW4-8: OFF
P16_3_FT2232_RXD5	UART data reception 2 for USB-to-serial conversion	P16_3*	B12	SW8-5: ON, SW8-6: OFF
P16_4_FT2232_TXD5	UART data transmission 2 for USB-to-serial conversion	P16_4*	A12	SW8-7: ON, SW8-8: OFF

Note: Connected via SW4 or SW8.

When the USB connector (CN34) for terminal output is first connected to a PC, the PC will search for a driver. A driver with the standard specification that has been installed on the PC should be used.

7.11 SPI Memory

This board has OctaFlash, Quad SPI flash memory, and EEPROM as SPI memory. An SPI expansion connector (CN63) is also connected to SPI1.

Figure 7-13 shows the configuration of the SPI memory circuits, and Table 7-13 lists the SPI memories. Table 7-14, Table 7-15 and Table 7-16 list the signal connections for each memory. Table 7-17 lists the signal connections for the SPI expansion connector (CN63). Figure 7-14 shows the switch settings when using SPI expansion connector (CN63).

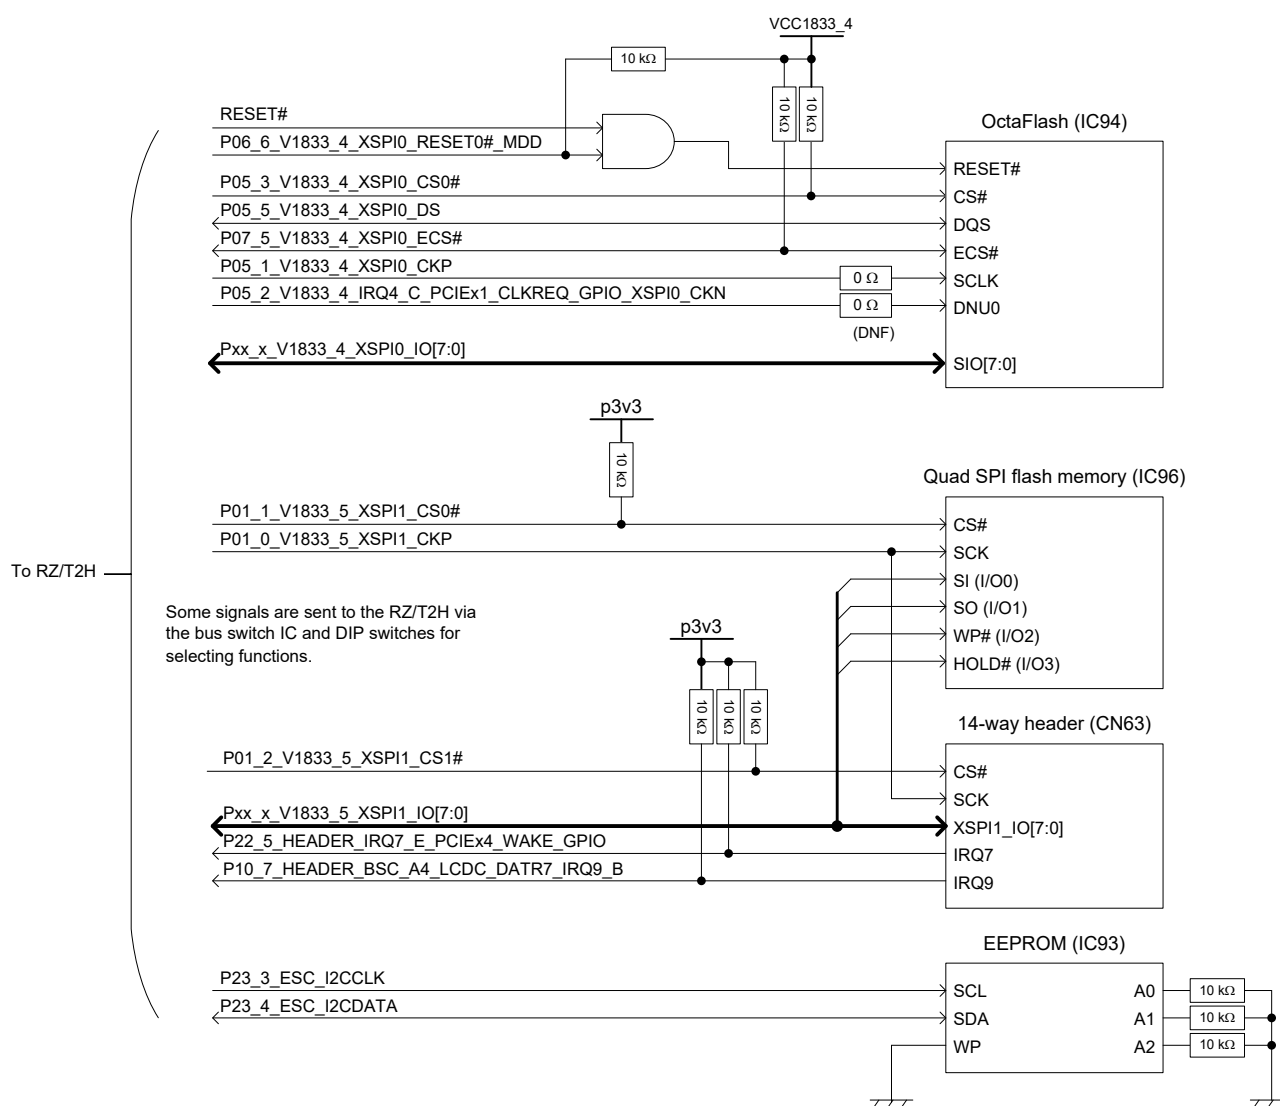


Figure 7-13 Configuration of SPI Memory Circuits

Table 7-13 List of SPI Memories

SPI Memory	Reference	Controller	Address Space
OctaFlash (512 Mbits)	IC94	XSPI0_CS0	40000000h to 43FFFFFFh (64 Mbytes)
Quad SPI flash memory (128 Mbits)	IC96	XSPI1_CS0	50000000h to 50FFFFFFh (16 Mbytes)
EEPROM (16 Kbits)	IC93	I2C or EtherCAT	—

Table 7-14 Signal Connections of OctaFlash

Signal Name	Function or Intended Use	MPU		Settings of Configuration Circuits
		Port	Pin	
P06_6_V1833_4_XSPI0_RESET0#_MDD	Reset for CS0	P06_6	AG8	—
P05_3_V1833_4_XSPI0_CS0#	CS0#	P05_3	AG4	—
P05_5_V1833_4_XSPI0_DS	DS	P05_5	AF5	—
P07_5_V1833_4_XSPI0_ECS#	ECS#	P07_5*	AG6	SW5-5: OFF, SW5-6: ON
P05_1_V1833_4_XSPI0_CKP	CKP	P05_1	AA8	—
P05_2_V1833_4_IRQ4_C_PCIEx1_CLKREQ_GPIO_XSPI0_CKN	CKN	P05_2	AA9	—
P06_5_V1833_4_XSPI0_IO7	Data 7	P06_5	AA7	—
P06_4_V1833_4_XSPI0_IO6	Data 6	P06_4	AB8	—
P06_3_V1833_4_XSPI0_IO5	Data 5	P06_3	AB7	—
P06_2_V1833_4_XSPI0_IO4	Data 4	P06_2	AE6	—
P06_1_V1833_4_XSPI0_IO3	Data 3	P06_1	AC6	—
P06_0_V1833_4_XSPI0_IO2	Data 2	P06_0	AE5	—
P05_7_V1833_4_XSPI0_IO1	Data 1	P05_7	AE7	—
P05_6_V1833_4_XSPI0_IO0	Data 0	P05_6	AD6	—

Note: Connected via SW5.

Table 7-15 Signal Connections of Quad SPI Flash Memory

Signal Name	Function or Intended Use	MPU		Settings of Configuration Circuits
		Port	Pin	
P01_1_V1833_5_XSPI1_CS0#	CS0#	P01_1*	AG12	SW1-6: ON
P01_0_V1833_5_XSPI1_CKP	CKP	P01_0*	AF13	SW1-6: ON
P01_7_V1833_5_XSPI1_IO3	Data 3	P01_7*	AC13	SW1-6: ON
P01_6_V1833_5_XSPI1_IO2	Data 2	P01_6*	AD13	SW1-6: ON
P01_5_V1833_5_XSPI1_IO1	Data 1	P01_5*	AE13	SW1-6: ON
P01_4_V1833_5_XSPI1_IO0	Data 0	P01_4*	AG13	SW1-6: ON

Note: Connected via the bus switch IC.

Table 7-16 Signal Connections of EEPROM


Signal Name	Function or Intended Use	MPU		Settings of Configuration Circuits
		Port	Pin	
P23_3_ESC_I2CCLK	EtherCAT I2CCLK	P23_3*	A21	SW6-7: ON, SW6-8: OFF
P23_4_ESC_I2CDATA	EtherCAT I2CDATA	P23_4*	C20	SW6-9: ON, SW6-10: OFF

Note: Connected via SW6.

Table 7-17 Signal Connections of SPI Expansion Connector (CN63)

Pin	Signal Name	MPU		Settings of Configuration Circuits
		Port	Pin	
1	GROUND	—	—	—
2	P22_5_HEADER_IRQ7_E_PCIE4_WAKE_GPIO	P22_5*1	E21	SW2-1 : ON, SW2-2: OFF
3	P01_0_V1833_5_XSPI1_CKP	P01_0*2	AF13	SW1-6 : ON
4	P01_2_V1833_5_XSPI1_CS1#	P01_2*2	AD14	SW1-6 : ON
5	P02_3_V1833_5_XSPI1_IO7	P02_3*2	AF12	SW1-6 : ON
6	P02_2_V1833_5_XSPI1_IO6	P02_2*2	AA13	SW1-6 : ON
7	P02_1_V1833_5_XSPI1_IO5	P02_1*2	AB13	SW1-6 : ON
8	P02_0_V1833_5_XSPI1_IO4	P02_0*2	AC14	SW1-6 : ON
9	P01_7_V1833_5_XSPI1_IO3	P01_7*2	AC13	SW1-6 : ON
10	P01_6_V1833_5_XSPI1_IO2	P01_6*2	AD13	SW1-6 : ON
11	P01_5_V1833_5_XSPI1_IO1	P01_5*2	AE13	SW1-6 : ON
12	P01_4_V1833_5_XSPI1_IO0	P01_4*2	AG13	SW1-6 : ON
13	P10_7_HEADER_BSC_A4_LCDC_DAT7_IRQ9_B	P10_7	C4	—
14	p3v3	—	—	—

Notes: 1. Connected via the level shifter IC with an enable function.
 2. Connected via the bus switch IC.

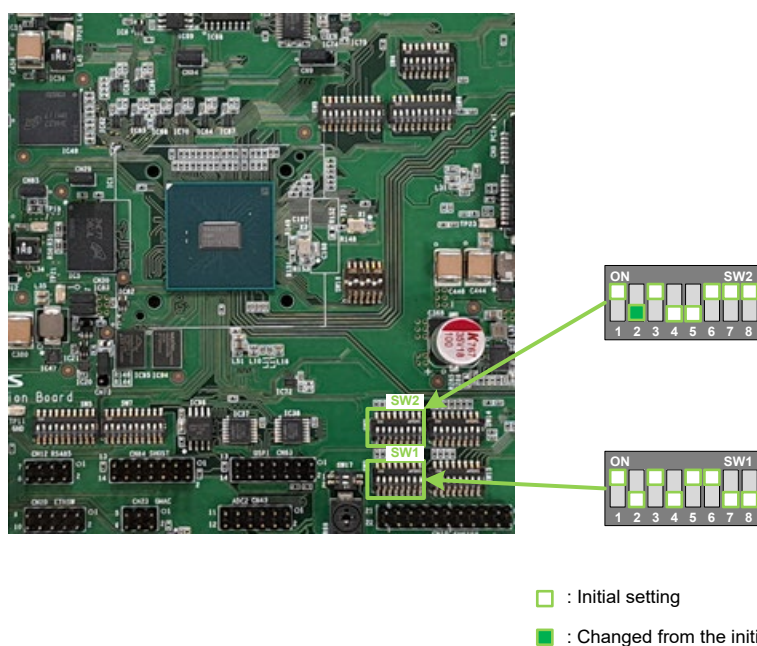**Figure 7-14 Switch Settings When Using SPI Expansion Connector (CN63)**

7.12 LPDDR4

This board is equipped with LPDDR4. Figure 7-15 shows the signal connections of LPDDR4.

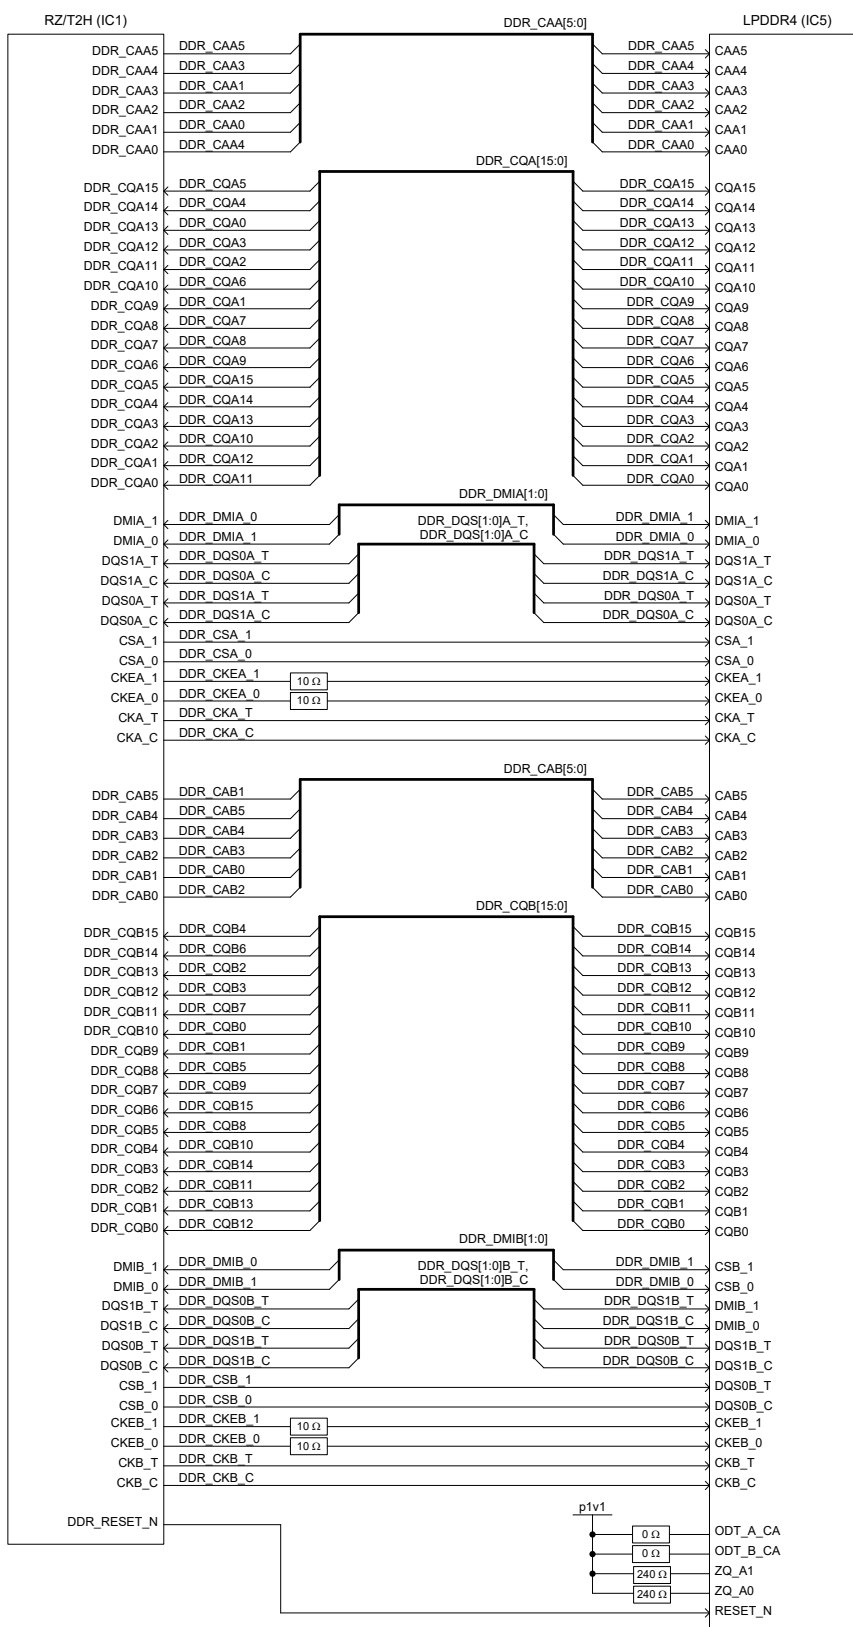


Figure 7-15 Signal Connections of LPDDR4

7.13 SD and eMMC

This board is equipped with an SD card slot (CN31), a microSD card slot (CN16), and eMMC (IC49). Figure 7-16 shows the configuration of the SD and eMMC circuit. Table 7-18, Table 7-19 and Table 7-20 list the signal connections. Figure 7-17 shows the switch settings when using the SD card slot (CN31).

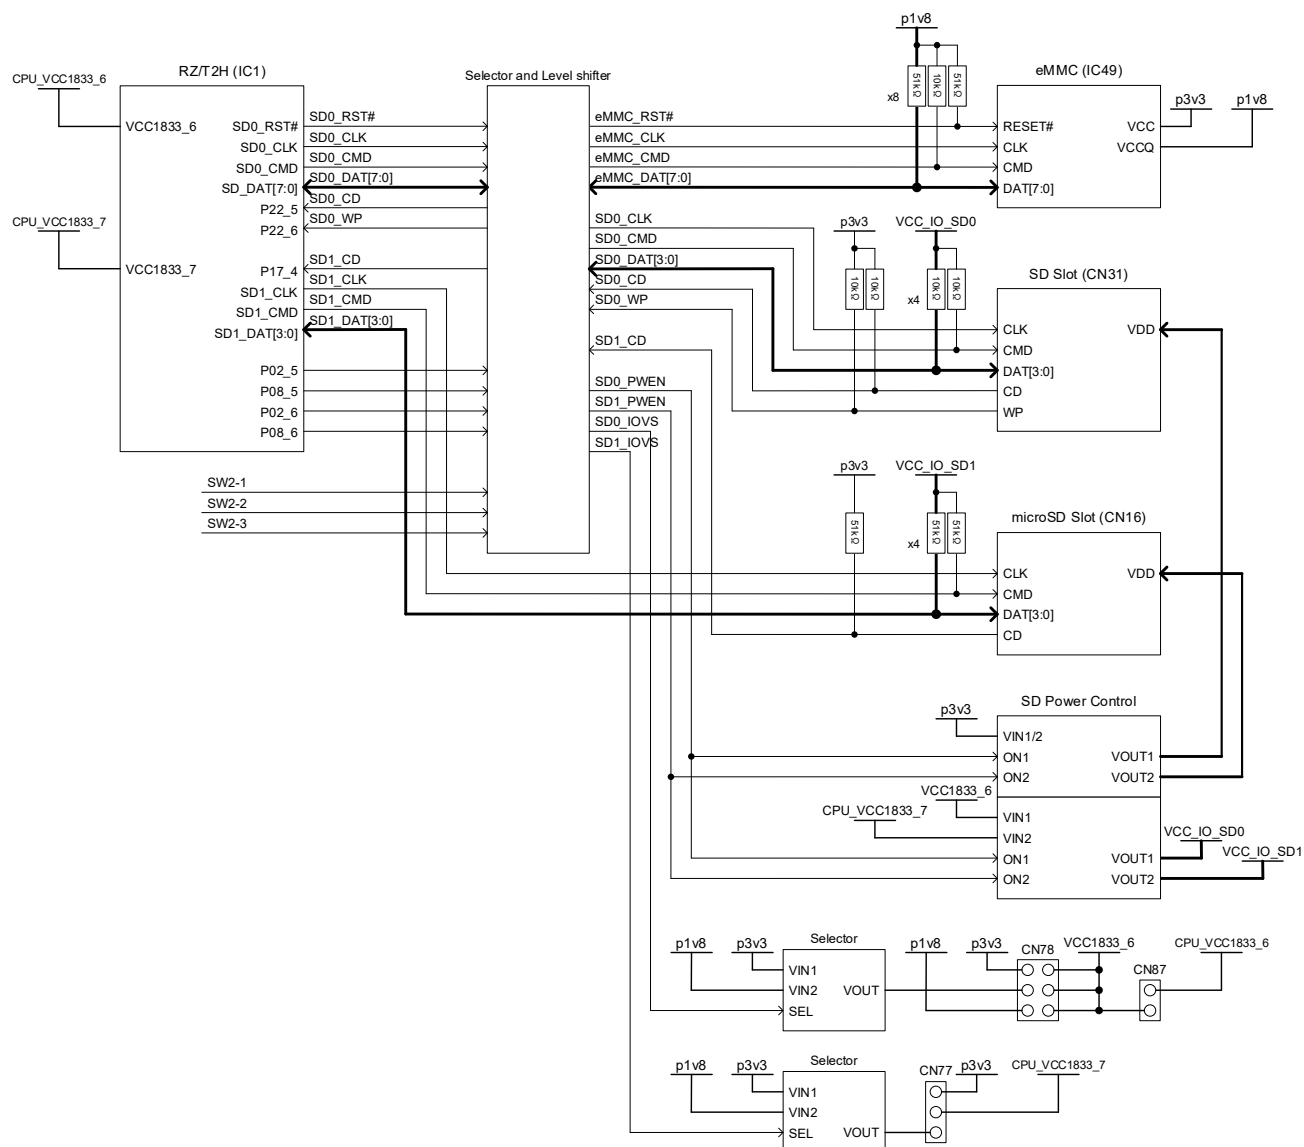


Figure 7-16 Configuration of SD and eMMC Circuit

Table 7-18 Signal Connections of eMMC

Signal Name	Function or Intended Use	MPU		Settings of Configuration Circuits
		Port	Pin	
P13_2_P1V8_eMMC_RST#	Reset	P13_2*	F8	SW2-1: ON, SW2-2: ON
P12_1_P1V8_eMMC_CMD	Command	P12_1*	G8	SW2-1: ON, SW2-2: ON
P12_0_P1V8_eMMC_CLK	Clock	P12_0*	D7	SW2-1: ON, SW2-2: ON
P12_2_P1V8_eMMC_DAT0	Data 0	P12_2*	E8	SW2-1: ON, SW2-2: ON
P12_3_P1V8_eMMC_DAT1	Data 1	P12_3*	E7	SW2-1: ON, SW2-2: ON
P12_4_P1V8_eMMC_DAT2	Data 2	P12_4*	B6	SW2-1: ON, SW2-2: ON
P12_5_P1V8_eMMC_DAT3	Data 3	P12_5*	G7	SW2-1: ON, SW2-2: ON
P12_6_P1V8_eMMC_DAT4	Data 4	P12_6*	D6	SW2-1: ON, SW2-2: ON
P12_7_P1V8_eMMC_DAT5	Data 5	P12_7*	E6	SW2-1: ON, SW2-2: ON
P13_0_P1V8_eMMC_DAT6	Data 6	P13_0*	C7	SW2-1: ON, SW2-2: ON
P13_1_P1V8_eMMC_DAT7	Data 7	P13_1*	F7	SW2-1: ON, SW2-2: ON

Note: Connected via the level shifter IC with an enable function.

Table 7-19 Signal Connections of SD Card Slot

Signal Name	Function or Intended Use	MPU		Settings of Configuration Circuits
		Port	Pin	
P12_1_VCC_SD0_CMD	Command	P12_1*	G8	SW2-1: OFF, SW2-2: ON
P12_0_VCC_SD0_CLK	Clock	P12_0*	D7	SW2-1: OFF, SW2-2: ON
P12_2_VCC_SD0_DAT0	Data 0	P12_2*	E8	SW2-1: OFF, SW2-2: ON
P12_3_VCC_SD0_DAT1	Data 1	P12_3*	E7	SW2-1: OFF, SW2-2: ON
P12_4_VCC_SD0_DAT2	Data 2	P12_4*	B6	SW2-1: OFF, SW2-2: ON
P12_5_VCC_SD0_DAT3	Data 3	P12_5*	G7	SW2-1: OFF, SW2-2: ON
P22_5_SD0_CD_A	Card detection	P22_5*	E21	SW2-1: OFF, SW2-2: ON
P22_6_SD0_WP_A	Write protection	P22_6*	C22	SW2-1: OFF, SW2-2: ON
P02_5_SD0_PWEN_A	Power supply control	P02_5*	AD11	SW2-1: OFF, SW2-2: ON
P02_6_SD0_IOVS_A	IO voltage selection of SD0	P02_6*	AD9	SW2-1: OFF, SW2-2: ON

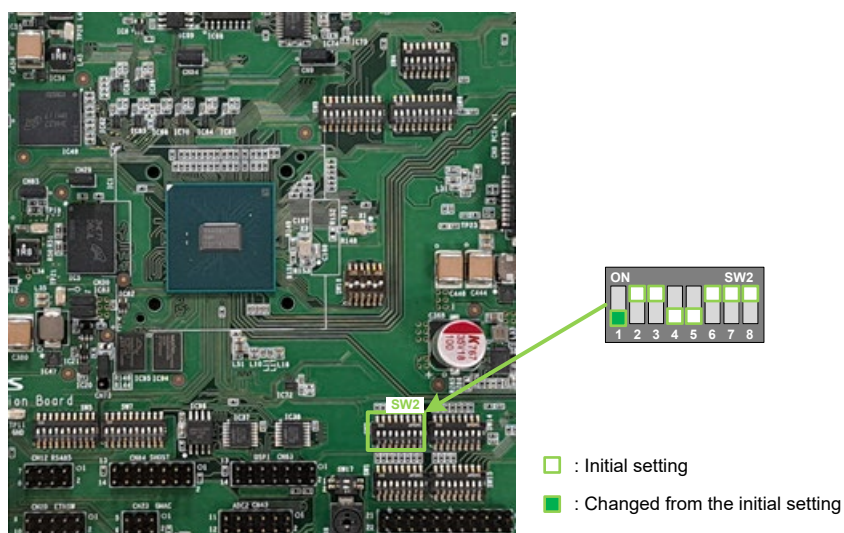
Note: Connected via the level shifter IC with an enable function.

Table 7-20 Signal Connections of microSD Card Slot

Signal Name	Function or Intended Use	MPU		Settings of Configuration Circuits
		Port	Pin	
P16_6_V1833_7_SD1_CMD	Command	P16_6	C12	—
P16_5_V1833_7_SD1_CLK	Clock	P16_5	G12	—
P16_7_V1833_7_SD1_DAT0	Data 0	P16_7	F12	—
P17_0_V1833_7_SD1_DAT1	Data 1	P17_0	A13	—
P17_1_V1833_7_SD1_DAT2	Data 2	P17_1	B13	—
P17_2_V1833_7_SD1_DAT3	Data 3	P17_2	E12	—
P17_4_SD1_CD_A	Card detection	P17_4*1	G13	SW2-3: ON
P08_5_SD1_PWEN_A	Power supply control	P08_5*1	AE3	SW2-3: ON
P08_6_SD1_IOVS_A_P32_2_GPIO	IO voltage selection of SD1	P08_6*1, *2	AD2	SW2-3: ON, SW5-3: OFF, SW5-4: ON
		P32_2*2	M22	SW5-1: ON, SW5-2: OFF, SW5-3: ON, SW5-4: OFF

Notes: 1. Connected via the bus switch IC.

2. Connected via SW5.

**Figure 7-17 Switch Settings When Using the SD Card Slot (CN31)**

7.14 CAN

This board is equipped with a CAN transceiver (IC84) and a CAN interface connector (CN55) so that the CAN module of the RZ/T2H can be evaluated. Figure 7-18 shows the configuration of the CAN interface circuit, and Table 7-21 lists the signal connections.

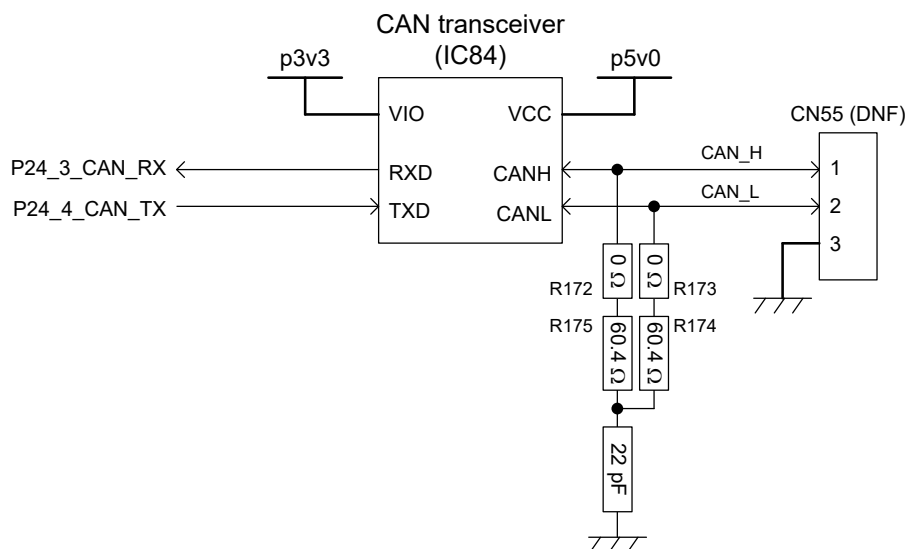


Figure 7-18 Configuration of CAN Interface Circuit

Table 7-21 Signal Connections of CAN

Signal Name	Function or Intended Use	MPU		Settings of Configuration Circuits
		Port	Pin	
P24_3_CAN_RX	Reception of CAN data	P24_3*	B20	SW7-3: OFF, SW7-4: ON
P24_4_CAN_TX	Transmission of CAN data	P24_4*	G22	SW7-1: OFF, SW7-2: ON

Note: Connected via SW7.

7.15 RS485 Interface

This board is equipped with an RS485 transceiver (IC88), an RS485 interface connector (CN58), and an RS485 external expansion connector (CN12). Figure 7-19 shows the configuration of the RS485 interface circuits, Table 7-22 lists the signal connections of the connector, and Table 7-23 lists the ports to be used.

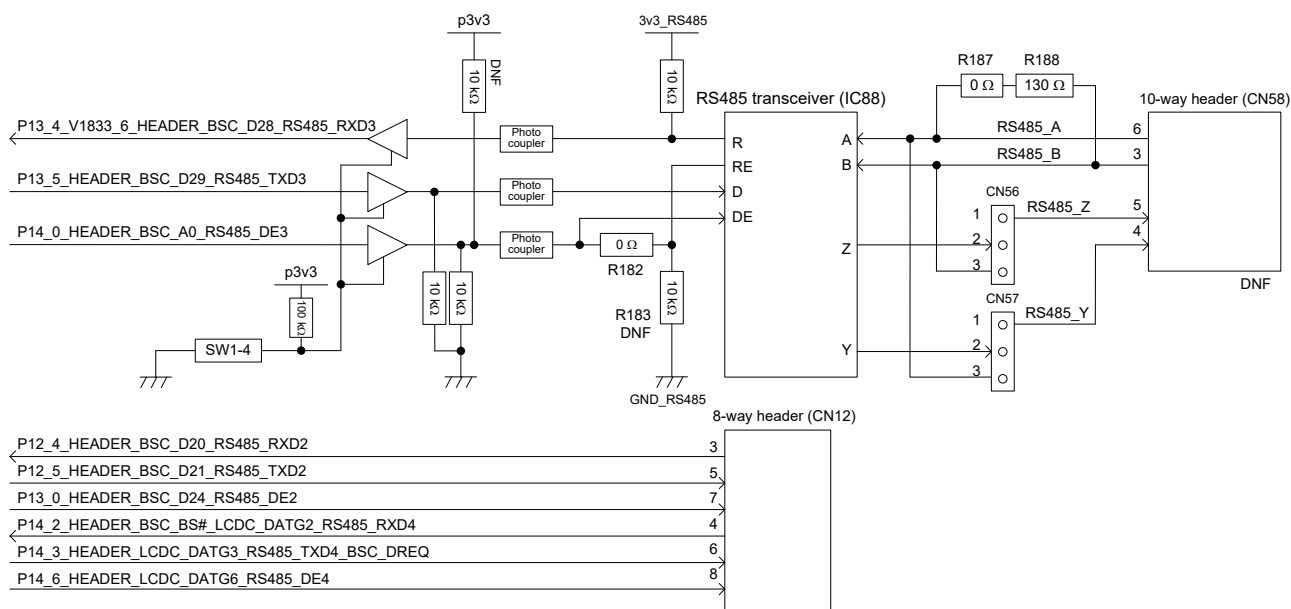


Figure 7-19 Configuration of RS485 Interface Circuits

Table 7-22 Signal Connections of RS485 Interface Connector (CN58)

Pin	Signal Name	Pin	Signal Name
1	GROUND	2	GROUND
3	RS485_B	4	RS485_Y
5	RS485_Z	6	RS485_A
7	GROUND	8	GROUND
9	GROUND	10	GROUND

Table 7-23 Ports Used with the RS485 Interface

Signal Name	Function or Intended Use	MPU		Settings of Configuration Circuits
		Port	Pin	
P13_4_V1833_6_HEADER_BSC_D28_RS485_RXD3	Reception of data	P13_4*	B8	SW1-4: OFF
P14_0_HEADER_BSC_A0_RS485_DE3	Driver enable signal	P14_0*	A7	SW1-4: OFF
P13_5_HEADER_BSC_D29_RS485_TXD3	Transmission of data	P13_5*	B7	SW1-4: OFF

Note: Connected via the buffer IC.

7.16 USB

This board is equipped with a USB Type-A connector (CN80), a Mini-B connector (CN79) and a Micro-AB connector (CN33). The USB function of the RZ/T2H can be used for either a USB host interface or a USB function interface or a USB OTG interface (cannot be used at the same time).

Figure 7-20 shows the configuration of the USB circuit, Table 7-24 lists the signal connections, and Figure 7-21 shows the switch settings when using USB.

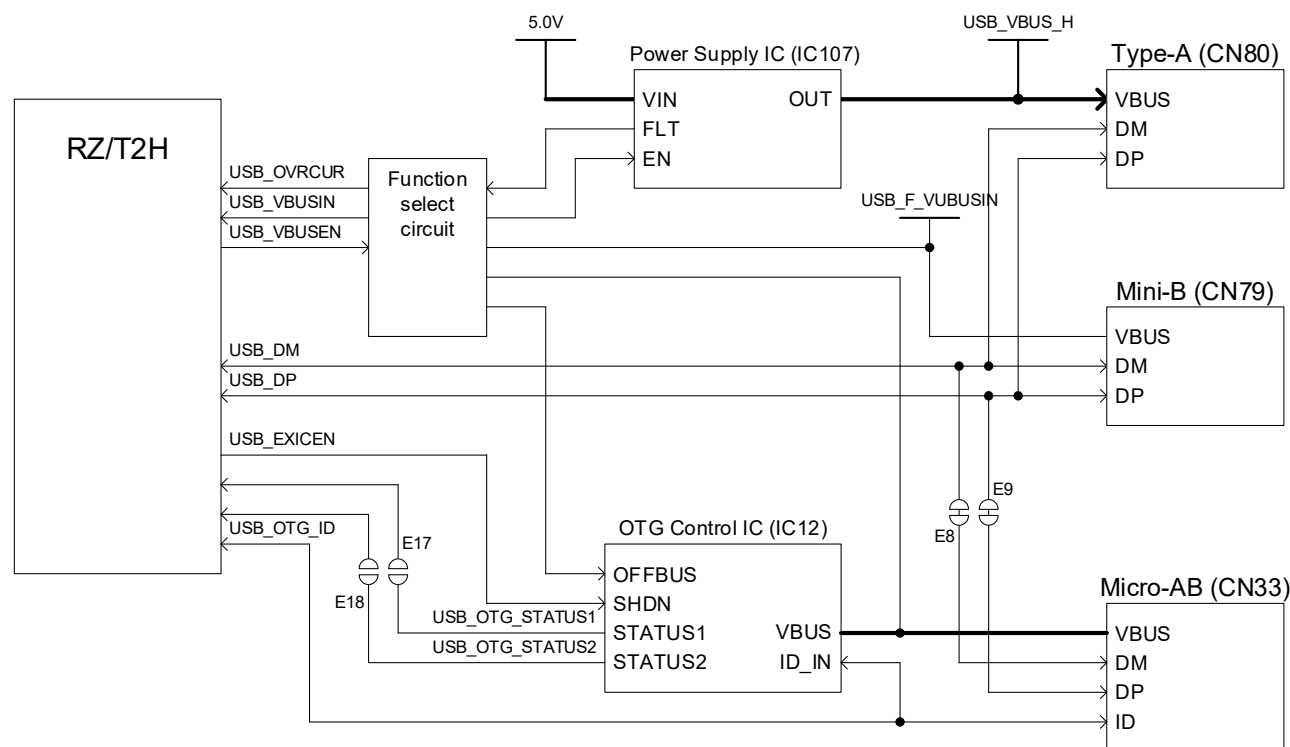


Figure 7-20 Configuration of USB Circuit

Table 7-24 Signal Connections of USB


Signal Name	Function or Intended Use	MPU		Settings of Configuration Circuits
		Port	Pin	
USB_DP	Input/output of D+ data	USB_DP	AF17	—
USB_DM	Input/output of D- data	USB_DM	AG17	—
VUBUSIN	VBUS detection	USB_VUBUSIN*2	AD16	SW7-7: OFF/ON, SW7-8: ON/OFF
USB_OTG_ID	OTG ID	USB_OTGID	AD17	—
P00_0_USB_VBUSEN_A	VBUS enable signal	P00_0*1*3	AE15	SW1-5: ON, SW7-9: OFF/ON, SW7-10: ON/OFF
P00_1_USB_OVRCUR_A	Overcurrent	P00_1*1	AD15	SW1-5: ON
P00_2_USB_EXICEN_A	OTG power supply IC control	P00_2*1	AC15	SW1-5: ON
P09_0_HEADER_PMOD2_GPIO0	OTG power supply IC status1	P09_0*4	AE1	E17: Short
P09_1_HEADER_PMOD2_GPIO1	OTG power supply IC status2	P09_1*4	AG2	E18: Short

Notes: 1. Connected via the bus switch IC.

2. Connected via SW7. Set SW7-7: OFF, SW7-8: ON for using Function, set SW7-7: ON, SW7-8: OFF for using OTG.

3. Connected via SW7. Set SW7-9: OFF, SW7-10: ON for using Host, set SW7-9: ON, SW7-10: OFF for using OTG.

4. Connected via the Option Link. Short E17 and E18 for using OTG.

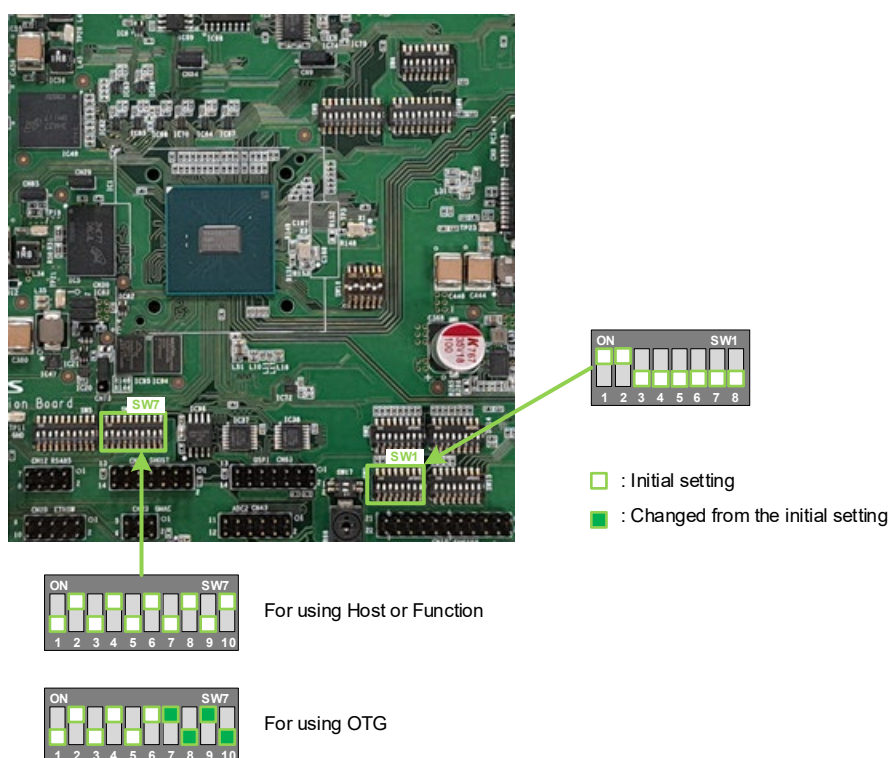

* In addition to above, Short E17 and E18 for using OTG.

Figure 7-21 Switch Settings When Using USB

7.17 Ethernet System

When running any Ethernet software, do so with the use of a unique MAC address. A sticker indicating the unique MAC address that was assigned by Renesas is affixed to this board (top side) to ensure full compatibility in the case of connection to other Renesas hardware modules.

An EtherCAT ID number is required to execute the EtherCAT slave controller software. Please use SW12 as required.

This board is equipped with four Ethernet PHY devices and Ethernet connectors (CN59, CN44, CN45, and CN1) so that the Ethernet system of the RZ/T2H can be evaluated. Figure 7-22 shows the configuration of the Ethernet system circuit. Table 7-25 to Table 7-28 list the signal connections. Table 7-29 initial settings by hardware strapping of the PHY devices.

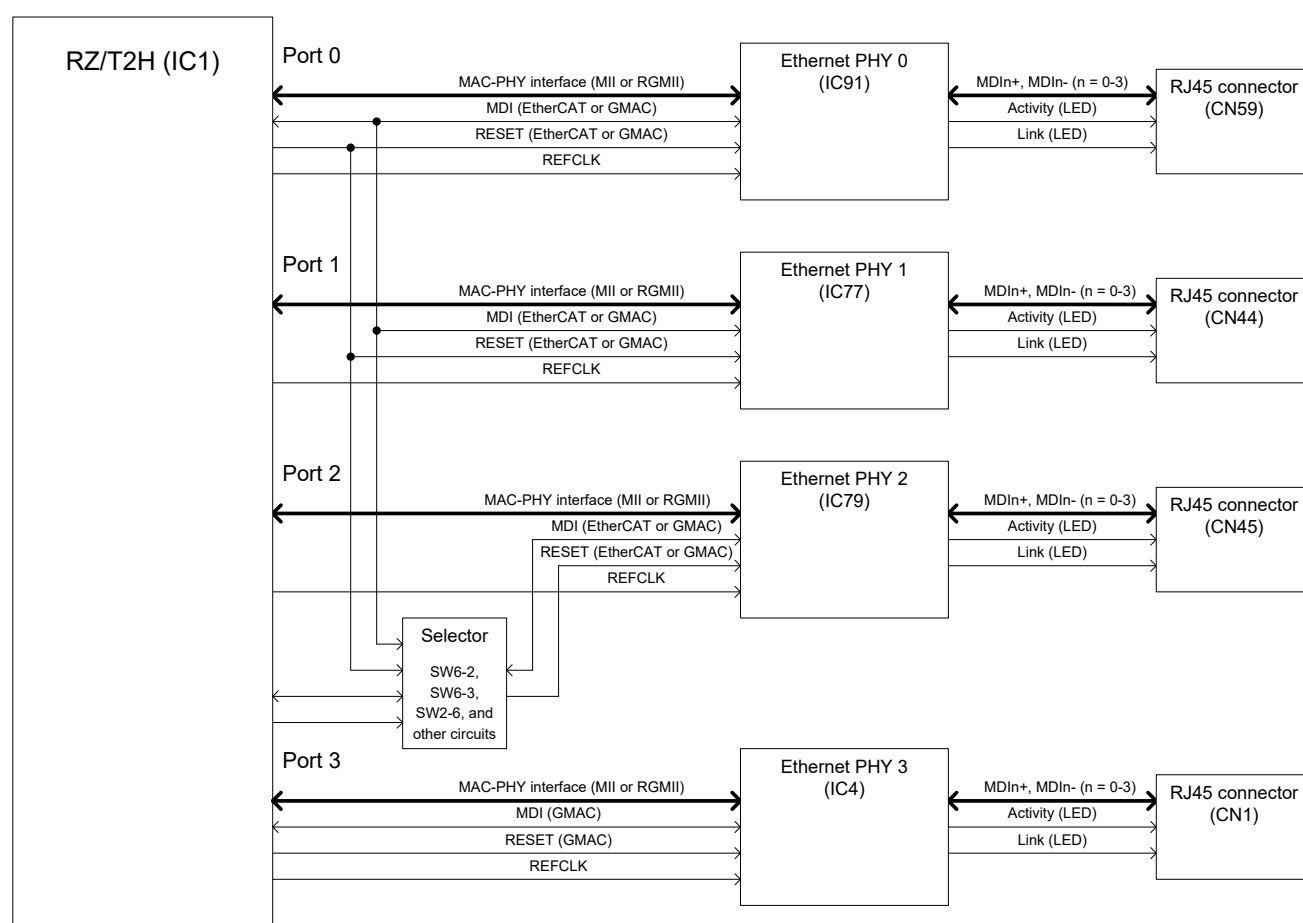


Figure 7-22 Configuration of Ethernet System Circuit

Table 7-25 Signal Connections of Ethernet Port 0 (ETH0)

Signal Name	Function or Intended Use	MPU		Settings of Configuration Circuits
		Port	Pin	
P20_0_V1833_0_ETH0_TXCLK	Transmit clock	P20_0	A18	—
P20_1_V1833_0_ETH0_TXD0_MDV	Transmit data 0	P20_1	A17	—
P20_2_V1833_0_ETH0_TXD1	Transmit data 1	P20_2	E17	—
P20_3_V1833_0_ETH0_TXD2	Transmit data 2	P20_3	C17	—
P20_4_V1833_0_ETH0_TXD3	Transmit data 3	P20_4	F17	—
P20_5_V1833_0_ETH0_TXEN	Transmit data enable/error	P20_5	B17	—
P22_1_ETH0_TXER	Transmit data error	P22_1	D21	—
P20_6_V1833_0_ETH0_RXCLK	Receive clock	P20_6	C18	—
P20_7_V1833_0_ETH0_RXD0	Receive data 0	P20_7	D18	—
P21_0_V1833_0_ETH0_RXD1	Receive data 1	P21_0	E18	—
P21_1_V1833_0_ETH0_RXD2	Receive data 2	P21_1	G17	—
P21_2_V1833_0_ETH0_RXD3	Receive data 3	P21_2	B19	—
P21_3_V1833_0_ETH0_RXDV	Receive data valid/error/carrier sense	P21_3	A19	—
P22_2_ETH0_RXER	Receive data error	P22_2	E22	—
P22_3_ETH0_CRS	Carrier sense	P22_3	F20	—
P22_4_ETH0_COL	Collision detection	P22_4	E20	—
P21_4_V1833_0_ESC_GMAC_ETHSW_MDC	MDI clock	P21_4	C19	—
P21_5_V1833_0_ESC_GMAC_ETHSW_MDIO	MDI data	P21_5	G16	—
P22_0_V1833_0_IRQ11G	MDI interrupt input	P22_0	E19	—
P21_6_V1833_0_ETH0_LINK	Link status	P21_6	D19	—
P21_7_V1833_0_ETH0_REFCLK	Clock output (25 MHz)	P21_7	D17	—
P11_0_ESC_RESETOUT01#	Reset output	P11_0*	C5	SW6-2: OFF, SW6-3: ON, SW6-4: OFF, SW6-5: ON

Note: Connected via SW6.

Table 7-26 Signal Connections of Ethernet Port 1 (ETH1)

Signal Name	Function or Intended Use	MPU		Settings of Configuration Circuits
		Port	Pin	
P24_5_V1833_1_ETH1_TXCLK	Transmit clock	P24_5	C24	—
P24_6_V1833_1_ETH1_TXD0_MD0	Transmit data 0	P24_6	A23	—
P24_7_V1833_1_ETH1_TXD1_MD1	Transmit data 1	P24_7	C23	—
P25_0_V1833_1_ETH1_TXD2_MD2	Transmit data 2	P25_0	B25	—
P25_1_V1833_1_ETH1_TXD3_MDW0	Transmit data 3	P25_1	A26	—
P25_2_V1833_1_ETH1_TXEN_MDW1	Transmit data enable/error	P25_2	A24	—
P26_6_ETH1_TXER	Transmit data error	P26_6	D26	—
P25_3_V1833_1_ETH1_RXCLK	Receive clock	P25_3	B26	—
P25_4_V1833_1_ETH1_RXD0	Receive data 0	P25_4	E23	—
P25_5_V1833_1_ETH1_RXD1	Receive data 1	P25_5	F23	—
P25_6_V1833_1_ETH1_RXD2	Receive data 2	P25_6	D23	—
P25_7_V1833_1_ETH1_RXD3	Receive data 3	P25_7	E24	—
P26_0_V1833_1_ETH1_RXDV	Receive data valid/error/carrier sense	P26_0	D25	—
P26_7_ETH1_RXER	Receive data error	P26_7	H22	—
P27_0_ETH1_CRS	Carrier sense	P27_0*	G23	SW4-1: ON, SW4-2: OFF
P27_1_ETH1_COL	Collision detection	P27_1*	G24	SW4-3: ON, SW4-4: OFF
P21_4_V1833_0_ESC_GMAC_ETHSW_MDC	MDI clock	P21_4	C19	—
P21_5_V1833_0_ESC_GMAC_ETHSW_MDIO	MDI data	P21_5	G16	—
P26_5_V1833_1_ETH1_INT#	MDI interrupt input	P26_5	C26	—
P26_3_V1833_1_ETH1_LINK	Link status	P26_3	A25	—
P26_4_ETH1_REFCLK	Clock output (25 MHz)	P26_4	C25	—
P11_0_ESC_RESETOUT01#	Reset output	P11_0*	C5	SW6-2: OFF, SW6-3: ON, SW6-4: OFF, SW6-5: ON

Note: Connected via SW4 or SW6.

Table 7-27 Signal Connections of Ethernet Port 2 (ETH2)

Signal Name	Function or Intended Use	MPU		Settings of Configuration Circuits
		Port	Pin	
P29_1_V1833_2_ETH2_TXCLK	Transmit clock	P29_1* ¹	J25	SW2-7: ON
P29_2_V1833_2_ETH2_TXD0	Transmit data 0	P29_2* ¹	K23	SW2-7: ON
P29_3_V1833_2_ETH2_TXD1	Transmit data 1	P29_3* ¹	H27	SW2-7: ON
P29_4_V1833_2_ETH2_TXD2	Transmit data 2	P29_4* ¹	L22	SW2-7: ON
P29_5_V1833_2_ETH2_TXD3	Transmit data 3	P29_5* ¹	L23	SW2-7: ON
P29_6_V1833_2_ETH2_TXEN	Transmit data enable/error	P29_6* ¹	J23	SW2-7: ON
P31_2_ETH2_TXER	Transmit data error	P31_2* ¹	N27	SW2-7: ON
P29_7_V1833_2_ETH2_RXCLK	Receive clock	P29_7* ¹	L25	SW2-7: ON
P30_0_V1833_2_ETH2_RXD0	Receive data 0	P30_0* ¹	K27	SW2-7: ON
P30_1_V1833_2_ETH2_RXD1	Receive data 1	P30_1* ¹	K25	SW2-7: ON
P30_2_V1833_2_ETH2_RXD2	Receive data 2	P30_2* ¹	L26	SW2-7: ON
P30_3_V1833_2_ETH2_RXD3	Receive data 3	P30_3* ¹	J27	SW2-7: ON
P30_4_V1833_2_ETH2_RXDV	Receive data valid/error/carrier sense	P30_4* ¹	K24	SW2-7: ON
P31_3_ETH2_RXER	Receive data error	P31_3* ¹	N26	SW2-7: ON
P31_4_ETH2_CRS	Carrier sense	P31_4* ¹	N25	SW2-7: ON
P31_5_ETH2_COL	Collision detection	P31_5* ¹	P26	SW2-7: ON
P21_4_P30_5_VCC_ETH2_MDC	MDI clock	P21_4* ²	C19	SW2-6: ON
		P30_5* ²	J22	SW2-6: OFF
P21_5_P30_6_VCC_ETH2_MDIO	MDI data	P21_5* ²	G16	SW2-6: ON
		P30_6* ²	K21	SW2-6: OFF
P31_1_V1833_2_IRQ13	MDI interrupt input	P31_1	J26	—
P30_7_V1833_2_ETH2_LINK	Link status	P30_7	J24	—
P31_0_V1833_2_ETH2_REFCLK	Clock output (25 MHz)	P31_0	L24	—
P11_0_ESC_RESETOUT2#_P17_5_GMAC_RESETOUT2#	Reset output	P11_0* ³	C5	SW6-2: OFF, SW6-3: ON, SW6-4: OFF, SW6-5: ON
		P17_5* ³	A14	SW6-1: OFF, SW6-2: ON, SW6-3: OFF

Notes: 1. Connected via the bus switch IC.
2. Connected via the selector IC.
3. Connected via SW6.

Table 7-28 Signal Connections of Ethernet Port 3 (ETH3)

Signal Name	Function or Intended Use	MPU		Settings of Configuration Circuits
		Port	Pin	
P33_2_V1833_3_ETH3_TXCLK	Transmit clock	P33_2*	R24	SW2-8: ON
P33_3_V1833_3_ETH3_TXD0	Transmit data 0	P33_3*	U25	SW2-8: ON
P33_4_V1833_3_ETH3_TXD1	Transmit data 1	P33_4*	U24	SW2-8: ON
P33_5_V1833_3_ETH3_TXD2	Transmit data 2	P33_5*	T25	SW2-8: ON
P33_6_V1833_3_ETH3_TXD3	Transmit data 3	P33_6*	R25	SW2-8: ON
P33_7_V1833_3_ETH3_TXEN	Transmit data enable/error	P33_7*	R26	SW2-8: ON
P34_7_ETH3_TXER	Transmit data error	P34_7*	W23	SW2-8: ON
P34_0_V1833_3_ETH3_RXCLK	Receive clock	P34_0*	V23	SW2-8: ON
P34_1_V1833_3_ETH3_RXD0	Receive data 0	P34_1*	R22	SW2-8: ON
P34_2_V1833_3_ETH3_RXD1	Receive data 1	P34_2*	T23	SW2-8: ON
P34_3_V1833_3_ETH3_RXD2	Receive data 2	P34_3*	U23	SW2-8: ON
P34_4_V1833_3_ETH3_RXD3	Receive data 3	P34_4*	P27	SW2-8: ON
P34_5_V1833_3_ETH3_RXDV	Receive data valid/error/carrier sense	P34_5*	R27	SW2-8: ON
P35_0_ETH3_RXER	Receive data error	P35_0*	V25	SW2-8: ON
P35_1_ETH3_CRS	Carrier sense	P35_1*	T26	SW2-8: ON
P35_2_ETH3_COL	Collision detection	P35_2*	W25	SW2-8: ON
P26_1_V1833_1_GMACMDC_A	MDI clock	P26_1	B23	—
P26_2_V1833_1_GMACMDIO_A	MDI interrupt input	P26_2	B24	—
P27_2_HEADER_IRQ3	Link status	P27_2	G26	—
P34_6_V1833_3_ETH3_REFCLK	Clock output (25 MHz)	P34_6	R23	—
P32_3_MikroBUS_GMAC_RESETOUT3#	Reset output	P32_3	N23	—

Note: Connected via the bus switch IC.

Table 7-29 Initial Settings by Hardware Strapping of the PHY Devices

Items of PHY Initial Settings	Contents of PHY Initial Settings
CLKOUT	Disabled
Managed or unmanaged	Unmanaged mode
CLK delay	2.0 ns
Link advertisement	Default operating mode, 10, 100, or 1000 FDX/HDX, auto-nego is ON
MAC interface	RGMII mode
Selection of GMII/MII or RGMII/RMII	PHY0 (IC91), PHY1 (IC77): GMII or MII mode (when R191 or R155 is Fit) PHY2 (IC79), PHY3 (IC4): RGMII mode (when R23 or R486 is DNF)
PHY address	PHY0 (IC91): 0 PHY1 (IC77): 1 PHY2 (IC79): 2 PHY3 (IC4): 3
Enabling of forced 1000-BT mode	Not set

On the board as shipped, Ethernet ports 0 and 1 are set to the 3.3-V/MII mode (CN37, CN38: 2-3 are short-circuit. R191, R155: Fit.) and Ethernet ports 2 and 3 are set to the 1.8-V/RGMII mode (CN39, CN40: 1-2 are short-circuit. R23, R486: DNF.). When switching the MII and RGMII modes, change the settings with reference to Table 6-13 and Table 6-19.

7.18 PCIe

This board is equipped with a clock driver, power-supply IC, and connectors (CN8 and CN32) for the PCIe so that the PCIe function of the RZ/T2H can be evaluated. Figure 7-23 shows the configuration of the PCIe circuit.

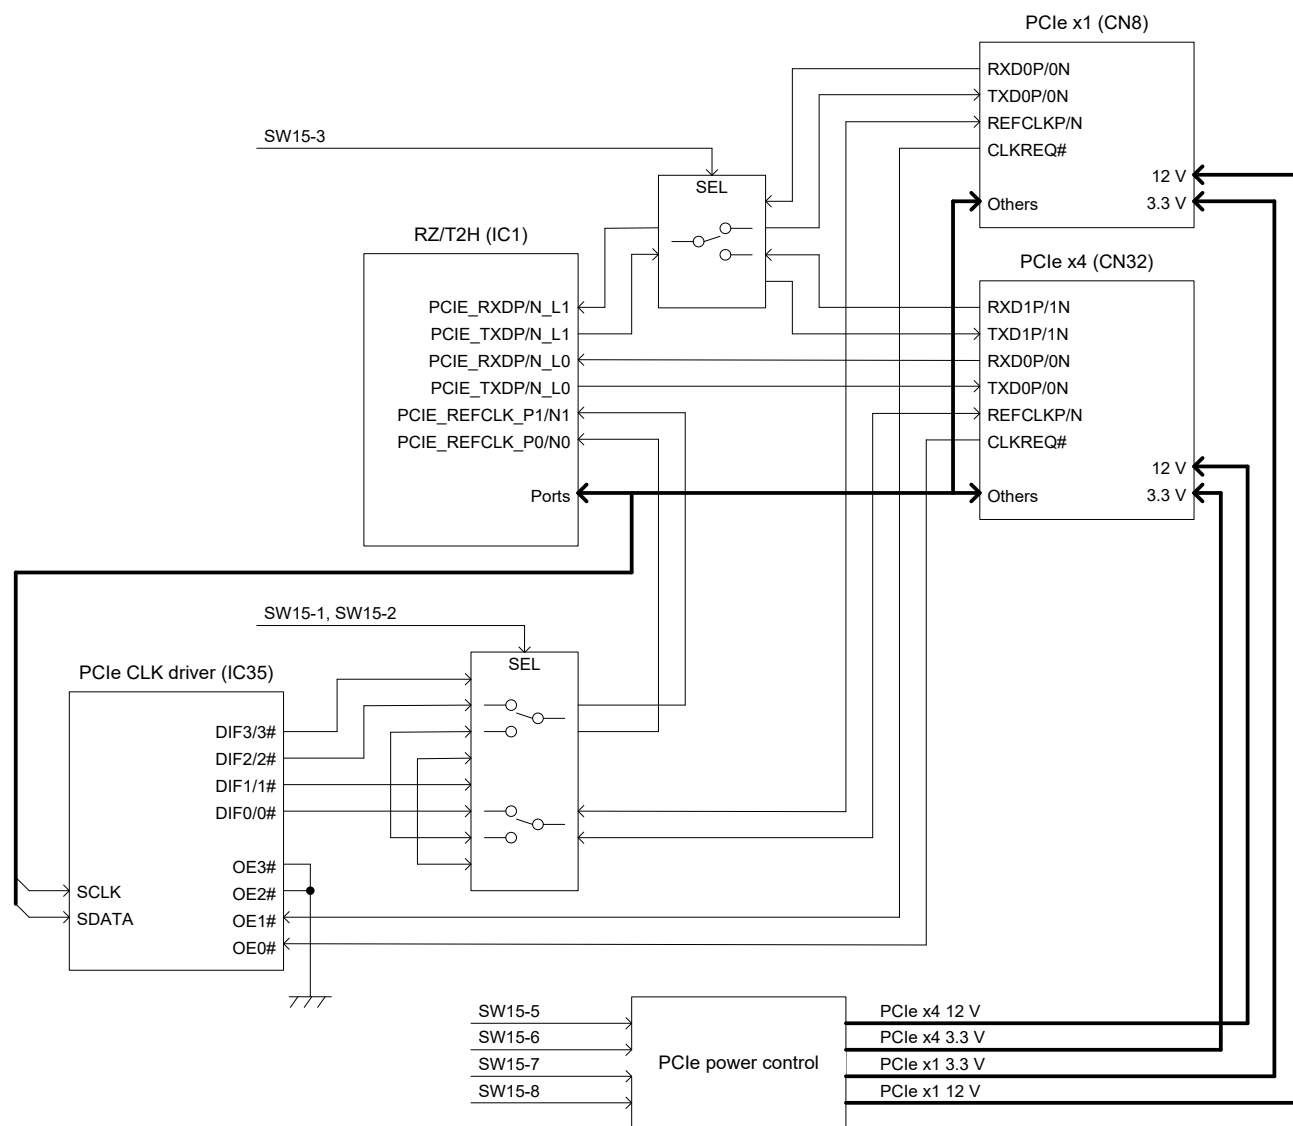


Figure 7-23 Configuration of PCIe Circuit

The configurations of root complex or endpoint, and 2 lanes $\times$ 1 port or 1 lane $\times$ 2 ports can be selected by setting SW15-1 to SW15-3. In addition, the supply of power to each connector can be controlled by setting SW15-5 to SW15-8. However, since the connection of data signals to the connector is the same for an endpoint setting as for a root complex setting, a crossover cable should be used when performing evaluation. Table 7-30 and Figure 7-24 show the PCIe configurations and associated switch settings.

Table 7-30 PCIe Configurations and Associated Switch Settings (Excluding Signal Function Selection Switches)

Configuration No.	Description of Configuration	Settings of Switches
1	Root complex and 2 lanes × 1 port (CN32)	SW15-1 and SW15-2: ON, SW15-3: OFF, SW15-5 and SW15-6: ON, SW15-7 and SW15-8: OFF
2	Root complex and 1 lane × 2 ports	SW15-1 and SW15-2: ON , SW15-3: ON, SW15-5 to SW15-8: ON
3	Endpoint and 2 lanes × 1 port (CN32)	SW15-1 and SW15-2: OFF, SW15-3: OFF, SW15-5 to SW15-8: OFF
4	Endpoint and 1 lane × 2 ports	SW15-1 and SW15-2: OFF, SW15-3: ON, SW15-5 to SW15-8: OFF
5	Root complex and 1 lane × 1 port (CN32), endpoint and 1 lane × 1 port (CN8)	SW15-1: ON , SW15-2: OFF, SW15-3: ON, SW15-5 and SW15-6: ON, SW15-7 and SW15-8: OFF
6	Root complex and 1 lane × 1 port (CN8), endpoint and 1 lane × 1 port (CN32)	SW15-1: OFF, SW15-2: ON , SW15-3: ON, SW15-5 and SW15-6: OFF , SW15-7 and SW15-8: ON

Table 7-31 and Table 7-32 list the signal connections of the PCIe x4 connector (CN32) and PCIe x1 connector (CN8), respectively.

Table 7-31 Signal Connections of PCIe x4 Connector (CN32)

Pin*1	Function Name	Connection	MPU		Settings of Configuration Circuits
			Port	Pin	
A1	PRSNT1#	For a root complex: Fixed to the low level For an endpoint: Connected to PRSNT2#, PRSNT3#	— —	— —	— —
A5	TCK	Pull-down	—	—	—
A6	TDI	Pull-up	—	—	—
A7	TDO	NC	—	—	—
A8	TMS	Pull-up	—	—	—
A11	PERST#	For a root complex: Connected to P33_3 (PCIE_RSTOUT0B) of the RZ/T2H For an endpoint: Input to the reset IC via CN73	P33_3*2 —	U25 —	SW2-8: OFF, SW15-1: ON —
A13	REFCLK+	For a root complex: Clock driver output For an endpoint: Input to PCIE_REFCLK_P0 of the RZ/T2H	— —	— —	— —
A14	REFCLK-	For a root complex: Clock driver output For an endpoint: Input to PCIE_REFCLK_N0 of the RZ/T2H	— —	— —	— —
A16	HSIP0	Connected to PCIE_RXDP_L0 of the RZ/T2H	—	AG20	—
A17	HSIN0	Connected to PCIE_RXDN_L0 of the RZ/T2H	—	AF20	—
A21	HSIP1	For 1 port: Connected to PCIE_RXDP_L1 of the RZ/T2H For 2 ports: NC	— —	AG19 —	— —
A22	HSIN1	For 1 port: Connected to PCIE_RXDN_L1 of the RZ/T2H For 2 ports: NC	— —	AF19 —	— —
A21	HSIP1	NC	—	—	—
A22	HSIN1	NC	—	—	—
A25	HSIP2	NC	—	—	—
A26	HSIN2	NC	—	—	—
A29	HSIP3	NC	—	—	—
A30	HSIN3	NC	—	—	—
B5	SMCLK	Pull-up	—	—	—
B6	SMDAT	Pull-up	—	—	—
B9	TRST#	Pull-down	—	—	—
B10	3V3AUX	Connected to the 3.3-V power supply for the PCIe x4 connector (only supplied for a root complex)	—	—	—
B11	WAKE#	Connected to P22_5 of the RZ/T2H	P22_5*3	E21	SW2-1: ON, SW2-2: OFF
B12	CLKREQ#	For a root complex: Clock driver input For an endpoint: Connected to P17_3 (PCIEx4_CLKREQ) of the RZ/T2H	— P17_3	— C13	— SW15-1: OFF
B14	HSOP0	Connected to PCIE_TXDP_L0 of the RZ/T2H	—	AG23	—
B15	HSOP0	Connected to PCIE_TXDN_L0 of the RZ/T2H	—	AF23	—

B17	PRSNT2#	For a root complex: Connected to P17_3 of the RZ/T2H (same as B31) For an endpoint: Connected to PRSNT1#	P17_3 —	C13 —	SW15-1: ON —
B19	HSOP1	For 1 port: Connected to PCIE_TXDP_L1 of the RZ/T2H For 2 ports: NC	— —	AG22 —	— —
B20	HSOP1	For 1 port: Connected to PCIE_TXDN_L1 of the RZ/T2H For 2 ports: NC	— —	AF22 —	— —
B23	HSOP2	NC	—	—	—
B24	HSOP2	NC	—	—	—
B27	HSOP3	NC	—	—	—
B28	HSOP3	NC	—	—	—
B31	PRSNT3#	For a root complex: Connected to P17_3 of the RZ/T2H (same as B17) For an endpoint: Connected to PRSNT1#	P17_3 —	C13 —	SW15-1: ON —

Notes: 1. The pins for power supplies (12 V, 3.3 V, and GROUND) and reserved pins are omitted.
2. Connected via the bus switch IC.
3. Connected via the level shifter IC with an enable function.

Table 7-32 Signal Connections of PCIe x1 Connector (CN8) (Only for a Configuration of 1 Lane × 2 Ports)

Pin*1	Function Name	Connection	MPU		Settings of Configuration Circuits
			Port	Pin	
A1	PRSNT1#	For a root complex: Fixed to the low level For an endpoint: Connected to PRSNT2#	— —	— —	— —
A5	TCK	Pull-down	—	—	—
A6	TDI	Pull-up	—	—	—
A7	TDO	NC	—	—	—
A8	TMS	Pull-up	—	—	—
A11	PERST#	For a root complex: Connected to P33_4 (PCIE_RSTOUT1B) of the RZ/T2H For an endpoint: Input to the reset IC via CN73	P33_4*2 —	U24 —	SW2-8: OFF, SW15-2: ON —
A13	REFCLK+	For a root complex: Clock driver output For an endpoint: Input to PCIE_REFCLK_P1 of the RZ/T2H	— —	— AD9	— —
A14	REFCLK-	For a root complex: Clock driver output For an endpoint: Input to PCIE_REFCLK_N1 of the RZ/T2H	— —	— AC9	— —
A16	HSIP0	Connected to PCIE_RXDP_L1 of the RZ/T2H	—	AG19	—
A17	HSIN0	Connected to PCIE_RXDN_L1 of the RZ/T2H	—	AF19	—
B5	SMCLK	Pull-up	—	—	—
B6	SMDAT	Pull-up	—	—	—
B9	TRST#	Pull-down	—	—	—
B10	3V3AUX	Connected to the 3.3-V power supply for the PCIe x1 connector (only supplied for a root complex)	—	—	—
B11	WAKE#	Connected to P16_3 of the RZ/T2H	P16_3*3	B12	SW8-5: OFF, SW8-6: ON
B12	CLKREQ#	For a root complex: Clock driver input For an endpoint: Connected to P05_2 of the RZ/T2H	— P05_2	— AA9	— SW15-2: OFF, E20: Short-circuit
B14	HSOP0	Connected to PCIE_TXDP_L1 of the RZ/T2H	—	AG22	—
B15	HSOP0	Connected to PCIE_TXDN_L1 of the RZ/T2H	—	AF22	—
B17	PRSNT2#	For a root complex: Connected to P05_2 of the RZ/T2H For an endpoint: Connected to PRSNT1#	P05_2 —	AA9 —	SW15-2: ON, E20: Short-circuit —

Notes: 1. The pins for power supplies (12 V, 3.3 V, and GROUND) and reserved pins are omitted.
2. Connected via the bus switch IC.
3. Connected via SW8.

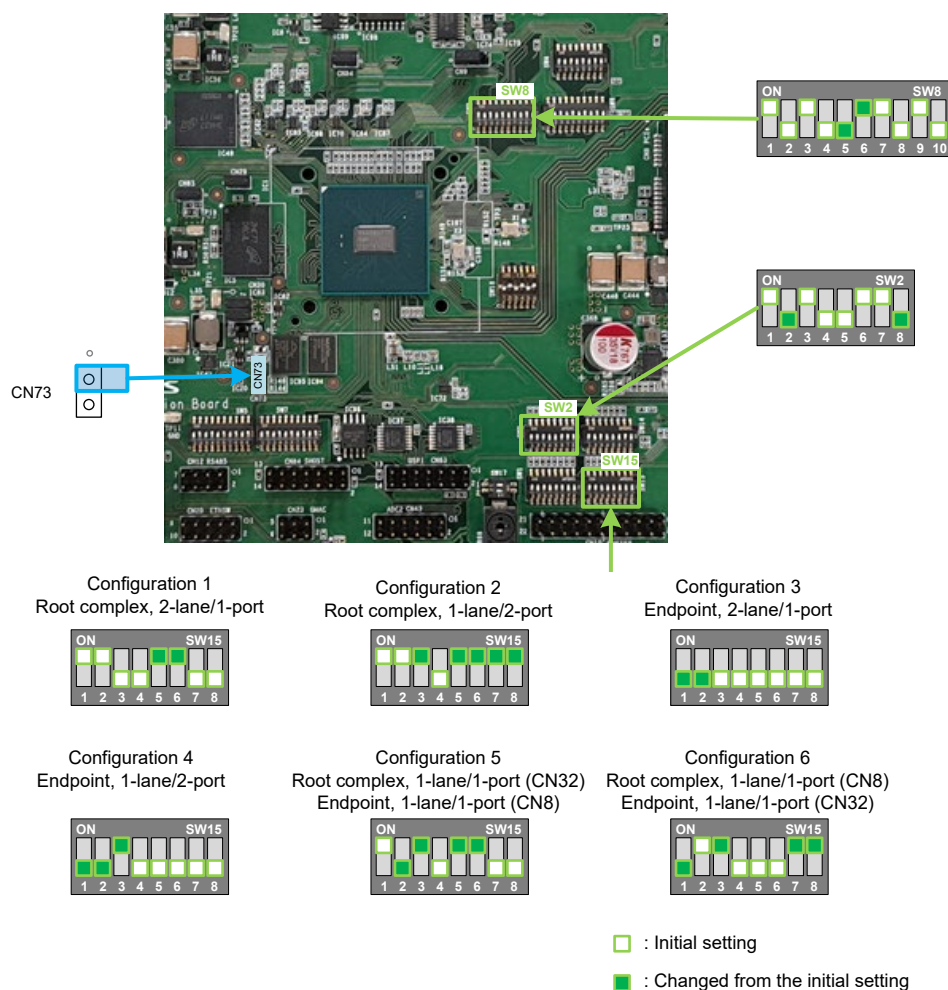


Figure 7-24 Switch Settings When Using PCIe

When endpoint mode is selected, the PCIe reset signal can be included in the system reset factors by short-circuiting CN73. On the board as shipped, CN73 is open-circuit.

7.19 LCD Interface

This board is equipped with an LCD interface connector (CN15). Figure 7-25 shows the configuration of the LCD interface circuit. Table 7-33 lists the signal connections. Figure 7-26 shows the switch settings when using the LCD interface.

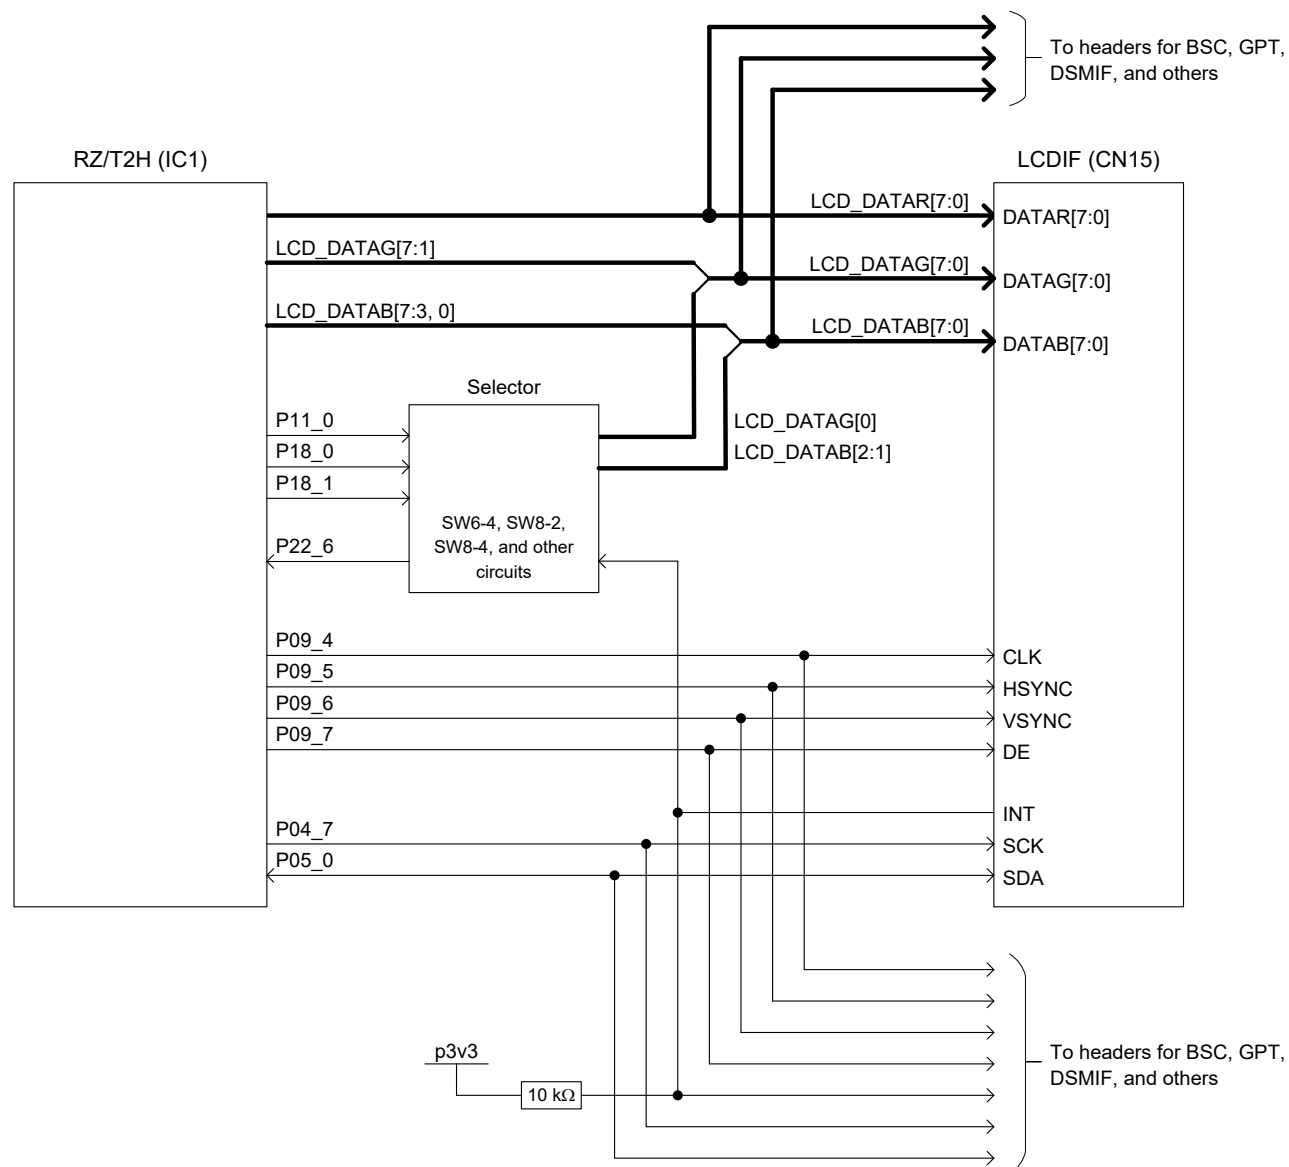


Figure 7-25 Configuration of LCD Interface Circuit

Table 7-33 Signal Connections of LCD Interface Connector (CN15)

Pin	Signal Name	MPU		Settings of Configuration Circuits
		Port	Pin	
1	P05_0_HEADER_I2C_SDA1_C	P05_0	AA10	—
2	P04_7_HEADER_I2C_SCL1_C	P04_7	AC11	—
3	p5v0	—	—	—
4	P22_6_HEADER_IRQ8_E	P22_6*1	C22	SW2-1 : ON, SW2-2: OFF
5	GROUND	—	—	—
6	p1v8	—	—	—
7	p1v8	—	—	—
8	p1v8	—	—	—
9	p1v8	—	—	—
10	GROUND	—	—	—
11	p3v3	—	—	—
12	P09_7_HEADER_BSC_WE0#_LDCDC_DE	P09_7	D5	—
13	P09_6_HEADER_BSC_D15_LDCDC_VSYNC	P09_6	D3	—
14	P09_5_HEADER_BSC_D14_LDCDC_HSYNC	P09_5	C2	—
15	GROUND	—	—	—
16	P09_4_HEADER_BSC_D13_LDCDC_CLK	P09_4	D2	—
17	GROUND	—	—	—
18	P18_6_HEADER_BSC_A14_LDCDC_DATB7	P18_6	B16	—
19	P18_5_HEADER_BSC_A13_LDCDC_DATB6	P18_5	G15	—
20	P18_4_HEADER_BSC_A12_LDCDC_DATB5	P18_4	F15	—
21	P18_3_BSC_A11_LDCDC_DATB4	P18_3	D13	—
22	P18_2_BSC_A10_LDCDC_DATB3	P18_2	B15	—
23	P18_1_BSC_A9_LDCDC_DATB2	P18_1*2	E13	SW8-1 : OFF, SW8-2: ON
24	P18_0_BSC_A8_LDCDC_DATB1	P18_0*2	D15	SW8-3: OFF, SW8-4: ON
25	P17_7_HEADER_BSC_WE3#_AH_LDCDC_DATB0	P17_7	E15	—
26	P17_6_HEADER_LDCDC_DATG7	P17_6	F13	—
27	P14_6_HEADER_LDCDC_DATG6_RS485_DE4	P14_6	B9	—
28	P14_5_HEADER_LDCDC_DATG5_BSC_TEND	P14_5	C11	—
29	P14_4_HEADER_LDCDC_DATG4_BSC_DACK	P14_4	A9	—
30	P14_3_HEADER_LDCDC_DATG3_RS485_TXD4_BSC_DREQ	P14_3	D9	—
31	P14_2_HEADER_BSC_BS#_LDCDC_DATG2_RS485_RXD4	P14_2	C10	—
32	P14_1_HEADER_BSC_RD/WR#_LDCDC_DATG1	P14_1	C9	—
33	P11_0_BSC_A5_LDCDC_DATG0_PMOD2_RXD1	P11_0*3	C5	SW6-3 : OFF, SW6-4: ON, SW6-5: OFF
34	P10_7_HEADER_BSC_A4_LDCDC_DATR7_IRQ9_B	P10_7	C4	—
35	P10_6_HEADER_BSC_A3_LDCDC_DATR6	P10_6	A6	—
36	P10_5_HEADER_BSC_A2_LDCDC_DATR5	P10_5	B3	—
37	P10_4_HEADER_BSC_A1_LDCDC_DATR4	P10_4	B5	—

38	P10_3_HEADER_BSC_RD#_LDCDC_DATR3	P10_3	B1	—
39	P10_2_HEADER_BSC_CS0#_LDCDC_DATR2	P10_2	B2	—
40	P10_1_HEADER_BSC_WAIT#_LDCDC_DATR1	P10_1	A5	—
41	P10_0_HEADER_BSC_WE1#_LDCDC_DATR0	P10_0	D4	—
42	p3v3	—	—	—
43	p3v3	—	—	—
44	GROUND	—	—	—
45	GROUND	—	—	—

Notes: 1. Connected via the level shifter IC with an enable function.
 2. Connected via SW8.
 3. Connected via SW6.

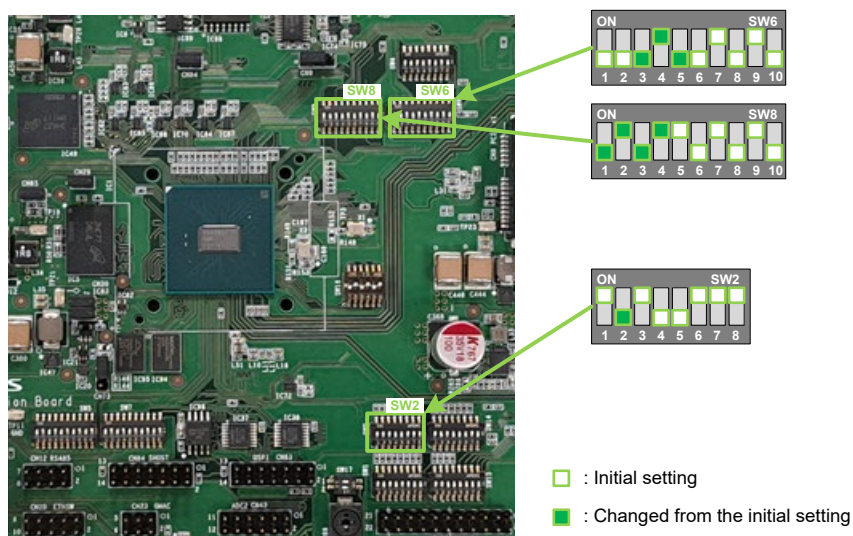


Figure 7-26 Switch Settings When Using the LCD Interface

7.20 Serial Host Interface

This board is equipped with a connector (CN64) for the serial host interface, and the serial host interface of the RZ/T2H can be evaluated by connecting the connector to an external host CPU. Table 7-34 lists the signal connections of the serial host interface connector (CN64). Figure 7-27 shows the switch settings when using the serial host interface.

Table 7-34 Signal Connections of Serial Host Interface Connector (CN64)

Pin	Signal Name	MPU		Settings of Configuration Circuits
		Port	Pin	
1	GROUND	—	—	—
2	P27_0_HEADER_BSC_CS5# (HSPI_INT#)	P27_0*1	G23	SW4-1 : OFF, SW4-2: ON
3	P27_6_HEADER (HSPI_CKP)	P27_6	G27	—
4	P27_1_HEADER (HSPI_CS#)	P27_1*1	G24	SW4-3: OFF, SW4-4: ON
5	P31_5_HEADER_PMOD1_MOSI (HSPI_IO7)	P31_5*2	P26	SW2-7 : OFF
6	P31_4_HEADER_PMOD1_SCK (HSPI_IO6)	P31_4*2	N25	SW2-7: OFF
7	P31_3_HEADER (HSPI_IO5)	P31_3*2	N26	SW2-7: OFF
8	P31_2_HEADER (HSPI_IO4)	P31_2*2	N27	SW2-7: OFF
9	P27_5_HEADER (HSPI_IO3)	P27_5*1	F25	SW4-7: OFF, SW4-8: ON
10	P27_4_HEADER (HSPI_IO2)	P27_4*1	H26	SW4-5: OFF, SW4-6: ON
11	P27_3_HEADER (HSPI_IO1)	P27_3	F27	—
12	P27_2_HEADER_IRQ3 (HSPI_IO0)	P27_2	G26	SW2-8: OFF
13	P02_4_V1833_5_MBX_HINT# (MBX_HINT#)	P02_4	AE12	—
14	p3v3	—	—	—

Notes: 1. Connected via SW4.

2. Connected via the bus switch IC.

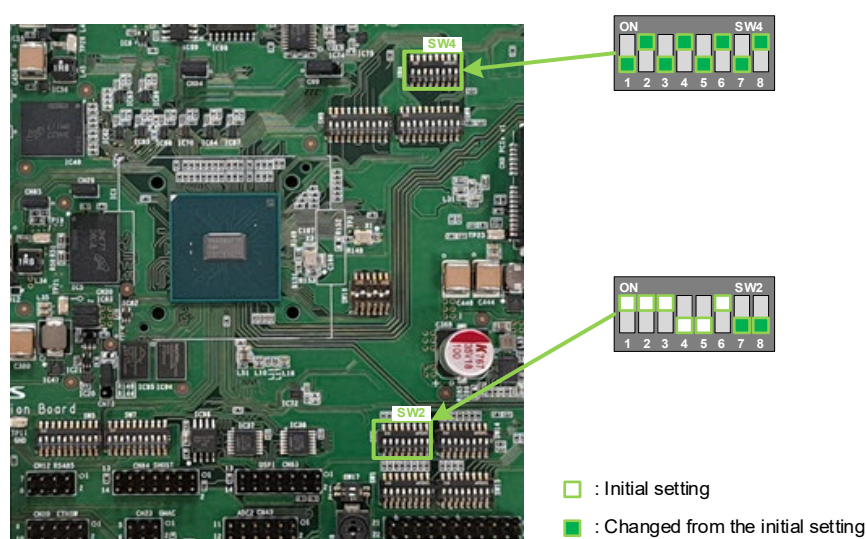


Figure 7-27 Switch Settings When Using the Serial Host Interface

7.21 Pin Headers

This board is equipped with the 2.54-mm pitch pin headers listed in Table 7-35. Table 7-36 to Table 7-52 list the signal connections of the pin headers. Figure 7-28 to Figure 7-33 show the switch settings when using the pin headers.

Table 7-35 List of Pin Headers

Function	Reference	Number of Pins	Description
ENCIF interface	CN2	30 (15 × 2)	For ENCIF0 (units 0 to 5)
	CN3	30 (15 × 2)	For ENCIF1 (units 6 to 11)
	CN10	22 (11 × 2)	For ENCIF2 (units 12 to 15)
DSMIF interface	CN21	30 (15 × 2)	For DSMIF0 (units 0 to 2)
	CN18	30 (15 × 2)	For DSMIF1 (units 3 to 5)
	CN22	30 (15 × 2)	For DSMIF2 (units 6 to 8)
	CN19	10 (5 × 2)	For DSMIF3 (unit 9)
GPT interface	CN24	36 (18 × 2)	For GPT0 (units 0 to 2)
	CN25	36 (18 × 2)	For GPT1 (units 3 to 5)
	CN26	36 (18 × 2)	For GPT2 (units 6 to 8)
ETHSW signal monitoring	CN20	10 (5 × 2)	For monitoring the PTPOUT and TDMAOUT signals
GMAC signal monitoring	CN23	6 (3 × 2)	For monitoring the PTPTRG signals
Bus interface	CN13	40 (20 × 2)	For the address line and others
	CN17	40 (20 × 2)	For the data line and others
ADC	CN41	10 (5 × 2)	For ADC0
	CN42	10 (5 × 2)	For ADC1
	CN43	12 (6 × 2)	For ADC2

Table 7-36 Signal Connections of ENCIF0 (CN2)

Pin	Function Name	Signal Name	MPU		Settings of Configuration Circuits
			Port	Pin	
1	GROUND	GROUND	—	—	—
2	ENCIFCK01	P33_2_V1833_3_HEADER_BSC_A16	P33_2* ¹	R24	SW2-8 : OFF
3	ENCIFCK00	P14_2_HEADER_BSC_BS#_LCDC_DATG2_RS485_RXD4	P14_2	C10	—
4	ENCIFOE01	P33_3_V1833_3_HEADER_BSC_A17_PCl_e_RST_OUT0B	P33_3* ¹	U25	SW2-8: OFF
5	ENCIFOE00	P14_3_HEADER_LCDC_DATG3_RS485_TXD4_BSC_DREQ	P14_3	D9	—
6	ENCIFDO01	P33_4_V1833_3_HEADER_BSC_A18_PCl_e_RST_OUT1B	P33_4* ¹	U24	SW2-8: OFF
7	ENCIFDO00	P14_4_HEADER_LCDC_DATG4_BSC_DACK	P14_4	A9	—
8	ENCIFDI01	P33_5_V1833_3_HEADER_BSC_A19	P33_5* ¹	T25	SW2-8: OFF
9	ENCIFDI00	P14_5_HEADER_LCDC_DATG5_BSC_TEND	P14_5	C11	—
10	GROUND	GROUND	—	—	—
11	ENCIFCK02	P03_3_HEADER_BSC_D11	P03_3	AB11	—
12	ENCIFCK03	P04_5_HEADER	P04_5	AF9	—
13	ENCIFOE02	P03_4_HEADER_BSC_D12	P03_4	AB10	—
14	ENCIFOE03	P04_6_HEADER	P04_6	AD10	—
15	ENCIFDO02	P03_5_HEADER	P03_5	AC12	—
16	ENCIFDO03	P04_7_HEADER_I2C_SCL1_C	P04_7	AC11	—
17	ENCIFDI02	P03_6_HEADER	P03_6	AG9	—
18	ENCIFDI03	P05_0_HEADER_I2C_SDA1_C	P05_0	AA10	—
19	GROUND	GROUND	—	—	—
20	ENCIFCK05	P12_4_HEADER_BSC_D20_RS485_RXD2	P12_4* ²	B6	SW2-1: ON, SW2-2: OFF
21	ENCIFCK04	P00_6_HEADER	P00_6	AG14	—
22	ENCIFOE05	P12_5_HEADER_BSC_D21_RS485_TXD2	P12_5* ²	G7	SW2-1: ON, SW2-2: OFF
23	ENCIFOE04	P00_7_HEADER_IRQ5_A	P00_7	AE14	—
24	ENCIFDO05	P12_6_HEADER_BSC_D22	P12_6* ²	D6	SW2-1: ON, SW2-2: OFF
25	ENCIFDO04	P01_0_V1833_5_HEADER	P01_0* ¹	AF13	SW1-6: OFF
26	ENCIFDI05	P12_7_HEADER_BSC_D23	P12_7* ²	E6	SW2-1: ON, SW2-2: OFF
27	ENCIFDI04	P01_1_V1833_5_HEADER	P01_1* ¹	AG12	SW1-6 : OFF
28	GROUND	GROUND	—	—	—
29	p5v0	p5v0	—	—	—
30	p3v3	p3v3	—	—	—

Notes: 1. Connected via the bus switch IC.

2. Connected via the level shifter IC with an enable function.

Table 7-37 Signal Connections of ENCIF1 (CN3)

Pin	Function Name	Signal Name	MPU		Settings of Configuration Circuits
			Port	Pin	
1	GROUND	GROUND	—	—	—
2	ENCIFCK07	P34_2_V1833_3_HEADER_BSC_A24	P34_2*	T23	SW2-8 : OFF
3	ENCIFCK06	P33_6_V1833_3_HEADER_BSC_A20	P33_6*	R25	SW2-8: OFF
4	ENCIFOE07	P34_3_V1833_3_HEADER_BSC_A25	P34_3*	U23	SW2-8: OFF
5	ENCIFOE06	P33_7_V1833_3_HEADER_BSC_A21	P33_7*	R26	SW2-8: OFF
6	ENCIFDO07	P34_4_V1833_3_HEADER_BSC_CS2#	P34_4*	P27	SW2-8: OFF
7	ENCIFDO06	P34_0_V1833_3_HEADER_BSC_A22	P34_0*	V23	SW2-8: OFF
8	ENCIFDI07	P34_5_V1833_3_HEADER_BSC_CS3#	P34_5*	R27	SW2-8: OFF
9	ENCIFDI06	P34_1_V1833_3_HEADER_BSC_A23	P34_1*	R22	SW2-8: OFF
10	GROUND	GROUND	—	—	—
11	ENCIFCK08	P28_5_HEADER	P28_5	D27	—
12	ENCIFCK09	P29_1_V1833_2_HEADER	P29_1*	J25	SW2-7: OFF
13	ENCIFOE08	P28_6_HEADER	P28_6	E27	—
14	ENCIFOE09	P29_2_V1833_2_HEADER	P29_2*	K23	SW2-7: OFF
15	ENCIFDO08	P28_7_HEADER	P28_7	H23	—
16	ENCIFDO09	P29_3_V1833_2_HEADER	P29_3*	H27	SW2-7: OFF
17	ENCIFDI08	P29_0_HEADER	P29_0	H25	—
18	ENCIFDI09	P29_4_V1833_2_HEADER	P29_4*	L22	SW2-7: OFF
19	GROUND	GROUND	—	—	—
20	ENCIFCK11	P30_1_V1833_2_HEADER	P30_1*	K25	SW2-7: OFF
21	ENCIFCK10	P29_5_V1833_2_HEADER	P29_5*	L23	SW2-7: OFF
22	ENCIFOE11	P30_2_V1833_2_HEADER	P30_2*	L26	SW2-7: OFF
23	ENCIFOE10	P29_6_V1833_2_HEADER	P29_6*	J23	SW2-7: OFF
24	ENCIFDO11	P30_3_V1833_2_HEADER	P30_3*	J27	SW2-7: OFF
25	ENCIFDO10	P29_7_V1833_2_HEADER	P29_7*	L25	SW2-7: OFF
26	ENCIFDI11	P30_4_V1833_2_HEADER	P30_4*	K24	SW2-7: OFF
27	ENCIFDI10	P30_0_V1833_2_HEADER	P30_0*	K27	SW2-7: OFF
28	GROUND	GROUND	—	—	—
29	p5v0	p5v0	—	—	—
30	p3v3	p3v3	—	—	—

Note: Connected via the bus switch IC.

Table 7-38 Signal Connections of ENCIF2 (CN10)

Pin	Function Name	Signal Name	MPU		Settings of Configuration Circuits
			Port	Pin	
1	GROUND	GROUND	—	—	—
2	ENCIFCK13	P13_4_HEADER_BSC_D28_RS485_RXD3	P13_4* ¹	B8	SW1-4 : ON
3	ENCIFCK12	P13_0_HEADER_BSC_D24_RS485_DE2	P13_0* ²	C7	SW2-1 : ON, SW2-2 : OFF
4	ENCIFOE13	P13_5_HEADER_BSC_D29_RS485_TXD3	P13_5	B7	—
5	ENCIFOE12	P13_1_HEADER_BSC_D25	P13_1* ²	F7	SW2-1 : ON, SW2-2 : OFF
6	ENCIFDO13	P13_6_HEADER_BSC_D30	P13_6	A8	—
7	ENCIFDO12	P13_2_HEADER_BSC_D26	P13_2* ²	F8	SW2-1 : ON, SW2-2 : OFF
8	ENCIFDI13	P13_7_HEADER_BSC_D31	P13_7	C8	—
9	ENCIFDI12	P13_3_V1833_6_HEADER_BSC_D27	P13_3	F6	—
10	GROUND	GROUND	—	—	—
11	ENCIFCK14	P18_4_HEADER_BSC_A12_LCDC_DATB5	P18_4	F15	—
12	ENCIFCK15	P31_6_HEADER_PMOD1_MISO	P31_6	P25	—
13	ENCIFOE14	P18_5_HEADER_BSC_A13_LCDC_DATB6	P18_5	G15	—
14	ENCIFOE15	P31_7_HEADER_PMOD1_SSL	P31_7	M26	—
15	ENCIFDO14	P18_6_HEADER_BSC_A14_LCDC_DATB7	P18_6	B16	—
16	ENCIFDO15	P32_0_HEADER	P32_0	M25	—
17	ENCIFDI14	P18_7_HEADER_BSC_A15	P18_7	C16	—
18	ENCIFDI15	P32_1_HEADER	P32_1	M23	—
19	NC	NC	—	—	—
20	GROUND	GROUND	—	—	—
21	p5v0	p5v0	—	—	—
22	p3v3	p3v3	—	—	—

Notes: 1. SW1-4 has to be set to ON, and RXD of the RS485 has to be disabled.
2. Connected via the level shifter IC with an enable function.

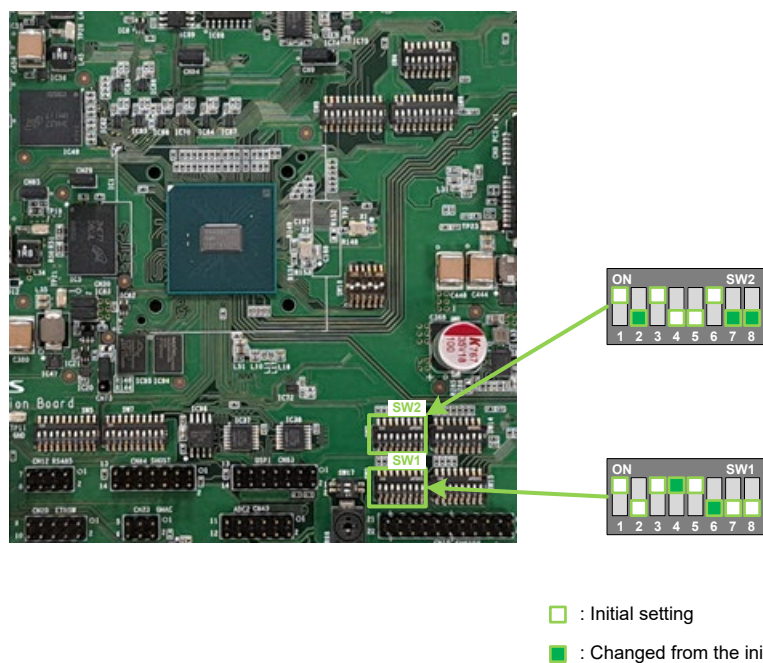


Figure 7-28 Switch Settings When Using ENCIF0 (CN2), ENCIF1 (CN3), and ENCIF2 (CN10)

Table 7-39 Signal Connections of DSMIF0 (CN21)

Pin	Function Name	Signal Name	MPU		Settings of Configuration Circuits
			Port	Pin	
1	p5v0	p5v0	—	—	—
2	p3v3	p3v3	—	—	—
3	MCLK02	P07_5_V1833_4_HEADER	P07_5* ¹	AG6	SW5-5 : ON, SW5-6: OFF
4	MDAT02	P07_6_V1833_4_HEADER	P07_6	AC7	—
5	MCLK01	P07_3_V1833_4_HEADER	P07_3	AE8	—
6	MDAT01	P07_4_V1833_4_HEADER	P07_4	AC8	—
7	MCLK00	P07_1_V1833_4_HEADER	P07_1	AF4	—
8	MDAT00	P07_2_V1833_4_HEADER	P07_2	AG5	—
9	GROUND	GROUND	—	—	—
10	GROUND	GROUND	—	—	—
11	p5v0	p5v0	—	—	—
12	p3v3	p3v3	—	—	—
13	MCLK12	P09_0_HEADER_PMOD2_GPIO0	P09_0	AE1	—
14	MDAT12	P09_1_HEADER_PMOD2_GPIO1	P09_1	AG2	—
15	MCLK11	P08_6_HEADER_SW_SEI	P08_6* ²	AD2	SW2-3 : OFF, E7: Short-circuit
16	MDAT11	P08_7_HEADER_SW2_IRQ0-D_PMOD2_RST	P08_7	AF2	—
17	MCLK10	P07_7_V1833_4_HEADER	P07_7	AB9	—
18	MDAT10	P08_0_V1833_4_HEADER	P08_0	AD7	—
19	GROUND	GROUND	—	—	—
20	GROUND	GROUND	—	—	—
21	p5v0	p5v0	—	—	—
22	p3v3	p3v3	—	—	—
23	MCLK22	P02_2_V1833_5_HEADER	P02_2* ³	AA13	SW1-6 : OFF
24	MDAT22	P11_1_HEADER_PMOD2_TXD1	P11_1	C1	—
25	MCLK21	P10_6_HEADER_BSC_A3_LCDC_DATR6	P10_6	A6	—
26	MDAT21	P10_7_HEADER_BSC_A4_LCDC_DATR7_IRQ9_B	P10_7	C4	—
27	MCLK20	P09_2_HEADER	P09_2	AE2	—
28	MDAT20	P09_3_HEADER	P09_3	AF1	—
29	GROUND	GROUND	—	—	—
30	GROUND	GROUND	—	—	—

Notes: 1. Connected via SW5.
 2. Connected via the bus switch IC and option link E7.
 3. Connected via the bus switch IC.

Table 7-40 Signal Connections of DSMIF1 (CN18)

Pin	Function Name	Signal Name	MPU		Settings of Configuration Circuits
			Port	Pin	
1	p5v0	p5v0	—	—	—
2	p3v3	p3v3	—	—	—
3	MCLK32	P14_7_HEADER	P14_7	A10	—
4	MDAT32	P15_0_HEADER	P15_0	G9	—
5	MCLK31	P11_4_HEADER	P11_4	A2	—
6	MDAT31	P11_5_HEADER	P11_5	B4	—
7	MCLK30	P11_2_HEADER_PMOD2_CTS1#RTS1#_A	P11_2	C3	—
8	MDAT30	P11_3_HEADER_PMOD2_CTS1#_A	P11_3	D1	—
9	GROUND	GROUND	—	—	—
10	GROUND	GROUND	—	—	—
11	p5v0	p5v0	—	—	—
12	p3v3	p3v3	—	—	—
13	MCLK42	P15_5_HEADER	P15_5	E11	—
14	MDAT42	P15_6_HEADER_IRQ1_G	P15_6	D10	—
15	MCLK41	P15_3_HEADER	P15_3	G11	—
16	MDAT41	P15_4_HEADER	P15_4	F9	—
17	MCLK40	P15_1_HEADER	P15_1	E10	—
18	MDAT40	P15_2_HEADER	P15_2	F11	—
19	GROUND	GROUND	—	—	—
20	GROUND	GROUND	—	—	—
21	p5v0	p5v0	—	—	—
22	p3v3	p3v3	—	—	—
23	MCLK52	P19_6_HEADER	P19_6*2	E16	—
24	MDAT52	P19_7_HEADER	P19_7	F16	—
25	MCLK51	P16_1_HEADER	P16_1	B11	—
26	MDAT51	P16_2_HEADER	P16_2	A11	—
27	MCLK50	P15_7_HEADER	P15_7	E9	—
28	MDAT50	P16_0_HEADER	P16_0	D11	—
29	GROUND	GROUND	—	—	—
30	GROUND	GROUND	—	—	—

Table 7-41 Signal Connections of DSMIF2 (CN22)

Pin	Function Name	Signal Name	MPU		Settings of Configuration Circuits
			Port	Pin	
1	p5v0	p5v0	—	—	—
2	p3v3	p3v3	—	—	—
3	MCLK62	P24_1_HEADER	P24_1	D22	—
4	MDAT62	P24_2_HEADER	P24_2	F21	—
5	MCLK61	P23_7_HEADER	P23_7	G19	—
6	MDAT61	P24_0_HEADER	P24_0	F19	—
7	MCLK60	P23_5_HEADER	P23_5*1	C21	SW7-5 : ON, SW7-6 : OFF
8	MDAT60	P23_6_HEADER	P23_6	B21	—
9	GROUND	GROUND	—	—	—
10	GROUND	GROUND	—	—	—
11	p5v0	p5v0	—	—	—
12	p3v3	p3v3	—	—	—
13	MCLK72	P10_0_HEADER_BSC_WE1#_LCDC_DATR0	P10_0	D4	—
14	MDAT72	P10_1_HEADER_BSC_WAIT#_LCDC_DATR1	P10_1	A5	—
15	MCLK71	P09_6_HEADER_BSC_D15_LCDC_VSYNC	P09_6	D3	—
16	MDAT71	P09_7_HEADER_BSC_WE0#_LCDC_DE	P09_7	D5	—
17	MCLK70	P24_3_HEADER	P24_3*1	B20	SW7-3 : ON, SW7-4 : OFF
18	MDAT70	P24_4_HEADER	P24_4*1	G22	SW7-1 : ON, SW7-2 : OFF
19	GROUND	GROUND	—	—	—
20	GROUND	GROUND	—	—	—
21	p5v0	p5v0	—	—	—
22	p3v3	p3v3	—	—	—
23	MCLK82	P33_0_HEADER	P33_0	P24	—
24	MDAT82	P33_1_HEADER	P33_1	P23	—
25	MCLK81	P31_4_HEADER_PMOD1_SCK	P31_4*2	N25	SW2-7 : OFF
26	MDAT81	P31_5_HEADER_PMOD1_MOSI	P31_5	P26	—
27	MCLK80	P31_2_HEADER	P31_2*2	N27	SW2-7 : OFF
28	MDAT80	P31_3_HEADER	P31_3*2	N26	SW2-7 : OFF
29	GROUND	GROUND	—	—	—
30	GROUND	GROUND	—	—	—

Notes: 1. Connected via SW7.

2. Connected via the bus switch IC.

Table 7-42 Signal Connections of DSMIF3 (CN19)

Pin	Function Name	Signal Name	MPU		Settings of Configuration Circuits
			Port	Pin	
1	p5v0	p5v0	—	—	—
2	p3v3	p3v3	—	—	—
3	MCLK92	P35_5_HEADER	P35_5*	V24	SW1-3 : OFF,
4	MDAT92	P35_6_HEADER	P35_6*	U22	SW1-3: OFF,
5	MCLK91	P35_3_HEADER	P35_3*	V22	SW1-3: OFF,
6	MDAT91	P35_4_HEADER	P35_4*	W24	SW1-3: OFF,
7	MCLK90	P35_1_HEADER	P35_1*	T26	SW2-8 : OFF,
8	MDAT90	P35_2_HEADER	P35_2*	W25	SW2-8: OFF,
9	GROUND	GROUND	—	—	—
10	GROUND	GROUND	—	—	—

Note: Connected via the bus switch IC.

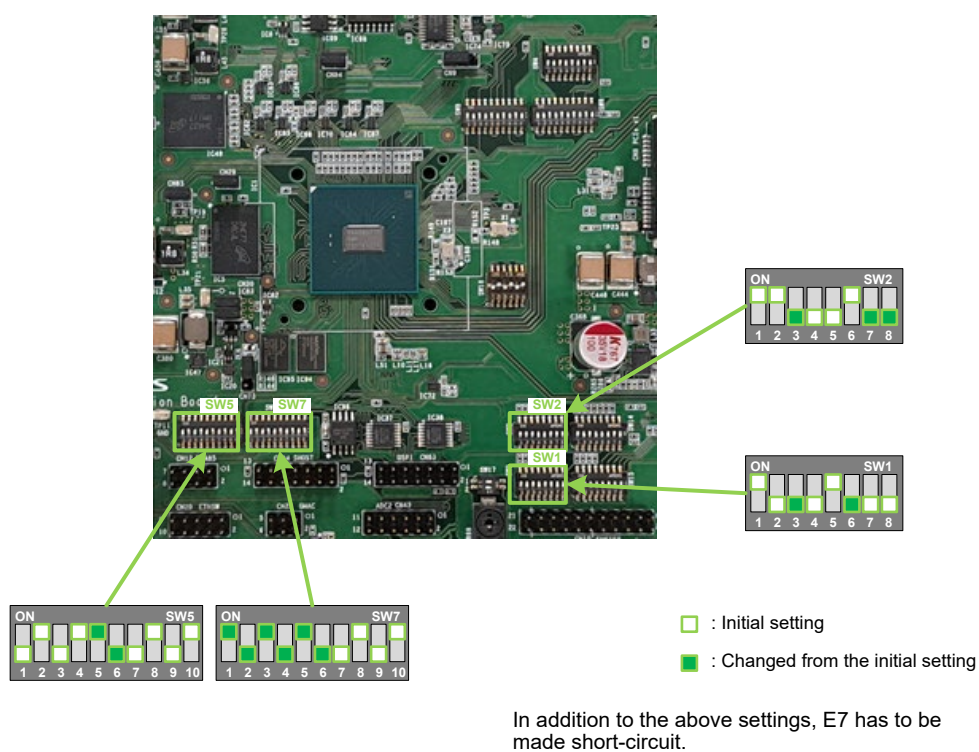


Figure 7-29 Switch Settings When Using DSMIF0 (CN21), DSMIF1 (CN18), DSMIF2 (CN22), and DSMIF3 (CN19)

Table 7-43 Signal Connections of GPT0 (CN24)

Pin	Function Name	Signal Name	MPU		Settings of Configuration Circuits
			Port	Pin	
1	GROUND	GROUND	—	—	—
2	GROUND	GROUND	—	—	—
3	GTIOC00_0A	P00_0_HEADER_BSC_D0	P00_0*1	AE15	SW1-5 : OFF
4	GTIOC00_0B	P00_1_HEADER_BSC_D1	P00_1*1	AD15	SW1-5: OFF
5	GTIOC00_1A	P00_2_HEADER_BSC_D2	P00_2*1	AC15	SW1-5: OFF
6	GTIOC00_1B	P00_3_HEADER_BSC_D3_SW1_IRQ2_A_ADT RG1	P00_3	AG15	—
7	GTIOC00_2A	P00_4_HEADER_BSC_D4	P00_4	AF15	—
8	GTIOC00_2B	P00_5_HEADER	P00_5	AB15	—
9	GTIOC00_3A	P00_6_HEADER	P00_6	AG14	—
10	GTIOC00_3B	P00_7_HEADER_IRQ5_A	P00_7	AE14	—
11	GTIOC00_4A	P01_0_V1833_5_HEADER	P01_0*1	AF13	SW1-6: OFF
12	GTIOC00_4B	P01_1_V1833_5_HEADER	P01_1*1	AG12	SW1-6: OFF
13	GROUND	GROUND	—	—	—
14	GROUND	GROUND	—	—	—
15	GTIOC01_0A	P01_2_V1833_5_HEADER	P01_2*1	AD14	SW1-6: OFF
16	GTIOC01_0B	P01_3_V1833_5_HEADER	P01_3	AB14	—
17	GTIOC01_1A	P32_4_HEADER_MikroBUS_MOSI	P32_4	N22	—
18	GTIOC01_1B	P32_5_HEADER_MikroBUS_MISO	P32_5	M27	—
19	GTIOC01_2A	P32_6_HEADER_MikroBUS_CS	P32_6	L27	—
20	GTIOC01_2B	P32_7_HEADER	P32_7	N24	—
21	GTIOC01_3A	P02_0_V1833_5_HEADER	P02_0*1	AC14	SW1-6: OFF
22	GTIOC01_3B	P02_1_V1833_5_HEADER	P02_1*1	AB13	SW1-6: OFF
23	GTIOC01_4A	P02_2_V1833_5_HEADER	P02_2*1	AA13	SW1-6: OFF
24	GTIOC01_4B	P02_3_V1833_5_HEADER	P02_3*1	AF12	SW1-6: OFF
25	GROUND	GROUND	—	—	—
26	GROUND	GROUND	—	—	—
27	GTIOC02_0A	P02_5_HEADER_BSC_D5	P02_5*2	AD11	SW2-1 : ON, SW2-2: OFF
28	GTIOC02_0B	P02_6_HEADER_BSC_D6	P02_6*2	AD9	SW2-1: ON, SW2-2: OFF
29	GTIOC02_1A	P02_7_HEADER_BSC_D7	P02_7	AE9	—
30	GTIOC02_1B	P03_0_HEADER_BSC_D8	P03_0	AE10	—
31	GTIOC02_2A	P03_1_HEADER_BSC_D9	P03_1	AC10	—
32	GTIOC02_2B	P03_2_HEADER_BSC_D10	P03_2	AC9	—
33	GTIOC02_3A	P13_0_HEADER_BSC_D24_RS485_DE2	P13_0*2	C7	SW2-1: ON, SW2-2: OFF
34	GTIOC02_3B	P13_1_HEADER_BSC_D25	P13_1*2	F7	SW2-1: ON, SW2-2: OFF
35	GTIOC02_4A	P03_5_HEADER	P03_5	AC12	—
36	GTIOC02_4B	P03_6_HEADER	P03_6	AG9	—

Notes: 1. Connected via the bus switch IC.

2. Connected via the level shifter IC with an enable function.

Table 7-44 Signal Connections of GPT1 (CN25)

Pin	Function Name	Signal Name	MPU		Settings of Configuration Circuits
			Port	Pin	
1	GROUND	GROUND	—	—	—
2	GROUND	GROUND	—	—	—
3	GTIOC03_0A	P03_7_HEADER	P03_7	AB12	—
4	GTIOC03_0B	P04_0_HEADER_BSC_IRQOUT#	P04_0	AE11	—
5	GTIOC03_1A	P04_1_HEADER_MikroBUS_RST	P04_1	AF11	—
6	GTIOC03_1B	P04_2_HEADER_MikroBUS_PWM	P04_2	AA12	—
7	GTIOC03_2A	P04_3_HEADER_PMOD1_RST	P04_3	AG10	—
8	GTIOC03_2B	P04_4_HEADER_PMOD1_GPIO0	P04_4	AG11	—
9	GTIOC03_3A	P04_5_HEADER	P04_5	AF9	—
10	GTIOC03_3B	P04_6_HEADER	P04_6	AD10	—
11	GTIOC03_4A	P04_7_HEADER_I2C_SCL1_C	P04_7	AC11	—
12	GTIOC03_4B	P05_0_HEADER_I2C_SDA1_C	P05_0	AA10	—
13	GROUND	GROUND	—	—	—
14	GROUND	GROUND	—	—	—
15	GTIOC04_0A	P09_4_HEADER_BSC_D13_LCDC_CLK	P09_4	D2	—
16	GTIOC04_0B	P09_5_HEADER_BSC_D14_LCDC_HSYNC	P09_5	C2	—
17	GTIOC04_1A	P01_4_V1833_5_HEADER	P01_4*1	AG13	SW1-6 : OFF
18	GTIOC04_1B	P01_5_V1833_5_HEADER	P01_5*1	AE13	SW1-6: OFF
19	GTIOC04_2A	P01_6_V1833_5_HEADER	P01_6*1	AD13	SW1-6: OFF
20	GTIOC04_2B	P01_7_V1833_5_HEADER	P01_7*1	AC13	SW1-6: OFF
21	GTIOC04_3A	P10_2_HEADER_BSC_CS0#_LCDC_DATR2	P10_2	B2	—
22	GTIOC04_3B	P10_3_HEADER_BSC_RD#_LCDC_DATR3	P10_3	B1	—
23	GTIOC04_4A	P10_4_HEADER_BSC_A1_LCDC_DATR4	P10_4	B5	—
24	GTIOC04_4B	P10_5_HEADER_BSC_A2_LCDC_DATR5	P10_5	B3	—
25	GROUND	GROUND	—	—	—
26	GROUND	GROUND	—	—	—
27	GTIOC05_0A	P11_6_HEADER_PMOD1_GPIO1	P11_6	A3	—
28	GTIOC05_0B	P11_7_HEADER	P11_7	A4	—
29	GTIOC05_1A	P12_0_HEADER_BSC_D16	P12_0*2	D7	SW2-1 : ON, SW2-2: OFF
30	GTIOC05_1B	P12_1_HEADER_BSC_D17	P12_1*2	G8	SW2-1: ON, SW2-2: OFF
31	GTIOC05_2A	P12_2_HEADER_BSC_D18	P12_2*2	E8	SW2-1: ON, SW2-2: OFF
32	GTIOC05_2B	P12_3_HEADER_BSC_D19	P12_3*2	E7	SW2-1: ON, SW2-2: OFF
33	GTIOC05_3A	P12_4_HEADER_BSC_D20_RS485_RXD2	P12_4*2	B6	SW2-1: ON, SW2-2: OFF
34	GTIOC05_3B	P12_5_HEADER_BSC_D21_RS485_TXD2	P12_5*2	G7	SW2-1: ON, SW2-2: OFF
35	GTIOC05_4A	P12_6_HEADER_BSC_D22	P12_6*2	D6	SW2-1: ON, SW2-2: OFF
36	GTIOC05_4B	P12_7_HEADER_BSC_D23	P12_7*2	E6	SW2-1: ON, SW2-2: OFF

Notes: 1. Connected via the bus switch IC.

2. Connected via the level shifter IC with an enable function.

Table 7-45 Signal Connections of GPT2 (CN26)

Pin	Function Name	Signal Name	MPU		Settings of Configuration Circuits
			Port	Pin	
1	GROUND	GROUND	—	—	—
2	GROUND	GROUND	—	—	—
3	GTIOC06_0A	P22_7_HEADER	P22_7*	G21	SW5-9 : ON, SW5-10: OFF
4	GTIOC06_0B	P23_0_HEADER	P23_0*	G20	SW5-7: ON, SW5-8: OFF
5	GTIOC06_1A	P23_1_HEADER	P23_1*	A20	SW8-9 : OFF, SW8-10: ON
6	GTIOC06_1B	P23_2_HEADER	P23_2	A22	—
7	GTIOC06_2A	P23_3_HEADER	P23_3*	A21	SW6-7 : OFF, SW6-8: ON
8	GTIOC06_2B	P23_4_HEADER	P23_4*	C20	SW6-9: OFF, SW6-10: ON
9	GTIOC06_3A	P13_5_HEADER_BSC_D29_RS485_TXD3	P13_5	B7	—
10	GTIOC06_3B	P13_6_HEADER_BSC_D30	P13_6	A8	—
11	GTIOC06_4A	P13_7_HEADER_BSC_D31	P13_7	C8	—
12	GTIOC06_4B	P14_0_HEADER_BSC_A0_RS485_DE3	P14_0	A7	—
13	GROUND	GROUND	—	—	—
14	GROUND	GROUND	—	—	—
15	GTIOC07_0A	P19_0_HEADER	P19_0	D14	—
16	GTIOC07_0B	P19_1_HEADER	P19_1	E14	—
17	GTIOC07_1A	P19_2_HEADER	P19_2	C14	—
18	GTIOC07_1B	P19_3_HEADER	P19_3	C15	—
19	GTIOC07_2A	P19_4_HEADER	P19_4	A15	—
20	GTIOC07_2B	P19_5_HEADER	P19_5	A16	—
21	GTIOC07_3A	P18_4_HEADER_BSC_A12_LCDC_DATB5	P18_4	F15	—
22	GTIOC07_3B	P18_5_HEADER_BSC_A13_LCDC_DATB6	P18_5	G15	—
23	GTIOC07_4A	P18_6_HEADER_BSC_A14_LCDC_DATB7	P18_6	B16	—
24	GTIOC07_4B	P18_7_HEADER_BSC_A15	P18_7	C16	—
25	GROUND	GROUND	—	—	—
26	GROUND	GROUND	—	—	—
27	GTIOC08_0A	P27_7_HEADER	P27_7	C27	—
28	GTIOC08_0B	P28_0_HEADER	P28_0	F24	—
29	GTIOC08_1A	P28_1_HEADER	P28_1	E26	—
30	GTIOC08_1B	P28_2_HEADER	P28_2	G25	—
31	GTIOC08_2A	P28_3_HEADER	P28_3	B27	—
32	GTIOC08_2B	P28_4_HEADER	P28_4	E25	—
33	GTIOC08_3A	P27_3_HEADER	P27_3	F27	—
34	GTIOC08_3B	P27_4_HEADER	P27_4*	H26	SW4-5 : OFF, SW4-6: ON
35	GTIOC08_4A	P27_5_HEADER	P27_5*	F25	SW4-7: OFF, SW4-8: ON
36	GTIOC08_4B	P27_6_HEADER	P27_6	G27	—

Note: Connected via SW4, SW5, SW6, or SW8.

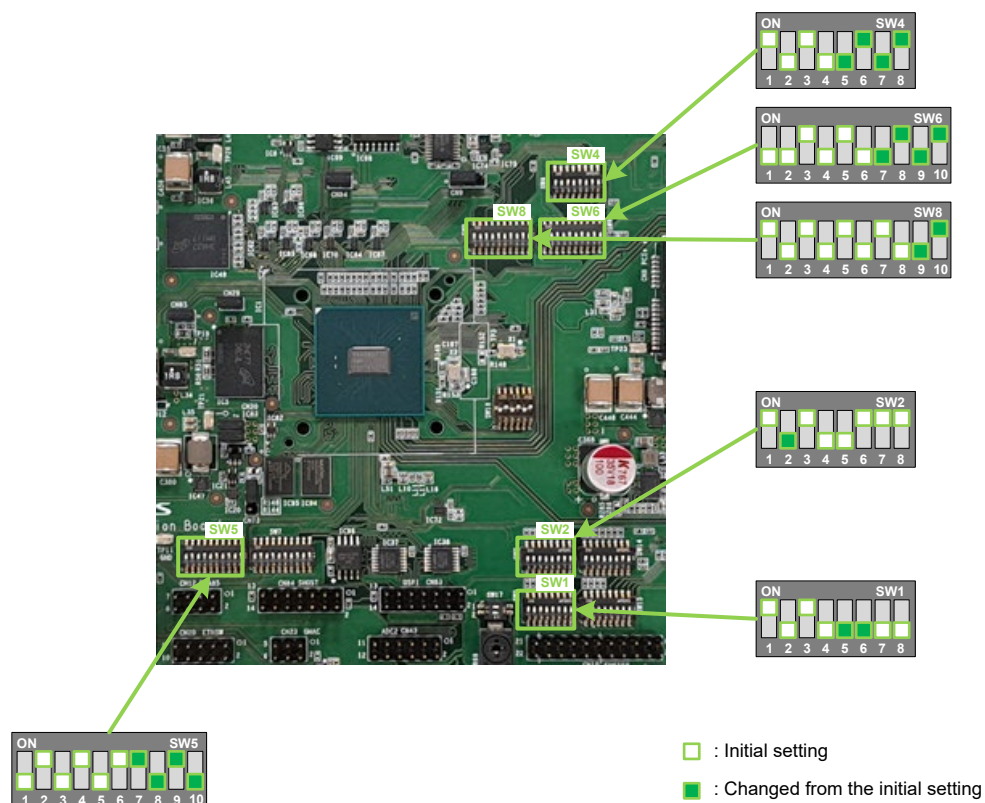


Figure 7-30 Switch Settings When Using GPT0 (CN24), GPT1 (CN25), and GPT2 (CN26)

Table 7-46 Signal Connections of ETHSW (CN20)

Pin	Function Name	Signal Name	MPU		Settings of Configuration Circuits
			Port	Pin	
1	ETHSW_PTPOUT0	P17_6_HEADER_LCDC_DATG7	P17_6	F13	—
2	GROUND	GROUND	—	—	—
3	ETHSW_PTPOUT1	P17_7_HEADER_BSC_WE3#_AH_LCDC_DATB0	P17_7	E15	—
4	ETHSW_TDMAOUT0	P27_7_HEADER	P27_7	C27	—
5	ETHSW_PTPOUT2	P14_0_HEADER_BSC_A0_RS485_DE3	P14_0	A7	—
6	ETHSW_TDMAOUT1	P28_0_HEADER	P28_0	F24	—
7	ETHSW_PTPOUT3	P18_7_HEADER_BSC_A15	P18_7	C16	—
8	ETHSW_TDMAOUT2	P28_1_HEADER	P28_1	E26	—
9	GROUND	GROUND	—	—	—
10	ETHSW_TDMAOUT3	P28_2_HEADER	P28_2	G25	—

Table 7-47 Signal Connections of GMAC (CN23)

Pin	Function Name	Signal Name	MPU		Settings of Configuration Circuits
			Port	Pin	
1	GMAC0_PTPTRG0	P22_5_HEADER_IRQ7_E_PCIEx4_WAKE_GPIO	P22_5*	E21	SW2-1 : ON, SW2-2: OFF
2	GMAC0_PTPTRG1	P22_6_HEADER_IRQ8_E	P22_6*	C22	SW2-1: ON, SW2-2: OFF
3	GMAC1_PTPTRG0	P27_2_HEADER_IRQ3	P27_2	G26	SW2-8: OFF
4	GMAC1_PTPTRG1	P27_3_HEADER	P27_3	F27	—
5	GMAC2_PTPTRG0	P31_6_HEADER_PMOD1_MISO	P31_6	P25	—
6	GMAC2_PTPTRG1	P31_7_HEADER_PMOD1_SSL	P31_7	M26	—

Note: Connected via the level shifter IC with an enable function.

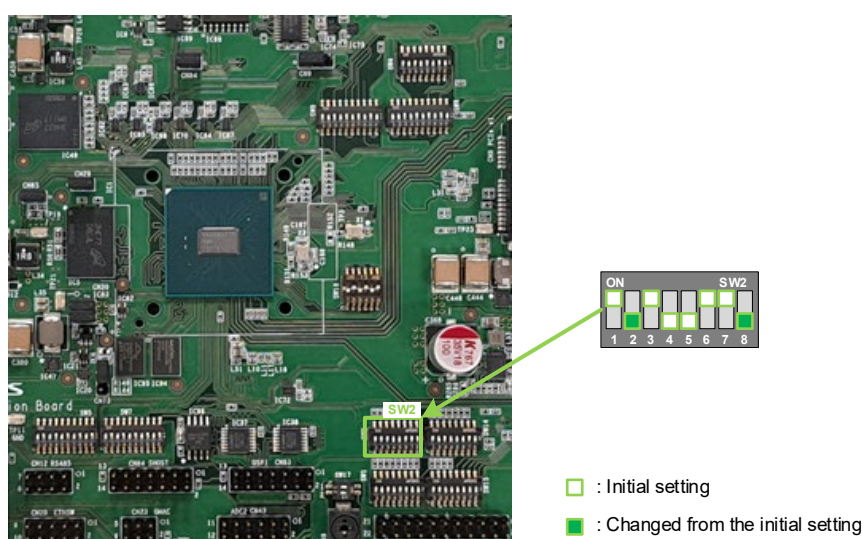
**Figure 7-31 Switch Settings When Using GMAC (CN23)**

Table 7-48 Signal Connections of BSC1 (CN13)

Pin	Signal Name	MPU		Settings of Configuration Circuits
		Port	Pin	
1	P14_0_HEADER_BSC_A0_RS485_DE3	P14_0	A7	—
2	p3v3	—	—	—
3	P10_4_HEADER_BSC_A1_LCDC_DATR4	P10_4	B5	—
4	P33_2_V1833_3_HEADER_BSC_A16	P33_2*1	R24	SW2-8 : OFF
5	P10_5_HEADER_BSC_A2_LCDC_DATR5	P10_5	B3	—
6	P33_3_V1833_3_HEADER_BSC_A17_PCl_e_RSTOUT0B	P33_3*1	U25	SW2-8: OFF
7	P10_6_HEADER_BSC_A3_LCDC_DATR6	P10_6	A6	—
8	P33_4_V1833_3_HEADER_BSC_A18_PCl_e_RSTOUT1B	P33_4*1	U24	SW2-8: OFF
9	P10_7_HEADER_BSC_A4_LCDC_DATR7_IRQ9_B	P10_7	C4	—
10	P33_5_V1833_3_HEADER_BSC_A19	P33_5*1	T25	SW2-8: OFF
11	GROUND	—	—	—
12	P33_6_V1833_3_HEADER_BSC_A20	P33_6*1	R25	SW2-8: OFF
13	P11_0_BSC_A5_LCDC_DATG0_PMOD2_RXD1	P11_0*2	C5	SW6-3 : OFF, SW6-4: ON, SW6-5: OFF
14	P33_7_V1833_3_HEADER_BSC_A21	P33_7*1	R26	SW2-8: OFF
15	P17_4_BSC_A6	P17_4*1	G13	SW2-3: OFF
16	P34_0_V1833_3_HEADER_BSC_A22	P34_0*1	V23	SW2-8: OFF
17	P17_5_BSC_A7	P17_5*2	A14	SW6-1: ON, SW6-2: OFF
18	P34_1_V1833_3_HEADER_BSC_A23	P34_1*1	R22	SW2-8: OFF
19	P18_0_BSC_A8_LCDC_DATB1	P18_0*2	D15	SW8-3 : OFF, SW8-4: ON
20	P27_0_HEADER_BSC_CS5#	P27_0	G23	SW4-1 : OFF, SW4-2: ON
21	P18_1_BSC_A9_LCDC_DATB2	P18_1*2	E13	SW8-1: OFF, SW8-2: ON
22	P34_2_V1833_3_HEADER_BSC_A24	P34_2*1	T23	SW2-8: OFF
23	P18_2_BSC_A10_LCDC_DATB3	P18_2	B15	—
24	P34_3_V1833_3_HEADER_BSC_A25	P34_3*1	U23	SW2-8: OFF
25	P18_3_BSC_A11_LCDC_DATB4	P18_3	D13	—
26	P14_4_HEADER_LCDC_DATG4_BSC_DACK	P14_4	A9	—
27	P18_4_HEADER_BSC_A12_LCDC_DATB5	P18_4	F15	—
28	P14_3_HEADER_LCDC_DATG3_RS485_TXD4_BSC_DR EQ	P14_3	D9	—
29	GROUND	—	—	—
30	P14_2_HEADER_BSC_BS#_LCDC_DATG2_RS485_RXD 4	P14_2	C10	—
31	P18_5_HEADER_BSC_A13_LCDC_DATB6	P18_5	G15	—
32	P10_2_HEADER_BSC_CS0#_LCDC_DATR2	P10_2	B2	—
33	P18_6_HEADER_BSC_A14_LCDC_DATB7	P18_6	B16	—
34	P34_4_V1833_3_HEADER_BSC_CS2#	P34_4*1	P27	SW2-8: OFF
35	P18_7_HEADER_BSC_A15	P18_7	C16	—
36	P34_5_V1833_3_HEADER_BSC_CS3#	P34_5*1	R27	SW2-8: OFF
37	P04_0_HEADER_BSC_IRQOUT#	P04_0	AE11	—
38	P14_1_HEADER_BSC_RD/WR#_LCDC_DATG1	P14_1	C9	—
39	P10_3_HEADER_BSC_RD#_LCDC_DATR3	P10_3	B1	—
40	P14_5_HEADER_LCDC_DATG5_BSC_TEND	P14_5	C11	—

Notes: 1. Connected via the bus switch IC.

2. Connected via SW6 or SW8.

Table 7-49 Signal Connections of BSC2 (CN17)

Pin	Signal Name	MPU		Settings of Configuration Circuits
		Port	Pin	
1	P00_0_HEADER_BSC_D0	P00_0*1	AE15	SW1-5 : OFF
2	P08_6_HEADER_SW_SEI_BSC_CKIO	P08_6*1	AD2	SW2-3 : OFF
3	P00_1_HEADER_BSC_D1	P00_1*1	AD15	SW1-5: OFF
4	P12_2_HEADER_BSC_D18	P12_2*2	E8	SW2-1: ON, SW2-2: OFF
5	P00_2_HEADER_BSC_D2	P00_2*1	AC15	SW1-5: OFF
6	P12_3_HEADER_BSC_D19	P12_3*2	E7	SW2-1: ON, SW2-2: OFF
7	P00_3_HEADER_BSC_D3_SW1_IRQ2_A_ADTRG1	P00_3	AG15	—
8	P12_4_HEADER_BSC_D20_RS485_RXD2	P12_4*2	B6	SW2-1: ON, SW2-2: OFF
9	P00_4_HEADER_BSC_D4	P00_4	AF15	—
10	P12_5_HEADER_BSC_D21_RS485_TXD2	P12_5*2	G7	SW2-1: ON, SW2-2: OFF
11	GROUND	—	—	—
12	P12_6_HEADER_BSC_D22	P12_6*2	D6	SW2-1: ON, SW2-2: OFF
13	P02_5_HEADER_BSC_D5	P02_5*2	AD11	SW2-1: ON, SW2-2: OFF
14	P12_7_HEADER_BSC_D23	P12_7*2	E6	SW2-1: ON, SW2-2: OFF
15	P02_6_HEADER_BSC_D6	P02_6*2	AD9	SW2-1: ON, SW2-2: OFF
16	P13_0_HEADER_BSC_D24_RS485_DE2	P13_0*2	C7	SW2-1: ON, SW2-2: OFF
17	P02_7_HEADER_BSC_D7	P02_7	AE9	—
18	P13_1_HEADER_BSC_D25	P13_1*2	F7	SW2-1: ON, SW2-2: OFF
19	P03_0_HEADER_BSC_D8	P03_0	AE10	—
20	P17_6_HEADER_BSC_WE2#_LDCD_DATG7	P17_6	F13	—
21	P03_1_HEADER_BSC_D9	P03_1	AC10	—
22	P13_2_HEADER_BSC_D26	P13_2*2	F8	SW2-1: ON, SW2-2: OFF
23	P03_2_HEADER_BSC_D10	P03_2	AC9	—
24	P13_3_V1833_6_HEADER_BSC_D27	P13_3	F6	—
25	P03_3_HEADER_BSC_D11	P03_3	AB11	—
26	P13_4_HEADER_BSC_D28_RS485_RXD3	P13_4*3	B8	SW1-4: ON
27	P03_4_HEADER_BSC_D12	P03_4	AB10	—
28	P13_5_HEADER_BSC_D29_RS485_TXD3	P13_5	B7	—
29	GROUND	—	—	—
30	P13_6_HEADER_BSC_D30	P13_6	A8	—
31	P09_4_HEADER_BSC_D13_LCDC_CLK	P09_4	D2	—
32	P13_7_HEADER_BSC_D31	P13_7	C8	—
33	P09_5_HEADER_BSC_D14_LCDC_HSYNC	P09_5	C2	—
34	P10_1_HEADER_BSC_WAIT#_LDCD_DATR1	P10_1	A5	—
35	P09_6_HEADER_BSC_D15_LCDC_VSYNC	P09_6	D3	—
36	P09_7_HEADER_BSC_WE0#_LCDC_DE	P09_7	D5	—
37	P12_0_HEADER_BSC_D16	P12_0*2	D7	SW2-1: ON, SW2-2: OFF
38	P10_0_HEADER_BSC_WE1#_LDCD_DATR0	P10_0	D4	—
39	P12_1_HEADER_BSC_D17	P12_1*2	G8	SW2-1: ON, SW2-2: OFF
40	P17_7_HEADER_BSC_WE3#_AH_LCDC_DATB0	P17_7	E15	—

Notes: 1. Connected via the bus switch IC.
 2. Connected via the level shifter IC with an enable function.
 3. SW1-4 has to be set to ON and RXD of the RS485 has to be disabled.

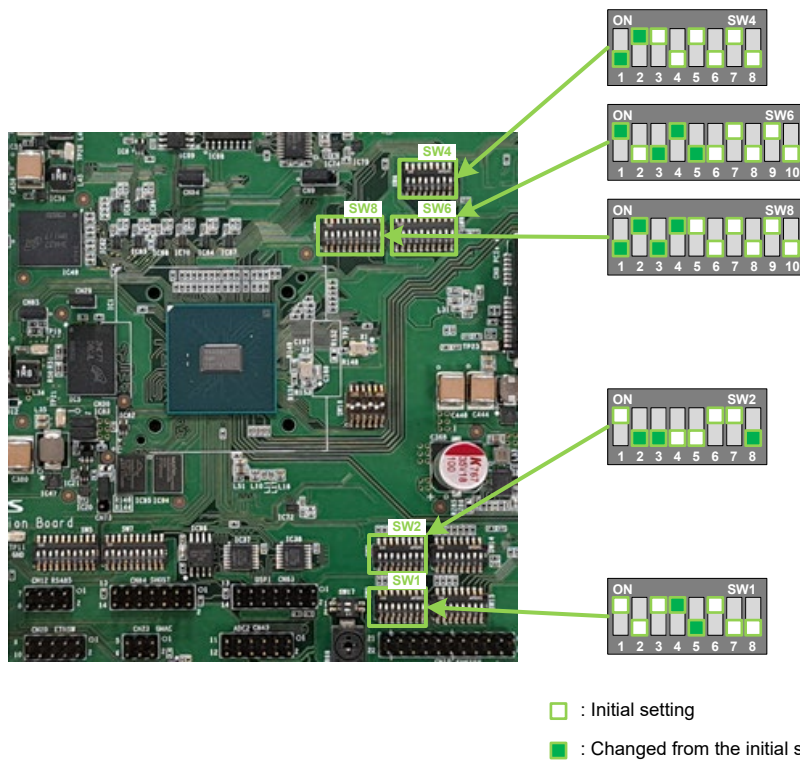


Figure 7-32 Switch Settings When Using BSC1 (CN13) and BSC2 (CN17)

Table 7-50 Signal Connections of ADC0 (CN41)

Pin	Signal Name	MPU		Settings of Configuration Circuits
		Port	Pin	
1	VCC08_AVDD_ADC0	—	—	—
2	AN000_V18ADC0_AD_HEADER	—	AA27*	SW17-1 : OFF, SW17-2: ON
3	AVSS_ADC0	—	—	—
4	AN001_V18ADC0_AD_HEADER	—	AB26	—
5	AVSSIO_ADC0	—	—	—
6	AN002_V18ADC0_AD_HEADER	—	AA26	—
7	VCC18_AVDDIO_ADC0	—	—	—
8	AN003_V18ADC0_AD_HEADER	—	AB27	—
9	VCC18_AVDDREF_ADC0	—	—	—
10	AVSS_ADC0	—	—	—

Note: Connected via SW17.

Table 7-51 Signal Connections of ADC1 (CN42)

Pin	Signal Name	MPU		Settings of Configuration Circuits
		Port	Pin	
1	VCC08_AVDD_ADC1	—	—	—
2	AN100_V18ADC1_AD_HEADER	—	AC27*	SW18-1 : ON, SW18-2: OFF
3	AVSS_ADC1	—	—	—
4	AN101_V18ADC1_AD_HEADER	—	AD27*	SW18-3: ON, SW18-4: OFF
5	AVSSIO_ADC1	—	—	—
6	AN102_V18ADC1_AD_HEADER	—	AD26*	SW18-5: ON, SW18-6: OFF
7	VCC18_AVDDIO_ADC1	—	—	—
8	AN103_V18ADC1_AD_HEADER	—	AC26	—
9	VCC18_AVDDREF_ADC1	—	—	—
10	AVSS_ADC1	—	—	—

Note: Connected via SW18.

Table 7-52 Signal Connections of ADC2 (CN43)

Pin	Signal Name	MPU		Settings of Configuration Circuits
		Port	Pin	
1	AN200_V18ADC2_AD_HEADER	—	AF27	—
2	VCC08_AVDD_ADC2	—	—	—
3	AN201_V18ADC2_AD_HEADER	—	AE27	—
4	AVSS_ADC2	—	—	—
5	AN202_V18ADC2_AD_HEADER	—	AE26	—
6	AVSSIO_ADC2	—	—	—
7	AN203_V18ADC2_AD_HEADER	—	AG26	—
8	VCC18_AVDDIO_ADC2	—	—	—
9	AN204_V18ADC2_AD_HEADER	—	AF26	—
10	VCC18_AVDDREF_ADC2	—	—	—
11	AN205_V18ADC2_AD_HEADER	—	AG25	—
12	AVSS_ADC2	—	—	—

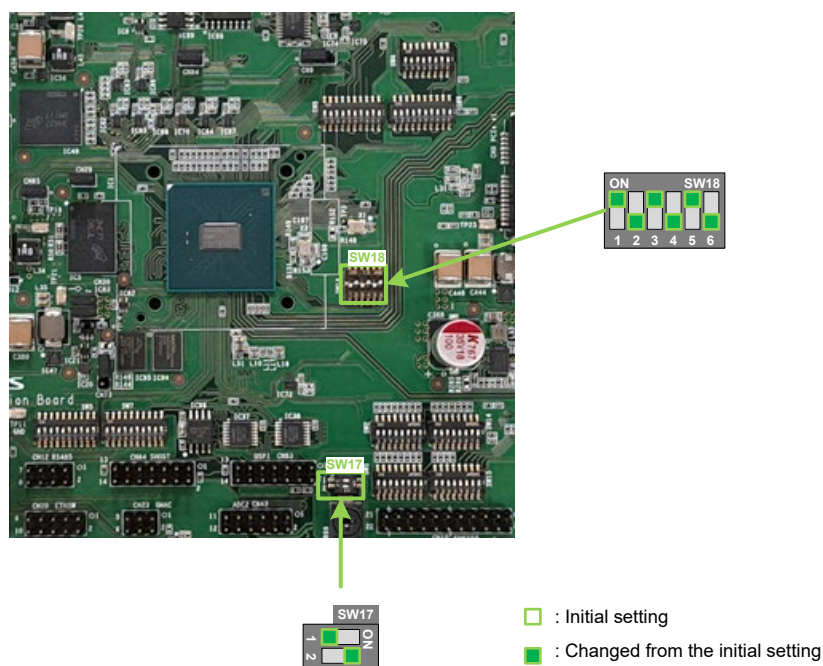


Figure 7-33 Switch Settings When Using ADC0 (CN41) and ADC1 (CN42)

7.22 Test Pins

This board is equipped with the test pins listed in Table 7-53 and Figure 7-34.

Table 7-53 List of Test Pins

Reference	Description	Reference	Description
TP3	For monitoring EXTCLKIN (DNF)	TP21	For monitoring the p0v8 power supply
TP4	GROUND (DNF)	TP22	For monitoring the p1v8 power supply
TP5	GROUND (DNF)	TP23	For monitoring the PCIE3V3 power supply
TP6	GROUND (DNF)	TP24	For monitoring the p3v3 power supply
TP7	GROUND (DNF)	TP25	For monitoring the ETH_VDD25 power supply
TP8	GROUND (DNF)	TP26	For monitoring the ETH_VDD10 power supply
TP9	GROUND (DNF)	TP27	For monitoring the P06_7_V1833_4_USER_LED2 signal
TP10	GROUND (DNF)	TP28	For monitoring the P08_5_USER_LED3 signal
TP11	GROUND	TP29	For monitoring the P18_0_ESC_LED_RUN signal
TP14	For monitoring the CPU3V3 power supply	TP30	For monitoring the P18_1_ESC_LED_ERR signal
TP15	GROUND	TP31	For monitoring the P22_7_ESC_LINKACT0 signal
TP16	For monitoring the cVBUS power supply	TP32	For monitoring the P23_0_ESC_LINKACT1 signal
TP17	For monitoring the P3V3_USB_PD power supply	TP33	For monitoring the P23_5_ESC_LINKACT2 signal
TP18	For monitoring the P12V power supply	TP34	For monitoring the P23_1_USER_LED0 signal
TP19	For monitoring the p1v1 power supply	TP35	For monitoring the P32_2_USER_LED1 signal
TP20	For monitoring the p5v0s power supply	TP36	For monitoring the 15-V power generation unit

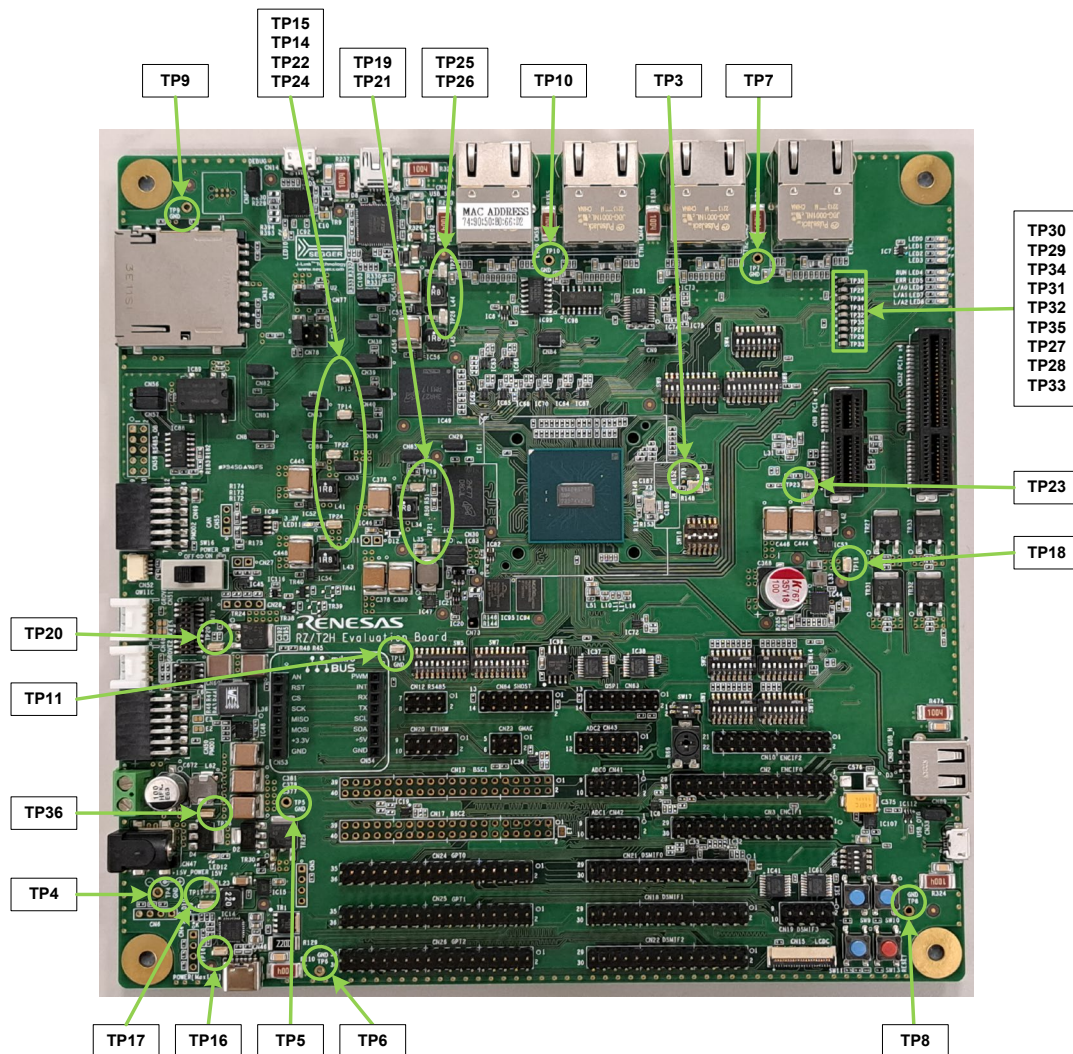


Figure 7-34 Arrangement of Test Pins

8. Developing Code

8.1 Overview

The following methods for debugging code for this device are available.

- Connect this board to a PC via J-Link™ OB, which is a development tool from Segger and mounted on this board.
- Connect this board to a PC via an emulator from a given company.

For more details on individual emulators, refer to the Web sites of the manufacturers.

8.2 Supported Modes

This board supports a variety of boot modes. The possible mode settings are shown in section 6.3.1. For detailed information on the microprocessor, such as operating modes and registers, refer to the RZ/T2H and RZ/N2H Groups User's Manual: Hardware.

Mode settings should only be changed while the power is turned off to avoid causing damage to the microprocessor.

8.3 Address Spaces

For details on the usable address spaces determined by the operating mode of the microprocessor, refer to the RZ/T2H and RZ/N2H Groups User's Manual: Hardware.

9. Usage Notes

9.1 Handling of the XTALSEL Pin

Though the circuitry of this board is configured so that XTALSEL does not pass through any resistor when it is at the low level because it is to be switched by a switch during evaluation, operation with this circuit configuration is not guaranteed. When XTALSEL is to be set to the low level (selecting EXTCLKIN as the main clock source) on a customer's board, connect it to VSS via a resistor according to the descriptions in the RZ/T2H and RZ/N2H Groups User's Manual: Hardware (R01UH1039EJ).

9.2 Use of the RGB-HDMI Conversion Board

Warning

When this board is used with an RGB-HDMI conversion board connected to the LCD interface, the EMC emission may exceed the restriction on class A equipment according to EN55032:2015. Therefore, special care must be taken, such as keeping this board away from EMC-sensitive equipment. If interference does occur, separation by a longer distance may be required. In such cases, additional appropriate measures should be taken on the responsibility of the user and operator of the equipment.

10. Support

For details on the RZ/T2H microprocessors, refer to the RZ/T2H and RZ/N2H Groups User's Manual: Hardware (R01UH1039EJ).

Online technical support and information are available from this Web page: <https://www.renesas.com/>.

Technical Contact Details

America: techsupport.america@renesas.com

Europe: <https://www.renesas.com/en-eu/support/contact.html>

Global & Japan: <https://www.renesas.com/support/contact.html>

General information on Renesas microprocessors can be found on the Renesas website at: <https://www.renesas.com/>.

Design and Manufacturing Information

The design and manufacturing information on this board "RZ/T2H Evaluation Board Design Package" can be obtained from: <https://www.renesas.com/rzt2h-evkit>.


- File name: rzt2h-evaluation-board-v1-designpackage.zip
- File contents

Table 10-1 Contents of the RZ/T2H Evaluation Board Design Package

File Type	Description	File Name or Folder Name
File (txt)	Readme	Readme for schematic.txt
File (PDF)	Schematics	rzt2h-evaluation-board-v1-schematic.pdf
File (PDF)	Mechanical drawings	rzt2h-evaluation-board-v1-mechdwg.pdf
File (PDF)	3D drawings	rzt2h-evaluation-board-v1-3d.pdf
File (xlsx)	Bill of materials (BOM)	rzt2h-evaluation-board-v1-BOM.xlsx
Folder	Manufacturing files	rzt2h-evaluation-board-Manufacturing Files
Folder	Design files	rzt2h-evaluation-board-Design Files

11. Appendix

The arrangements of individual components on this board are shown in this appendix.

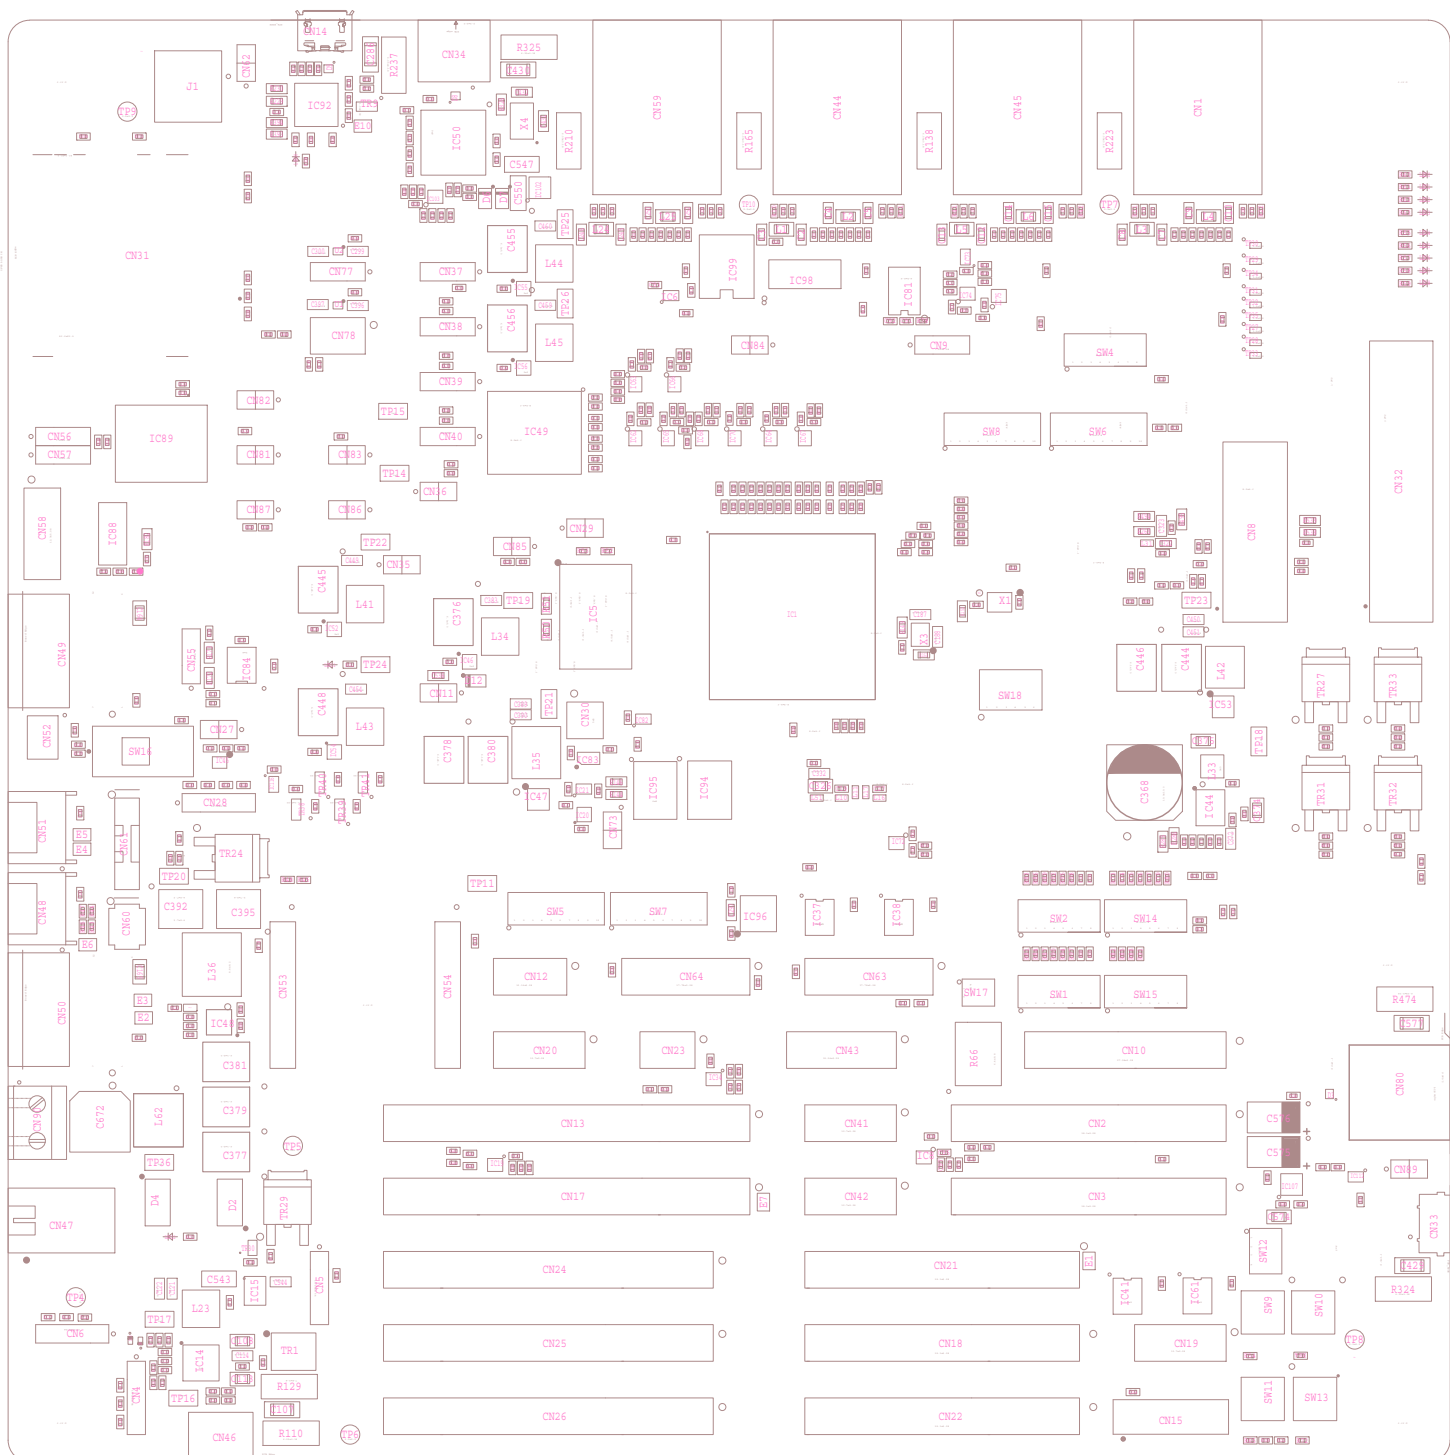



Revision History	RZ/T2H Group RZ/T2H Evaluation Board User's Manual
------------------	---

Rev.	Date	Description	
		Page	Summary
1.00	Jul.01.24	—	First edition issued
1.10	May.16.25	10 15 18 53 55 57 61 69 74 98 99	- Added USB OTG-related descriptions to the following: Table 1-1 Figure 3-1 Figure 4-1 Table 5-23 Table 5-24 Table 5-25 Table 5-27 Table 6-8 Table 6-18 7.16 USB, Figure 7-20 Table 7-24, Figure 7-21 - Fixed minor typographical error.

RZ/T2H Group

RZ/T2H Evaluation Board User's Manual User's Manual

Publication Date: Rev.1.10 May.16.25

Published by: Renesas Electronics Corporation

RZ/T2H Group



Renesas Electronics Corporation

R20UT5405EJ0110