

RL78/G16

Resonator and Oscillator Constants


The resonators for which the operation is verified and their oscillator constants are shown below.

Cautions 1. The oscillator constants shown above are reference values based on evaluation in a specific environment by the resonator manufacturer. Be sure to apply to the resonator manufacturer for evaluation on the actual circuit before using these constants for your application.

Also apply to the resonator manufacturer for re-evaluation on the actual circuit if you have changed the make of the microcontroller or the board.

2. The oscillation voltage and oscillation frequency only indicate the oscillator characteristic. Use the RL78 microcontroller so that the internal operation conditions are within the specifications of the DC and AC characteristics.

Figure. External Oscillation Circuit Example

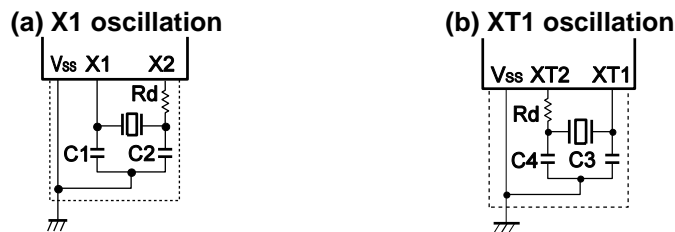

(1) X1 oscillation

As of Jun. 2023

Manufacturer	Resonator	Part Number	SMD/ Lead	(MHz)	Recommended Circuit Constants <small>Note 1</small> (reference)			Oscillation Voltage Range (V)		Operating ambient temperature (°C)
					C1 (pF)	C2 (pF)	Rd (Ω)	MIN.	MAX.	
Murata Manufacturing Co., Ltd. <small>Note 2</small>	Ceramic resonator	CSTCR4M00G55-R0	SMD	4.0	(39)	(39)	0	2.4	5.5	-40 ~ 85
		CSTCR4M00G55Z-R0								-40 ~ 125
		CSTLS4M00G53-B0	Lead		(15)	(15)	0			-20 ~ 80
		CSTLS4M00G53Z-B0								-40 ~ 125
		CSTCR4M19G55-R0	SMD	4.194	(39)	(39)	0			-40 ~ 80
		CSTCR4M19G55Z-R0								-40 ~ 125
		CSTLS4M19G53-B0	Lead		(15)	(15)	0			-20 ~ 80
		CSTLS4M19G53Z-B0								-40 ~ 125
		CSTCR4M91G53-R0	SMD	4.915	(15)	(15)	0			-40 ~ 80
		CSTCR4M91G53Z-R0								-40 ~ 125
		CSTLS4M91G53-B0	Lead		(15)	(15)	0			-20 ~ 80
		CSTLS4M91G53Z-B0								-40 ~ 125
		CSTCR5M00G53-R0	SMD	5.0	(15)	(15)	0			-40 ~ 80
		CSTCR5M00G53Z-R0								-40 ~ 125
		CSTLS5M00G53-B0	Lead		(15)	(15)	0			-20 ~ 80
		CSTLS5M00G53Z-B0								-40 ~ 125
		CSTCR6M00G53-R0	SMD	6.0	(15)	(15)	0			-40 ~ 80
		CSTCR6M00G53Z-R0								-40 ~ 125
		CSTLS6M00G53-B0	Lead		(15)	(15)	0			-20 ~ 80
		CSTLS6M00G53Z-B0								-40 ~ 125
		CSTNE8M00G520000R0	SMD	8.0	(10)	(10)	0			-40 ~ 85
		CSTNE8M00G52Z000R0								-40 ~ 125
		CSTLS8M00G53-B0	Lead		(15)	(15)	0			-20 ~ 80
		CSTLS8M00G53Z-B0								-40 ~ 125
CSTNE10M0G520000R0	SMD	10.0	(10)	(10)	0	-40 ~ 85				
CSTNE10M0G52Z000R0						-40 ~ 125				
CSTLS10M0G53-B0	Lead		(15)	(15)	0	-20 ~ 80				
CSTLS10M0G53Z-B0						-40 ~ 125				
CSTNE12M0G520000R0	SMD	12.0	(10)	(10)	0	-40 ~ 85				
CSTNE12M0G52Z000R0						-40 ~ 125				
Nihon Dempa Kogyo Co., Ltd. <small>Note 3</small>	Crystal resonator	NX5032GA/CHP-CSK-16	SMD	8.0	3	3	0	2.4	5.5	-40 ~ 85
		NX3225SA/CHP-CRG-25	SMD	12.0	3	3	0			-40 ~ 85
Kyocera Co., Ltd. <small>Note 4</small>	Crystal resonator	CX3225SA08000D0PPVL1	SMD	8.0	2	2	0	2.4	5.5	-40 ~ 85
		CX3225SA10000D0PPTL2 (AMPH=0)	SMD	10.0	2	2	0			-40 ~ 85
		CX3225SA12000D0PPSCC	SMD	12.0	6	6	0			-40 ~ 85

Notes 1. Values in parentheses in the C1 and C2 columns indicate an internal capacitance.

- When using this resonator, for details about the matching, contact Murata Manufacturing Co., Ltd. (<http://www.murata.com>)
- When using this resonator, for details about the matching, contact Nihon Dempa Kogyo Co., Ltd. (<http://www.ndk.com/en>)
- When using this resonator, for details about the matching, contact Kyocera Co., Ltd. (<http://global.kyocera.com>).

(2) XT1 oscillation

As of Jun, 2023

Manufacturer	Resonator	Part Number	SMD/Lead	Frequency (kHz)	XT1 oscillation mode ^{Note 1}	Recommended Circuit Constants			Oscillation Voltage Range (V)		Operating ambient temperature (°C)
						C3 (pF)	C4 (pF)	Rd (Ω)	MIN.	MAX.	
Nihon Dempa Kogyo Co., Ltd. ^{Note2}	Crystal resonator	NX3215SA /CHP-MUA-13	SMD	32.768	Normal oscillation	12	12	0	2.4	5.5	-40 to 85
					Low power consumption oscillation	12	12				
					Ultra-low power consumption oscillation	7	7				
		NX2012SA /CHP-MUB-14	SMD	32.768	Normal oscillation	12	12	0	2.4	5.5	
					Low power consumption oscillation	12	12				
					Ultra-low power consumption oscillation	7	7				

Note 1. Set the XT1 oscillation mode by using the AMPHS0 and AMPHS1 bits of the clock operation mode control register (CMC).

2. When using this resonator, for details about the matching, contact Nihon Dempa Kogyo Co., Ltd. (<http://www.ndk.com/en>)