

To our customers,

Old Company Name in Catalogs and Other Documents

On April 1st, 2010, NEC Electronics Corporation merged with Renesas Technology Corporation, and Renesas Electronics Corporation took over all the business of both companies. Therefore, although the old company name remains in this document, it is a valid Renesas Electronics document. We appreciate your understanding.

Renesas Electronics website: <http://www.renesas.com>

April 1st, 2010
Renesas Electronics Corporation

Issued by: Renesas Electronics Corporation (<http://www.renesas.com>)

Send any inquiries to <http://www.renesas.com/inquiry>.

Notice

1. All information included in this document is current as of the date this document is issued. Such information, however, is subject to change without any prior notice. Before purchasing or using any Renesas Electronics products listed herein, please confirm the latest product information with a Renesas Electronics sales office. Also, please pay regular and careful attention to additional and different information to be disclosed by Renesas Electronics such as that disclosed through our website.
2. Renesas Electronics does not assume any liability for infringement of patents, copyrights, or other intellectual property rights of third parties by or arising from the use of Renesas Electronics products or technical information described in this document. No license, express, implied or otherwise, is granted hereby under any patents, copyrights or other intellectual property rights of Renesas Electronics or others.
3. You should not alter, modify, copy, or otherwise misappropriate any Renesas Electronics product, whether in whole or in part.
4. Descriptions of circuits, software and other related information in this document are provided only to illustrate the operation of semiconductor products and application examples. You are fully responsible for the incorporation of these circuits, software, and information in the design of your equipment. Renesas Electronics assumes no responsibility for any losses incurred by you or third parties arising from the use of these circuits, software, or information.
5. When exporting the products or technology described in this document, you should comply with the applicable export control laws and regulations and follow the procedures required by such laws and regulations. You should not use Renesas Electronics products or the technology described in this document for any purpose relating to military applications or use by the military, including but not limited to the development of weapons of mass destruction. Renesas Electronics products and technology may not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable domestic or foreign laws or regulations.
6. Renesas Electronics has used reasonable care in preparing the information included in this document, but Renesas Electronics does not warrant that such information is error free. Renesas Electronics assumes no liability whatsoever for any damages incurred by you resulting from errors in or omissions from the information included herein.
7. Renesas Electronics products are classified according to the following three quality grades: “Standard”, “High Quality”, and “Specific”. The recommended applications for each Renesas Electronics product depends on the product’s quality grade, as indicated below. You must check the quality grade of each Renesas Electronics product before using it in a particular application. You may not use any Renesas Electronics product for any application categorized as “Specific” without the prior written consent of Renesas Electronics. Further, you may not use any Renesas Electronics product for any application for which it is not intended without the prior written consent of Renesas Electronics. Renesas Electronics shall not be in any way liable for any damages or losses incurred by you or third parties arising from the use of any Renesas Electronics product for an application categorized as “Specific” or for which the product is not intended where you have failed to obtain the prior written consent of Renesas Electronics. The quality grade of each Renesas Electronics product is “Standard” unless otherwise expressly specified in a Renesas Electronics data sheets or data books, etc.
 - “Standard”: Computers; office equipment; communications equipment; test and measurement equipment; audio and visual equipment; home electronic appliances; machine tools; personal electronic equipment; and industrial robots.
 - “High Quality”: Transportation equipment (automobiles, trains, ships, etc.); traffic control systems; anti-disaster systems; anti-crime systems; safety equipment; and medical equipment not specifically designed for life support.
 - “Specific”: Aircraft; aerospace equipment; submersible repeaters; nuclear reactor control systems; medical equipment or systems for life support (e.g. artificial life support devices or systems), surgical implantations, or healthcare intervention (e.g. excision, etc.), and any other applications or purposes that pose a direct threat to human life.
8. You should use the Renesas Electronics products described in this document within the range specified by Renesas Electronics, especially with respect to the maximum rating, operating supply voltage range, movement power voltage range, heat radiation characteristics, installation and other product characteristics. Renesas Electronics shall have no liability for malfunctions or damages arising out of the use of Renesas Electronics products beyond such specified ranges.
9. Although Renesas Electronics endeavors to improve the quality and reliability of its products, semiconductor products have specific characteristics such as the occurrence of failure at a certain rate and malfunctions under certain use conditions. Further, Renesas Electronics products are not subject to radiation resistance design. Please be sure to implement safety measures to guard them against the possibility of physical injury, and injury or damage caused by fire in the event of the failure of a Renesas Electronics product, such as safety design for hardware and software including but not limited to redundancy, fire control and malfunction prevention, appropriate treatment for aging degradation or any other appropriate measures. Because the evaluation of microcomputer software alone is very difficult, please evaluate the safety of the final products or system manufactured by you.
10. Please contact a Renesas Electronics sales office for details as to environmental matters such as the environmental compatibility of each Renesas Electronics product. Please use Renesas Electronics products in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive. Renesas Electronics assumes no liability for damages or losses occurring as a result of your noncompliance with applicable laws and regulations.
11. This document may not be reproduced or duplicated, in any form, in whole or in part, without prior written consent of Renesas Electronics.
12. Please contact a Renesas Electronics sales office if you have any questions regarding the information contained in this document or Renesas Electronics products, or if you have any other inquiries.

(Note 1) “Renesas Electronics” as used in this document means Renesas Electronics Corporation and also includes its majority-owned subsidiaries.

(Note 2) “Renesas Electronics product(s)” means any product developed or manufactured by or for Renesas Electronics.

NE85002 SERIES

2 W C-BAND POWER GaAs FET N-CHANNEL GaAs MES FET

DESCRIPTION

The NE8500295 power GaAs FET covers 3.5 to 8.5 GHz frequency range with three different Class A, 2.0 W partially matched devices. Each packaged device has an input lumped element matching network.


NE8500200 is the six-cells recessed gate chip used in '95' package.

The device incorporates Ti-Al gate and silicon dioxide glassivation. To reduce the thermal resistance, the device has a PHS. (Plated Heat Sink)

NEC's stringent quality assurance and test procedures assure the highest reliability and performance.

FEATURES

- Class A operation
- High power output
- High reliability

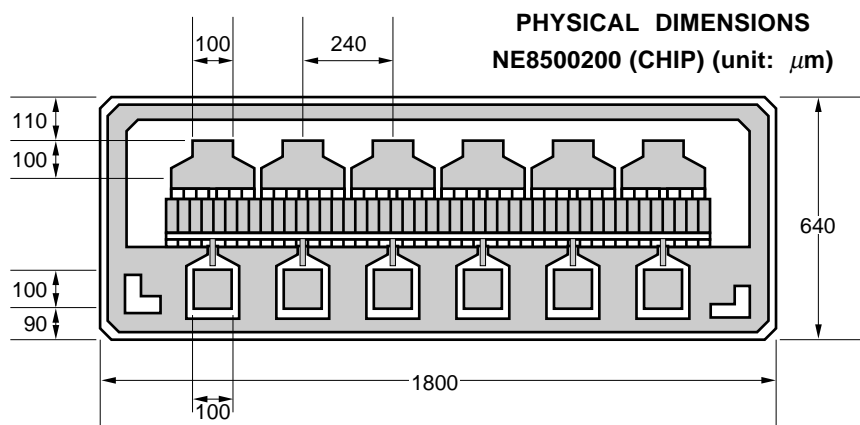


SELECTION CHART

PART NUMBER	PERFORMANCE SPECIFIED		
	Pout (**) (dBm)	G _L (**) (dB)	USABLE FREQUENCY (GHz)
NE8500200(*) NE8500200-WB(*) NE8500200-RG(*)	33.8 min	8.0 min	2.0 to 10
NE8500295-4	33.8 min	10.5 min	3.5 to 5.5
NE8500295-6	33.8 min	9.5 min	5.5 to 7.5
NE8500295-8	33.5 min	8.0 min	7.5 to 8.5

- * GB, RG indicate a type of containers for chips.
- WB: black carrier, RG: ring,
- ** Specified at the condition at the last page.

PACKAGE CODE-95 (unit: mm)

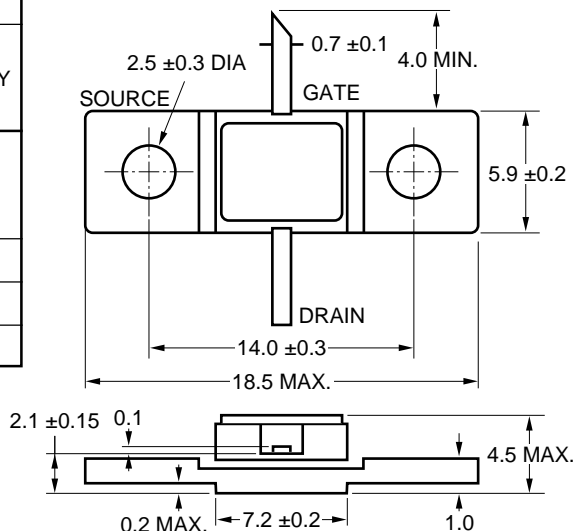

ABSOLUTE MAXIMUM RATINGS (T_A = 25 °C)

Drain to Source Voltage	V _{DSX}	15	V
Gate to Source Voltage	V _{GSX}	-12	V
Gate to Drain Voltage	V _{GDX}	-18	V
Total Power Disipation(*)	P _T	13	W
Drain Current	I _D	2.5	A
Gate Current	I _G	13	mA
Channel Temperature	T _{ch}	175	°C
Storage Temperature	T _{stg}	-65 to 175	°C

*T_C = 25 °C

RECOMMENDING OPERATION RANDGE

CHARACTERISTIC	SYMBOL	MIN.	TYP.	MAX.	UNIT
Drain to Source Voltage	V _{DS}	9	-	10	V
Channel Temperature	T _{ch}	-	-	130	°C
Input Power	G _{comp}	-	-	3	dB _{comp}
Gate Resistance	R _g	-	-	2	kΩ

ELECTRICAL CHARACTERISTICS (T_A = 25 °C)



CHARACTERISTIC	SYMBOL	MIN.	TYP.	MAX.	UNIT	TEST CONDITIONS
Saturated Drain Current	I _{DSS}	950	-	1900	mA	V _{ds} = 2.5 V, V _{gs} = 0 V
Pinch-off Voltage	V _P	-3.0	-	-1.0	V	V _{ds} = 2.5 V, I _{ds} = 8 mA
Transconductance	g _m	-	600	-	mS	V _{ds} = 2.5 V, I _{ds} = I _{DSS}
Thermal Resistance	R _{th}	-	10	15	°C/W	

PERFORMANCE SPECIFICATIONS (T_A = 25 °C)

PART NUMBER		NE8500200 NE8500200-WB NE8500200-RG			N8500295-4			NE8500295-6			NE8500295-8			UNIT	TEST CONDITIONS
PACKAGE CODE		CHIP			95			95			95				
CHARACTERISTIC	SYMBOL	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.		
Output Power	P _o	33.8	-	-	-	-	-	-	-	-	-	-	-	dBm	V _{ds} = 10 V I _{ds} = 450 mA set R _g = 1kΩ f(*) pin(**)
		-	-	-	33.8	-	-	-	-	-	-	-	-	dBm	
		-	-	-	-	-	-	33.8	-	-	-	-	-	dBm	
		-	-	-	-	-	-	-	-	-	33.5	-	-	dBm	
Gate to source Current	I _{gs}	-2.4	-	2.4	-2.4	-	2.4	-	-	-	-	-	-	mA	
		-	-	-	-	-	-	-2.4	-	2.4	-2.4	-	2.4	μA	
Linear Gain	G _L	8.0	-	-	10.5	-	-	9.5	-	-	8.0	-	-	dB	P _{in} = 18 dBm (***)

* Test frequencies are: NE8500200 @8.5 GHz, NE8500295-4 @4.2 GHz, NE8500295-6 @6.5 GHz, NE8500295-8 @8.5 GHz
 ** Test input power are: NE8500200 @27.0 dBm, NE8500295-4 @24.5 dBm, NE8500295-6 @25.5 dBm, NE8500295-8 @27.0dBm
 *** The conditions are the same as the above except this.

TYPICAL PERFORMANCE CURVE (T_A = 25 °C)

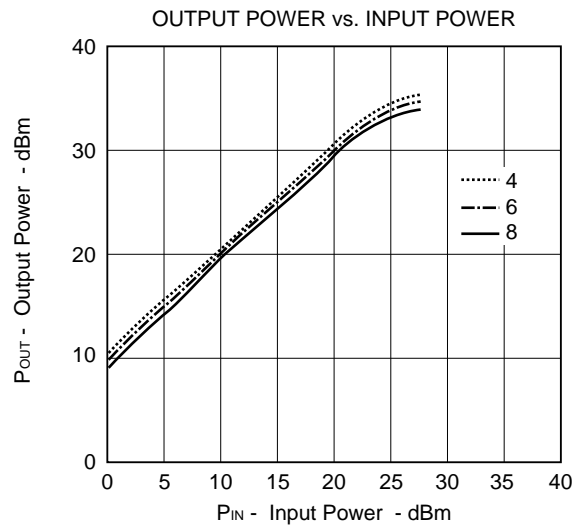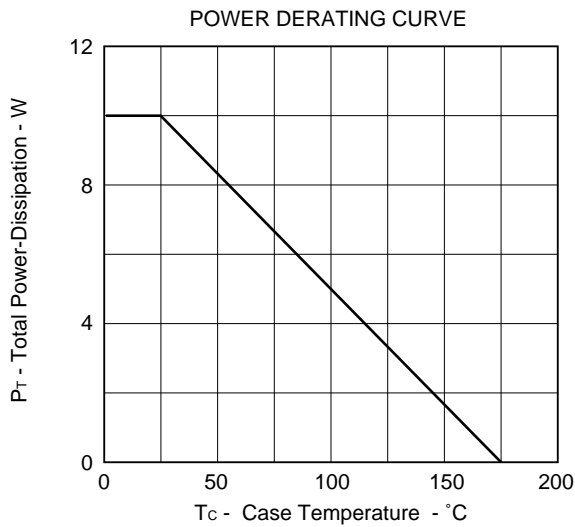

S-PARAMETER

NE8500295-6

$V_{DS} = 10\text{ V}$, $I_{DS} = 450\text{ mA}$, $V_{GS} = -1.784\text{ V}$, $I_G = 0.0\text{ mA}$, $R_G = 1\text{ k}\Omega$

FREQUENCY GHz	S ₁₁		S ₂₁		S ₁₂		S ₂₂	
	MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG
0.100	0.963	-59.2	16.698	149.4	0.003	29.7	0.373	-169.5
0.500	0.952	-149.1	5.714	97.6	0.016	22.8	0.463	-171.2
1.000	0.947	-173.8	3.033	74.2	0.017	20.0	0.485	-179.3
1.500	0.963	172.9	2.152	56.4	0.018	17.4	0.512	177.7
2.000	0.956	161.8	1.701	41.0	0.021	22.2	0.532	173.9
2.500	0.949	150.9	1.472	26.0	0.022	21.2	0.556	172.7
3.000	0.948	140.7	1.328	11.3	0.029	20.6	0.578	170.5
3.500	0.898	138.5	1.164	0.7	0.031	17.4	0.605	168.0
3.600	0.896	136.7	1.163	-2.0	0.032	18.2	0.607	167.3
3.700	0.889	134.9	1.167	-4.7	0.033	15.4	0.605	166.5
3.800	0.887	133.0	1.170	-7.9	0.035	15.2	0.609	165.5
3.900	0.879	130.7	1.169	-10.7	0.037	15.0	0.609	164.6
4.000	0.876	128.2	1.168	-13.3	0.036	11.0	0.607	163.2
4.200	0.862	123.7	1.204	-18.9	0.036	6.5	0.593	161.8
4.400	0.850	119.0	1.249	-25.3	0.037	6.6	0.591	159.7
4.500	0.847	116.0	1.278	-28.7	0.041	4.8	0.595	158.4
4.600	0.842	113.8	1.300	-32.3	0.042	3.4	0.596	157.5
4.800	0.828	108.1	1.357	-39.9	0.044	-0.6	0.604	155.4
5.000	0.813	101.8	1.432	-47.9	0.048	-6.9	0.616	152.3
5.200	0.789	95.5	1.515	-56.6	0.050	-13.7	0.632	149.6
5.400	0.759	88.7	1.612	-66.1	0.051	-19.8	0.651	146.8
5.500	0.737	85.4	1.648	-71.0	0.054	-23.9	0.664	146.0
5.600	0.710	82.3	1.703	-76.6	0.054	-28.4	0.681	144.5
5.800	0.649	76.0	1.806	-87.2	0.055	-38.6	0.717	141.8
6.000	0.560	69.8	1.926	-99.8	0.057	-47.4	0.757	140.0
6.200	0.454	65.1	2.045	-113.6	0.054	-60.5	0.806	137.1
6.400	0.324	66.6	2.120	-129.7	0.050	-76.3	0.850	133.3
6.500	0.264	73.2	2.118	-137.2	0.046	-82.7	0.871	131.2
6.600	0.227	86.0	2.110	-145.5	0.043	-92.3	0.887	128.9
6.800	0.245	116.2	2.033	-161.7	0.033	-107.8	0.905	124.4
7.000	0.344	127.7	1.924	-176.3	0.023	-123.6	0.920	120.2
7.200	0.437	126.9	1.815	171.4	0.012	-154.5	0.905	116.7
7.400	0.510	120.9	1.685	157.8	0.007	145.5	0.892	112.6
7.500	0.539	117.6	1.625	151.0	0.013	99.5	0.884	110.2
7.600	0.565	112.5	1.568	145.1	0.016	74.4	0.876	107.5
7.800	0.599	102.5	1.481	132.5	0.027	53.1	0.858	102.4
8.000	0.623	90.7	1.406	119.5	0.038	36.3	0.838	95.9
8.200	0.643	76.8	1.326	105.7	0.052	21.6	0.818	87.9
8.400	0.646	61.0	1.215	91.5	0.068	6.2	0.794	78.8
8.500	0.637	53.5	1.163	84.6	0.075	-1.9	0.779	74.7
8.600	0.645	45.4	1.104	77.5	0.079	-9.4	0.766	69.9
8.800	0.624	29.9	0.983	64.4	0.090	-25.4	0.741	62.2
9.000	0.610	16.0	0.868	52.6	0.096	-41.3	0.718	56.0
9.200	0.602	3.0	0.784	41.5	0.098	-53.1	0.704	51.5
9.400	0.581	-10.1	0.703	30.9	0.099	-66.1	0.691	48.5
9.500	0.574	-16.9	0.676	25.9	0.099	-69.3	0.693	47.0
9.600	0.568	-23.4	0.643	20.4	0.098	-73.6	0.685	45.8
9.800	0.538	-38.0	0.599	10.9	0.092	-83.3	0.682	44.6
10.000	0.514	-55.8	0.561	-0.6	0.090	-88.5	0.673	43.2

NE8500295-8

$V_{DS} = 10\text{ V}$, $I_{DS} = 450\text{ mA}$, $V_{GS} = -1.386\text{ V}$, $I_G = 0.0\text{ mA}$, $R_G = 1\text{ k}\Omega$

FREQUENCY GHz	S ₁₁		S ₂₁		S ₁₂		S ₂₂	
	MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG
0.100	0.971	-54.8	17.977	150.9	0.004	35.4	0.427	-155.9
0.500	0.937	-146.3	6.354	98.2	0.016	24.0	0.464	-172.3
1.000	0.934	-174.0	3.391	74.5	0.018	22.3	0.492	-178.9
1.500	0.947	170.9	2.382	56.2	0.020	20.8	0.513	177.4
2.000	0.939	158.3	1.869	40.3	0.026	28.1	0.534	173.3
2.500	0.921	153.8	1.473	27.7	0.023	22.7	0.573	169.5
3.000	0.906	145.4	1.335	15.9	0.027	20.9	0.592	168.1
3.500	0.887	137.0	1.272	2.7	0.034	19.9	0.603	165.7
3.600	0.886	135.1	1.264	-0.2	0.034	20.2	0.603	165.0
3.700	0.877	133.2	1.269	-2.7	0.036	19.4	0.601	164.4
3.800	0.876	131.3	1.267	-5.6	0.038	14.9	0.605	163.0
3.900	0.869	128.9	1.265	-8.6	0.040	15.7	0.605	161.8
4.000	0.866	126.2	1.252	-11.1	0.041	10.2	0.602	160.3
4.200	0.851	121.7	1.285	-16.2	0.040	8.7	0.586	159.0
4.400	0.840	116.7	1.322	-22.3	0.042	7.7	0.582	156.6
4.500	0.836	113.9	1.343	-25.5	0.044	6.0	0.583	155.2
4.600	0.832	111.6	1.365	-29.0	0.047	5.7	0.583	154.3
4.800	0.821	105.7	1.415	-35.8	0.050	2.0	0.585	152.1
5.000	0.805	98.8	1.483	-43.6	0.056	-4.1	0.592	149.2
5.200	0.783	91.8	1.549	-51.8	0.059	-9.0	0.604	146.3
5.400	0.752	83.9	1.631	-60.6	0.062	-16.2	0.620	144.1
5.500	0.734	80.2	1.658	-64.9	0.065	-18.9	0.628	142.8
5.600	0.714	76.1	1.703	-70.0	0.066	-23.4	0.641	141.5
5.800	0.656	67.3	1.791	-79.7	0.070	-32.0	0.666	139.5
6.000	0.587	57.4	1.893	-90.6	0.073	-41.5	0.695	138.7
6.200	0.494	45.8	1.997	-102.5	0.075	-51.6	0.729	136.6
6.400	0.374	31.5	2.096	-116.3	0.076	-63.3	0.769	134.6
6.500	0.303	23.5	2.124	-122.7	0.075	-69.9	0.788	133.4
6.600	0.229	13.6	2.155	-129.9	0.073	-76.8	0.809	132.3
6.800	0.079	-26.8	2.143	-145.1	0.067	-89.3	0.840	129.0
7.000	0.116	-152.8	2.078	-159.4	0.063	-101.5	0.874	125.7
7.200	0.240	-179.6	2.008	-171.7	0.056	-113.7	0.886	123.0
7.400	0.352	164.3	1.894	174.2	0.046	-126.4	0.887	118.2
7.500	0.394	158.7	1.824	167.5	0.042	-134.1	0.883	115.9
7.600	0.436	151.2	1.768	161.2	0.039	-142.6	0.886	113.5
7.800	0.497	139.2	1.663	149.3	0.030	-163.8	0.872	108.6
8.000	0.536	126.7	1.587	137.2	0.025	165.8	0.858	102.2
8.200	0.564	113.4	1.530	124.8	0.018	116.4	0.849	94.9
8.400	0.575	98.5	1.455	110.7	0.027	66.5	0.846	86.0
8.500	0.570	91.0	1.413	103.5	0.033	49.5	0.843	81.5
8.600	0.577	81.8	1.369	96.0	0.040	31.6	0.834	76.1
8.800	0.541	63.6	1.245	80.9	0.058	-0.7	0.814	67.1
9.000	0.497	45.2	1.105	66.6	0.069	-26.2	0.773	59.8
9.200	0.439	27.2	0.960	53.7	0.073	-47.4	0.740	54.6
9.400	0.381	12.6	0.829	43.5	0.065	-60.9	0.730	53.4
9.500	0.354	3.8	0.787	38.6	0.067	-59.8	0.747	51.7
9.600	0.344	-4.1	0.736	33.3	0.073	-63.3	0.741	49.9
9.800	0.287	-19.2	0.655	25.2	0.074	-83.8	0.718	47.3
10.000	0.288	-34.5	0.622	17.0	0.068	-86.2	0.712	46.8

CHIP HANDLING**DIE ATTACHMENT**

Die attach can be accomplished with a Au-Sn (300 ± 10 °C) performs in a forming gas environment. Epoxy die attach is not recommended.

BONDING

Gate and drain bonding wires should be minimum length, semi-hard gold wire (3 - 8 % elongation) 30 microns or less in diameter.

Bonding should be performed with a wedge tip that has a taper of approximately 15 %.

Die attach and bonding time should be kept to a minimum. As a general rule, the bonding operation should be kept within a 280 °C _ 5 minute curve. If longer periods are required, the temperature should be lowered.

PRECAUTIONS

The user must operate in a clean, dry environment.

The chip channel is glassivated for mechanical protection only and does not preclude the necessity of a clean environment.

The bonding equipment should be periodically checked for sources of surge voltage and should be properly grounded at all times. In fact, all test and handling equipment should be grounded to minimize the possibilities of static discharge.

[MEMO]

No part of this document may be copied or reproduced in any form or by any means without the prior written consent of NEC Corporation. NEC Corporation assumes no responsibility for any errors which may appear in this document.

NEC Corporation does not assume any liability for infringement of patents, copyrights or other intellectual property rights of third parties by or arising from use of a device described herein or any other liability arising from use of such device. No license, either express, implied or otherwise, is granted under any patents, copyrights or other intellectual property rights of NEC Corporation or others.

While NEC Corporation has been making continuous effort to enhance the reliability of its semiconductor devices, the possibility of defects cannot be eliminated entirely. To minimize risks of damage or injury to persons or property arising from a defect in an NEC semiconductor device, customer must incorporate sufficient safety measures in its design, such as redundancy, fire-containment, and anti-failure features.

NEC devices are classified into the following three quality grades:

"Standard", "Special", and "Specific". The Specific quality grade applies only to devices developed based on a customer designated "quality assurance program" for a specific application. The recommended applications of a device depend on its quality grade, as indicated below. Customers must check the quality grade of each device before using it in a particular application.

Standard: Computers, office equipment, communications equipment, test and measurement equipment, audio and visual equipment, home electronic appliances, machine tools, personal electronic equipment and industrial robots

Special: Transportation equipment (automobiles, trains, ships, etc.), traffic control systems, anti-disaster systems, anti-crime systems, safety equipment and medical equipment (not specifically designed for life support)

Specific: Aircrafts, aerospace equipment, submersible repeaters, nuclear reactor control systems, life support systems or medical equipment for life support, etc.

The quality grade of NEC devices in "Standard" unless otherwise specified in NEC's Data Sheets or Data Books. If customers intend to use NEC devices for applications other than those specified for Standard quality grade, they should contact NEC Sales Representative in advance.

Anti-radioactive design is not implemented in this product.