

μPD5904T7K

R09DS0045EJ0200

Rev.2.00

Dec 11, 2012

CMOS Integrated Circuits High Power SP4T Switch

DESCRIPTION

The μPD5904T7K is a CMOS MMIC SP4T (Single Pole Four Throw) switch for GSM and UMTS/LTE main Antenna switching and other High Power RF switching applications up to +35 dBm.

This device can operate frequency from 0.05 to 6.0 GHz, having low insertion loss and high isolation.

This device is housed in a 12-pin plastic QFN (Quad Flat Non-Leaded) (T7K) package.

FEATURES

- Low control voltage : $V_{cont} = 1.3 \text{ V MIN.}, V_{DD} = 2.3 \text{ V MIN.}$
- Low insertion loss : $L_{ins} = 0.4 \text{ dB TYP. @ } f = 1 \text{ GHz}$
: $L_{ins} = 0.5 \text{ dB TYP. @ } f = 2 \text{ GHz}$
- High isolation : $ISL = 35 \text{ dB TYP. @ } f = 1 \text{ GHz}$
: $ISL = 30 \text{ dB TYP. @ } f = 2 \text{ GHz}$
- High Handling power : $P_{in(0.1dB)} = +38 \text{ dBm TYP. @ } f = 0.9/2 \text{ GHz}$
- High-density surface mounting : 12-pin plastic QFN (T7K) package (2.0 × 2.0 × 0.6 mm)
- No DC blocking capacitors required.

APPLICATIONS

- GSM and UMTS/LTE main Antenna switching
- Diversity Antenna switching
- Antenna tuning Application

ORDERING INFORMATION

Part Number	Order Number	Package	Marking	Supplying Form
μPD5904T7K-E2	μPD5904T7K-E2-A	12-pin plastic QFN (T7K) (Pb-Free)	5904	<ul style="list-style-type: none"> • Embossed tape 8 mm wide • Pin 10, 11 and 12 face the perforation side of the tape • Qty 3 kpcs/reel

Remark To order evaluation samples, please contact your nearby sales office.

Part number for sample order: μPD5904T7K-A




CAUTION

Although this device is designed to be as robust as possible, ESD (Electrostatic Discharge) can damage this device. This device must be protected at all times from ESD. Static charges may easily produce potentials of several kilovolts on the human body or equipment, which can discharge without detection. Industry-standard ESD precautions must be employed at all times.

The mark <R> shows major revised points.


The revised points can be easily searched by copying an "<R>" in the PDF file and specifying it in the "Find what:" field.

<R> PIN CONNECTIONS AND INTERNAL BLOCK DIAGRAM

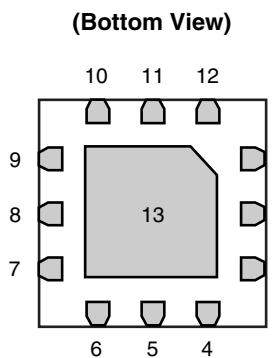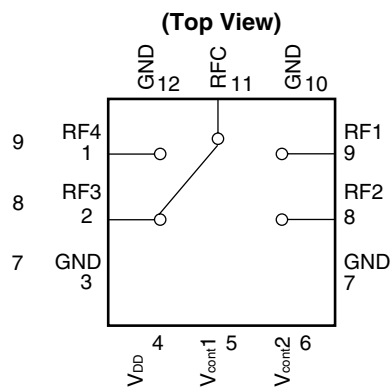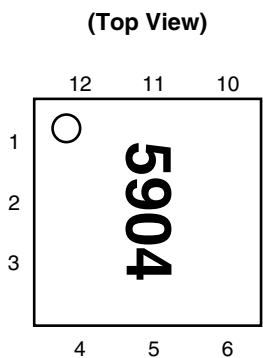

Pin No.	Pin Name
1	RF4
2	RF3
3	GND
4	V _{DD}
5	V _{cont1}
6	V _{cont2}
7	GND
8	RF2
9	RF1
10	GND
11	RFC
12	GND
13	GND

BLOCK DIAGRAM

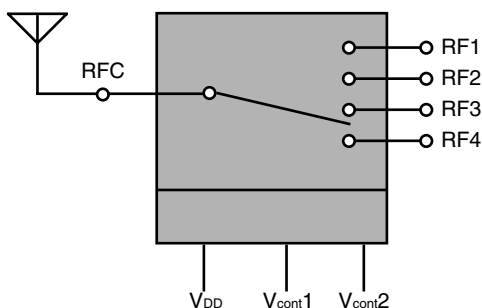

SW TRUTH TABLE

V _{cont1}	V _{cont2}	RFC–RF1	RFC–RF2	RFC–RF3	RFC–RF4
High	High	ON	OFF	OFF	OFF
High	Low	OFF	ON	OFF	OFF
Low	High	OFF	OFF	ON	OFF
Low	Low	OFF	OFF	OFF	ON

ABSOLUTE MAXIMUM RATINGS (T_A = +25°C, unless otherwise specified)

Parameter	Symbol	Ratings	Unit
Supply Voltage	V _{DD}	3.6	V
Control Voltage	V _{cont}	3.6	V
Input Power	P _{in}	+38	dBm
Operating Ambient Temperature	T _A	–40 to +85	°C
Storage Temperature	T _{stg}	–55 to +125	°C

RECOMMENDED OPERATING RANGE (T_A = +25°C, unless otherwise specified)

Parameter	Symbol	MIN.	TYP.	MAX.	Unit
Operating Frequency	f	0.05	–	6.0	GHz
Supply Voltage	V _{DD}	2.3	–	3.3	V
Control Voltage (High)	V _{cont (H)} ^{Note}	1.3	–	V _{DD}	V
Control Voltage (Low)	V _{cont (L)}	0	–	0.4	V

Note: V_{cont} ≤ V_{DD}

ELECTRICAL CHARACTERISTICS

($T_A = +25^\circ\text{C}$, $V_{DD} = 2.5\text{ V}$, $V_{\text{cont (H)}} = 1.8\text{ V}$, $V_{\text{cont (L)}} = 0\text{ V}$, $Z_O = 50\ \Omega$, unless otherwise specified)

Parameter	Symbol	Path	Test Conditions	MIN.	TYP.	MAX.	Unit
Insertion Loss	$L_{\text{ins}1}$	RFC –	$f = 0.05\text{ to }0.5\text{ GHz}$	–	0.35	0.50	dB
	$L_{\text{ins}2}$	RF1, 2, 3, 4	$f = 0.5\text{ to }1.0\text{ GHz}$	–	0.40	0.55	dB
	$L_{\text{ins}3}$		$f = 1.0\text{ to }2.0\text{ GHz}$	–	0.50	0.65	dB
	$L_{\text{ins}4}$		$f = 2.0\text{ to }2.7\text{ GHz}$	–	0.55	0.75	dB
	$L_{\text{ins}5}$		$f = 2.7\text{ to }3.8\text{ GHz}$	–	0.60	0.80	dB
	$L_{\text{ins}6}$		$f = 3.8\text{ to }6.0\text{ GHz}$	–	0.75	0.95	dB
Isolation	ISL1	RFC –	$f = 0.05\text{ to }0.5\text{ GHz}$	30	40	–	dB
	ISL2	RF1, 2, 3, 4	$f = 0.5\text{ to }1.0\text{ GHz}$	25	35	–	dB
	ISL3		$f = 1.0\text{ to }2.0\text{ GHz}$	20	30	–	dB
	ISL4		$f = 2.0\text{ to }2.7\text{ GHz}$	15	25	–	dB
	ISL5		$f = 2.7\text{ to }3.8\text{ GHz}$	15	25	–	dB
	ISL6		$f = 3.8\text{ to }6.0\text{ GHz}$	10	20	–	dB
Return Loss (RFC)	$RL_{(C)1}$	RFC –	$f = 0.05\text{ to }3.8\text{ GHz}$	15	25	–	dB
	$RL_{(C)2}$	RF1, 2, 3, 4	$f = 3.8\text{ to }6.0\text{ GHz}$	10	17	–	dB
Return Loss (RF1,2,3,4)	$RL_{(RF)1}$	RF1, 2, 3, 4	$f = 0.05\text{ to }3.8\text{ GHz}$	15	25	–	dB
	$RL_{(RF)2}$		$f = 3.8\text{ to }6.0\text{ GHz}$	10	17	–	dB
0.1 dB Loss Compression Input Power	$P_{\text{in (0.1 dB)1}}$	RFC –	$f = 0.9\text{ GHz}$	+36.0	+38.0 Note	–	dBm
	$P_{\text{in (0.1 dB)2}}$	RF1, 2, 3, 4	$f = 2.0\text{ GHz}$	+36.0	+38.0 Note	–	dBm
Harmonics	2f0 (L)	RFC –	$f = 0.9\text{ GHz}$,	75	80	–	dBc
	3f0 (L)	RF1, 2, 3, 4	$P_{\text{in}} = +35\text{ dBm CW}$	70	75	–	
	2f0 (H)	RFC –	$f = 2.0\text{ GHz}$,	75	85	–	dBc
	3f0 (H)	RF1, 2, 3, 4	$P_{\text{in}} = +33\text{ dBm CW}$	70	80	–	
2nd Order Inter Modulation Distortion	IMD2(L)	RFC –	$f = 835\text{ MHz}$, $P_{\text{in}} = +20\text{ dBm}$ $f = 45\text{ MHz}$, $P_{\text{in}} = -15\text{ dBm}$	–	-98	-93	dBc
	IMD2(H)	RF1, 2, 3, 4	$f = 1\ 950\text{ MHz}$, $P_{\text{in}} = +20\text{ dBm}$ $f = 190\text{ MHz}$, $P_{\text{in}} = -15\text{ dBm}$	–	-105	-100	
3rd Order Inter Modulation Distortion	IMD3(L)	RFC –	$f = 835\text{ MHz}$, $P_{\text{in}} = +20\text{ dBm}$ $f = 790\text{ MHz}$, $P_{\text{in}} = -15\text{ dBm}$	–	-110	-105	dBc
	IMD3(H)	RF1, 2, 3, 4	$f = 1\ 950\text{ MHz}$, $P_{\text{in}} = +20\text{ dBm}$ $f = 1\ 760\text{ MHz}$, $P_{\text{in}} = -15\text{ dBm}$	–	-110	-105	
Triple Beat Ratio	TBR(L)	RFC –	$f = 836 \pm 0.5\text{ MHz}$, $P_{\text{in}} = +21.5\text{ dBm}$ $f = 881.5\text{ MHz}$, $P_{\text{in}} = -30\text{ dBm}$	75	80	–	dBc
	TBR(H)	RF1, 2, 3, 4	$f = 1\ 880.5 \pm 0.5\text{ MHz}$, $P_{\text{in}} = +21.5\text{ dBm}$ $f = 1\ 960\text{ MHz}$, $P_{\text{in}} = -30\text{ dBm}$	75	80	–	
Input 2nd order Intercept Point	$IIP_{2(\text{Cel})}$	RFC –	$f = 836.6\text{ MHz}$, $P_{\text{in}} = +24\text{ dBm}$ $f = 1718\text{ MHz}$, $P_{\text{in}} = -20\text{ dBm}$	105	110	–	dBm
	$IIP_{2(\text{PCS})}$	RF1, 2, 3, 4	$f = 1\ 885\text{ MHz}$, $P_{\text{in}} = +24\text{ dBm}$ $f = 3\ 850\text{ MHz}$, $P_{\text{in}} = -20\text{ dBm}$	105	110	–	

Note: Absolute Maximum Ratings


ELECTRICAL CHARACTERISTICS

($T_A = +25^\circ\text{C}$, $V_{DD} = 2.5\text{ V}$, $V_{\text{cont}}(\text{H}) = 1.8\text{ V}$, $V_{\text{cont}}(\text{L}) = 0\text{ V}$, $Z_O = 50\ \Omega$, unless otherwise specified)

Parameter	Symbol	Path	Test Conditions	MIN.	TYP.	MAX.	Unit
Switch Control Speed	t_{sw}	RFC – RF1, 2, 3, 4	50% CTL to 90/10%	–	1.5	3	μs
Supply Current	I_{DD}	–	No RF	–	130	250	μA
Control Current 1	$I_{\text{cont}}1(\text{H})$	–	$V_{\text{cont}}1$: High No RF	–	–	1	μA
	$I_{\text{cont}}1(\text{L})$	–	$V_{\text{cont}}1$: Low No RF	–	–	1	
Control Current 2	$I_{\text{cont}}2(\text{H})$	–	$V_{\text{cont}}2$: High No RF	–	–	1	μA
	$I_{\text{cont}}2(\text{L})$	–	$V_{\text{cont}}2$: Low No RF	–	–	1	


EOL Product

<R> EVALUATION CIRCUIT

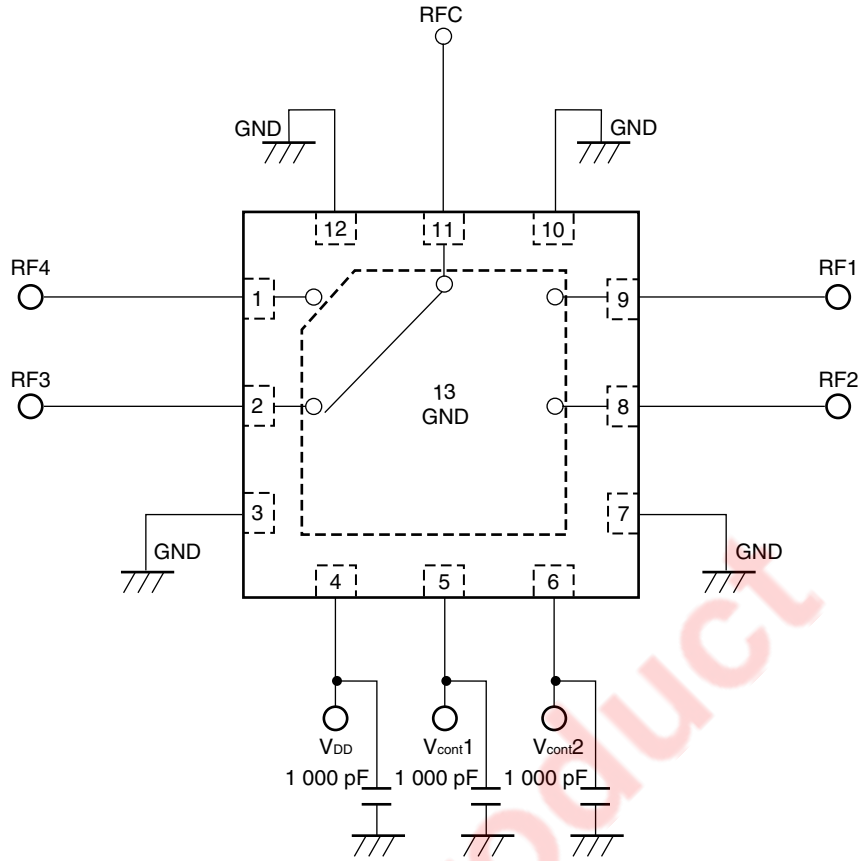

The application circuits and their parameters are for reference only and are not intended for use in actual design-ins.

APPLICATION INFORMATION

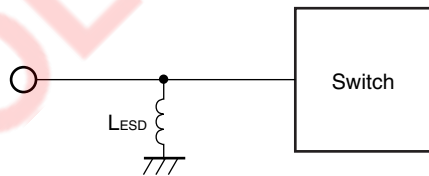


- L_{ESD} provides a means to increase the ESD protection on a specific RF port, typically the port attached to the antenna.


TYPICAL CHARACTERISTICS

($T_A = +25^\circ\text{C}$, $V_{DD} = 2.5\text{ V}$, $V_{\text{cont (H)}} = 1.8\text{ V}$, $V_{\text{cont (L)}} = 0\text{ V}$, $Z_O = 50\ \Omega$, unless otherwise specified)


RFC-RF1/RF2/RF3/RF4
INSERTION LOSS vs. FREQUENCY

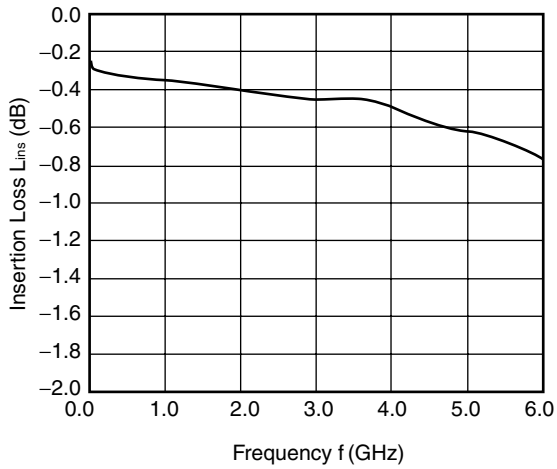


RFC-RF2/RF3/RF4 (RFC-RF1 ON)
ISOLATION vs. FREQUENCY

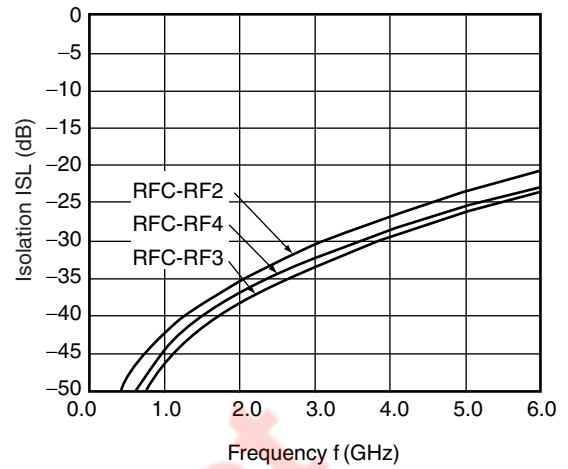

RFC RETURN LOSS vs. FREQUENCY

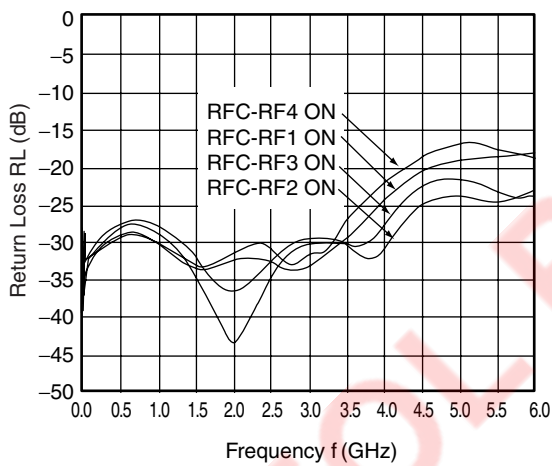


RF1/RF2/RF3/RF4 RETURN LOSS vs. FREQUENCY

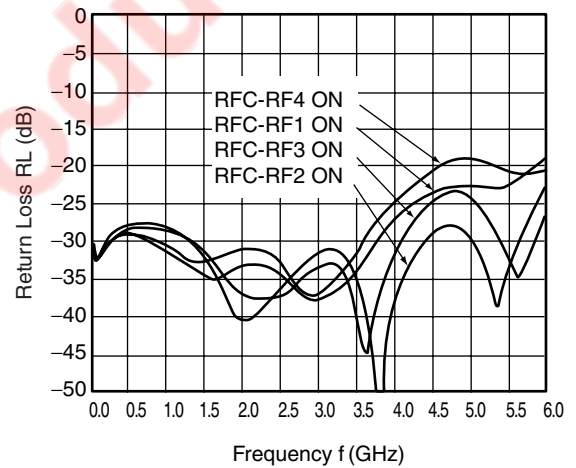


Remark The graphs indicate nominal characteristics.


RFC-RF1/RF2/RF3/RF4 INSERTION LOSS vs. SUPPLY VOLTAGE

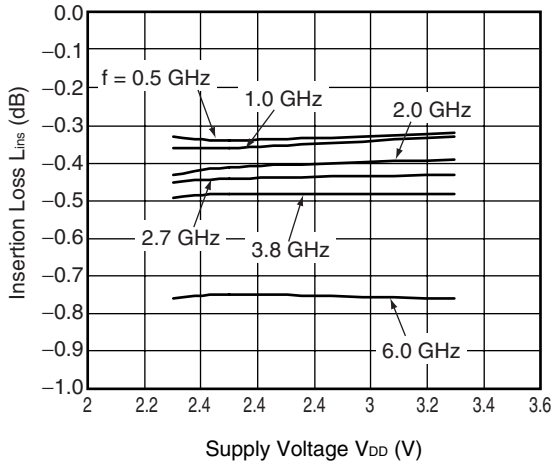


RFC-RF1/RF2/RF3/RF4 ISOLATION vs. SUPPLY VOLTAGE

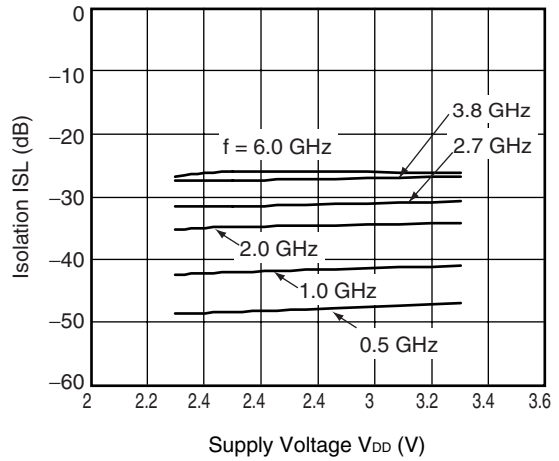


RFC-RF1/RF2/RF3/RF4 RETURN LOSS vs. SUPPLY VOLTAGE

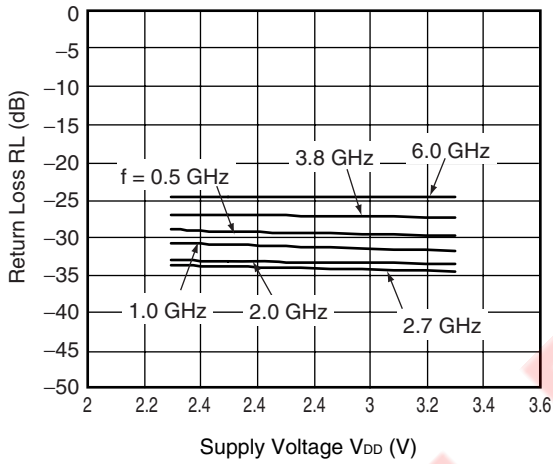


RF1/RF2/RF3/RF4-RFC RETURN LOSS vs. SUPPLY VOLTAGE

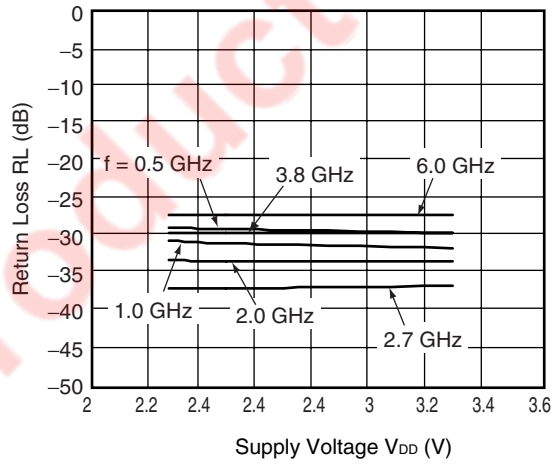

RFC-RF1/RF2/RF3/RF4 INSERTION LOSS vs. INPUT POWER f = 0.9 GHz

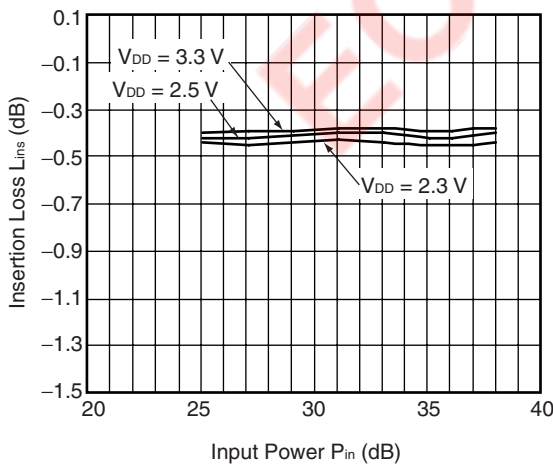


RFC-RF1/RF2/RF3/RF4 INSERTION LOSS vs. INPUT POWER f = 2 GHz

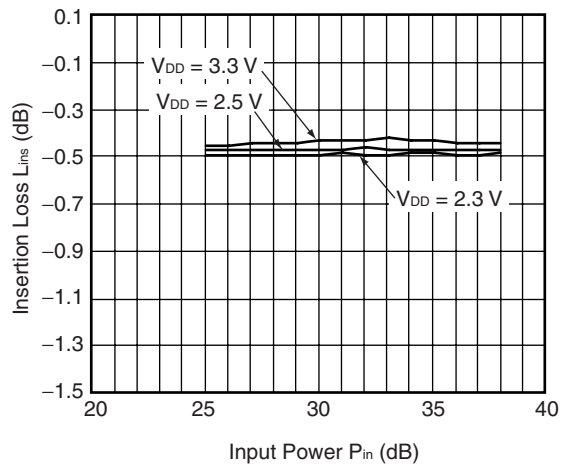


Remark The graphs indicate nominal characteristics.


RFC-RF1/RF2/RF3/RF4 2nd HARMONICS vs. INPUT POWER $f = 0.9$ GHz

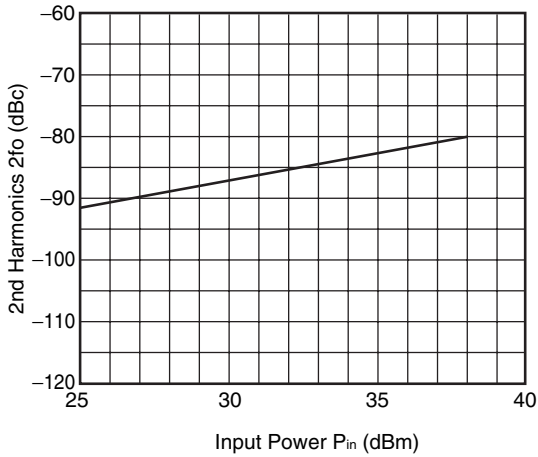


RFC-RF1/RF2/RF3/RF4 3rd HARMONICS $3f_o$ vs. INPUT POWER $f = 0.9$ GHz

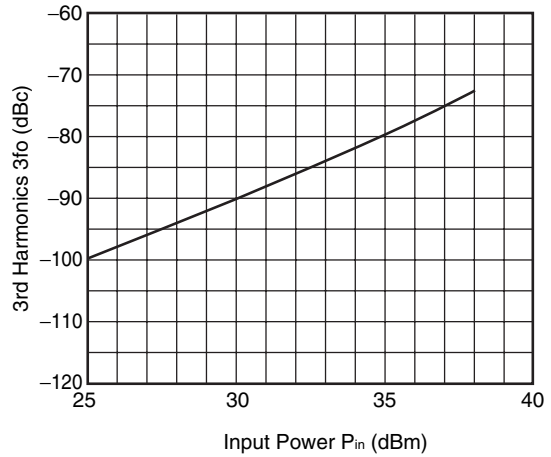


RFC-RF1/RF2/RF3/RF4 2nd HARMONICS vs. INPUT POWER $f = 2$ GHz

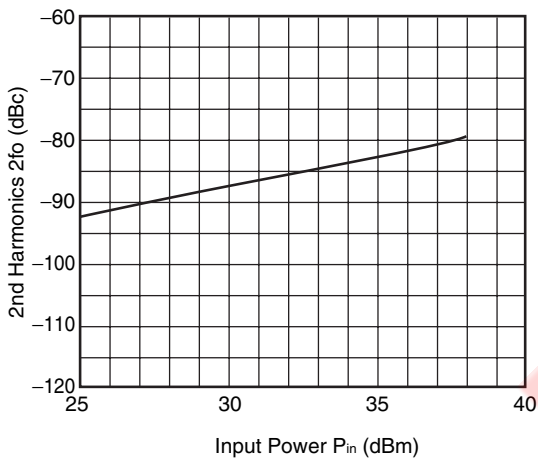


RFC-RF1/RF2/RF3/RF4 3rd HARMONICS $3f_o$ vs. INPUT POWER $f = 2$ GHz

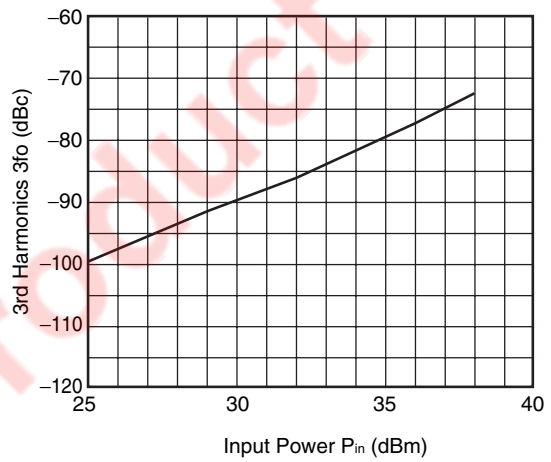

RFC-RF1/RF2/RF3/RF4 INSERTION LOSS vs. OPERATING AMBIENT TEMPERATURE $f = 0.5$ GHz

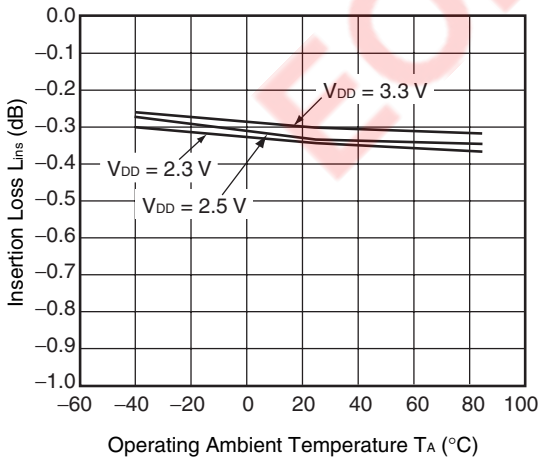


RFC-RF1/RF2/RF3/RF4 INSERTION LOSS vs. OPERATING AMBIENT TEMPERATURE $f = 1$ GHz

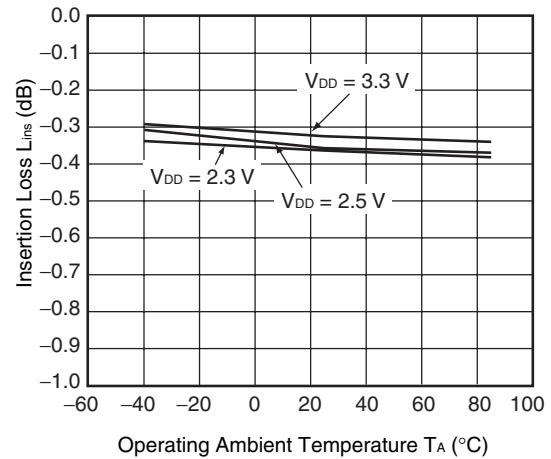


Remark The graphs indicate nominal characteristics.


RFC-RF1/RF2/RF3/RF4 INSERTION LOSS vs. OPERATING AMBIENT TEMPERATURE $f = 2$ GHz

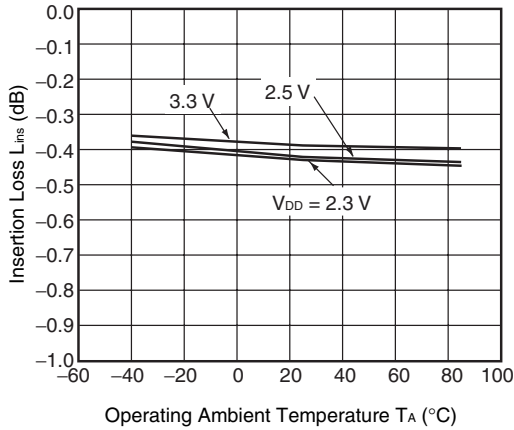


RFC-RF1/RF2/RF3/RF4 INSERTION LOSS vs. OPERATING AMBIENT TEMPERATURE $f = 2.7$ GHz

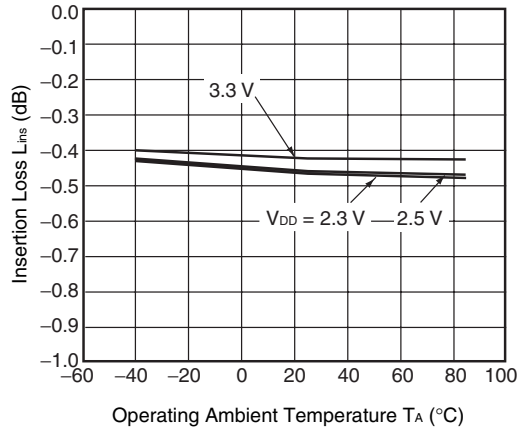


RFC-RF1/RF2/RF3/RF4 INSERTION LOSS vs. OPERATING AMBIENT TEMPERATURE $f = 3.8$ GHz

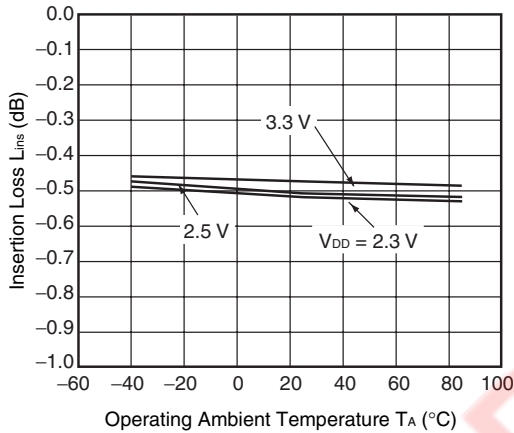


RFC-RF1 INSERTION LOSS vs. OPERATING AMBIENT TEMPERATURE $f = 6$ GHz

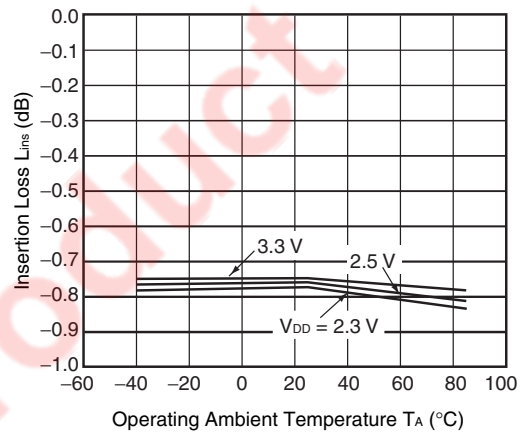

RFC-RF1/RF2/RF3/RF4 ISOLATION vs. OPERATING AMBIENT TEMPERATURE $f = 0.5$ GHz

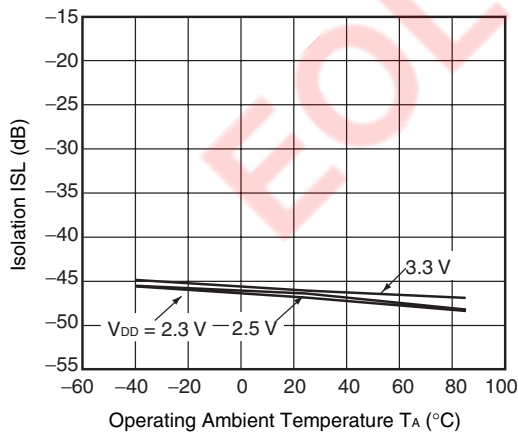


RFC-RF1/RF2/RF3/RF4 ISOLATION vs. OPERATING AMBIENT TEMPERATURE $f = 1$ GHz

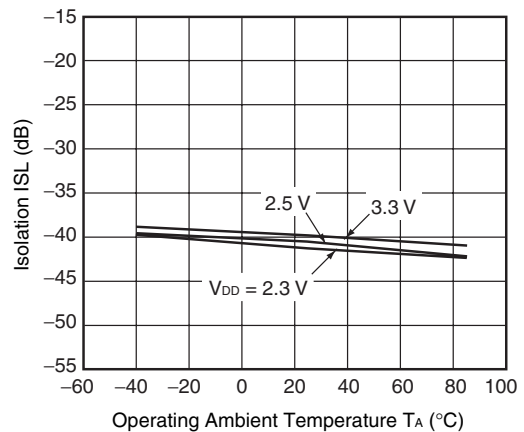


Remark The graphs indicate nominal characteristics.


RFC-RF1/RF2/RF3/RF4 ISOLATION vs. OPERATING AMBIENT TEMPERATURE f = 2 GHz

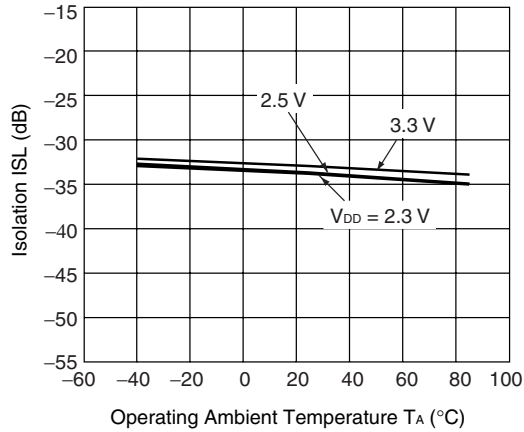


RFC-RF1/RF2/RF3/RF4 ISOLATION vs. OPERATING AMBIENT TEMPERATURE f = 2.7 GHz

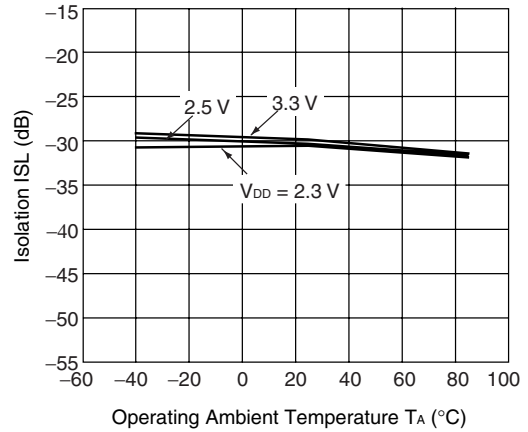


RFC-RF1/RF2/RF3/RF4 ISOLATION vs. OPERATING AMBIENT TEMPERATURE f = 3.8 GHz

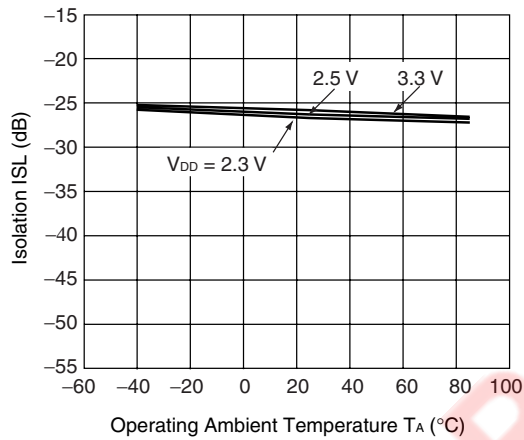


RFC-RF1/RF2/RF3/RF4 ISOLATION vs. OPERATING AMBIENT TEMPERATURE f = 6 GHz

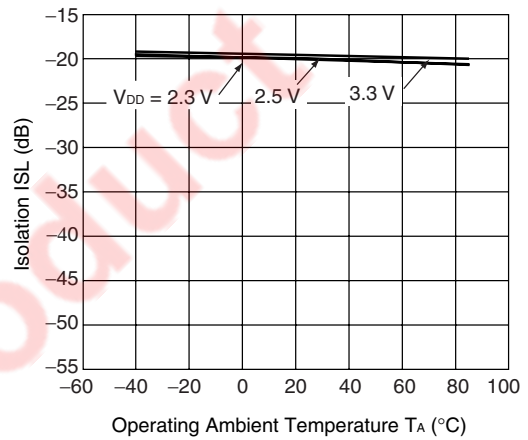

RFC RETURN LOSS vs. OPERATING AMBIENT TEMPERATURE f = 3.8 GHz

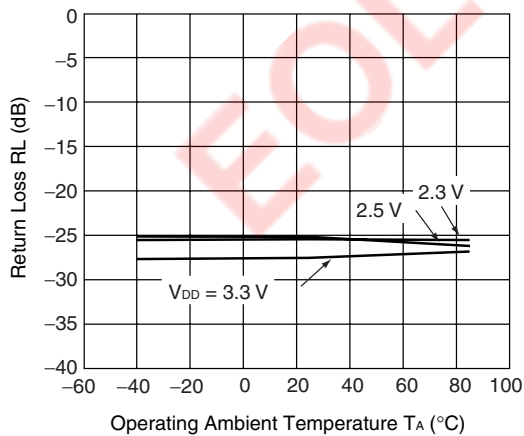


RFC RETURN LOSS vs. OPERATING AMBIENT TEMPERATURE f = 6.0 GHz

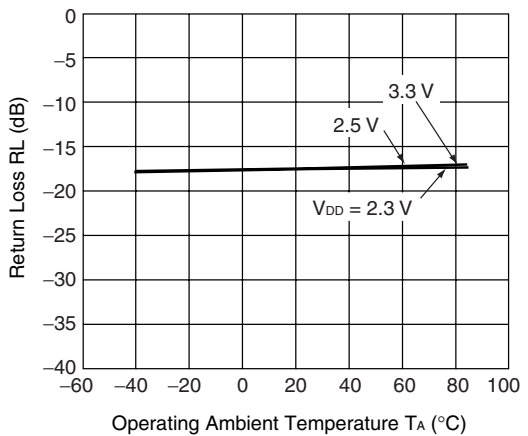


Remark The graphs indicate nominal characteristics.

RF 1/RF2/RF3/RF4 RETURN LOSS vs.
OPERATING AMBIENT TEMPERATURE f = 3.8 GHz

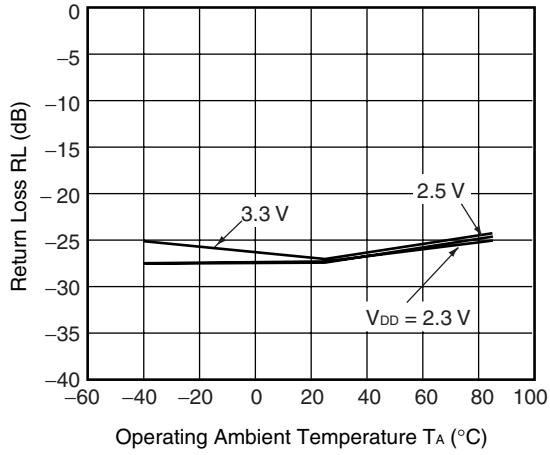

RRF1/RF2/RF3/RF4 RETURN LOSS vs.
OPERATING AMBIENT TEMPERATURE f = 6 GHz


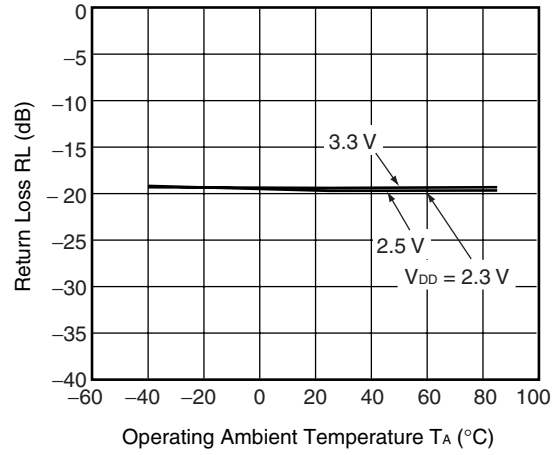


Remark The graphs indicate nominal characteristics.

EOL Product

MOUNTING PAD LAYOUT DIMENSIONS

12-PIN PLASTIC QFN (T7K) (UNIT: mm)

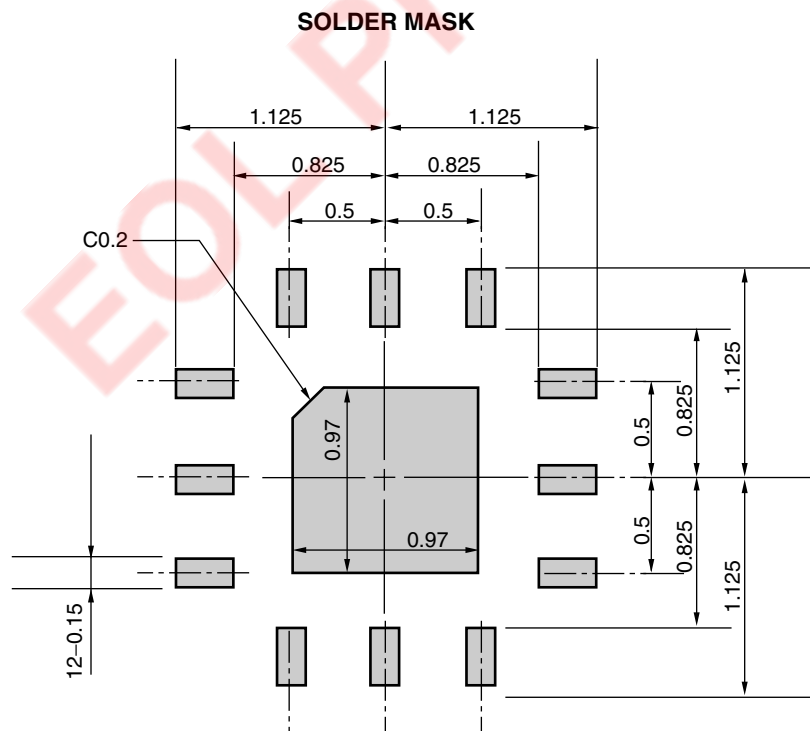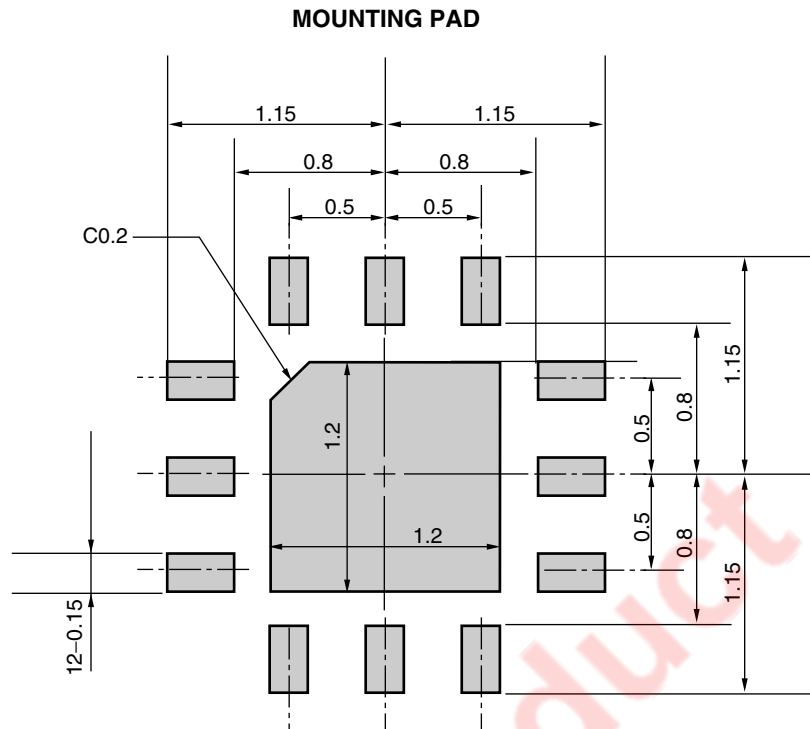

Solder thickness : 0.1 mm

Remark The mounting pad layout in this document is for reference only.
When designing PCB, please consider workability of mounting, solder joint reliability, prevention of solder bridge and so on, in order to optimize the design.

RECOMMENDED SOLDERING CONDITIONS

This product should be soldered and mounted under the following recommended conditions. For soldering methods and conditions other than those recommended below, contact your nearby sales office.

Soldering Method	Soldering Conditions	Condition Symbol
Infrared Reflow	Peak temperature (package surface temperature) : 260°C or below Time at peak temperature : 10 seconds or less Time at temperature of 220°C or higher : 60 seconds or less Preheating time at 120 to 180°C : 120±30 seconds Maximum number of reflow processes : 3 times Maximum chlorine content of rosin flux (% mass) : 0.2% (Wt.) or below	IR260
Partial Heating	Peak temperature (terminal temperature) : 350°C or below Soldering time (per side of device) : 3 seconds or less Maximum chlorine content of rosin flux (% mass) : 0.2% (Wt.) or below	HS350

CAUTION

Do not use different soldering methods together (except for partial heating).

EOL Product

Revision History	μPD5904T7K Data Sheet
-------------------------	------------------------------

Rev.	Date	Description	
		Page	Summary
1.00	Jul 24, 2012	–	First edition issued
2.00	Dec 11, 2012	p.2	GND is added as Pin No.13 in PIN CONNECTIONS AND INTERNAL BLOCK DIAGRAM.
		p.5	GND is added in EVALUATION CIRCUIT.

EOL Product

All trademarks and registered trademarks are the property of their respective owners.

Notice

1. Descriptions of circuits, software and other related information in this document are provided only to illustrate the operation of semiconductor products and application examples. You are fully responsible for the incorporation of these circuits, software, and information in the design of your equipment. Renesas Electronics assumes no responsibility for any losses incurred by you or third parties arising from the use of these circuits, software, or information.
2. Renesas Electronics has used reasonable care in preparing the information included in this document, but Renesas Electronics does not warrant that such information is error free. Renesas Electronics assumes no liability whatsoever for any damages incurred by you resulting from errors in or omissions from the information included herein.
3. Renesas Electronics does not assume any liability for infringement of patents, copyrights, or other intellectual property rights of third parties by or arising from the use of Renesas Electronics products or technical information described in this document. No license, express, implied or otherwise, is granted hereby under any patents, copyrights or other intellectual property rights of Renesas Electronics or others.
4. You should not alter, modify, copy, or otherwise misappropriate any Renesas Electronics product, whether in whole or in part. Renesas Electronics assumes no responsibility for any losses incurred by you or third parties arising from such alteration, modification, copy or otherwise misappropriation of Renesas Electronics product.
5. Renesas Electronics products are classified according to the following two quality grades: "Standard" and "High Quality". The recommended applications for each Renesas Electronics product depends on the product's quality grade, as indicated below.
"Standard": Computers; office equipment; communications equipment; test and measurement equipment; audio and visual equipment; home electronic appliances; machine tools; personal electronic equipment; and industrial robots etc.
"High Quality": Transportation equipment (automobiles, trains, ships, etc.); traffic control systems; anti-disaster systems; anti-crime systems; and safety equipment etc.
Renesas Electronics products are neither intended nor authorized for use in products or systems that may pose a direct threat to human life or bodily injury (artificial life support devices or systems, surgical implantations etc.), or may cause serious property damages (nuclear reactor control systems, military equipment etc.). You must check the quality grade of each Renesas Electronics product before using it in a particular application. You may not use any Renesas Electronics product for any application for which it is not intended. Renesas Electronics shall not be in any way liable for any damages or losses incurred by you or third parties arising from the use of any Renesas Electronics product for which the product is not intended by Renesas Electronics.
6. You should use the Renesas Electronics products described in this document within the range specified by Renesas Electronics, especially with respect to the maximum rating, operating supply voltage range, movement power voltage range, heat radiation characteristics, installation and other product characteristics. Renesas Electronics shall have no liability for malfunctions or damages arising out of the use of Renesas Electronics products beyond such specified ranges.
7. Although Renesas Electronics endeavors to improve the quality and reliability of its products, semiconductor products have specific characteristics such as the occurrence of failure at a certain rate and malfunctions under certain use conditions. Further, Renesas Electronics products are not subject to radiation resistance design. Please be sure to implement safety measures to guard them against the possibility of physical injury, and injury or damage caused by fire in the event of the failure of a Renesas Electronics product, such as safety design for hardware and software including but not limited to redundancy, fire control and malfunction prevention, appropriate treatment for aging degradation or any other appropriate measures. Because the evaluation of microcomputer software alone is very difficult, please evaluate the safety of the final products or systems manufactured by you.
8. Please contact a Renesas Electronics sales office for details as to environmental matters such as the environmental compatibility of each Renesas Electronics product. Please use Renesas Electronics products in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive. Renesas Electronics assumes no liability for damages or losses occurring as a result of your noncompliance with applicable laws and regulations.
9. Renesas Electronics products and technology may not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable domestic or foreign laws or regulations. You should not use Renesas Electronics products or technology described in this document for any purpose relating to military applications or use by the military, including but not limited to the development of weapons of mass destruction. When exporting the Renesas Electronics products or technology described in this document, you should comply with the applicable export control laws and regulations and follow the procedures required by such laws and regulations.
10. It is the responsibility of the buyer or distributor of Renesas Electronics products, who distributes, disposes of, or otherwise places the product with a third party, to notify such third party in advance of the contents and conditions set forth in this document, Renesas Electronics assumes no responsibility for any losses incurred by you or third parties as a result of unauthorized use of Renesas Electronics products.
11. This document may not be reproduced or duplicated in any form, in whole or in part, without prior written consent of Renesas Electronics.
12. Please contact a Renesas Electronics sales office if you have any questions regarding the information contained in this document or Renesas Electronics products, or if you have any other inquiries.
(Note 1) "Renesas Electronics" as used in this document means Renesas Electronics Corporation and also includes its majority-owned subsidiaries.
(Note 2) "Renesas Electronics product(s)" means any product developed or manufactured by or for Renesas Electronics.



SALES OFFICES

Renesas Electronics Corporation

<http://www.renesas.com>

Refer to "<http://www.renesas.com/>" for the latest and detailed information.

California Eastern Laboratories, Inc.
4590 Patrick Henry Drive, Santa Clara, California 95054, U.S.A.
Tel: +1-408-919-2500, Fax: +1-408-988-0279

Renesas Electronics Europe Limited
Dukes Meadow, Millboard Road, Bourne End, Buckinghamshire, SL8 5FH, U.K
Tel: +44-1628-651-700, Fax: +44-1628-651-804

Renesas Electronics Europe GmbH
Arcadiastrasse 10, 40472 Düsseldorf, Germany
Tel: +49-211-65030, Fax: +49-211-6503-1327

Renesas Electronics (China) Co., Ltd.
7th Floor, Quantum Plaza, No.27 ZhiChunLu Haidian District, Beijing 100083, P.R.China
Tel: +86-10-8235-1155, Fax: +86-10-8235-7679

Renesas Electronics (Shanghai) Co., Ltd.
Unit 204, 205, AZIA Center, No.1233 Lujiazui Ring Rd., Pudong District, Shanghai 200120, China
Tel: +86-21-5877-1818, Fax: +86-21-6887-7858 / -7898

Renesas Electronics Hong Kong Limited
Unit 1601-1613, 16/F., Tower 2, Grand Century Place, 193 Prince Edward Road West, Mongkok, Kowloon, Hong Kong
Tel: +852-2886-9318, Fax: +852 2886-9022/9044

Renesas Electronics Taiwan Co., Ltd.
13F, No. 363, Fu Shing North Road, Taipei, Taiwan
Tel: +886-2-8175-9600, Fax: +886 2-8175-9670

Renesas Electronics Singapore Pte. Ltd.
80 Bendemeer Road, Unit #06-02 Hyflux Innovation Centre Singapore 339949
Tel: +65-6213-0200, Fax: +65-6213-0300

Renesas Electronics Malaysia Sdn.Bhd.
Unit 906, Block B, Menara Amcorp, Amcorp Trade Centre, No. 18, Jln Persiaran Barat, 46050 Petaling Jaya, Selangor Darul Ehsan, Malaysia
Tel: +60-3-7955-9390, Fax: +60-3-7955-9510

Renesas Electronics Korea Co., Ltd.
11F., Samik Lavied' or Bldg., 720-2 Yeoksam-Dong, Kangnam-Ku, Seoul 135-080, Korea
Tel: +82-2-558-3737, Fax: +82-2-558-5141