

ISL74420SLHEV1Z

Radiation Hardened Quad Clock Evaluation Board

Description

The ISL74420SLHEV1Z radiation hardened quad clock fanout IC evaluation board (shown in [Figure 3](#)) features the [ISL74420SLH](#).

The ISL74420SLHEV1Z provides users with mechanical switches for configuration, which ease user experimentation with frequency and delay selections and other configuration options.

The ISL74420SLHEV1Z is functionally similar to another evaluation board, the ISL74420SLHDEMO1Z, which is an example of a small footprint layout with SMD resistors to provide a user-defined power-up configuration.

Both versions of the ISL74420SLH boards support the I²C interface, which allows overriding the power-up pin-selected configuration.

The ISL74420SLH Datasheet provides further details regarding the I²C specifications. The included ISLUSBPMADAPT3Z and iRADNavigator software allow computer control of the ISL74420M. Refer to the *ISL74420x iRADNavigator GUI Software Manual* for instructions.

The ISL74420SLHEV1Z evaluation board and this accompanying manual provide a physical/electrical method for evaluating the ISL74420SLH stand-alone operation. However, before starting an evaluation, the reader should review the *ISL74420SLH Datasheet* for more detailed information about the device operation, function, and performance.

Features

- User settable switches for easy selection of frequency and phase configuration.
- Banana Plugs for bench supply connection to PVIN and VCCEXT inputs.
- SW3 (PVIN) for power cycling to enable strapping sense connection updates.
- 2-pin 0.1" spacing and coaxial connectors for the clock outputs.
- Enables I²C access for software control on internal device registers and associated operation.

Specifications

The ISL74420SLHEV1Z evaluation board is configured using switch settings for immediate evaluation of ISL74420SLH.

The board allows for other conditions to be evaluated with user switches strapping connections or I²C software control of the internal device registers.

The electrical ratings of the ISL74420SLHEV1Z evaluation board are shown in [Table 1](#).

Table 1. Electrical Ratings

Parameter	Rating
PVIN Supply Voltage	3V to 18V
VCCEXT Range	3V to 5.5V
Operating Frequency Range	25kHz to 50MHz
Output Phase Delay Selection	15° Increments
Temperature	-55°C to +125°C

Included Accessories

- ISLUSBPMADAPT3Z - USB to I²C/PMBus/SMBus adapter
- USB 2.0 cable - Type A male to type mini-B male

Contents

1. Functional Description	3
1.1 Operational Characteristics	3
1.2 Setup and Configuration	4
2. Board Design	5
2.1 Basic Layout	6
2.2 Layout Guidelines	6
2.3 User Switches Frequency and Phase Selection	6
2.4 Schematic Diagram	8
2.5 Bill of Materials	8
2.6 Board Layout	10
2.7 Configuration Scenarios: Selecting Clockout Frequency and Phase (Delay) Options	11
3. Typical Performance Graphs	12
4. Ordering Information	15
5. Revision History	15

1. Functional Description

ISL74420SLHEV1Z as shipped is tested and configured for the following:

- Core Oscillator: 48MHz (Leader Mode Enabled)
- PRESCALE: Divide-by-2
- CLKOUT0: 2MHz, 0° phase delay
- CLKOUT1: 2MHz, 180° phase delay
- CLKOUT2: 2MHz, 90° phase delay
- CLKOUT3: 2MHz, 270° phase delay

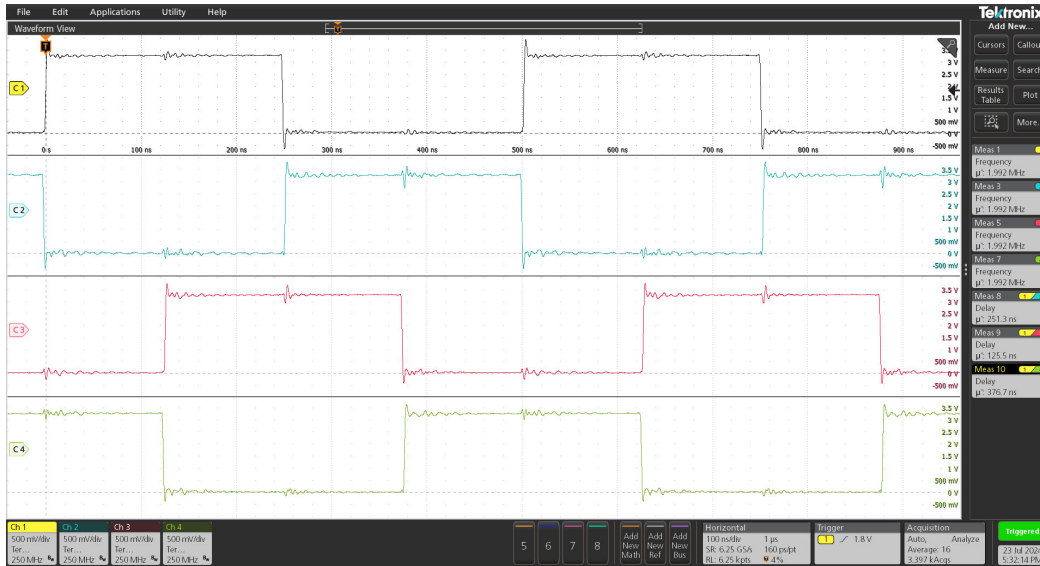


Figure 1. ISL74420SLHEV1Z as Shipped, Tested and Configured

This setup provides an example of ideal SYNC signals for an ISL73847 4-phase design, such as the ISL73847SEHEV3Z. Contact Renesas regarding the customer-specific sync output configuration options and discussion.

Photographs of the ISL74420SLHEV1Z are shown in [Figure 3](#) and [Figure 4](#).

The ISL74420SLHEV1Z evaluation board provides access to the device pins and convenient pads for connecting test equipment. For more information, see the schematic ([Figure 5](#)), PCB layers ([Figure 7](#) through [Figure 11](#)), and [Bill of Materials](#). Performance data taken using the ISL74420SLHEV1Z and basic lab equipment is shown in [Figure 12](#) through [Figure 25](#).

1.1 Operational Characteristics

The ISL74420SLHEV1Z only requires a single voltage supply, $3.0\text{V} < \text{PVIN} < 18\text{V}$, connected to the PVIN banana plug. The internal regulator creates a 3.3V VCC (50mA) supply for the ISL74420SLH. It is best to keep $\text{PVIN} > 3.6\text{V}$ when using the internal regulator, which is the default condition of the board. Applying the PVIN voltage results in the device outputting four continuous clocks as previously described.

- JP1 connects the part's VCC to its VCCEXT. Remove JP1 before providing VCCEXT from an external supply to the J6 banana jack.
- J7 is a connector that provides access to the CLKIN of the device, which enables the use of an external signal source. R16 can be installed if a termination resistor is required.

Review the datasheet regarding operational characteristics regarding OSCTUNE, MASTER, PRESCL, and OUTEN options.

1.2 Setup and Configuration

The following equipment is recommended for testing the board:

- 3V to 18V DC power supply (Set to 5V for initial evaluation)
- 4-channel 200MHz or higher oscilloscope
- As noted in the [Functional Description](#), the board comes shipped configured as an example for ideal SYNC signals for a 4-phase 90° shifted design
- To review detailed options regarding Setup and Configuration, review the Frequency and I2C Address Selection, and Phase Selection tables in the datasheet.

Complete the following steps to configure and use the board:

1. Connect and turn on a 5V power supply to the PVIN pin.
2. Use the oscilloscope to look at CLKOUT[0:3] waveforms. Proper probe grounding must be practiced when observing clean waveforms.
3. Advanced: When CLKOUT waveforms are observed, the user might wish to experiment with the results of switching between Leader and Follower modes. *Note:* The ISL74420SLHEV1Z board provides user-settable switches to ease experimentation with the ISL74420SLH. Review the Leader and Follower Configuration section in the datasheet to explore the effect on the four clock outputs of these modes and the external CLKIN capability.

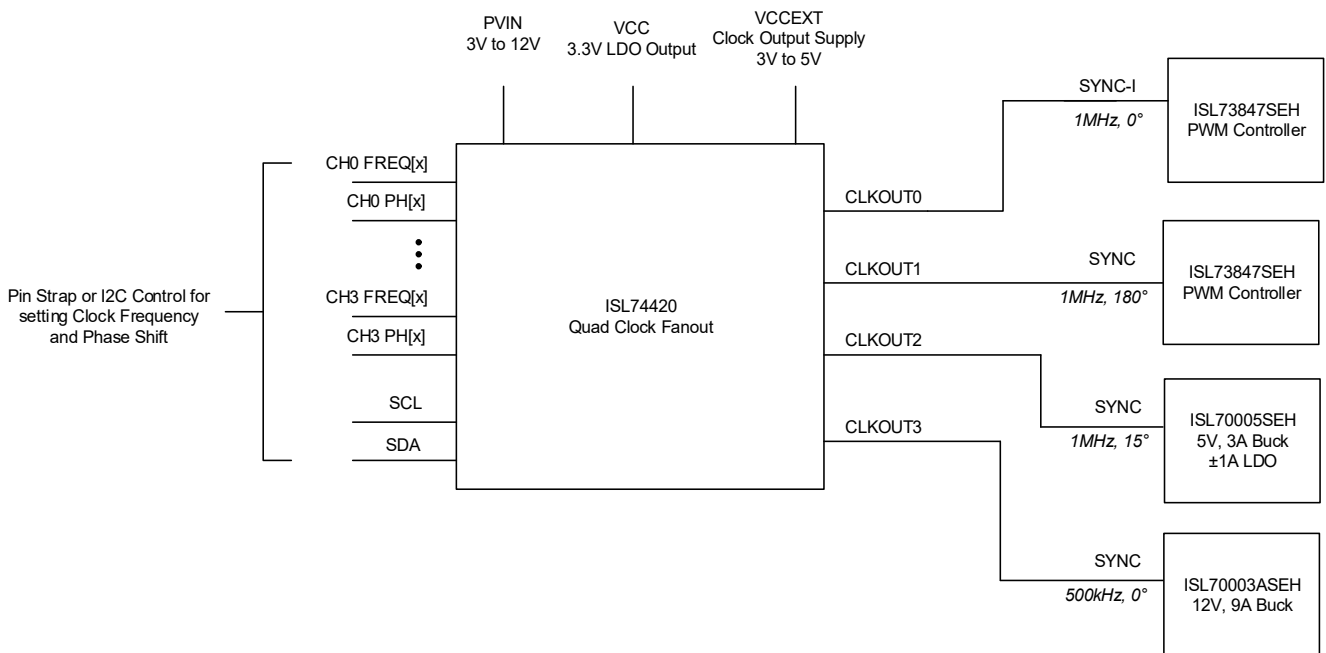


Figure 2. Example Evaluation Test Setup Block Diagram

2. Board Design

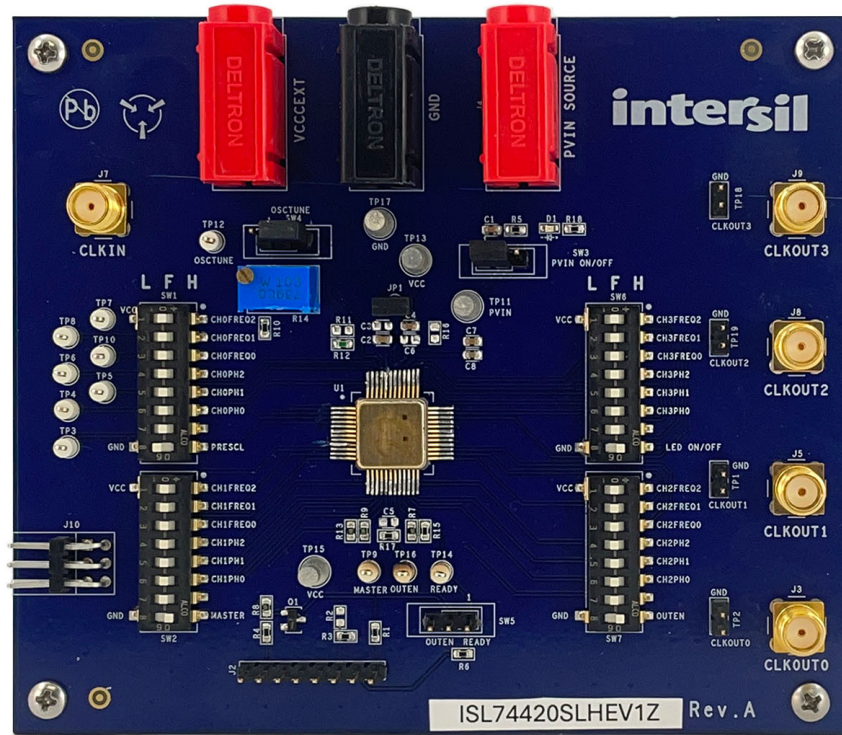


Figure 3. Evaluation Board (Top)

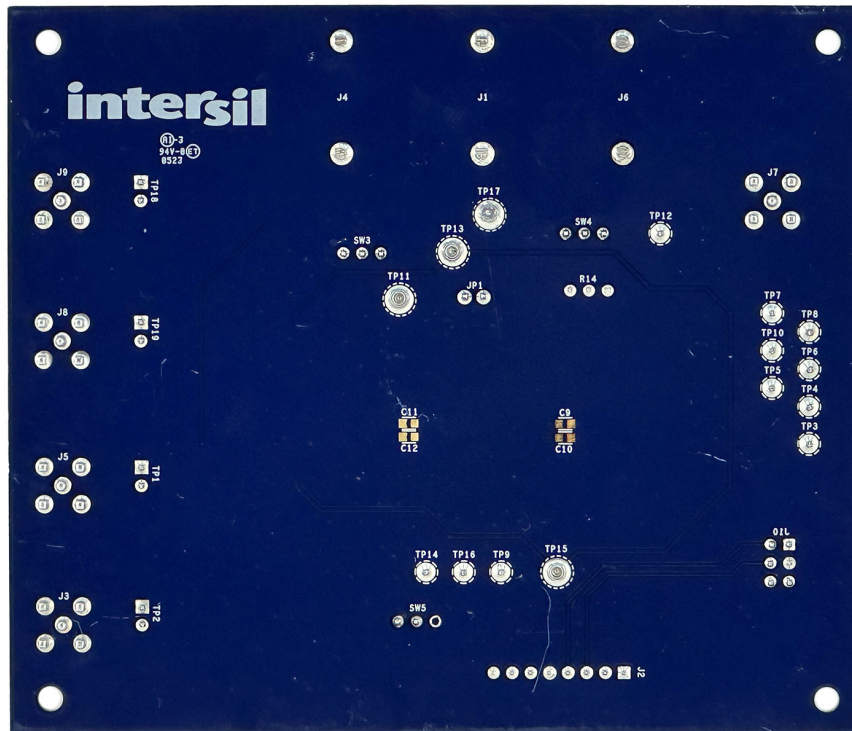


Figure 4. Evaluation Board (Bottom)

2.1 Basic Layout

The ISL74420SLH is located in the center of the board and is labeled U1. Connect the input power across the PVIN and GND banana receptacles. After a short power-on reset (POR) time, the four CLKOUT[0:3] signals can be measured on the output connectors. SW4 and the potentiometer R14 can be adjusted to tune the internal oscillator. These are connected to the OSCTUNE Pin 45 of the ISL74420SLH. Refer to the *ISL74420SLH Datasheet* (Core oscillator Tuning section) for detailed information regarding range and effect of the OSCTUNE control. Consult the schematic in [Figure 5](#) for more details.

2.2 Layout Guidelines

The ISL74420SLHEV1Z PCB layout has been optimized for ease of testing. Its clock outputs can be connected to external devices using two pin 0.1 pin connection or coaxial connections.

When incorporating the ISL74420SLH into a system, a few guidelines can ensure optimal electrical and noise performance. Analog circuits can conduct noise through paths that connect them to the outside world. These paths include the PVIN, VCC, VCCEXT, input to any device pin, and outputs. **Important:** Ensure these paths are kept away from known system noise sources.

When designing a new system, Renesas recommends decoupling the power supply pins (PVIN, VCC, and VCCEXT) for power supply filtering. If the traces to the supply lines are long, Renesas recommends using a larger 1 μ F capacitor at the point of entry for the supply and a smaller capacitor, such as a 0.1 μ F, close to the part to reduce high-frequency perturbations.

CLKOUT[0:3] routing is critical. Consider placing series termination resistors on the four clock outputs. Renesas recommends reviewing best practice documentation related to clock routing and termination options, see the *Quick Guide - Output Terminations Application Note*. Locate series Termination placeholders as close as possible to the driving device pin.

PCB design is critical to reducing parasitic inductances, closely placing crucial components near the IC. The critical components are the decoupling capacitor locations and parasitics on the load connection of the four CLKOUT pins. Also, refer to the datasheet discussion of the Termination CLKOUT and CLKIN signals.

Important: Refer to the *ISL74420SLH Datasheet* when reconfiguring the evaluation board. Reference the details of Frequency and I²C Address Selection sections and the Phase Selection tables in the *ISL74420SLH Datasheet*. These tables detail configuration options that are set by the four 8-position switch assemblies for user strapping as shown in [User Switches Frequency and Phase Selection](#).

2.3 User Switches Frequency and Phase Selection

Pin Number	Pin Name	L F H (TOP)	Description
1	CH0 FREQ[2]	SW1-1	3-level (tri-level) logic frequency division selection for Channel 0.
2	CH0 FREQ[1]	SW1-2	
3	CH0 FREQ[0]	SW1-3	
48	CH0 PH[2]	SW1-4	3-level (tri-level) logic phase delay selection for Channel 0.
47	CH0 PH[1]	SW1-5	
46	CH0 PH[0]	SW1-6	
-	-	SW1-7	Not used
4	PRESCL	SW1-8	3-level (tri-level) logic pre-scaler selection for all channels.
12	CH1 FREQ[2]	SW2-1	3-level (tri-level) logic frequency division selection for Channel 1.
11	CH1 FREQ[1]	SW2-2	
10	CH1 FREQ[0]	SW2-3	

Pin Number	Pin Name	L F H (TOP)	Description
13	CH1 PH[2]	SW2-4	3-level (tri-level) logic phase delay selection for Channel 1.
14	CH1 PH[1]	SW2-5	
15	CH1 PH[0]	SW2-6	
-	-	SW2-7	Not used
20	MASTER	SW2-8	Logic level input to select if the part should use its internal oscillator when no external clock is present.
25	CH2 FREQ[2]	SW7-1	3-level (tri-level) logic frequency division selection for Channel 2.
26	CH2 FREQ[1]	SW7-2	
27	CH2 FREQ[0]	SW7-3	
22	CH2 PH[0]	SW7-4	3-level (tri-level) logic phase delay selection for Channel 2.
23	CH2 PH[1]	SW7-5	
24	CH2 PH[2]	SW7-6	
-	-	SW7-7	Not Used
19	OUTEN	SW7-8	Logic level input to enable the CLKOUTx pins. (1K to Ready)
36	CH3 FREQ[2]	SW6-1	3-level (tri-level) logic frequency division selection for Channel 3.
35	CH3 FREQ[1]	SW6-2	
34	CH3 FREQ[0]	SW6-3	
37	CH3 PH[2]	SW6-4	3-level (tri-level) logic phase delay selection for Channel 3.
38	CH3 PH[1]	SW6-5	
39	CH3 PH[0]	SW6-6	
-	-	SW6-7	Not Used
-	LED	SW6-8	Test LED

2.4 Schematic Diagram

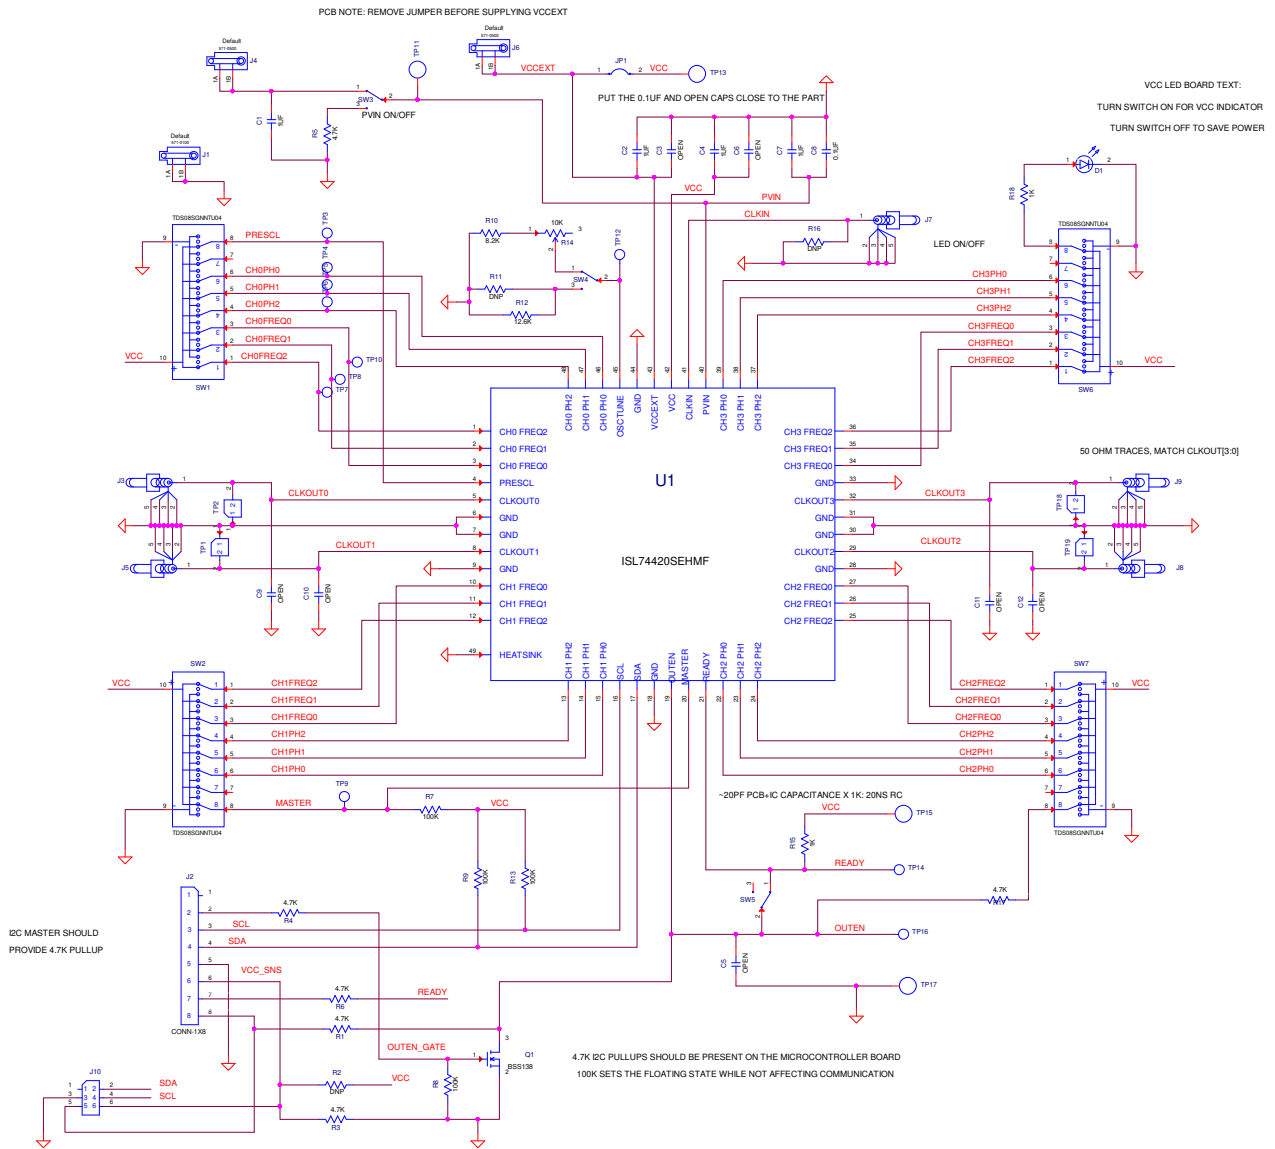


Figure 5. Schematic

2.5 Bill of Materials

Qty	Reference Designator	Description	Manufacturer	Manufacturer Part Number
4	TP11, TP13, TP15, TP17	Test Point Turret 0.150 Pad 0.100 Thole	Keystone	1514-2
5	J3, J5, J7-J9	Silver Plated 50Ω PCB Mount Receptacle	Amphenol	31-5329-51RFX
1	R14	Trimmer Potentiometer (RoHS Compliant)	Bourns	3299W-1-503-LF
4	TP12, TP14, TP16, TP20	Miniature White Test Point 0.100 Pad 0.040 Thole	Keystone	5002

Qty	Reference Designator	Description	Manufacturer	Manufacturer Part Number
1	J1	10A BLACK Banana Jack Socket Terminal - Female - Horizontal - 4mm Plug	Deltron	571-0100
2	J4, J6	10A RED Banana Jack Socket Terminal - Female - Horizontal - 4mm Plug	Deltron	571-0500
4	TP1, TP2, TP18, TP19	TEST POINT 2 Pin Header 2.54mm (0.100) Pitch	FCI	68000-236 TESTPOINT
1	Q1	200mA 50V N-Channel Transistor	Diodes-inc	BSS138
1	J2	Male In-line 8 pins × 0.1 inch Connector Strip	Various	CONN-1X8
1	C8	Multilayer Cap (Automotive AEC-Q200)	Murata	GCJ188R71H104KA12D
4	C1, C2, C4, C7	Ceramic Chip Cap	Murata	GCM188R71E105KA64D
1	SW3	SPDT On-None-On (2 Switch Positions) SM Ultra miniature Toggle Switch	C&K	GT11MSCBE
7	C3, C5, C6, C9-C12	Multilayer Cap	Various	Generic
2	R2, R11	Metal Film Chip Resistor (Do Not Populate)	Various	Generic
1	R16	Thick Film Chip Resistor (Do Not Populate)	Various	Generic
1	U1	Radiation Hardened LDR to 75Krad(Si) Quad Output Clock Fanout Buffers	Renesas	ISL74420SLHF/PROTO
1	JP2	Three Pin Jumper	Generic	JUMPER-3-100
2	JP1, JP3	100 mil Spacing Two Pin Jumper	Generic	JUMPER2_100
1	D1	AllnGaP Green	Liteon	LTST-C190KGKT
2	R15, R18	Metal Film Chip Resistor	Rohm	MCR03EZPFX1001
4	R4, R5, R10, R17	Metal Film Chip Resistor	Rohm	MCR03EZPFX4701
1	R6	Thick Film Chip Resistor	Vishay	RCS06030000Z0EA
4	R7-R9, R13	Thick Film Chip Resistor (AEC-Q200)	KOA	RK73H1JTTD1003F
1	R12	Thin Film Resistor	Yageo	RT0603BRD0712K7L
4	SW1, SW2, SW6, SW7	TDS Series Low Profile Tri-State 8-Pos Switch	TE	TDS08SGNNTU04
1	J10	Male 6 Pin Right Angle Header 2.54mm×2.54mm (0.100)	Samtec	TSW-103-08-T-D-RA
1	Bag and Ship	PWB-FG, ISLUSBPMADAPT3Z, ROHS	-	ISLUSBPMADAPT3Z
1	Bag and Ship	CABLE-USB 2.0, TYPE A MALE/TYPE MINI-B MALE, ROHS	-	88732-8800

2.6 Board Layout

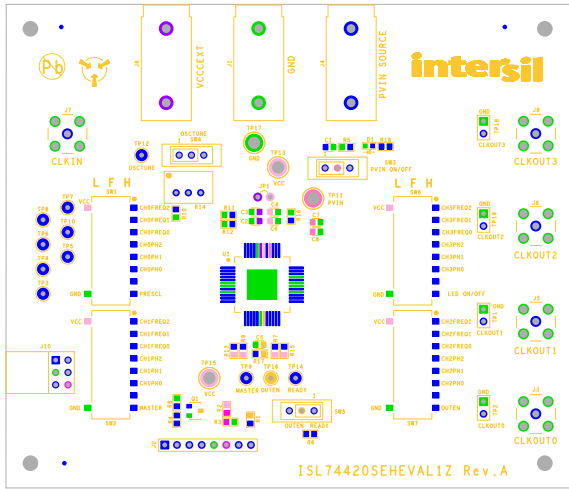


Figure 6. Top Silkscreen

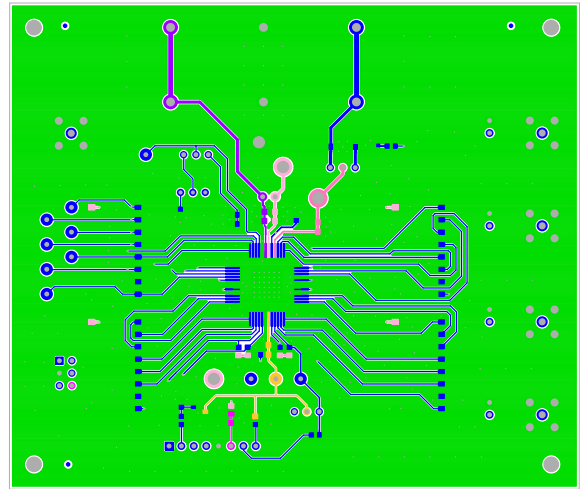


Figure 7. Top Layer

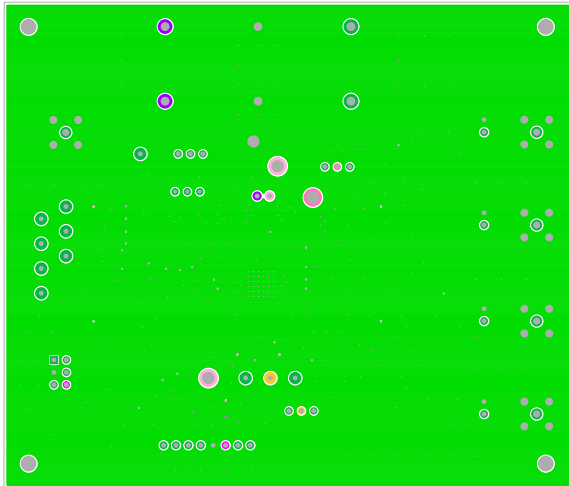


Figure 8. Layer 2

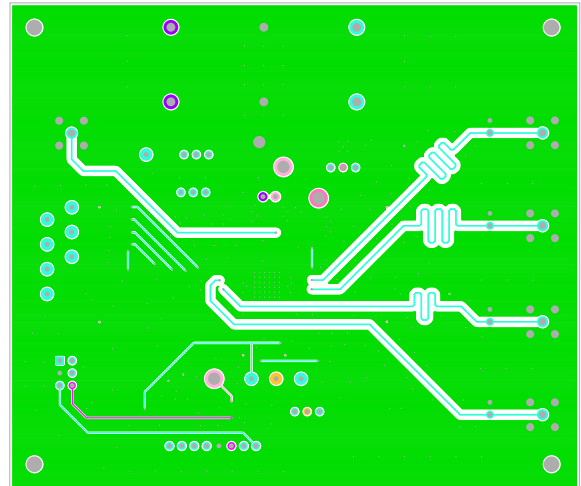


Figure 9. Layer 3

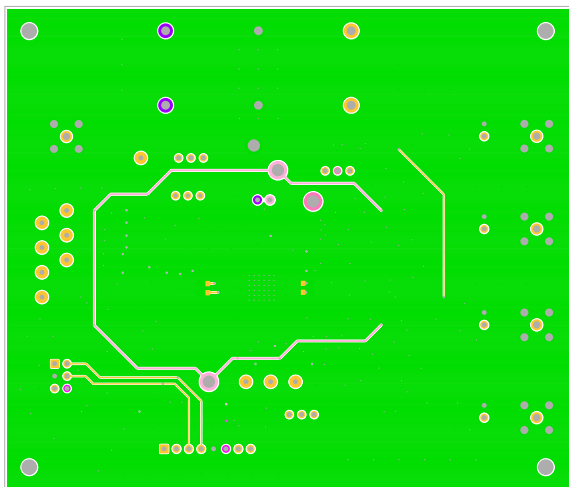


Figure 10. Bottom Layer

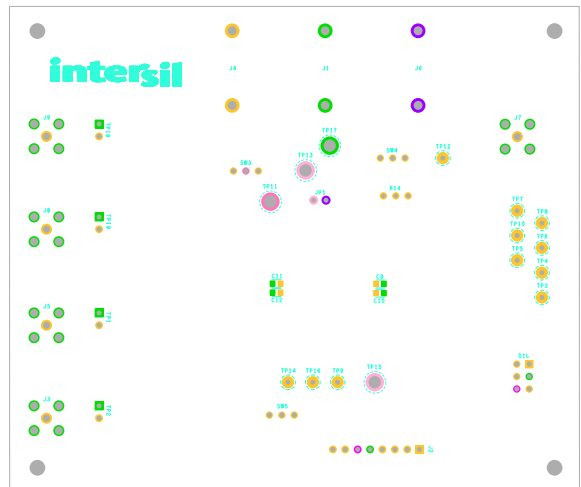


Figure 11. Bottom Silkscreen

2.7 Configuration Scenarios: Selecting Clockout Frequency and Phase (Delay) Options

The ISL74420SLH design targets low skew and propagation delays regarding the four clockout signal sources. As such, the application requirements must be addressed before selecting the device configuration.

Note: The typical performance graphs provide scope shots for the five configuration scenarios described in the following text and in the datasheet.

The ISL74420SLH supports a wide variety of frequency configurations, but there are certain rules that must be followed. When the required output frequencies are selected, consider which of the following Scenarios matches the configuration. Next, ensure that the rules are followed for that scenario.

- Scenario 1 (Figure 16 and Figure 17) – All four outputs are at the same frequency
 - All four phase configurations are engaged.
- Scenario 2 (Figure 18 and Figure 19) – Three outputs have the same frequency, one output at a different frequency
 - The three outputs with the same frequency (4MHz) must be on outputs CLKOUT0, CLKOUT1, and CLKOUT2.
 - The phase configurations for CLKOUT0, 1, and 2 are engaged.
 - The different frequency (12MHz) must be on CLKOUT3.
 - The phase configuration for CLKOUT3 is ignored and defaults to 0°.
- Scenario 3 (Figure 20 and Figure 21) – Two outputs have the same frequency, the other two outputs are at a different same frequency (such as, two outputs at 500kHz, two other outputs at 333kHz)
 - One pair of same frequencies must be on CLKOUT0 and CLKOUT1.
 - The other pair of frequencies must be on CLKOUT2 and CLKOUT3.
 - The phase relationship of CLKOUT0 and CLKOUT1 is controlled.
 - The phase relationship of CLKOUT2 and CLKOUT3 is controlled.
 - The phase relationship between outputs of different frequencies (such as, CLKOUT0 and CLKOUT3) cannot be controlled.
- Scenario 4 (Figure 22 and Figure 23) – Two outputs have the same frequency, the other two outputs are at two different frequencies (there are three total different frequencies output)
 - The pair of same frequencies must be on CLKOUT0 and CLKOUT1.
 - The phase configurations for CLKOUT0 and CLKOUT1 are engaged.
 - The two different frequencies must be on CLKOUT2 and CLKOUT3
 - The phase configuration for CLKOUT2 and CLKOUT3 are ignored and default to 0°.
- Scenario 5 (Figure 24 and Figure 25) – All four outputs are at different frequencies
 - The frequencies can be in any order on any CLKOUTx channel.
 - The phase configuration for all CLKOUTx is ignored and defaults to 0°.

3. Typical Performance Graphs

Unless otherwise noted, PVIN = 5V Example Configurations Scenarios 1 to 5 Frequency & Phase / Period and Delays

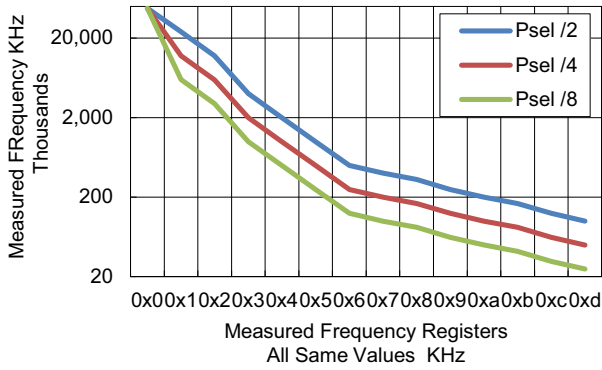


Figure 12. CLKOUT[0:3] Freq. Options 48MHz Int Clk

Freq Hex	Psel /2	Psel /4	Psel /8
0x0	RSVD	RSVD	RSVD
0x1	23,996,650	11,942,687	5,984,147
0x2	11,962,595	5,978,623	2,990,954
0x3	3,988,690	1,993,907	996,681
0x4	1,995,292	996,619	498,323
0x5	997,471	498,231	249,189
0x6	498,754	249,128	124,589
0x7	398,980	199,298	99,672
0x8	332,497	166,073	83,063
0x9	249,367	124,553	62,293
0xa	199,498	99,640	49,835
0xb	166,231	83,036	41,527
0xc	124,634	62,275	31,146
0xd	99,710	49,818	24,915

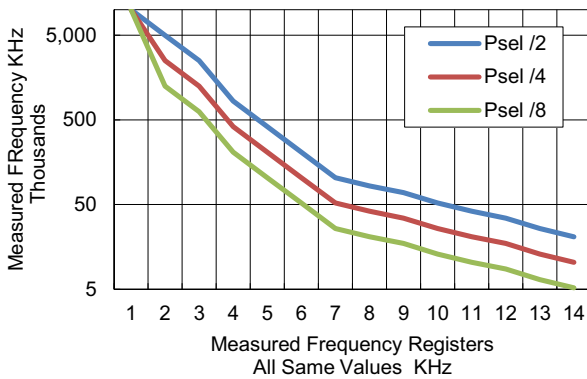


Figure 13. CLKOUT[0:3] Freq. Options 10MHz Ext Clk

Freq Dec	Psel /2	Psel /4	Psel /8
0	9999492	9997717	9987585
1	4999425	2500473	1250020
2	2500437	1250059	624977
3	833255	416667	208330
4	416645	208332	104167
5	208334	104167	52083
6	104167	52083	26042
7	83333	41667	20833
8	69444	34722	17361
9	52083	26042	13021
10	41667	20833	10417
11	34722	17361	8681
12	26042	13021	6510
13	20833	10417	5208

Unless otherwise noted, PVIN = 5V Example Configurations Scenarios 1 to 5 Frequency & Phase / Period and Delays (Cont.)

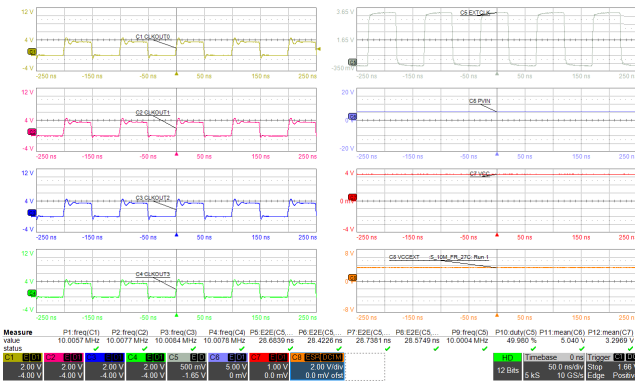


Figure 14. Frequency & Delay External CLKIN 10MHz Pre-Selector /2

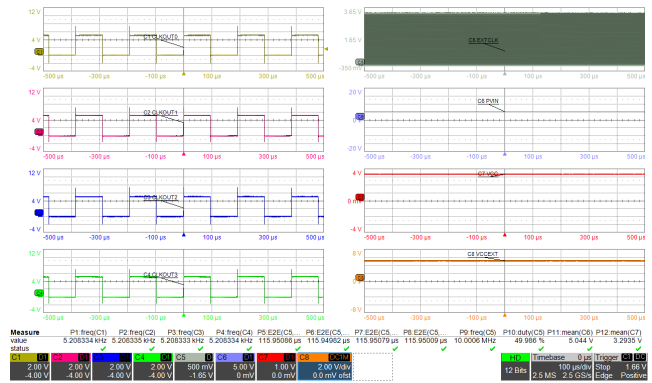


Figure 15. Frequency & Delay External CLKIN 10MHz Pre-Selector /8

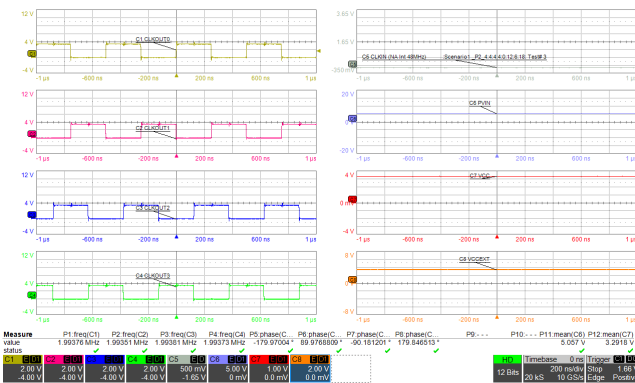


Figure 16. Example Scenario 1: Frequency and Phase (Four 2MHz frequency and four 90 phase measurements)

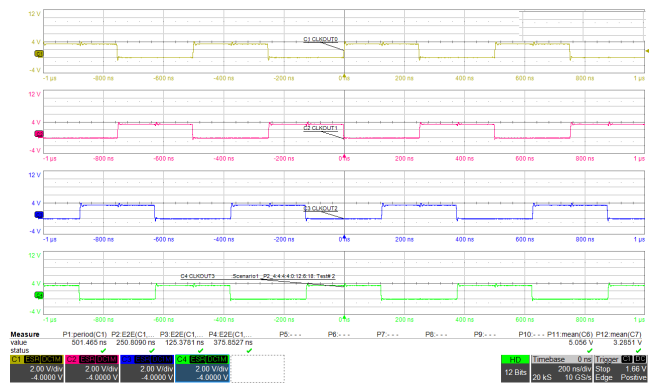


Figure 17. Example Scenario 1: Period and Delay (Four 500ns Period with Four delays (125ns))

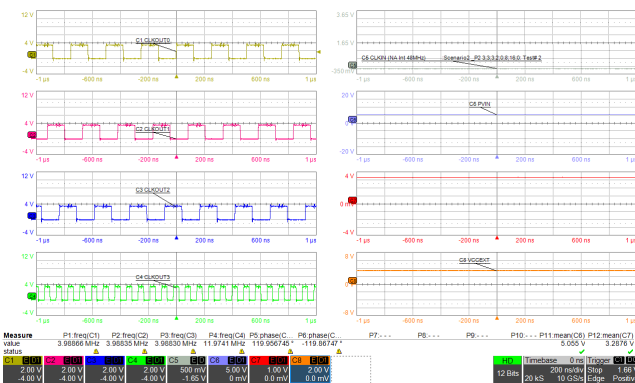


Figure 18. Example Scenario 2: Frequency and Phase

Three outputs have the same frequency (4MHz), one output at a different frequency (12MHz)

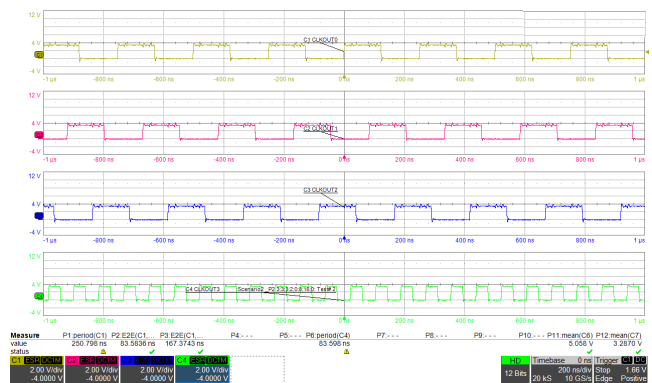


Figure 19. Example Scenario 2: Period and Delay

Three outputs have the same period (250ns), one output at a different period (83.5ns) C1-C2 delay (83ns) C1-C3 delay (167ns)

Unless otherwise noted, PVIN = 5V Example Configurations Scenarios 1 to 5 Frequency & Phase / Period and Delays (Cont.)

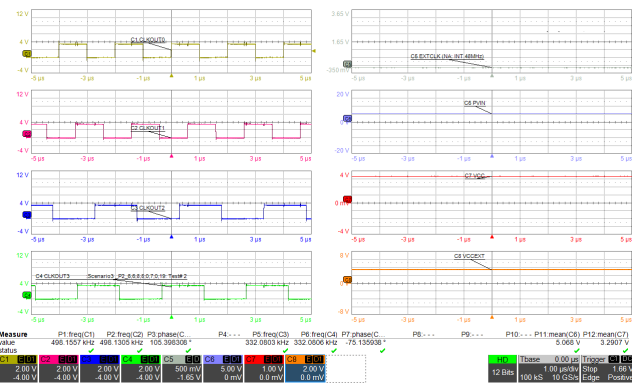


Figure 20. Example Scenario 3: Frequency and Phase

Two outputs have the same frequency (500kHz), the other two outputs are at a different same frequency (333kHz) C1-C2 Phase (105), C3-C4 Phase (-75)

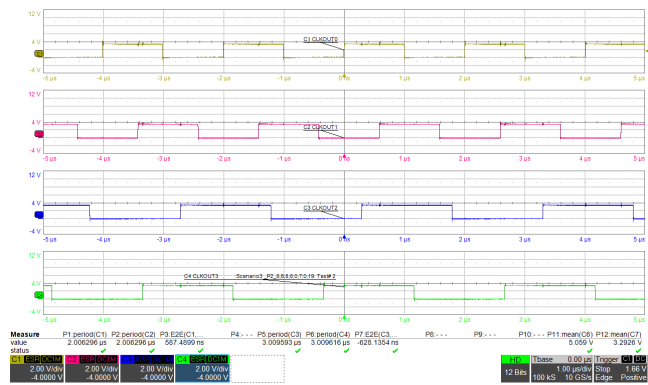


Figure 21. Example Scenario 3: Period and Delay

Two outputs have the same period (2µs), the other two outputs are at a different same period (3µs) C1-C2 delay(587ns) C3-C4 delay (-628NS)

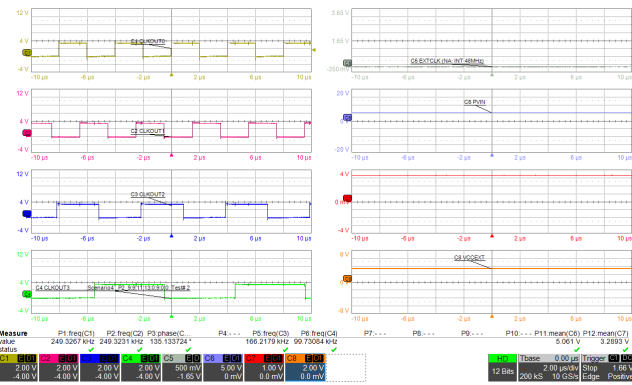


Figure 22. Example Scenario 4: Frequency and Phase

Two outputs have the same frequency (250kHz), the other two outputs are at two different frequencies (166kHz and 99.73kHz)

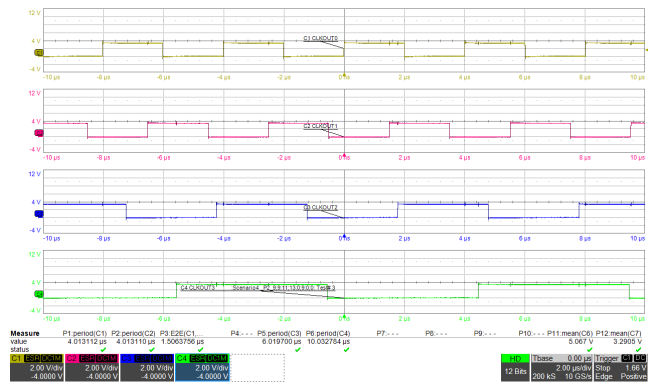


Figure 23. Example Scenario 4: Period and Delay

Two outputs have the same periods (4µs), the other two outputs are at two different periods (6µs and 10µs) (there are three total different periods output)

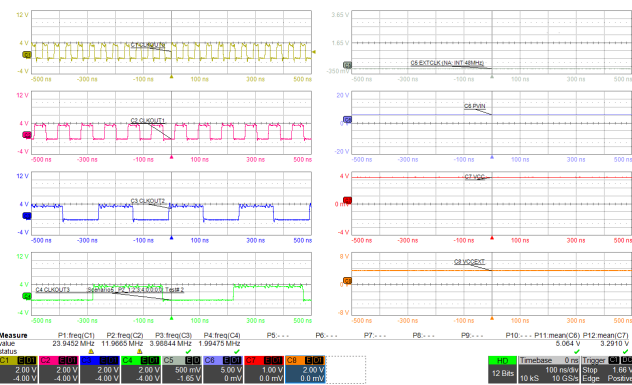


Figure 24. Example Scenario 5: Frequency

Four frequencies that can be in any order on any CLKOUTx channel (24MHz,12MHz, 4MHz, 2MHz).

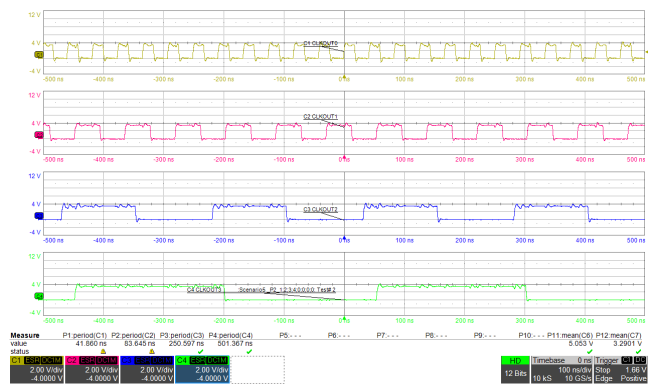


Figure 25. Example Scenario 5: Period

Four unique periods 41ns, 83ns, 250ns, 501ns. No programmable delay options.

4. Ordering Information

Part Number	Description
ISL74420SLHEV1Z	Radiation Hardened Quad Clock Evaluation Board (Full size Evaluation board: User settable mechanical Switches to select frequency and phase options)

5. Revision History

Revision	Date	Description
1.01	Apr 9, 2026	<ul style="list-style-type: none">▪ Updated page 1 content.▪ Updated Setup and Configuration section.▪ Updated BOM
1.00	May 28, 2025	Initial release

IMPORTANT NOTICE AND DISCLAIMER

RENESAS ELECTRONICS CORPORATION AND ITS SUBSIDIARIES (“RENESAS”) PROVIDES TECHNICAL SPECIFICATIONS AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES “AS IS” AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT OF THIRD-PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for developers who are designing with Renesas products. You are solely responsible for (1) selecting the appropriate products for your application, (2) designing, validating, and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements. These resources are subject to change without notice. Renesas grants you permission to use these resources only to develop an application that uses Renesas products. Other reproduction or use of these resources is strictly prohibited. No license is granted to any other Renesas intellectual property or to any third-party intellectual property. Renesas disclaims responsibility for, and you will fully indemnify Renesas and its representatives against, any claims, damages, costs, losses, or liabilities arising from your use of these resources. Renesas' products are provided only subject to Renesas' Terms and Conditions of Sale or other applicable terms agreed to in writing. No use of any Renesas resources expands or otherwise alters any applicable warranties or warranty disclaimers for these products.

(Disclaimer Rev.1.01)

Corporate Headquarters

TOYOSU FORESIA, 3-2-24 Toyosu,
Koto-ku, Tokyo 135-0061, Japan
www.renesas.com

Trademarks

Renesas and the Renesas logo are trademarks of Renesas Electronics Corporation. All trademarks and registered trademarks are the property of their respective owners.

Contact Information

For further information on a product, technology, the most up-to-date version of a document, or your nearest sales office, please visit www.renesas.com/contact-us/.