

ISL5216EVAL Schematics


Table Of Contents


Page 1	ISL5216EVAL Schematics - Title Page
Page 2	ISL5216EVAL Schematics - ISL5216
Page 3	ISL5216EVAL Schematics - Data Input
Page 4	ISL5216EVAL Schematics - Data Output
Page 5	ISL5216EVAL Schematics - Clock Distribution
Page 6	ISL5216EVAL Schematics - Programable Logic
Page 7	ISL5216EVAL Schematics - Control Interface
Page 8	ISL5216EVAL Schematics - SRAM
Page 9	ISL5216EVAL Schematics - Power


Highest Referenced Designators:


C109
J14
JP12
L1
R61
TP11
T9
U17
Y1


Unused Designators:

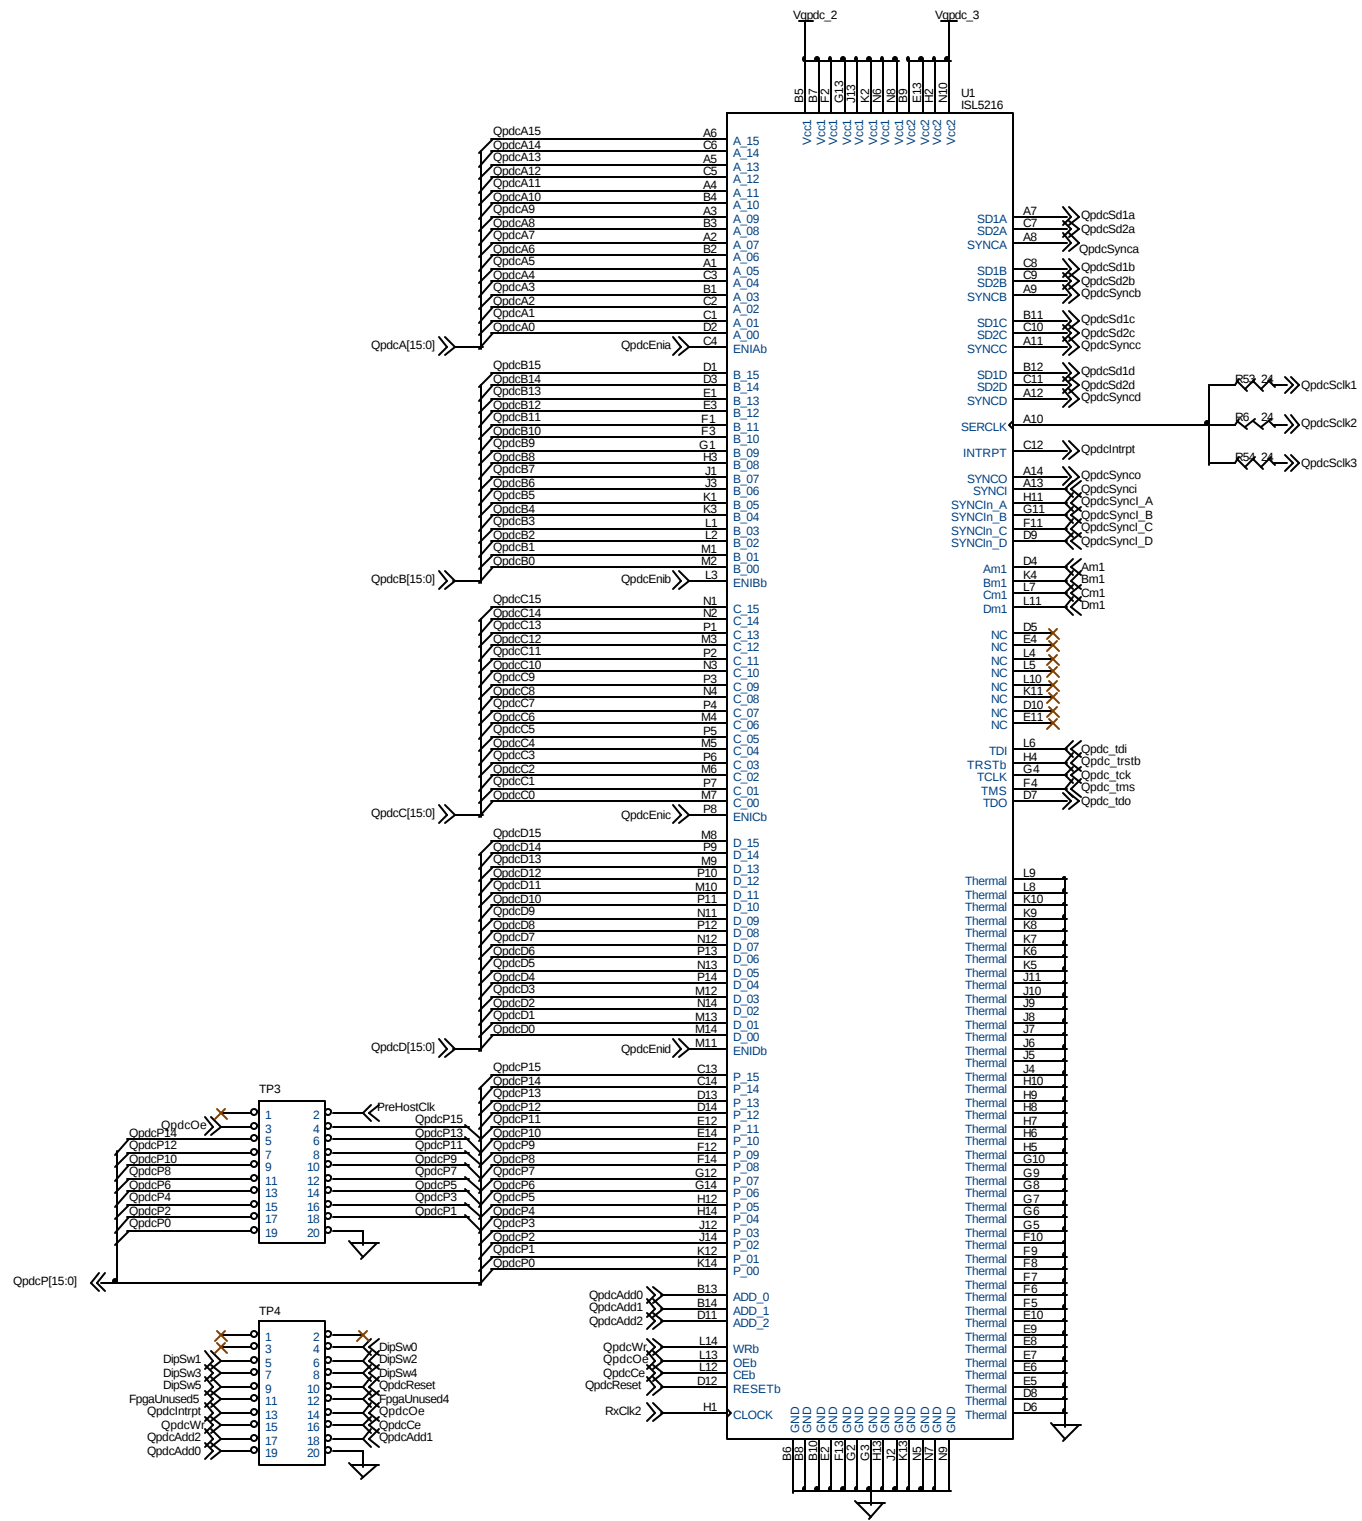


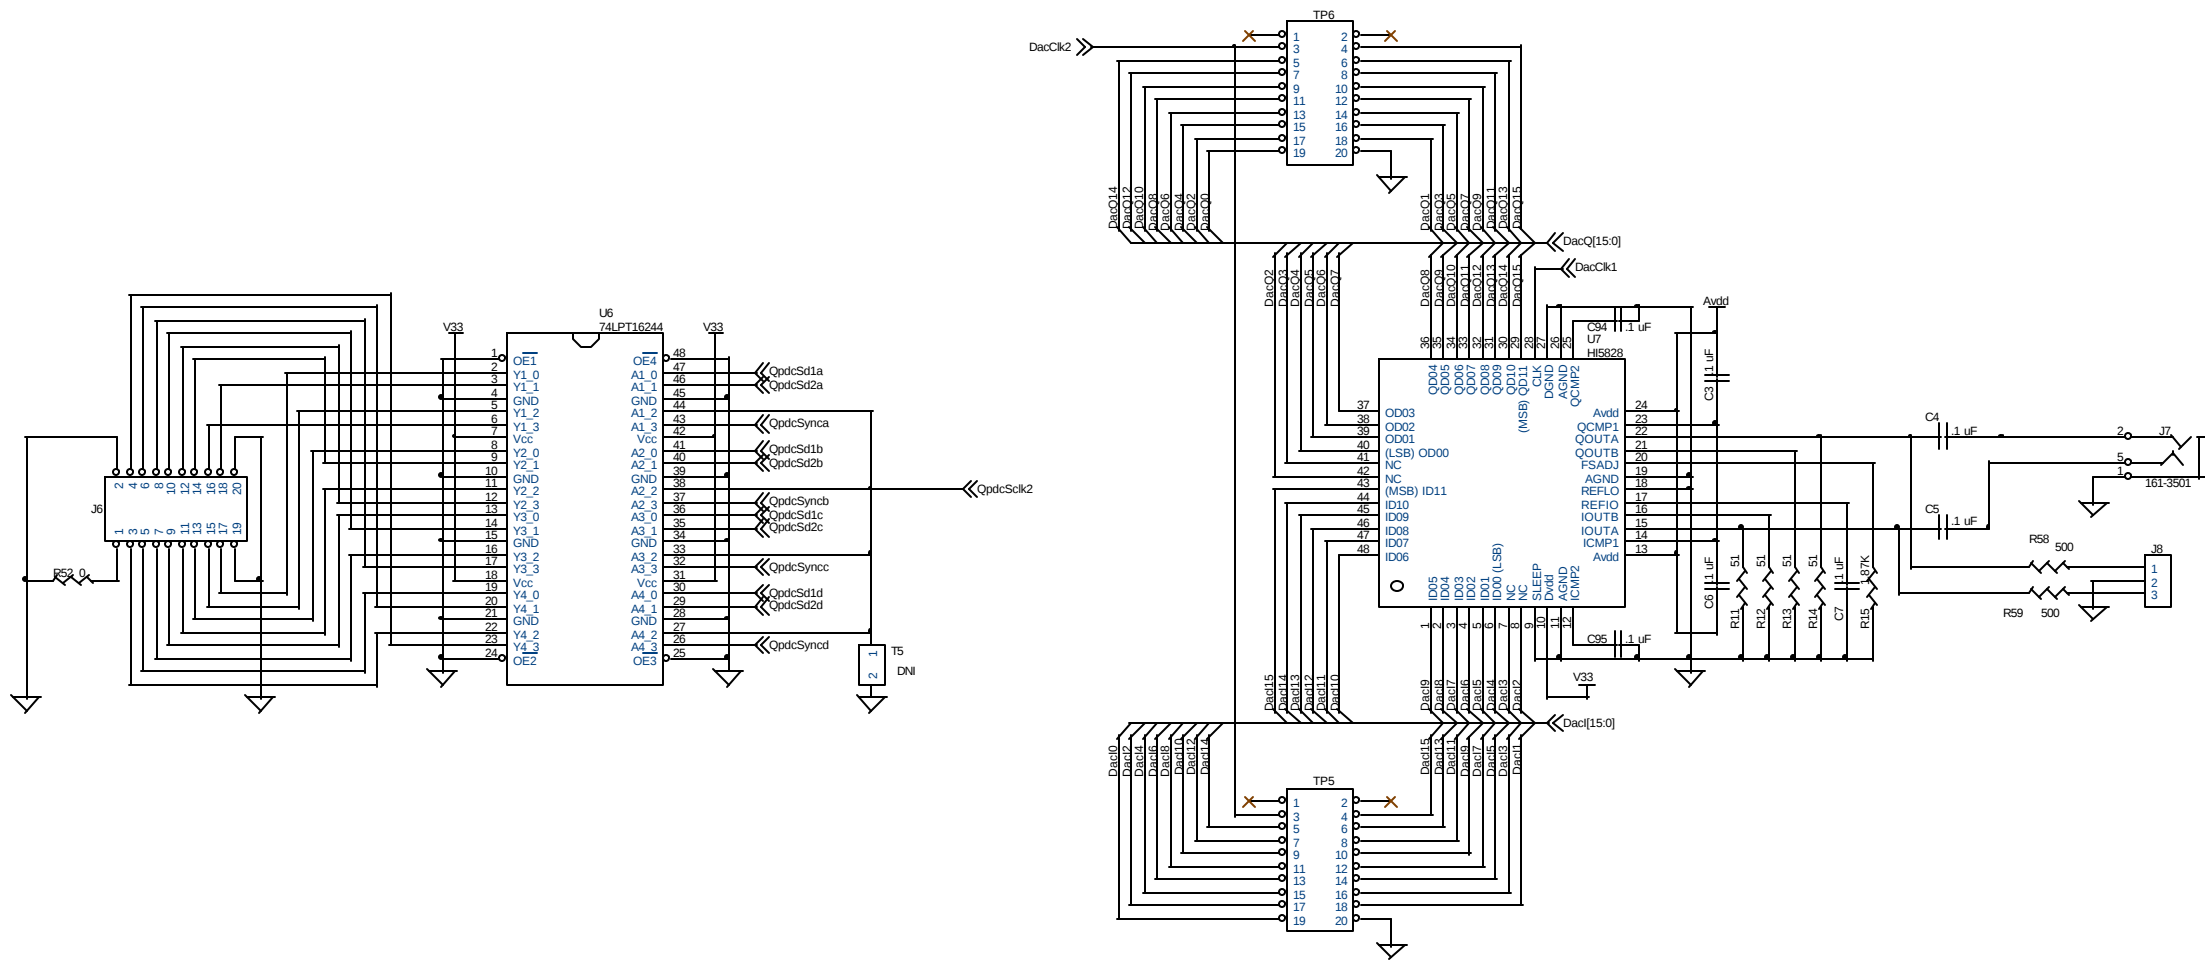

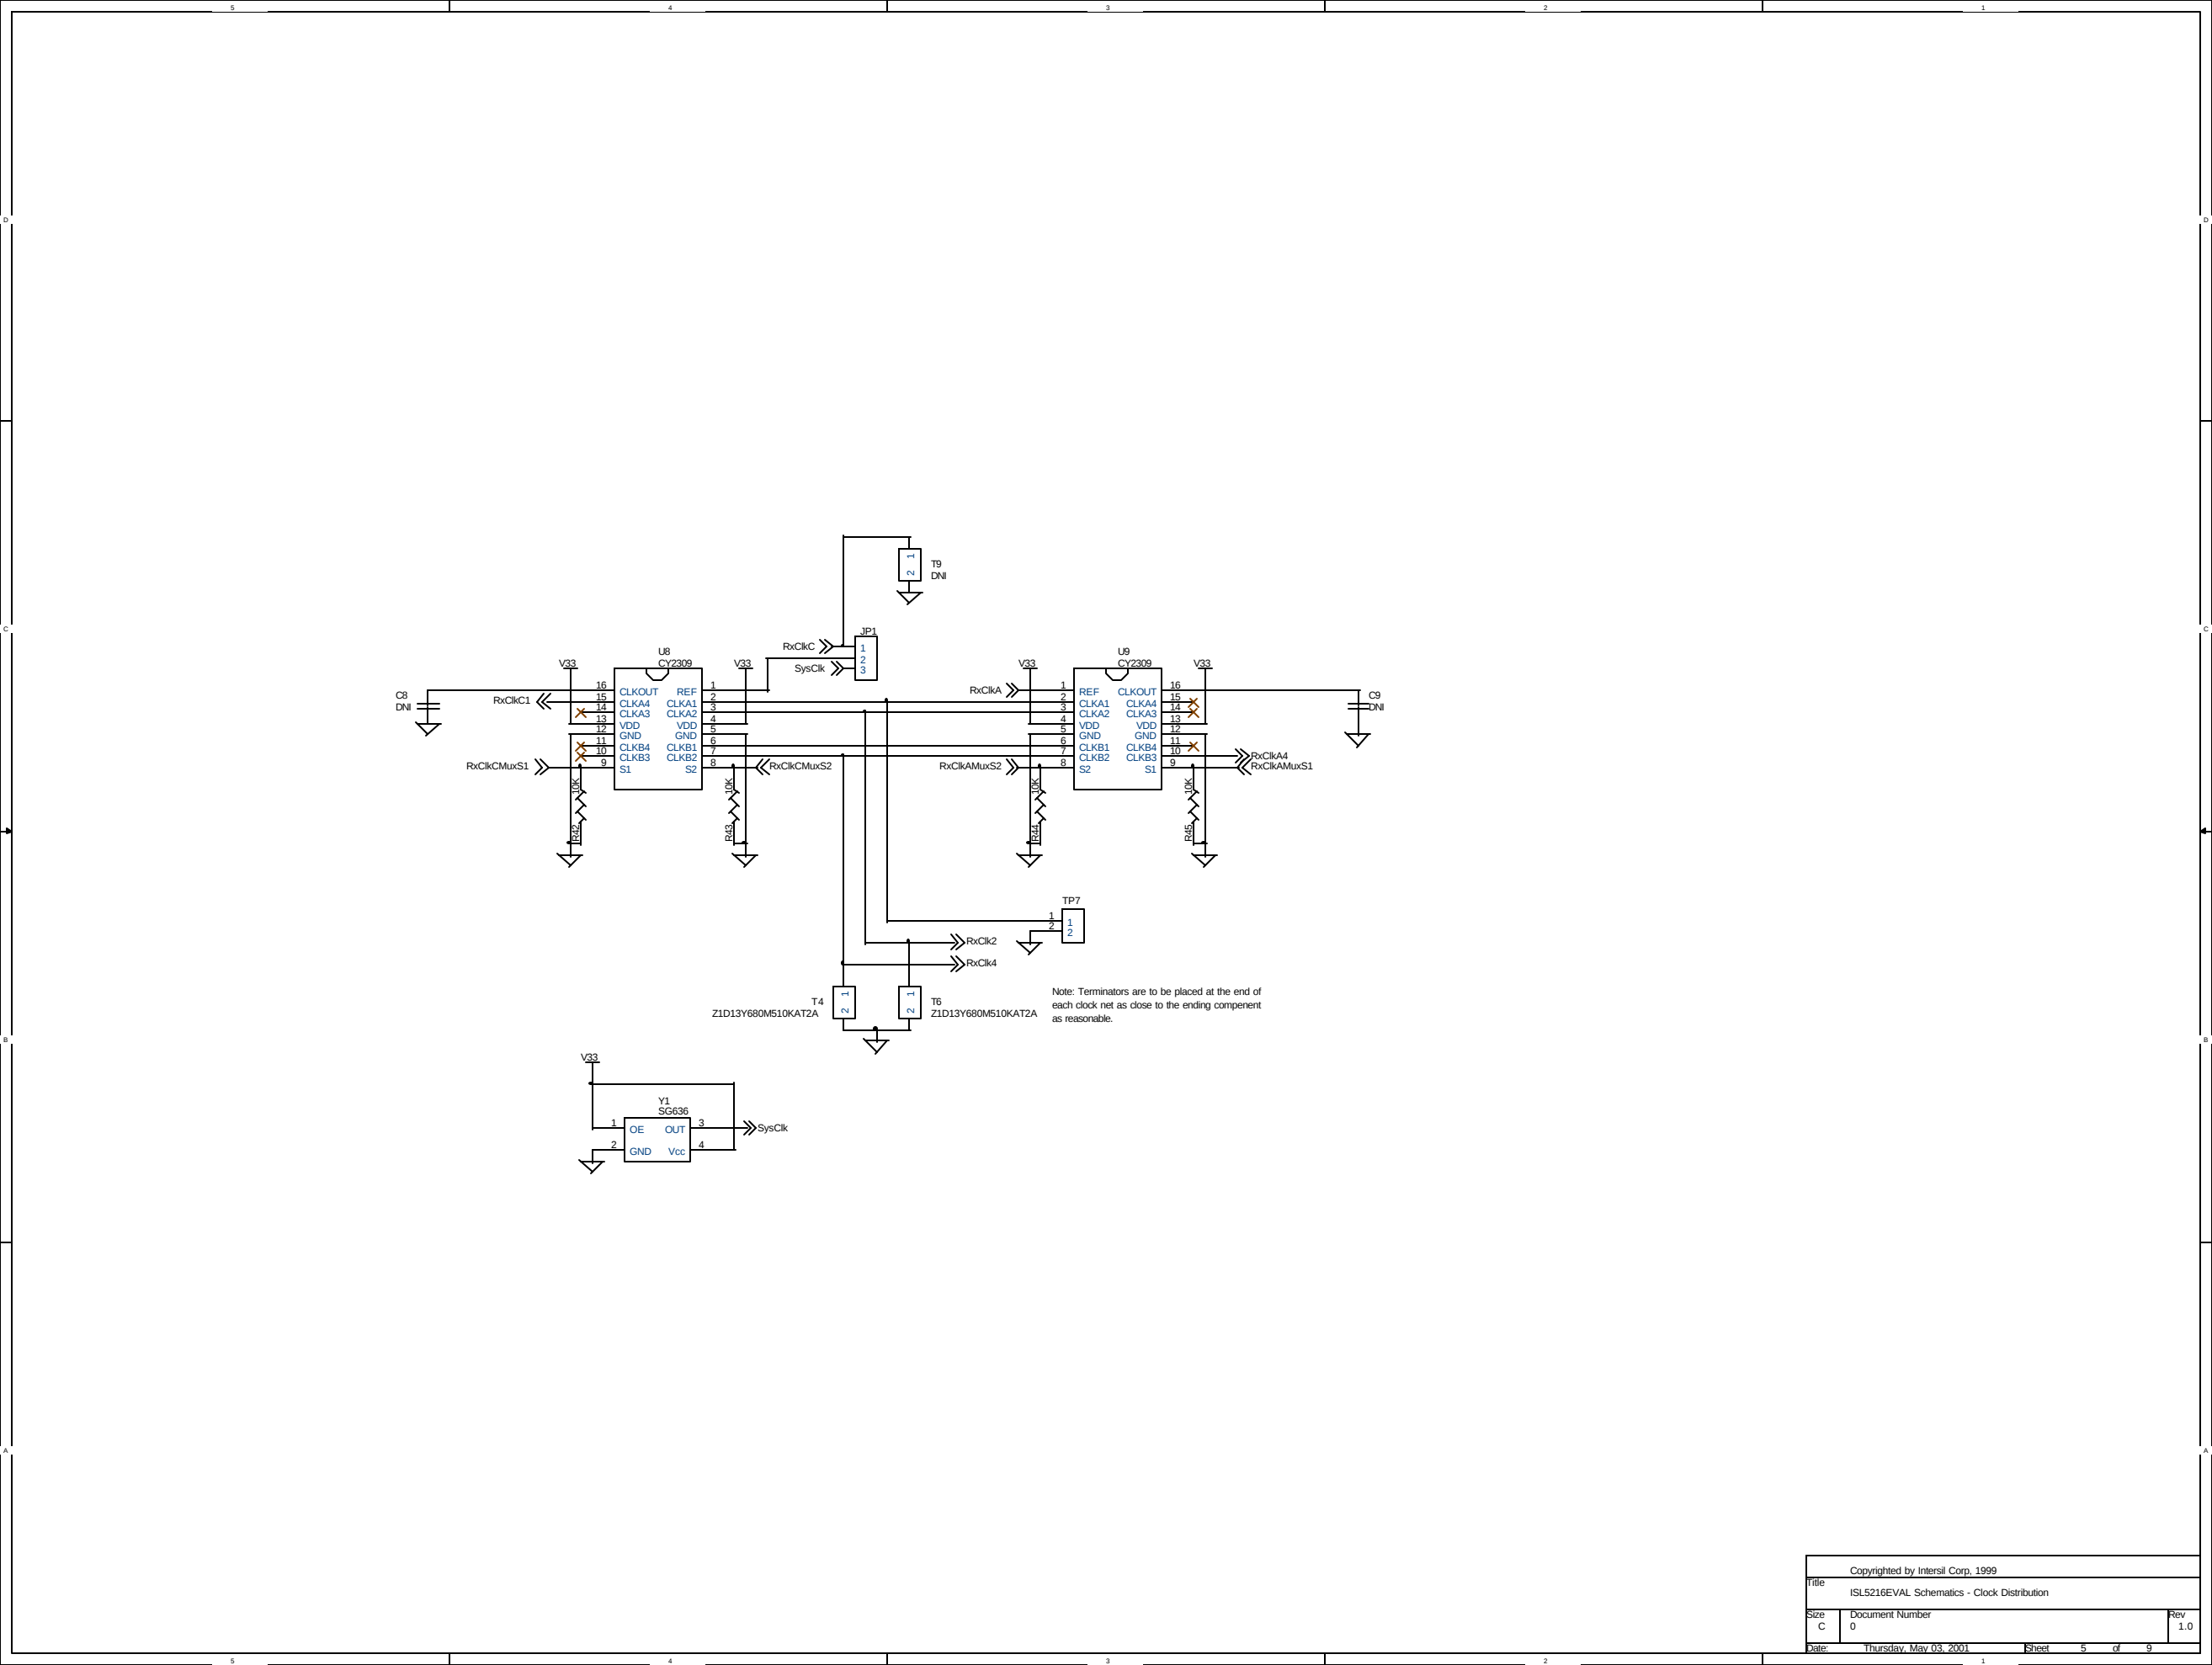

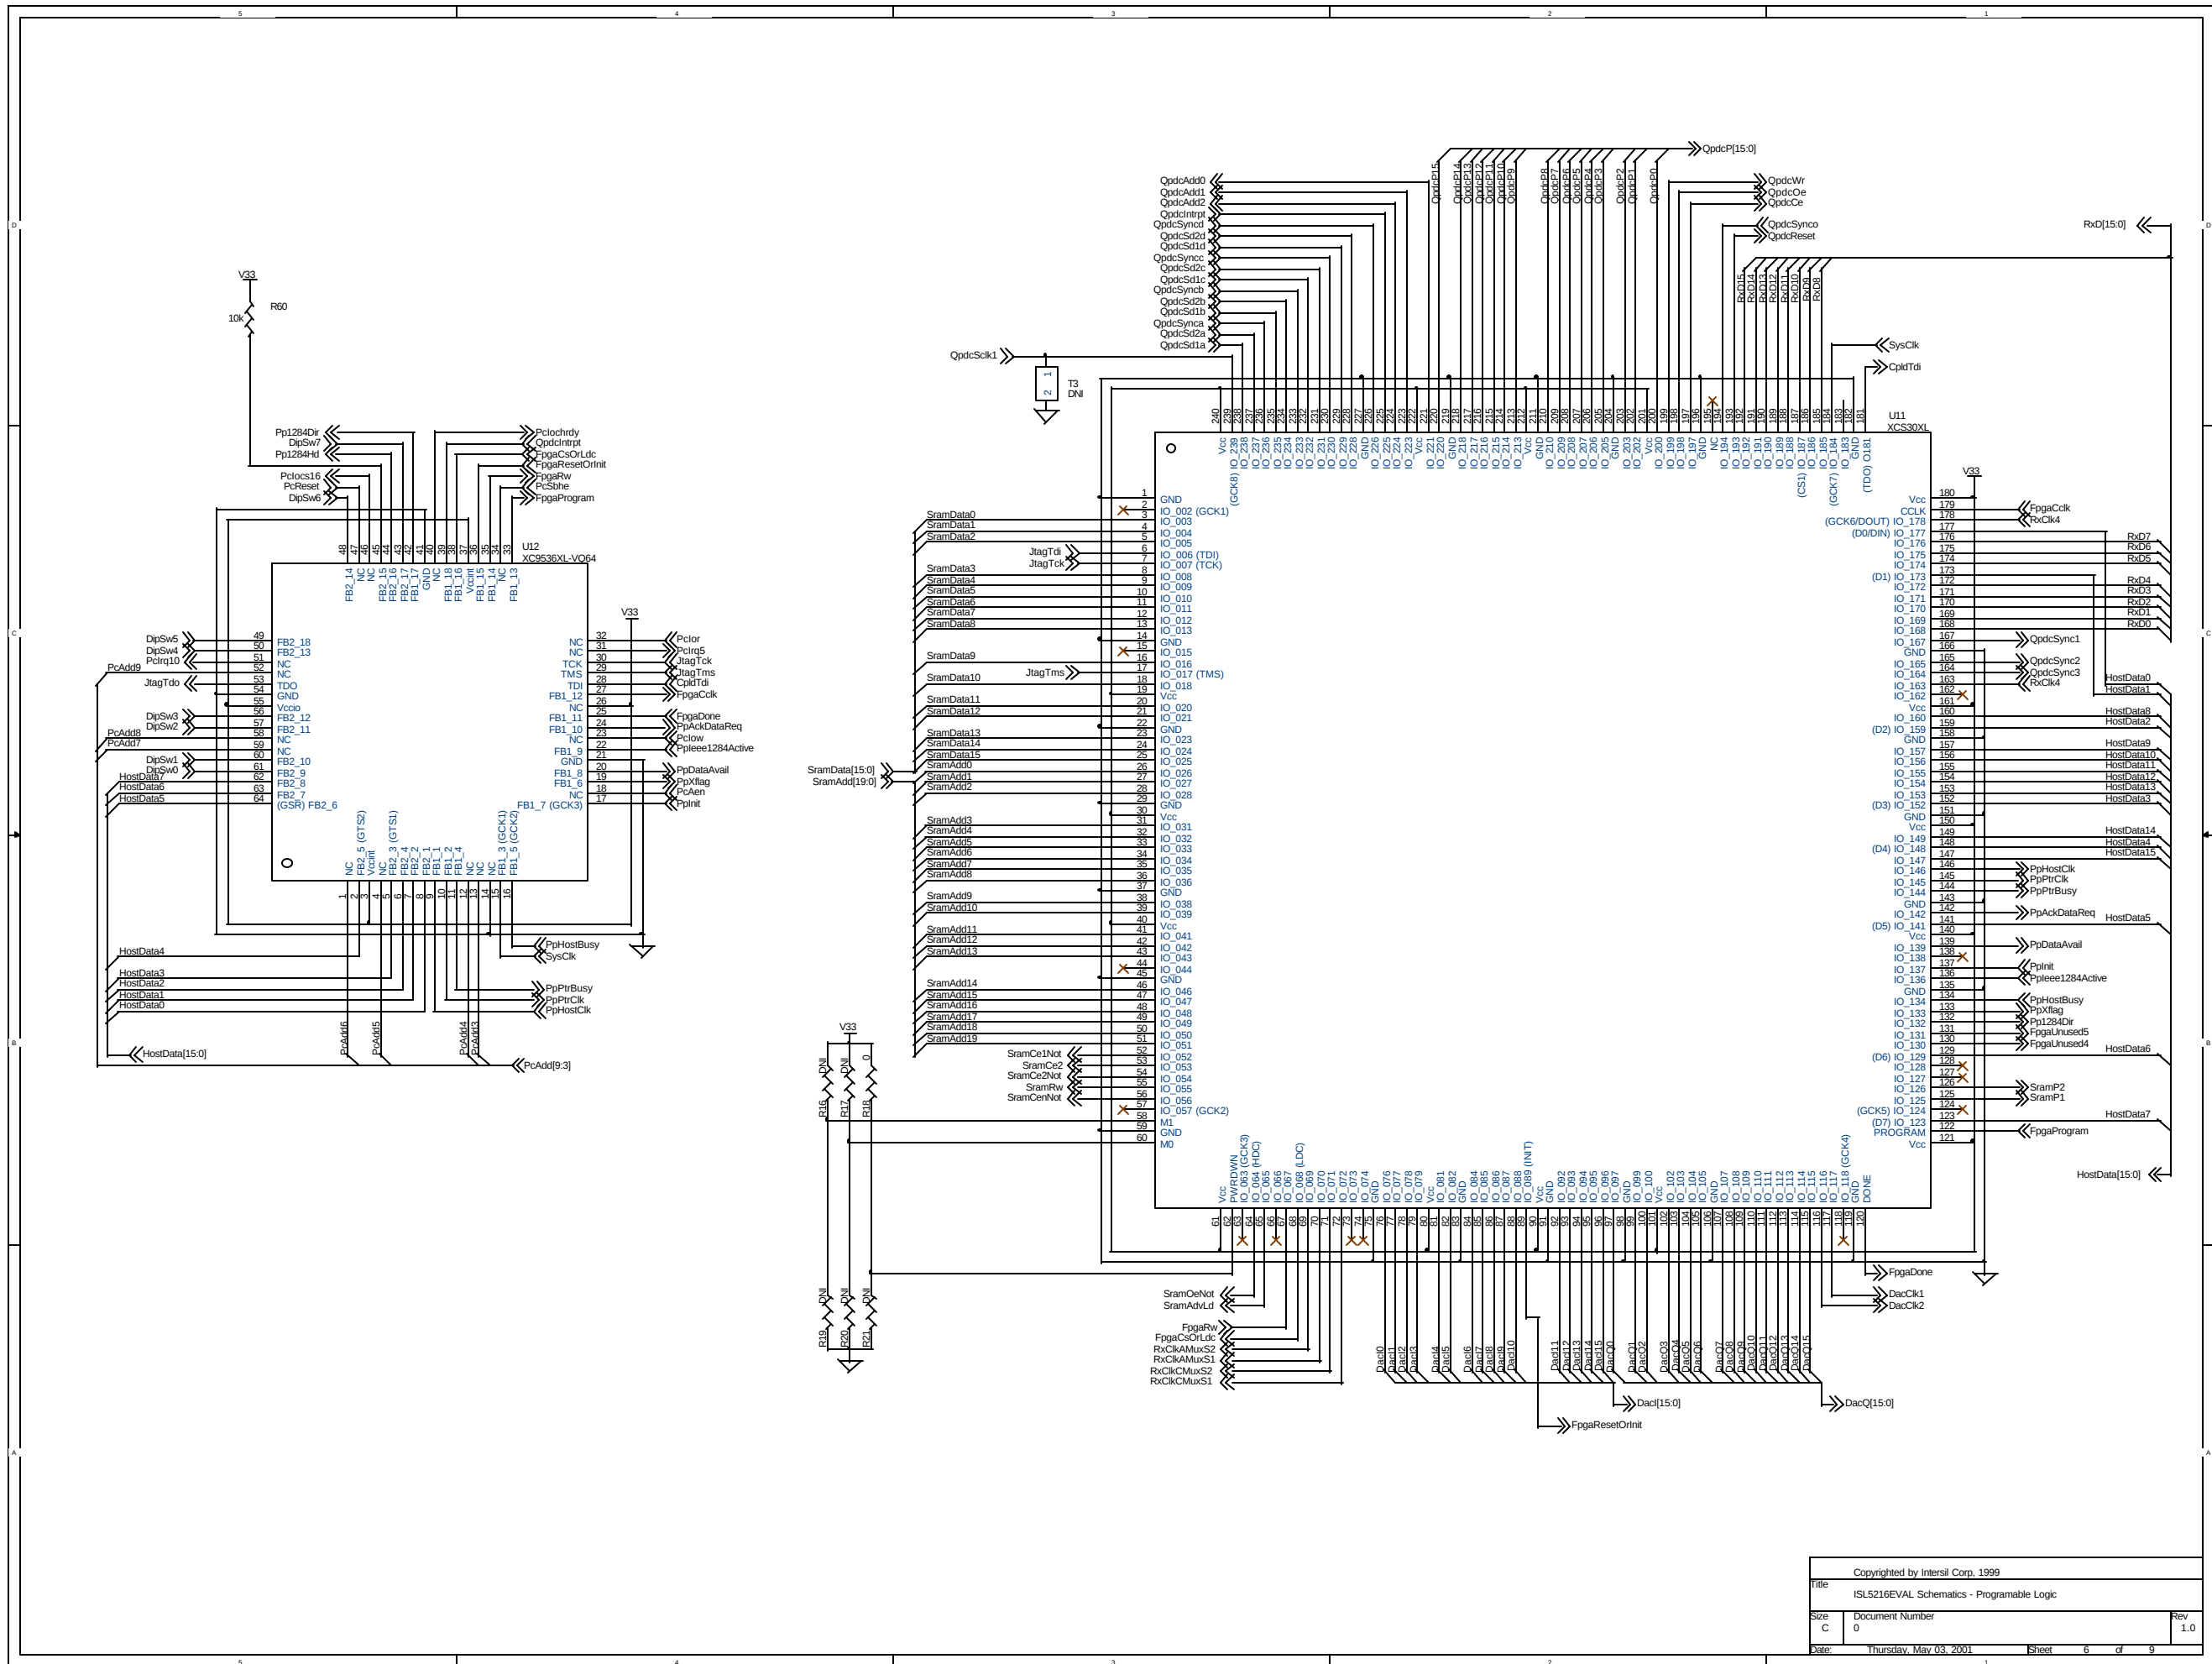



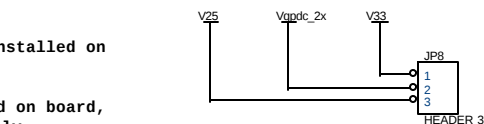

NOTE: This header should NOT be installed on the board. Instead, a zero Ohm resistor, or a piece of wire will go between the supply plane and Vqpd_c_2, depending if ISL5216 or HSP50216 are on board.

