




Integrated Device Technology

5P49V5907 and 5P49V5908

VersaClock® 5 with Additional PCIe Outputs

CLOCKS AND TIMING | INTERFACE AND CONNECTIVITY | MEMORY AND LOGIC | POWER MANAGEMENT | RF PRODUCTS

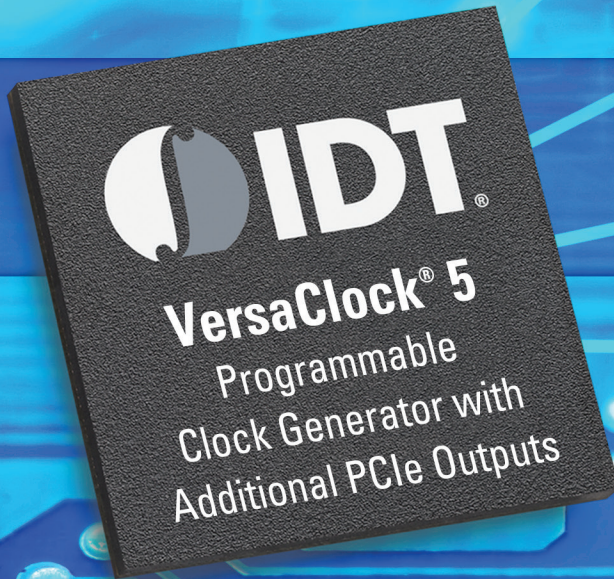

PCI EXPRESS®

FEATURES:

- 3 programmable outputs with any frequency up to 350 MHz
- LVPECL, LVDS, HCSL, or Dual LVCMOS outputs
- Additional 4 / 8 copies of low-power HCSL (LP-HCSL) outputs to accommodate PCI Express timing needs
- High Performance
 - Less than 700 fsec RMS phase jitter
 - Meets the requirements of PCI Express Gen 1/2/3 as well as 1G / 10G Ethernet and other high performance protocols
- Low Power
 - 35 mA core current consumption
 - Low-power HCSL outputs for PCI Express clocks

APPLICATIONS:

- High-end consumer
- Networking
- Computing
- Industrial
- Communications
- Broadcast video
- Medical

The VersaClock 5 5P49V5907 and 5P49V5908 devices have three outputs that can generate any frequency up to 350 MHz in various output types, and an additional four or eight LP-HCSL outputs specifically for PCI Express® clocking. The devices possess the same best-in-class jitter and power performance as the original 5P49V5901 device.



5 x 5 mm 40-VFQFPN package



6 x 6 mm 48-VFQFPN package

To request samples, download documentation, or learn more, visit: idt.com/go/VersaClock5

Integrated Device Technology, IDT and the IDT logo are registered trademarks of IDT. Other trademarks and service marks used herein, including protected names, logos and designs, are the property of IDT or their respective third party owners. © Copyright 2015. All rights reserved.