

SLG47512/13

Low Voltage GreenPAK Programmable Mixed-Signal Matrix

General Description

The SLG47512/13 provides a small, low voltage and low power component for commonly used mixed-signal functions. The user creates their circuit design by programming the one time programmable (OTP) Non-Volatile Memory (NVM) to configure the interconnect logic, the IO Pins, and the macrocells of the SLG47512/13. This highly versatile device allows a wide variety of mixed-signal functions to be designed within a very small, low power single integrated circuit.

Key Features

- Two High Speed General Purpose Analog Comparators (ACMPxH)
- Integrated Voltage References (Vref)
- Fifteen Combination Function Macrocells
 - Three Selectable DFF/LATCH or 2-bit LUTs or Shift Registers
 - One Selectable Programmable Pattern Generator or 2-bit LUT
 - Ten Selectable DFF/LATCH or 3-bit LUTs or Shift Registers
 - One Selectable DFF/LATCH or 4-bit LUTs or Shift Register
- Eight Multi-Function Macrocells
 - Seven Selectable DFF/LATCH or 3-bit LUTs + 8-bit Delay/Counters
 - One Selectable DFF/LATCH or 4-bit LUT + 16-bit Delay/Counter
- Serial Communications
 - I²C Protocol Interface
- Programmable Delay with Edge Detector Output
- Deglitch Filter or Edge Detector
- Two Oscillators (OSC)
 - 2.048 kHz Oscillator
 - 25 MHz Oscillator
- Analog Temperature Sensor
- Power-On Reset (POR) with CRC Check
- Read Back Protection (Read Lock)
- Power Supply
 - $1.0\text{ V} \leq V_{DD} \leq 1.65\text{ V}$
- Operating Temperature Range: -40 °C to +85 °C
- RoHS Compliant/Halogen-Free
- Available Package
 - 12-pin STQFN: 1.6 mm x 1.6 mm x 0.55 mm, 0.4 mm pitch
 - 16-pin MSTQFN: 1.6 mm x 1.6 mm x 0.55 mm, 0.4 mm pitch

Applications

- Notebook and Tablet PCs
- Smartphones and Fitness Bands
- Personal Computers and Servers
- PC Peripherals
- Consumer Electronics
- Data Communications Equipment
- Handheld and Portable Electronics

Contents

General Description	1
Key Features.....	1
Applications.....	1
1 Block Diagram	7
2 Pinout	8
2.1 Pin Configuration - STQFN- 12L	8
2.2 Pin Configuration - MSTQFN- 16L	9
3 Characteristics	13
3.1 Absolute Maximum Ratings	13
3.2 Electrostatic Discharge Ratings	13
3.3 Recommended Operating Conditions	13
3.4 Electrical Characteristics	14
3.5 I ² C Pins Electrical Characteristics	16
3.6 Macrocells Current Consumption	19
3.7 Timing Characteristics	19
3.8 Counter/Delay Characteristics	22
3.9 Oscillator Characteristics	23
3.10 ACMP Characteristics	23
3.11 Analog Temperature Sensor Characteristics	25
4 User Programmability	26
5 IO Pins	27
5.1 GPIO Pins	27
5.2 GPI Pin	27
5.3 Pull-Up/Down Resistors	27
5.4 Fast Pull-up/down during Power-up	27
5.5 GPI Structure	28
5.6 GPIO with I ² C Mode IO Structure	29
5.7 Matrix OE IO Structure	30
5.8 IO Typical Performance	31
6 Connection Matrix	34
6.1 Matrix Input Table	35
6.2 Matrix Output Table	37
6.3 Connection Matrix Virtual Inputs	40
7 Combination Function Macrocells	41
7.1 2-Bit LUT or D Flip-Flop or Shift Register Macrocells	41
7.2 2-bit LUT or Programmable Pattern Generator	46
7.3 3-Bit LUT or D Flip-Flop with Set/Reset or Shift Register Macrocells	48
7.4 4-Bit LUT or D Flip-Flop with Set/Reset or Shift Register Macrocell	60
8 Multi-Function Macrocells	64
8.1 3-Bit LUT or DFF/Latch with 8-Bit Counter/Delay Macrocells	64
8.2 4-Bit LUT or DFF/Latch with 16-Bit Counter/Delay Macrocell	73
8.3 CNT/DLY Timing Diagrams	76
8.4 FSM Timing Diagrams	83
8.5 Wake and Sleep Controller	86
9 Analog Comparators	91
9.1 ACMP0H Block Diagram	92
9.2 ACMP1H Block Diagram	93
9.3 ACMP Typical Performance	94
10 Programmable Delay/Edge Detector	95
10.1 Programmable Delay Timing Diagram - Edge Detector Output	95
11 Additional Logic Function. Deglitch Filter	96
12 Voltage Reference	97
12.1 Voltage Reference Overview	97
12.2 Vref Selection Table	97
12.3 Vref Block Diagram	98

12.4 Vref Typical Performance	99
13 Clocking	102
13.1 OSC General description	102
13.2 Oscillator0 (2.048 kHz)	103
13.3 Oscillator1 (25 MHz)	104
13.4 CNT/DLY Clock Scheme	105
13.5 External Clocking	105
13.6 Oscillators Accuracy	106
13.7 Oscillators Settling time	108
14 Power-On Reset	110
14.1 General Operation	110
14.2 POR Sequence	111
14.3 Macrocells Output States During POR Sequence	111
15 I²C Serial Communications Macrocell	114
15.1 I ² C Serial Communications Macrocell Overview	114
15.2 I ² C Serial Communications Device Addressing	114
15.3 I ² C Serial General Timing	115
15.4 I ² C Serial Communications Commands	115
15.5 I ² C Serial Command Register Map	121
16 Analog Temperature Sensor	123
17 Register Definitions	125
17.1 Register Map	125
18 Package Top Marking Definitions	184
18.1 STQFN 12L 1.6 mm x 1.6 mm x 0.55 mm 0.4P FC	184
18.2 MSTQFN 16L 1.6 mm x 1.6 mm x 0.55 mm 0.4P	184
19 Package Information	185
19.1 Package outlines for STQFN 12L 1.6 mm x 1.6 mm x 0.55 MM 0.4P FC Package	185
19.2 Package outlines for MSTQFN 16L 1.6 mm x 1.6 mm x 0.55 MM 0.4P Package	186
19.3 Moisture Sensitivity Level	187
19.4 STQFN Handling	187
19.5 Soldering Information	187
20 Ordering Information	187
20.1 Tape and Reel Specifications	187
20.2 Carrier Tape Drawing and Dimensions	188
21 Layout Guidelines	189
21.1 STQFN 12L 1.6 mm x 1.6 mm x 0.55 mm 0.4P FC Package	189
21.2 MSTQFN 16L 1.6 mm x 1.6 mm x 0.55 mm 0.4P Package	190
Glossary	191
Revision History	194

Low Voltage GreenPAK Programmable Mixed-Signal Matrix

Figures

Figure 1: Block Diagram.....	7
Figure 2: Steps to Create a Custom GreenPAK Device.....	26
Figure 3: GPI Structure Diagram.....	28
Figure 4: GPIO with I ² C Mode IO Structure Diagram.....	29
Figure 5: Matrix OE IO Structure Diagram.....	30
Figure 6: Typical High Level Output Current vs. High Level Output Voltage at T = +25 °C.....	31
Figure 7: Typical Low Level Output Current vs. Low Level Output Voltage, 1x Drive at T = +25 °C, Full Range.....	31
Figure 8: Typical Low Level Output Current vs. Low Level Output Voltage, 1x Drive at T = +25 °C.....	32
Figure 9: Typical Low Level Output Current vs. Low Level Output Voltage, 2x Drive at T = +25 °C, Full Range.....	32
Figure 10: Typical Low Level Output Current vs. Low Level Output Voltage, 2x Drive at T = +25 °C.....	33
Figure 11: Connection Matrix.....	34
Figure 12: Connection Matrix Usage Example.....	34
Figure 13: 2-bit LUT0 or DFF0 or Shift Register0.....	42
Figure 14: 2-bit LUT1 or DFF1 or Shift Register1.....	42
Figure 15: 2-bit LUT2 or DFF2 or Shift Register2.....	43
Figure 16: DFF0 to DFF2 and Shift Register0 to Shift Register2 Operation.....	43
Figure 17: DFF0 to DFF2 and Shift Register0 to Shift Register2 Operation with DFF Initial Value = 1.....	44
Figure 18: DFF0 to DFF2 and Shift Register0 to Shift Register2 Operation with Initial Value = b0001.....	45
Figure 19: 2-bit LUT3 or PGen.....	47
Figure 20: PGen Timing Diagram.....	47
Figure 21: 3-bit LUT0 or DFF3 or Shift Register 3.....	49
Figure 22: 3-bit LUT1 or DFF4 or Shift Register 4.....	50
Figure 23: 3-bit LUT2 or DFF5 or Shift Register 5.....	50
Figure 24: 3-bit LUT3 or DFF6 or Shift Register 6.....	51
Figure 25: 3-bit LUT4 or DFF7 or Shift Register 7.....	51
Figure 26: 3-bit LUT5 or DFF8 or Shift Register 8.....	52
Figure 27: 3-bit LUT6 or DFF9 or Shift Register 9.....	52
Figure 28: 3-bit LUT7 or DFF10 or Shift Register 10.....	53
Figure 29: 3-bit LUT8 or DFF11 or Shift Register 11.....	53
Figure 30: 3-bit LUT9 or DFF12 or Shift Register 12.....	54
Figure 31: DFF3 to DFF12 and Shift Register 3 to Shift Register 12 Operation.....	54
Figure 32: DFF3 to DFF12 and Shift Register 3 to Shift Register 12 Operation, nReset, Initial Value: b10011011.....	55
Figure 33: DFF3 to DFF12 and Shift Register3 to Shift Register12 Operation, nReset, Initial Value: b10011011, Case2.....	55
Figure 34: DFF3 to DFF12 and Shift Register 3 to Shift Register 12 Operation, nReset, Initial Value: b00011011.....	56
Figure 35: DFF3 to DFF12 and Shift Register 3 to Shift Register 12 Operation, nSet, Initial Value: b00011010.....	56
Figure 36: DFF3 to DFF12 and Shift Register 3 to Shift Register 12 Operation, nSet, Initial Value: b00011010, Case 2.....	57
Figure 37: DFF3 to DFF12 and Shift Register 3 to Shift Register 12 Operation, nSet, Initial Value: b10011010.....	57
Figure 38: 4-bit LUT0 or DFF13 or Shift Register 13.....	60
Figure 39: DFF13 and Shift Register 13 Operation.....	61
Figure 40: DFF13 and Shift Register 13 Operation, nSet, Initial Value: xA7B2.....	61
Figure 41: DFF13 and Shift Register 13 Operation, nReset, Initial Value: xA7B2.....	62
Figure 42: Possible Connections Inside Multi-Function Macrocell.....	64
Figure 43: 8-bit Multi-Function Macrocells Block Diagram (3-bit LUT10/DFF15, CNT/DLY1).....	65
Figure 44: 8-bit Multi-Function Macrocells Block Diagram (3-bit LUT11/DFF16, CNT/DLY2).....	66
Figure 45: 8-bit Multi-Function Macrocells Block Diagram (3-bit LUT12/DFF17, CNT/DLY3).....	67
Figure 46: 8-bit Multi-Function Macrocells Block Diagram (3-bit LUT13/DFF18, CNT/DLY4).....	68
Figure 47: 8-bit Multi-Function Macrocells Block Diagram (3-bit LUT14/DFF19, CNT/DLY5).....	69
Figure 48: 8-bit Multi-Function Macrocells Block Diagram (3-bit LUT15/DFF20, CNT/DLY6).....	70
Figure 49: 8-bit Multi-Function Macrocells Block Diagram (3-bit LUT16/DFF21, CNT/DLY7).....	71
Figure 50: 4-bit LUT1 or CNT/DLY0.....	74
Figure 51: Delay Macrocell Behavior with Different Oscillators Options (Edge Select: Both, Counter Data: 3).....	76
Figure 52: Delay Mode Timing Diagram (Rising, Falling, and Both Edge Detection).....	77
Figure 53: Counter Mode Timing Diagram without Two DFFs Synced Up.....	77
Figure 54: Counter Mode Timing Diagram with Two DFFs Synced Up.....	78
Figure 55: One-Shot Function Timing Diagram.....	79

Low Voltage GreenPAK Programmable Mixed-Signal Matrix

Figure 56: Frequency Detection Mode Timing Diagram.....	80
Figure 57: Edge Detection Mode Timing Diagram.....	81
Figure 58: Delayed Edge Detection Mode Timing Diagram.....	82
Figure 59: Counter Value, Counter Data = 3.....	83
Figure 60: CNT/FSM Mode Timing Diagram (Reset Rising Edge Mode, OSC is Forced On, UP = 0) for CNT Data = 3.....	83
Figure 61: CNT/FSM Mode Timing Diagram (Set Rising Edge Mode, OSC is Forced On, UP = 0) for CNT Data = 3.....	84
Figure 62: CNT/FSM Mode Timing Diagram (Reset Rising Edge Mode, OSC is Forced On, UP = 1) for CNT Data = 3.....	84
Figure 63: CNT/FSM Mode Timing Diagram (Set Rising Edge Mode, OSC is Forced On, UP = 1) for CNT Data = 3.....	85
Figure 64: DLY/FSM Mode, Falling Edge Delay, OSC is Forced On, DFFs Synced Up, UP = 0, CNT Data = 3.....	85
Figure 65: One Shot/FSM Mode, Rising Edge, OSC is Forced On, DFFs Synced Up, UP = 0, CNT Data = 3.....	85
Figure 66: Freq. Detector/FSM Mode, Rising Edge, OSC is Forced On, DFFs Synced Up, UP = 0, CNT Data = 3.....	86
Figure 67: Delayed Edge Detector/FSM Mode, Rising Edge, OSC is Forced On, DFFs Synced Up, UP = 0, CNT Data = 3.....	86
Figure 68: Wake/Sleep Controller.....	87
Figure 69: Wake/Sleep Timing Diagram, Normal Wake Mode, Counter Reset is Used.....	88
Figure 70: Wake/Sleep Timing Diagram, Short Wake Mode, Counter Reset is Used.....	88
Figure 71: Wake/Sleep Timing Diagram, Normal Wake Mode, Counter Set is Used.....	89
Figure 72: Wake/Sleep Timing Diagram, Short Wake Mode, Counter Set is Used.....	89
Figure 73: ACMP0H Block Diagram.....	92
Figure 74: ACMP1H Block Diagram.....	93
Figure 75: Typical Propagation Delay vs. Vref for ACMPxH at T = +25 °C, Gain = 1, Hysteresis = 0, VDD = 1.0 V to 1.65 V.....	94
Figure 76: ACMPxH Input Offset Voltage vs. Vref at T = -40 °C to +85 °C, VDD = 1.0 V to 1.65 V.....	94
Figure 77: Programmable Delay.....	95
Figure 78: Edge Detector Output.....	95
Figure 79: Deglitch Filter/Edge Detector Simplified Structure.....	96
Figure 80: Voltage Reference Block Diagram.....	98
Figure 81: Typical Load Regulation, Vref = 200 mV, T = -40 °C to +85 °C, Buffer - Enable.....	99
Figure 82: Typical Load Regulation, Vref = 400 mV, T = -40 °C to +85 °C, Buffer - Enable.....	99
Figure 83: Typical Load Regulation, Vref = 600 mV, T = -40 °C to +85 °C, Buffer - Enable.....	100
Figure 84: Typical Load Regulation, Vref = 850 mV, T = -40 °C to +85 °C, Buffer - Enable.....	100
Figure 85: Typical Input Offset Voltage vs. Vref at VDD = 1.2 V, T = +25 °C.....	101
Figure 86: Oscillator0 Block Diagram.....	103
Figure 87: Oscillator1 Block Diagram.....	104
Figure 88: Clock Scheme.....	105
Figure 89: Oscillator0 Frequency vs. Temperature, OSC0 = 2.048 kHz.....	106
Figure 90: Oscillator1 Frequency vs. Temperature, OSC1 = 25 MHz.....	106
Figure 91: Oscillators Total Error vs. Temperature, VDD = 1.0 V to 1.65 V.....	107
Figure 92: Oscillator0 Settling Time, VDD = 1.2 V, T = +25 °C, OSC0 = 2.048 kHz.....	108
Figure 93: Oscillator1 Settling Time, VDD = 1.2 V, T = +25 °C, OSC1 = 25 MHz (Normal Start).....	108
Figure 94: Oscillator1 Settling Time, VDD = 1.2 V, T = +25 °C, OSC1 = 25 MHz (Start with Delay).....	109
Figure 95: POR Sequence.....	111
Figure 96: Internal Macrocell States During POR Sequence.....	112
Figure 97: Power-Down.....	113
Figure 98: Basic Command Structure.....	115
Figure 99: I ² C General Timing Characteristics.....	115
Figure 100: Byte Write Command, R/W = 0.....	116
Figure 101: Sequential Write Command.....	116
Figure 102: Current Address Read Command, R/W = 1.....	117
Figure 103: Random Read Command.....	117
Figure 104: Sequential Read Command.....	118
Figure 105: Reset Command Timing.....	118
Figure 106: Example of I ² C Byte Write Bit Masking.....	120
Figure 107: Analog Temperature Sensor Structure Diagram.....	123
Figure 108: TS Output vs. Temperature, VDD = 1.0 V to 1.65 V.....	124

Low Voltage GreenPAK Programmable Mixed-Signal Matrix


Tables

Table 1: Functional Pin Description.....	9
Table 2: Pin Type Definitions	12
Table 3: Absolute Maximum Ratings.....	13
Table 4: Electrostatic Discharge Ratings	13
Table 5: Recommended Operating Conditions	13
Table 6: EC at T = -40 °C to +85 °C, V _{DD} = 1.0 V to 1.65 V Unless Otherwise Noted	14
Table 7: EC of the I ² C Pins for DI Mode at T = -40 °C to +85 °C, Full V _{DD} Range Unless Otherwise Noted	16
Table 8: EC of the I ² C Pins for DILV Mode at T = -40 °C to +85 °C, Full V _{DD} Range Unless Otherwise Noted.....	16
Table 9: I ² C Pins Timing Characteristics for DI Mode, T = -40 °C to +85 °C, Full V _{DD} Range Unless Otherwise Noted	17
Table 10: I ² C Pins Timing Characteristics for DILV Mode, T = -40 °C to +85 °C, Full V _{DD} Range Unless Otherwise Noted ..	17
Table 11: Typical Current Estimated for Each Macrocell at T = +25 °C	19
Table 12: Typical Delay Estimated for Each Macrocell at T = +25 °C	19
Table 13: Programmable Delay Expected Typical Delays and Pulse Widths at T = +25 °C.....	22
Table 14: Typical Filter Pulse Width.....	22
Table 15: Typical Counter/Delay Offset at T = +25 °C	22
Table 16: Oscillators Frequency Limits, V _{DD} = 1.0 V to 1.65 V	23
Table 17: Oscillators Power-On Delay at T = +25 °C, V _{DD} = 1.0 V to 1.65 V, OSC Power Setting: "Auto Power-On".....	23
Table 18: ACMP Specifications at T = -40 °C to +85 °C, V _{DD} = 1.0 V to 1.65 V, Unless Otherwise Noted.....	23
Table 19: TS Output vs Temperature	25
Table 20: Matrix Input Table.....	35
Table 21: Matrix Output Table.....	37
Table 22: Connection Matrix Virtual Inputs	40
Table 23: 2-bit LUT0 to 2-bit LUT2 Truth Table	46
Table 24: 2-bit LUT Standard Digital Functions	46
Table 25: 2-bit LUT3 Truth Table	48
Table 26: 2-bit LUT Standard Digital Functions	48
Table 27: 3-bit LUT0 to 3-bit LUT9 Truth Table	58
Table 28: 3-bit LUT Standard Digital Functions	58
Table 29: 4-bit LUT0 Truth Table	62
Table 30: 4-bit LUT Standard Digital Functions	63
Table 31: 3-bit LUT10 to 3-bit LUT16 Truth Table	72
Table 32: 4-bit LUT1 Truth Table	75
Table 33: 4-bit LUT Standard Digital Functions	75
Table 34: ACMP Input Selection	91
Table 35: Vref Selection Table.....	97
Table 36: Oscillator Operation Mode Configuration Settings	102
Table 37: Read/Write Protection Options.....	121
Table 38: Register Map.....	125
Table 39: MSL Classification.....	187

SLG47512/13

Low Voltage GreenPAK Programmable Mixed-Signal Matrix

1 Block Diagram

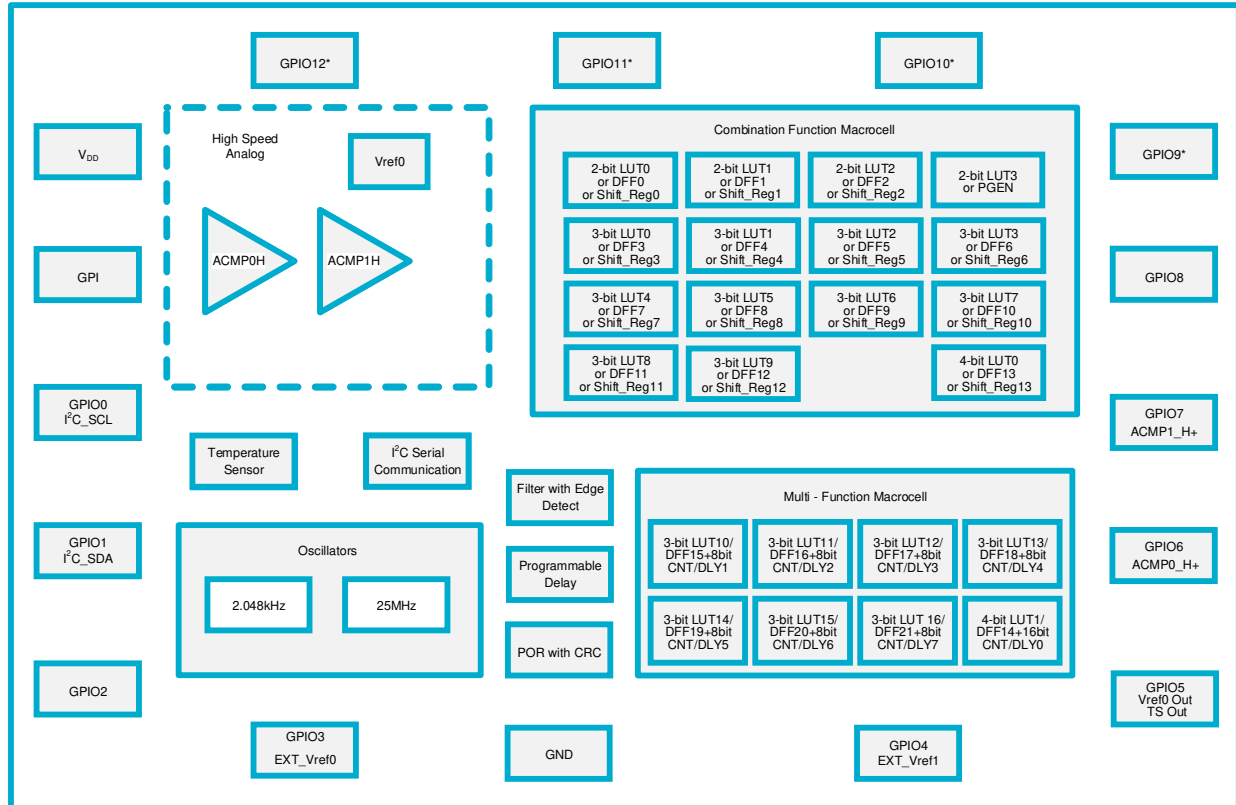

Note *: GPIO 9, 10, 11, and 12 are available in 16-pin package only.


Figure 1: Block Diagram

SLG47512/13

Low Voltage GreenPAK Programmable Mixed-Signal Matrix

2 Pinout

2.1 PIN CONFIGURATION - STQFN- 12L

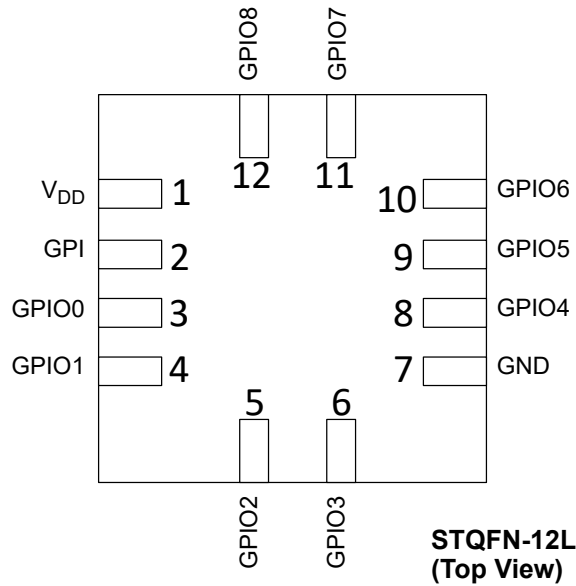

Pin #	Pin Name	Pin Functions
1	V _{DD}	Power Supply
2	GPI	GPI, SLA_0
3	GPIO0	GPIO, I ² C SCL
4	GPIO1	GPIO, I ² C SDA
5	GPIO2	GPIO with OE, EXT_OSC1_IN
6	GPIO3	GPIO with OE, EXT_Vref0, SLA_1
7	GND	Ground
8	GPIO4	GPIO with OE, EXT_Vref1, SLA_2
9	GPIO5	GPIO with OE, Vref_OUT, TS_OUT
10	GPIO6	GPIO with OE, ACMP0_H+
11	GPIO7	GPIO with OE, ACMP1_H+
12	GPIO8	GPIO with OE, SLA_3, EXT_OSC0_IN


Legend:

OE: Output Enable
ACMPx+: ACMPx Positive Input
ACMPx-: ACMPx Negative Input
I²C SCL: I²C Clock Input
I²C SDA: I²C Data Input/Output
Vref: Voltage Reference Output
EXT_CLKx: External Clock Input
SLA: Target Address
TS_OUT: Temperature Output

SLG47512/13

Low Voltage GreenPAK Programmable Mixed-Signal Matrix

2.2 PIN CONFIGURATION - MSTQFN-16L

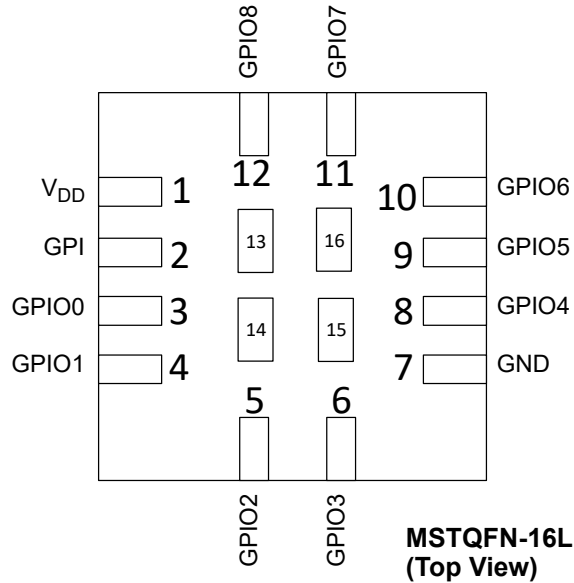

Pin #	Pin Name	Pin Functions
1	V _{DD}	Power Supply
2	GPI	GPI, SLA_0
3	GPIO0	GPIO, I ² C SCL
4	GPIO1	GPIO, I ² C SDA
5	GPIO2	GPIO with OE, EXT_OSC1_IN
6	GPIO3	GPIO with OE, EXT_Vref0, SLA_1
7	GND	Ground
8	GPIO4	GPIO with OE, EXT_Vref1, SLA_2
9	GPIO5	GPIO with OE, Vref_OUT, TS_OUT
10	GPIO6	GPIO with OE, ACMP0_H+
11	GPIO7	GPIO with OE, ACMP1_H+
12	GPIO8	GPIO with OE, SLA_3, EXT_OSC0_IN
13	GPIO9	GPIO with OE
14	GPIO10	GPIO with OE
15	GPIO11	GPIO with OE
16	GPIO12	GPIO with OE

Legend:

OE: Output Enable
ACMPx+: ACMPx Positive Input
ACMPx-: ACMPx Negative Input
I²C SCL: I²C Clock Input
I²C SDA: I²C Data Input/Output
Vref: Voltage Reference Output
EXT_CLKx: External Clock Input
SLA: Target Address
TS_OUT: Temperature Output

Table 1: Functional Pin Description

Pin #		Pin Name	Signal Name	Function	Input Options	Output Options
STQFN-12L	MSTQFN-16L					
1	1	V _{DD}	V _{DD}	Power Supply	--	--
2	2	GPI	GPI	General Purpose Input	Digital Input without Schmitt Trigger	--
					Digital Input with Schmitt Trigger	--
					Low Voltage Digital Input	--
			I ² C Target Address 0		--	--

SLG47512/13

Low Voltage GreenPAK Programmable Mixed-Signal Matrix

Table 1: Functional Pin Description (Continued)

Pin #		Pin Name	Signal Name	Function	Input Options	Output Options
STQFN-12L	MSTQFN-16L					
3	3	GPIO0	GPIO0	General Purpose IO (Note 1)	Digital Input without Schmitt Trigger	Open-Drain NMOS (1x)
					Digital Input with Schmitt Trigger	
					Low Voltage Digital Input	--
			I ² C SCL	I ² C Serial Clock	Digital Input without Schmitt Trigger	--
					Digital Input with Schmitt Trigger	--
					Low Voltage Digital Input	--
4	4	GPIO1	GPIO1	General Purpose IO	Digital Input without Schmitt Trigger	Open-Drain NMOS (1x)
					Digital Input with Schmitt Trigger	
					Low Voltage Digital Input	
			I ² C SDA	I ² C Serial Data	Digital Input without Schmitt Trigger	--
					Digital Input with Schmitt Trigger	--
					Low Voltage Digital Input	--
5	5	GPIO2	GPIO2	General Purpose IO with OE (Note 1)	Digital Input without Schmitt Trigger	Push-Pull (1x) (2x)
					Digital Input with Schmitt Trigger	Open-Drain NMOS (1x) (2x)
					Low Voltage Digital Input	--
			EXT_OSC1_IN	External Clock Connection	--	--
6	6	GPIO3	GPIO3	General Purpose IO with OE (Note 1)	Digital Input without Schmitt Trigger	Push-Pull (1x) (2x)
					Digital Input with Schmitt Trigger	Open-Drain NMOS (1x) (2x)
					Low Voltage Digital Input	--
			EXT_VREF0	Analog Comparator Negative Input	Analog	--
			I ² C Target Address 1		--	--
7	7	GND	GND	Power Supply	--	--
8	8	GPIO4	GPIO4	General Purpose IO with OE	Digital Input without Schmitt Trigger	Push-Pull (1x) (2x)
					Digital Input with Schmitt Trigger	Open-Drain NMOS (1x) (2x)
					Low Voltage Digital Input	

SLG47512/13

Low Voltage GreenPAK Programmable Mixed-Signal Matrix

Table 1: Functional Pin Description (Continued)

Pin #		Pin Name	Signal Name	Function	Input Options	Output Options
STQFN-12L	MSTQFN-16L					
8	8		EXT_VREF1	Analog Comparator Negative Input	Analog	--
			I ² C Target Address 2		--	--
9	9	GPIO5	GPIO5	General Purpose IO with OE (Note 1)	Digital Input without Schmitt Trigger	Push-Pull (1x) (2x)
					Digital Input with Schmitt Trigger	Open-Drain NMOS (1x) (2x)
					Low Voltage Digital Input	--
			Vref0	Vref0 Output	Analog	--
			TS_OUT	Temperature Sensor Output	Analog	--
10	10	GPIO6	GPIO6	General Purpose IO with OE (Note 1)	Digital Input without Schmitt Trigger	Push-Pull (1x) (2x)
					Digital Input with Schmitt Trigger	Open-Drain NMOS (1x) (2x)
					Low Voltage Digital Input	--
			ACMP0_H+	Analog Comparator 0_H Positive Input	Analog	--
11	11	GPIO7	GPIO7	General Purpose IO with OE (Note 1)	Digital Input without Schmitt Trigger	Push-Pull (1x) (2x)
					Digital Input with Schmitt Trigger	Open-Drain NMOS (1x) (2x)
					Low Voltage Digital Input	--
			ACMP1_H+	Analog Comparator 1_H Positive Input	Analog	--
12	12	GPIO8	GPIO8	General Purpose IO with OE (Note 1)	Digital Input without Schmitt Trigger	Push-Pull (1x) (2x)
					Digital Input with Schmitt Trigger	Open-Drain NMOS (1x) (2x)
					Low Voltage Digital Input	--
			I ² C Target Address 3		--	--
			EXT_OSC0_IN	External Clock Connection	--	--
--	13	GPIO9	GPIO9	General Purpose IO with OE (Note 1)	Digital Input without Schmitt Trigger	Push-Pull (1x) (2x)
					Digital Input with Schmitt Trigger	Open-Drain NMOS (1x) (2x)
					Low Voltage Digital Input	--

SLG47512/13

Low Voltage GreenPAK Programmable Mixed-Signal Matrix

Table 1: Functional Pin Description (Continued)

Pin #		Pin Name	Signal Name	Function	Input Options	Output Options
STQFN-12L	MSTQFN-16L					
--	14	GPIO10	GPIO10	General Purpose IO with OE (Note 1)	Digital Input without Schmitt Trigger	Push-Pull (1x) (2x)
					Digital Input with Schmitt Trigger	Open-Drain NMOS (1x) (2x)
					Low Voltage Digital Input	--
--	15	GPIO11	GPIO11	General Purpose IO with OE (Note 1)	Digital Input without Schmitt Trigger	Push-Pull (1x) (2x)
					Digital Input with Schmitt Trigger	Open-Drain NMOS (1x) (2x)
					Low Voltage Digital Input	--
--	16	GPIO12	GPIO12	General Purpose IO with OE (Note 1)	Digital Input without Schmitt Trigger	Push-Pull (1x) (2x)
					Digital Input with Schmitt Trigger	Open-Drain NMOS (1x) (2x)
					Low Voltage Digital Input	--
Note 1 General Purpose IO's with OE can be used to implement bidirectional signals under user control via Connection Matrix to OE signal in IO structure or as a 3-state output.						

Table 2: Pin Type Definitions

Pin Type	Description
V _{DD}	Power Supply
GPI	General Purpose Input
GPIO	General Purpose Input/Output
GND	Ground

Low Voltage GreenPAK Programmable Mixed-Signal Matrix

3 Characteristics

3.1 ABSOLUTE MAXIMUM RATINGS

Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. These are stress ratings only, so functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specification are not implied. Exposure to Absolute Maximum Rating conditions for extended periods may affect device reliability.

Table 3: Absolute Maximum Ratings

Parameter		Min	Max	Unit
Supply Voltage on V_{DD} relative to GND			2.2	V
DC Input Voltage		GND - 0.5 V	$V_{DD} + 0.5$ V	V
Maximum Average or DC Current (Through V_{DD} or GND pin)		--	90	mA
Maximum Average or DC Current (Through pin)	Push-Pull 1x	--	11	mA
	Push-Pull 2x	--	16	
	OD 1x	--	11	
	OD 2x	--	21	
Current at Input Pin		-1.0	1.0	mA
Input Leakage Current (Absolute Value)		--	1000	nA
Storage Temperature Range		-65	150	°C
Junction Temperature		--	150	°C
Moisture Sensitive Level		1		

3.2 ELECTROSTATIC DISCHARGE RATINGS

Table 4: Electrostatic Discharge Ratings

Parameter	Min	Max	Unit
ESD Protection (Human Body Model)	2000	--	V
ESD Protection (Charged Device Model)	1000	--	V

3.3 RECOMMENDED OPERATING CONDITIONS

Table 5: Recommended Operating Conditions

Parameter	Condition	Min	Max	Unit
Supply Voltage (V_{DD})		1.0	1.65	V
Operating Temperature		-40	85	°C
Maximal Voltage Applied to any PIN in High Impedance State		--	$V_{DD} + 0.3$	V
Typical Capacitor Value at V_{DD}		0.1	--	μF
Analog Input Common Mode Range	Allowable Input Voltage at Analog Pins	0	V_{DD}	V

SLG47512/13

Low Voltage GreenPAK Programmable Mixed-Signal Matrix

3.4 ELECTRICAL CHARACTERISTICS

Table 6: EC at T = -40 °C to +85 °C, V_{DD} = 1.0 V to 1.65 V Unless Otherwise Noted

Parameter	Description	Condition	Min	Typ	Max	Unit
V _{IH}	HIGH-Level Input Voltage	Logic Input (Note 1)	0.6x V _{DD}	--	V _{DD} +0.3	V
		Logic Input with 10 kΩ Pull-up (Note 1)	0.52x V _{DD}	--	V _{DD} +0.3	V
		Logic Input with 10 kΩ Pull-down (Note 1)	0.83x V _{DD}	--	V _{DD} +0.3	V
		Logic Input with Schmitt Trigger (Positive Going Threshold Voltage min = 0.4xV _{DD} ; max = 0.7xV _{DD})	0.7x V _{DD}	--	V _{DD} +0.3	V
		Logic Input with Schmitt Trigger (Positive Going Threshold Voltage min = 0.4xV _{DD} ; max = 0.7xV _{DD}), with 10 kΩ Pull-up	0.62x V _{DD}	--	V _{DD} +0.3	V
		Logic Input with Schmitt Trigger (Positive Going Threshold Voltage min = 0.4xV _{DD} ; max = 0.7xV _{DD}), with 10 kΩ Pull-down	0.88x V _{DD}	--	V _{DD} +0.3	V
		Low-Level Logic Input (Note 1)	0.6	--	--	V
		Low-Level Logic Input with 10 kΩ Pull-up (Note 1)	0.44	--	--	V
		Low-Level Logic Input with 10 kΩ Pull-down (Note 1)	0.75	--	--	V
V _{IL}	LOW-Level Input Voltage	Logic Input (Note 1)	GND-0.3	--	0.35x V _{DD}	V
		Logic Input with 10 kΩ Pull-up (Note 1)	V _{DD} -0.3	--	0.19x V _{DD}	V
		Logic Input with 10 kΩ Pull-down (Note 1)	V _{DD} -0.3	--	0.37x V _{DD}	V
		Logic Input with Schmitt Trigger (Negative Going Threshold Voltage min = 0.3xV _{DD} ; max = 0.6xV _{DD})	GND-0.3	--	0.3x V _{DD}	V
		Logic Input with Schmitt Trigger (Negative Going Threshold Voltage min = 0.3xV _{DD} ; max = 0.6xV _{DD}), with 10 kΩ Pull-up	V _{DD} -0.3	--	0.16x V _{DD}	V
		Logic Input with Schmitt Trigger (Negative Going Threshold Voltage min = 0.3xV _{DD} ; max = 0.6xV _{DD}), with 10 kΩ Pull-down	V _{DD} -0.3	--	0.37x V _{DD}	V
		Low-Level Logic Input (Note 1)	GND-0.3	--	0.27	V
		Low-Level Logic Input with 10 kΩ Pull-up (Note 1)	V _{DD} -0.3	--	0.08	V
		Low-Level Logic Input with 10 kΩ Pull-down (Note 1)	V _{DD} -0.3	--	0.33	V
V _{HYS}	Schmitt Trigger Hysteresis Voltage		0.07	0.21	0.33	V

**Low Voltage GreenPAK Programmable
Mixed-Signal Matrix**
Table 6: EC at T = -40 °C to +85 °C, V_{DD} = 1.0 V to 1.65 V Unless Otherwise Noted (Continued)

Parameter	Description	Condition	Min	Typ	Max	Unit
V _{HYS}	Schmitt Trigger Hysteresis Voltage	With 10 kΩ Pull-up/Pull-down	0.09x V _{DD}	0.25x V _{DD}	0.36x V _{DD}	V
		V _{DD} = 1.0 V	0.14	0.22	0.30	V
		V _{DD} = 1.2 V	0.12	0.23	0.33	V
		V _{DD} = 1.5 V	0.08	0.16	0.26	V
		V _{DD} = 1.65 V	0.07	0.14	0.22	V
V _{OH}	HIGH-Level Output Voltage	Push-Pull, 1x Drive, I _{OH} = 100 μA	V _{DD} - 0.01	--	--	V
		Push-Pull, 1x Drive, I _{OH} = 2 mA	0.85x V _{DD}	--	--	V
		Push-Pull, 2x Drive, I _{OH} = 100 μA	V _{DD} - 0.005	--	--	V
		Push-Pull, 2x Drive, I _{OH} = 2 mA	0.93x V _{DD}	--	--	V
V _{OL}	LOW-Level Output Voltage	Push-Pull, 1x Drive, I _{OL} = 100 μA	--	--	0.01	V
		Push-Pull, 1x Drive, I _{OL} = 1 mA	--	--	0.1x V _{DD}	V
		Push-Pull, 2x Drive, I _{OH} = 100 μA	--	--	0.005	V
		Push-Pull, 2x Drive, I _{OH} = 2 mA	--	--	0.1x V _{DD}	V
		NMOS OD, 1x Drive, I _{OL} = 100 μA	--	--	0.005	V
		NMOS OD, 1x Drive, I _{OL} = 2 mA	--	--	0.1x V _{DD}	V
		NMOS OD, 2x Drive, I _{OL} = 100 μA	--	--	0.002	V
		NMOS OD, 2x Drive, I _{OL} = 2 mA	--	--	0.05x V _{DD}	V
I _{OH}	HIGH-Level Output Pulse Current (Note 2)	Push-Pull, 1x Drive, V _{OH} = 0.8xV _{DD}	2.3	6.1	11.6	mA
		Push-Pull, 2x Drive, V _{OH} = 0.8xV _{DD}	4.3	11.5	22.2	mA
I _{OL}	LOW-Level Output Pulse Current (Note 2)	Push-Pull, 1x Drive, V _{OL} = 0.2xV _{DD}	1.6	5.0	9.1	mA
		Push-Pull, 2x Drive, V _{OL} = 0.2xV _{DD}	3.2	9.9	18.2	mA
		NMOS OD, 1x Drive, V _{OL} = 0.1xV _{DD}	2.0	5.9	11.2	mA
		NMOS OD, 2x Drive, V _{OL} = 0.1xV _{DD}	3.9	11.5	21.7	mA
T _{SU}	Startup Time	From V _{DD} rising past PON _{THR} , t _{RAMP} = 1 μs	--	2.243	3.213	ms
PON _{THR}	Power-On Threshold	V _{DD} Level Required to Start Up the Chip	0.749	0.878	1.027	V
		T = -20 °C to +85 °C, V _{DD} Level Required to Start Up the Chip	0.758	0.878	0.990	V
POFF _{THR}	Power-Off Threshold	V _{DD} Level Required to Switch Off the Chip	0.409	0.510	0.704	V

SLG47512/13

Low Voltage GreenPAK Programmable Mixed-Signal Matrix

Table 6: EC at T = -40 °C to +85 °C, V_{DD} = 1.0 V to 1.65 V Unless Otherwise Noted (Continued)

Parameter	Description	Condition	Min	Typ	Max	Unit
R _{PULL}	Pull-up or Pull-down Resistance	1 M for Pull-up: V _{IN} = GND; for Pull-down: V _{IN} = V _{DD}	--	1	--	MΩ
		100 k for Pull-up: V _{IN} = GND; for Pull-down: V _{IN} = V _{DD}	--	100	--	kΩ
		10 k For Pull-up: V _{IN} = GND; for Pull-down: V _{IN} = V _{DD}	--	10	--	kΩ
C _{IN}	Input Capacitance	T = +25 °C, V _{DD} = 1.2 V		3.2		pF
Note 1 No hysteresis.						
Note 2 DC or average current through any pin should not exceed value given in Absolute Maximum Conditions.						

3.5 I²C PINS ELECTRICAL CHARACTERISTICS

Table 7: EC of the I²C Pins for DI Mode at T = -40 °C to +85 °C, Full V_{DD} Range Unless Otherwise Noted

Parameter	Description	Condition	Fast-Mode		Fast-Mode Plus		Unit
			Min	Max	Min	Max	
V _{IL}	LOW-level Input Voltage		-0.5	0.3xV _{DD}	-0.5	0.3xV _{DD}	V
V _{IH}	HIGH-level Input Voltage		0.7xV _{DD}	V _{DD}	0.7xV _{DD}	V _{DD}	V
V _{HYS}	Hysteresis of Schmitt Trigger Inputs		0.05xV _{DD}	--	0.05xV _{DD}	--	V
V _{OL}	LOW-Level Output Voltage	Open-Drain at 2 mA sink current	0	0.2xV _{DD}	0	0.2xV _{DD}	V
		Open-Drain at 3 mA sink current	0	0.4	--	--	V
		Open-Drain at 20 mA sink current	--	--	--	0.21	V
I _{OL}	LOW-Level Output Current	V _{DD} = 1.2 V, V _{OL} = 0.2 V	3	--	20	--	mA
t _{of}	Output Fall Time from V _{IHmin} to V _{ILmax}		--	250	--	120	ns
I _i	Input Current each IO Pin	0.1xV _{DD} < V _I < 0.9xV _{DDmax}	-10	+10	-10	+10	mA
C _i	Capacitance for each IO Pin	T = +25 °C, V _{DD} = 1.2 V to 1.7 V	--	10	--	10	pF
Note 1 For Fast-mode Plus SDA pin must be configured as NMOS 2x Open-Drain, see register [1329] in section 17.							

Table 8: EC of the I²C Pins for DILV Mode at T = -40 °C to +85 °C, Full V_{DD} Range Unless Otherwise Noted

Parameter	Description	Condition	Fast-Mode		Unit
			Min	Max	
V _{IL}	LOW-level Input Voltage		-0.5	0.3xV _{DD}	V
V _{IH}	HIGH-level Input Voltage		0.7xV _{DD}	V _{DD}	V
V _{OL}	LOW-Level Output Voltage	Open-Drain at 2 mA sink current	0	0.2xV _{DD}	V
		Open-Drain at 3 mA sink current	0	0.4	V

SLG47512/13

Low Voltage GreenPAK Programmable Mixed-Signal Matrix

Table 8: EC of the I²C Pins for DILV Mode at T = -40 °C to +85 °C, Full V_{DD} Range Unless Otherwise Noted (Continued)

Parameter	Description	Condition	Fast-Mode		Unit
			Min	Max	
I _{OL}	LOW-Level Output Current	V _{DD} = 1.3 V, V _{OL} = 0.2 V	3	--	mA
t _{of}	Output Fall Time from V _{IHmin} to V _{ILmax}		--	250	ns
I _i	Input Current each IO Pin	0.1xV _{DD} < V _I < 0.9xV _{DDmax}	-10	+10	mA
C _i	Capacitance for each IO Pin	T = +25 °C, V _{DD} = 1.2 V to 1.7 V	--	10	pF

Table 9: I²C Pins Timing Characteristics for DI Mode, T = -40 °C to +85 °C, Full V_{DD} Range Unless Otherwise Noted

Parameter	Description	Condition	Speed				Unit
			400 kHz		1 MHz		
			Min	Max	Min	Max	
F _{SCL}	Clock Frequency, SCL		--	400	--	1000	kHz
t _{LOW}	Clock Pulse Width Low		1300	--	500	--	ns
t _{HIGH}	Clock Pulse Width High		600	--	260	--	ns
t _{SP}	Pulse Width of Spikes that must be suppressed by the Input Filter		--	50	--	50	ns
t _{VD_ACK}	Data Valid Acknowledge Time		--	900	--	450	ns
t _{BUF}	Bus Free Time between Stop and Start		1300	--	500	--	ns
t _{HD_STA}	Start Hold Time		600	--	260	--	ns
t _{SU_STA}	Start Set-up Time		600	--	260	--	ns
t _{HD_DAT}	Data Hold Time (Note 1)		55	--	55	--	ns
t _{SU_DAT}	Data Set-up Time		100	--	50	--	ns
t _R	Inputs Rise Time		--	300	--	120	ns
t _F	Inputs Fall Time		--	300	--	120	ns
t _{SU_STO}	Stop Set-up Time		600	--	260	--	ns
t _{VD_DAT}	Data Valid Time		--	900	--	450	ns

Note 1 Does not meet standard I²C specifications: t_{HD_DAT} = 0 ns (min) for Fast-Mode and Fast-Mode Plus.

Note 2 Timing diagram can be found in [Figure 99](#).

Table 10: I²C Pins Timing Characteristics for DILV Mode, T = -40 °C to +85 °C, Full V_{DD} Range Unless Otherwise Noted

Parameter	Description	Condition	Speed		Unit
			400 kHz		
			Min	Max	
F _{SCL}	Clock Frequency, SCL		--	400	kHz
t _{LOW}	Clock Pulse Width Low		1300	--	ns
t _{HIGH}	Clock Pulse Width High		600	--	ns
t _{SP}	Pulse Width of Spikes that must be suppressed by the Input Filter		--	50	ns
t _{VD_ACK}	Data Valid Acknowledge Time		--	900	ns
t _{BUF}	Bus Free Time between Stop and Start		1300	--	ns

SLG47512/13

Low Voltage GreenPAK Programmable Mixed-Signal Matrix

Table 10: I²C Pins Timing Characteristics for DILV Mode, T = -40 °C to +85 °C, Full V_{DD} Range Unless Otherwise Noted

Parameter	Description	Condition	Speed		Unit
			400 kHz		
			Min	Max	
t _{HD_STA}	Start Hold Time		600	--	ns
t _{SU_STA}	Start Set-up Time		600	--	ns
t _{HD_DAT}	Data Hold Time (Note 1)		200	--	ns
t _{SU_DAT}	Data Set-up Time (Note 1)		223	--	ns
t _R	Inputs Rise Time		--	300	ns
t _F	Inputs Fall Time		--	300	ns
t _{SU_STO}	Stop Set-up Time		600	--	ns
t _{VD_DAT}	Data Valid Time		--	900	ns
Note 1 Does not meet standard I ² C specifications: t _{HD_DAT} = 0 ns (min), t _{SU_DAT} = 100 ns (min).					
Note 2 Timing diagram can be found in Figure 99 .					

Low Voltage GreenPAK Programmable Mixed-Signal Matrix

3.6 MACROCELLS CURRENT CONSUMPTION

Table 11: Typical Current Estimated for Each Macrocell at T = +25 °C

Parameter	Description	Note	V _{DD} = 1.0 V	V _{DD} = 1.2 V	V _{DD} = 1.5 V	V _{DD} = 1.65 V	Unit
I _{DD}	Current	PDET+I ² C	0.32	0.40	0.56	0.70	μA
		PDET+BG+I ² C	0.83	0.93	1.14	1.31	μA
		PDET+BG+I _{BIAS} +Vref Source+Buffer (Buffer Selection: Any ACMPxH Vref)	14.90	15.06	15.33	15.52	μA
		Temperature Sensor+PDET+BG+I _{BIAS} +Vref Source+TPS+Buffer	15.70	15.86	16.13	16.32	μA
		PDET+BG+I _{BIAS} +Buffer (Vref Source - External, Buffer Selection: Any ACMPxH Vref)	8.04	8.17	8.41	8.59	μA
		OSC0+BG+PDET, Pre-divider = 1	1.04	1.18	1.46	1.66	μA
		OSC0+BG+PDET, Pre-divider = 4	1.04	1.18	1.46	1.66	μA
		OSC0+BG+PDET, Pre-divider = 8	1.04	1.18	1.46	1.66	μA
		OSC1+BG+PDET, Pre-divider = 1	67.94	79.49	96.28	107.51	μA
		OSC1+BG+PDET, Pre-divider = 4	70.33	82.36	99.85	111.55	μA
		OSC1+BG+PDET, Pre-divider = 8	69.12	80.91	98.08	109.57	μA
		PDET+BG+I _{BIAS} +ACMPH0+ACMPH1 +Vref Source (Vref Source - Internal, V _{IN+} = V _{DD} , V _{IN-} = 25 mV)	17.80	18.23	18.78	19.07	μA
		PDET+BG+I _{BIAS} +ACMPH0+ACMPH1 (V _{IN+} = V _{DD} , External Vref = 650 mV)	9.63	11.22	11.81	12.11	μA
		PDET+BG+I _{BIAS} +ACMPH0 (V _{IN+} = V _{DD} , External Vref = 650 mV)	5.42	6.28	6.69	6.92	μA

3.7 TIMING CHARACTERISTICS

Table 12: Typical Delay Estimated for Each Macrocell at T = +25 °C

Parameter	Description	Note	V _{DD} = 1.0 V		V _{DD} = 1.2 V		V _{DD} = 1.5 V		V _{DD} = 1.65 V		Unit
			Rising	Falling	Rising	Falling	Rising	Falling	Rising	Falling	
tpd	Delay	Digital Input to PP 1x	18	18	12	12	8	8	7	7	ns
tpd	Delay	Digital Input to PP 2x	18	18	12	12	8	8	7	7	ns
tpd	Delay	Digital Input with Schmitt Trigger to PP 1x	18	18	12	12	8	8	7	7	ns
tpd	Delay	Low Voltage Digital Input to PP 1x	18	18	12	12	8	8	7	7	ns
tpd	Delay	Digital input to NMOS 1x	--	18	--	12	--	8	--	7	ns
tpd	Delay	Digital input to NMOS 2x	--	18	--	12	--	8	--	7	ns

**Low Voltage GreenPAK Programmable
Mixed-Signal Matrix**
Table 12: Typical Delay Estimated for Each Macrocell at T = +25 °C (Continued)

Parameter	Description	Note	V _{DD} = 1.0 V		V _{DD} = 1.2 V		V _{DD} = 1.5 V		V _{DD} = 1.65 V		Unit
			Rising	Falling	Rising	Falling	Rising	Falling	Rising	Falling	
tpd	Delay	Output enable from Pin, OE Hi-Z to 1	19	--	12	--	10	--	9	--	ns
tpd	Delay	Output enable from Pin, OE Hi-Z to 0	--	19	--	12	--	10	--	9	ns
tpd	Delay	PP 1x 3 State Hi-Z to 1	19	--	12	--	10	--	9	--	ns
tpd	Delay	PP 1x 3 State Hi-Z to 0	--	19	--	12	--	10	--	9	ns
tpd	Delay	PP 2x 3 State Hi-Z to 1	19	--	11	--	10	--	9	--	ns
tpd	Delay	PP 2x 3 State Hi-Z to 0	--	19	--	11	--	10	--	9	ns
tpd	Delay	LATCH Q	13	13	8	8	5	5	4	4	ns
tpd	Delay	LATCH nQ	13	13	8	8	5	5	4	4	ns
tpd	Delay	LATCH nRESET High Q	13	13	8	8	5	5	4	4	ns
tpd	Delay	LATCH nRESET High nQ	13	13	8	8	5	5	4	4	ns
tpd	Delay	LATCH nRESET Low Q	13	13	8	8	5	5	4	4	ns
tpd	Delay	LATCH nRESET Low nQ	13	13	8	8	5	5	4	4	ns
tpd	Delay	LATCH nSET High Q	13	13	8	8	5	5	4	4	ns
tpd	Delay	LATCH nSET High nQ	13	13	8	8	5	5	4	4	ns
tpd	Delay	LATCH nSET Low Q	14	13	10	10	6	6	4	4	ns
tpd	Delay	LATCH nSET Low nQ	14	13	10	9	6	6	4	4	ns
tpd	Delay	Multi-Function LATCH Q	13	13	9	9	6	6	4	4	ns
tpd	Delay	Multi-Function LATCH nQ	13	13	9	9	6	6	4	4	ns
tpd	Delay	Multi-Function LATCH nRESET Q	13	13	9	9	6	6	4	4	ns
tpd	Delay	Multi-Function LATCH nRESET nQ	13	13	9	9	6	6	4	4	ns
tpd	Delay	Multi-Function LATCH nSET Q	13	13	9	9	6	6	4	4	ns
tpd	Delay	Multi-Function LATCH nSET nQ	13	13	9	9	6	6	4	4	ns
tpd	Delay	2-bit LUT	13	13	6	6	6	6	4	4	ns
tpd	Delay	3-bit LUT	13	13	9	8	6	6	4	4	ns
tpd	Delay	4-bit LUT	13	13	8	8	6	6	4	4	ns
tpd	Delay	Multi-Function 3-bit LUT	13	13	9	9	6	6	4	4	ns
tpd	Delay	Multi-Function 3-bit LUT, CNT Delay	13	13	9	9	6	6	4	4	ns
tpd	Delay	Multi-Function 4-bit LUT	13	13	9	9	6	6	4	4	ns
tpd	Delay	Multi-Function 4-bit LUT, CNT Delay	13	13	9	9	6	6	4	4	ns
tpd	Delay	Edge detect	10	10	5	5	4	4	3	3	ns
tw	Width	Edge detect	227	227	155	155	137	137	126	126	ns
tpd	Delay	Edge detect Delayed	238	238	162	162	139	139	129	129	ns
tpd	Delay	DFF Q	12	12	7	7	5	5	4	4	ns
tpd	Delay	DFF nQ	12	12	7	7	5	5	4	4	ns
tpd	Delay	DFF nRESET High Q	--	12	--	7	5	5	--	4	ns

**Low Voltage GreenPAK Programmable
Mixed-Signal Matrix**
Table 12: Typical Delay Estimated for Each Macrocell at T = +25 °C (Continued)

Parameter	Description	Note	V _{DD} = 1.0 V		V _{DD} = 1.2 V		V _{DD} = 1.5 V		V _{DD} = 1.65 V		Unit
			Rising	Falling	Rising	Falling	Rising	Falling	Rising	Falling	
tpd	Delay	DFF nRESET High nQ	12	--	7	--	5	--	4	--	ns
tpd	Delay	DFF nRESET Low Q	--	12	--	7	--	5	--	4	ns
tpd	Delay	DFF nRESET Low nQ	12	--	7	--	5	--	4	--	ns
tpd	Delay	DFF nSET High Q	12	--	7	--	5	--	4	--	ns
tpd	Delay	DFF nSET High nQ	--	12	--	7	--	5	--	4	ns
tpd	Delay	DFF nSET Low Q	12	--	7	--	5	--	4	--	ns
tpd	Delay	DFF nSET Low nQ	--	12	--	7	--	5	--	4	ns
tpd	Delay	Multi-Function DFF Q	13	13	6	6	5	5	4	4	ns
tpd	Delay	Multi-Function DFF nQ	13	13	6	6	5	5	4	4	ns
tpd	Delay	Multi-Function DFF nRESET Q	--	13	--	6	5	5	--	4	ns
tpd	Delay	Multi-Function DFF nRESET nQ	13	--	6	--	5	--	4	--	ns
tpd	Delay	Multi-Function DFF nSET Q	13	--	6	--	5	--	4	--	ns
tpd	Delay	Multi-Function DFF nSET nQ	--	13	--	6	--	5	--	5	ns
tpd	Delay	Shift Registers Q	14	14	7	7	6	6	5	5	ns
tpd	Delay	Shift Registers nQ	14	14	7	7	6	6	5	5	ns
tpd	Delay	Multi-Function Reset CNT Q	19	--	9	--	7	--	6	--	ns
tpd	Delay	Multi-Function Reset CNT nQ	--	19	--	9	--	7	--	6	ns
tpd	Delay	Multi-Function CNT Delay Q	19	19	9	9	7	7	6	6	ns
tpd	Delay	Multi-Function CNT Delay nQ	19	19	9	9	7	7	6	6	ns
tpd	Delay	Multi-Function CNT Edge Detect Q	19	--	9	--	7	--	6	--	ns
tpd	Delay	Multi-Function CNT Edge Detect nQ	--	19	--	9	--	7	--	6	ns
tw	Width	Multi-Function CNT Edge Detect Q	159	--	91	--	70	--	62	--	ns
tw	Width	Multi-Function CNT Edge Detect nQ	--	159	--	91	--	70	--	62	ns
tpd	Delay	Multi-Function CNT Frequency Detect Q	32	32	18	18	14	14	12	12	ns
tpd	Delay	Multi-Function CNT Frequency Detect nQ	32	32	18	18	14	14	12	12	ns
tpd	Delay	Multi-Function CNT One Shot Q	15	--	9	--	7	--	6	--	ns
tpd	Delay	Multi-Function CNT One Short nQ	--	15	--	9	--	7	--	6	ns
tpd	Delay	PGen CLK	10	10	5	5	4	4	4	4	ns
tpd	Delay	PGen nRESET Hi-Z to 0	--	10	--	5	--	4	--	4	ns
tpd	Delay	PGen nRESET Hi-Z to 1	10	--	5	--	4	--	4	--	ns
tpd	Delay	Filter Q	86	86	55	55	46	46	41	41	ns
tpd	Delay	Filter nQ	86	86	54	54	46	46	40	40	ns

Low Voltage GreenPAK Programmable Mixed-Signal Matrix

Table 13: Programmable Delay Expected Typical Delays and Pulse Widths at T = +25 °C

Parameter	Description	Note	V _{DD} = 1.0 V	V _{DD} = 1.2 V	V _{DD} = 1.5 V	V _{DD} = 1.65 V	Unit
tw1	Pulse Width, 1 cell	mode: (any) edge detect, edge detect output	220	168	132	122	ns
tw2	Pulse Width, 2 cell	mode: (any) edge detect, edge detect output	444	338	266	244	ns
tw3	Pulse Width, 3 cell	mode: (any) edge detect, edge detect output	669	510	399	368	ns
tw4	Pulse Width, 4 cell	mode: (any) edge detect, edge detect output	898	682	534	492	ns
time1	Delay, 1 cell	mode: (any) edge detect, edge detect output	9	6	4	3	ns
time1	Delay, 2 cell	mode: (any) edge detect, edge detect output	9	6	4	3	ns
time1	Delay, 3 cell	mode: (any) edge detect, edge detect output	9	6	4	3	ns
time1	Delay, 4 cell	mode: (any) edge detect, edge detect output	9	6	4	3	ns
time2	Delay, 1 cell	mode: both edge delay, edge detect output	229	173	135	124	ns
time2	Delay, 2 cell	mode: both edge delay, edge detect output	453	343	268	247	ns
time2	Delay, 3 cell	mode: both edge delay, edge detect output	679	514	402	369	ns
time2	Delay, 4 cell	mode: both edge delay, edge detect output	910	688	537	494	ns

Table 14: Typical Filter Pulse Width

Parameter	Condition	V _{DD} = 1.0 V	V _{DD} = 1.2 V	V _{DD} = 1.5 V	V _{DD} = 1.65 V	Unit
Filtered Pulse Width, t _{block}	T = +25 °C	< 60.5	< 45	< 32.5	< 27.5	ns
	T = -40 °C to +85 °C	< 52	< 37	< 27	< 21.5	ns

3.8 COUNTER/DELAY CHARACTERISTICS

Table 15: Typical Counter/Delay Offset at T = +25 °C

Parameter	OSC Freq	OSC Power	V _{DD} = 1.0 V	V _{DD} = 1.2 V	V _{DD} = 1.5 V	V _{DD} = 1.65 V	Unit
Power-On time	25 MHz	auto	0.05	0.04	0.03	0.03	μs
Power-On time	2.048 kHz	auto	471	480	486	492	μs
frequency settling time	25 MHz	auto	0.8	0.8	0.8	0.8	μs
frequency settling time	2.048 kHz	auto	963	963	963	963	μs
variable (CLK period)	25 MHz	forced	0-40.6	0-40.6	0-40.6	0-40.6	ns
variable (CLK period)	2.048 kHz	forced	0.490	0-490	0-490	0-490	μs
tpd (non-delayed edge)	25 MHz/ 2.048 kHz	either	15	9	6	5	ns

SLG47512/13

Low Voltage GreenPAK Programmable Mixed-Signal Matrix

3.9 OSCILLATOR CHARACTERISTICS

Table 16: Oscillators Frequency Limits, $V_{DD} = 1.0 \text{ V}$ to 1.65 V

Parameter	Temperature Range					
	+25 °C			-40 °C to +85 °C		
	Minimum Value, kHz	Maximum Value, kHz	Error, %	Minimum Value, kHz	Maximum Value, kHz	Error, %
2.048 kHz RC OSC0	2.0205	2.0754	+1.3	1.7655	2.1444	+4.7
			-1.3			-13.8
25 MHz RC OSC1	24100	25644	+2.6	22141	26250	+5.0
			-3.6			-11.4

3.9.1 OSC Power-On Delay

Table 17: Oscillators Power-On Delay at $T = +25 \text{ °C}$, $V_{DD} = 1.0 \text{ V}$ to 1.65 V , OSC Power Setting: "Auto Power-On"

OSC0 2.048 kHz		OSC1 25 MHz		OSC1 25 MHz Start with Delay	
Typical Value, μs	Maximum Value, μs	Typical Value, ns	Maximum Value, ns	Typical Value, ns	Maximum Value, ns
476	--	40.45	55.33	152	--

3.10 ACMP CHARACTERISTICS

Table 18: ACMP Specifications at $T = -40 \text{ °C}$ to $+85 \text{ °C}$, $V_{DD} = 1.0 \text{ V}$ to 1.65 V , Unless Otherwise Noted

Parameter	Description	Note	Condition	Min	Typ	Max	Unit
V_{ACMP}	ACMP Input Voltage Range	Positive Input		0	--	V_{DD}	V
		Negative Input		0	--	V_{DD}	V
V_{offset}	ACMP Input Offset	$V_{HYS} = 0 \text{ mV}$, Gain = 1, $V_{ref} = 25 \text{ mV}$ to 850 mV		-7.3	--	7.2	mV
I_{LKG}	ACMP Input Leakage			--	2	228	nA
t_{start}	ACMP Startup Time	ACMPxH Power-On delay, Minimal required wake time for the "Wake and Sleep function"	BG always On	--	--	78	μs
V_{HYS}	ACMP0H, ACMP1H Built-in Hysteresis (Note 1)	$V_{HYS} = 25 \text{ mV}$	$T = +25 \text{ °C}$	21.9	24.2	25.7	mV
		$V_{HYS} = 150 \text{ mV}$	$T = +25 \text{ °C}$	146.3	149.3	152.4	mV
		$V_{HYS} = 25 \text{ mV}$		19.2	24.6	28.8	mV
		$V_{HYS} = 150 \text{ mV}$		133.4	149.4	162.4	mV
R_{sin}	Series Input Resistance	Gain = 1x		--	3.3	--	G Ω
		Gain = 0.5x		1.0	1.2	1.5	M Ω
PROP	Propagation Delay, Response Time	Gain = 1, $V_{ref} = 25 \text{ mV}$ to 850 mV , Overdrive = 100 mV	Low to High	--	0.6	2.8	μs
			High to Low	--	0.8	1.8	μs
		Gain = 1, $V_{ref} = 250 \text{ mV}$ to 650 mV , Overdrive = 100 mV	Low to High	--	0.6	2.8	μs
			High to Low	--	0.7	1.4	μs

SLG47512/13

Low Voltage GreenPAK Programmable Mixed-Signal Matrix

Table 18: ACMP Specifications at T = -40 °C to +85 °C, V_{DD} = 1.0 V to 1.65 V, Unless Otherwise Noted (Continued)

Parameter	Description	Note	Condition	Min	Typ	Max	Unit
G	Gain error	G = 1		--	1	--	
		G = 0.5	V _{ref} > 250 mV	0.495	0.500	0.504	
V _{ref}	V _{ref} Accuracy, Buffer Disabled	V _{ref} = 25 mV	T = +25 °C	-1.67	--	1.55	%
				-8.26	--	4.52	%
		V _{ref} = 25 mV to 850 mV	T = +25 °C	-1.67	--	1.55	%
				-8.26	--	4.52	%
		V _{ref} = 50 mV to 850 mV	T = +25 °C	-1.32	--	1.42	%
				-7.99	--	4.35	%
		V _{ref} = 250 mV to 850 mV	T = +25 °C	-0.89	--	0.78	%
				-7.55	--	3.75	%
		V _{ref} = 850 mV	T = +25 °C	-0.66	--	0.74	%
	V _{ref} Output Buffer Offset	V _{ref} = 25 mV to 450 mV	T = +25 °C	-5.54	--	7.56	mV
				-6.58	--	10.03	mV
	V _{ref} Output Capacitance Loading		Load Resistance = 1 MΩ, V _{ref} = 25 mV to 850 mV	--	--	50	pF
			Load Resistance = 1 kΩ, V _{ref} = 25 mV to 850 mV	--	--	200	pF

Note 1 V_{IL} = V_{in} - V_{HYS}, V_{IH} = V_{in}.

SLG47512/13

Low Voltage GreenPAK Programmable Mixed-Signal Matrix

3.11 ANALOG TEMPERATURE SENSOR CHARACTERISTICS

Temperature Sensor typical nonlinearity $\pm 0.97\%$ for output at $V_{DD} = 1.2\text{ V}$.

Table 19: TS Output vs Temperature

T, °C	V _{DD} = 1.0 V		V _{DD} = 1.2 V		V _{DD} = 1.5 V		V _{DD} = 1.65 V	
	Typical, mV	Accuracy, %	Typical, mV	Accuracy, %	Typical, mV	Accuracy, %	Typical, mV	Accuracy, %
-40	834	± 4.12	824	± 1.98	818	± 1.74	816	± 1.73
-30	817	± 3.32	807	± 1.58	801	± 1.46	799	± 1.47
-20	799	± 2.66	789	± 1.26	783	± 1.20	782	± 1.22
-10	781	± 2.06	771	± 0.98	766	± 0.99	764	± 1.02
0	764	± 1.54	753	± 0.77	748	± 0.81	746	± 0.85
10	746	± 1.09	735	± 0.62	730	± 0.67	728	± 0.71
20	728	± 0.84	717	± 0.56	712	± 0.60	710	± 0.64
30	709	± 0.88	698	± 0.57	694	± 0.59	692	± 0.63
40	691	± 1.20	680	± 0.65	675	± 0.65	674	± 0.66
50	673	± 1.66	661	± 0.79	657	± 0.76	655	± 0.77
60	655	± 2.19	642	± 0.97	638	± 0.91	637	± 0.92
70	636	± 2.73	623	± 1.13	619	± 1.05	618	± 1.04
80	618	± 3.31	604	± 1.30	600	± 1.22	599	± 1.21
85	608	± 3.62	595	± 1.39	591	± 1.31	589	± 1.30

4 User Programmability

The SLG47512/13 is a user programmable device with one time programmable (OTP) memory elements that are able to configure the connection matrix and macrocells. A programming development kit allows the user the ability to create initial devices. Once the design is finalized, the programming code (.gpx file) is forwarded to Renesas Electronics Corporation to integrate into a production process.

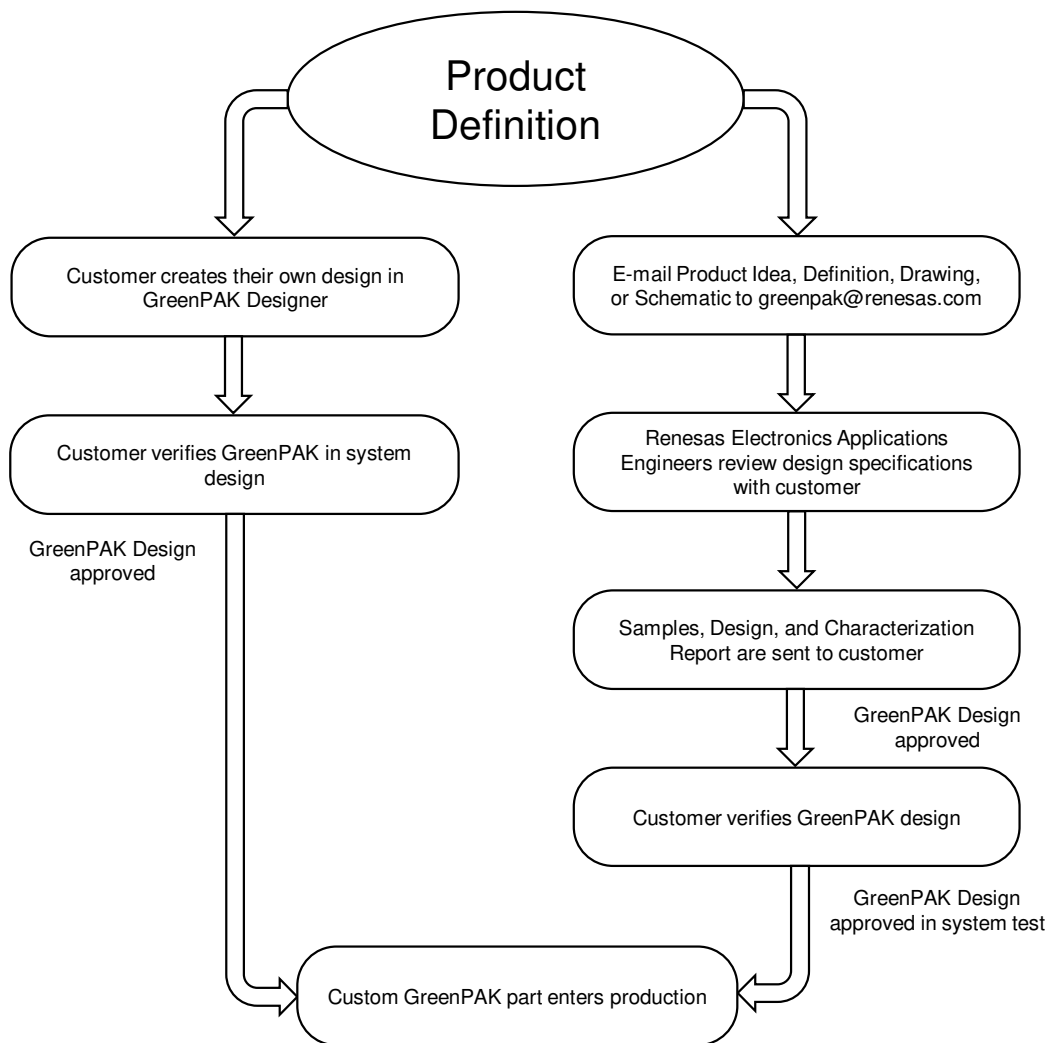


Figure 2: Steps to Create a Custom GreenPAK Device

SLG47512/13

Low Voltage GreenPAK Programmable Mixed-Signal Matrix

5 IO Pins

The SLG47512/13 has a total of 9 GPIOs (13 GPIOs for 16-PIN version) which can operate as Input or Output, and 1 GPI Pin which can operate as Input, as well as serve as a special function (such as outputting the voltage reference).

5.1 GPIO PINS

Pins from GPIO0 to GPIO12 serve as General Purpose IO Pins.

5.2 GPI PIN

GPI serves as a General Purpose Input Pin.

5.3 PULL-UP/DOWN RESISTORS

All IO Pins, except GPI, have the option for user selectable resistors connected to the input structure. The selectable values on these resistors are 10 k Ω , 100 k Ω , and 1 M Ω . The internal resistors can be configured as either Pull-up or Pull-downs.

5.4 FAST PULL-UP/DOWN DURING POWER-UP

During power-up, IO Pull-up/down resistance will switch to 2.6 k Ω initially and then it will switch to normal setting value. This function is enabled by register [1426].

SLG47512/13

Low Voltage GreenPAK Programmable Mixed-Signal Matrix

5.5 GPI STRUCTURE

5.5.1 GPI Structure (for GPI)

Input Mode [1:0]

00: Digital In without Schmitt Trigger, wosmt_en = 1, OE=0

01: Digital In with Schmitt Trigger, smt_en = 1, OE = 0

10: Low Voltage Digital In mode, lv_en = 1, OE = 0

11: Reserved

Note 1: OE cannot be selected by user

Note 2: OE is Matrix output, Digital In is Matrix input

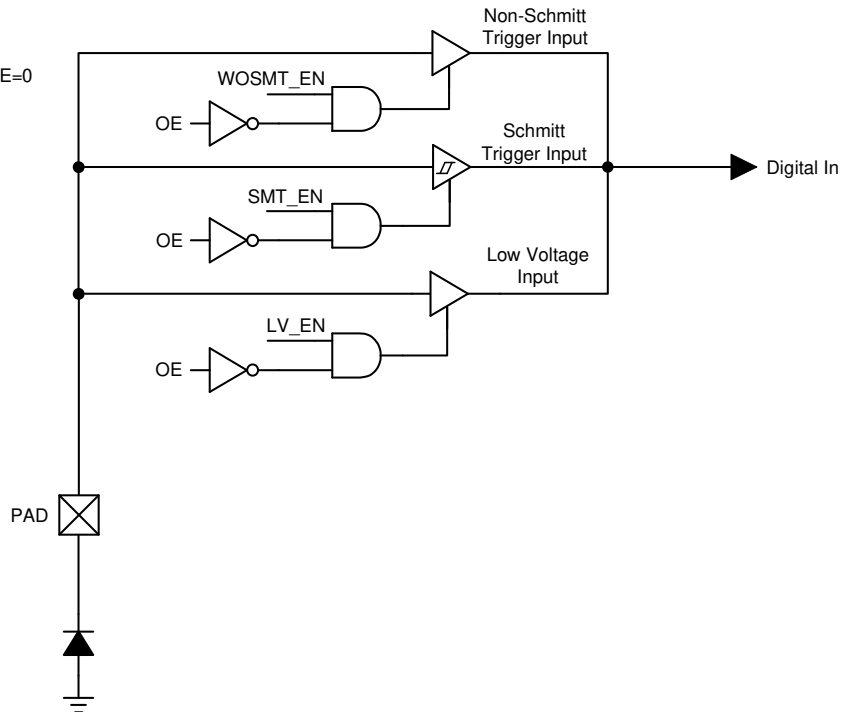


Figure 3: GPI Structure Diagram

SLG47512/13

Low Voltage GreenPAK Programmable Mixed-Signal Matrix

5.6 GPIO WITH I²C MODE IO STRUCTURE

5.6.1 GPIO with I²C Mode Structure (for GPIO0 and GPIO1)

GPIO0, GPIO1 Mode [2:0]
 00: Digital Input without Schmitt Trigger
 01: Digital Input with Schmitt Trigger
 10: Low Voltage Digital Input
 11: Reserved

Note 1: OE cannot be selected by user and is controlled by register. Digital In is Matrix input.
 Note 2: GPIO0 and GPIO1 do not support Push-Pull and PMOS Open-Drain modes.
 Note 3: Can be varied over PVT, for reference only.

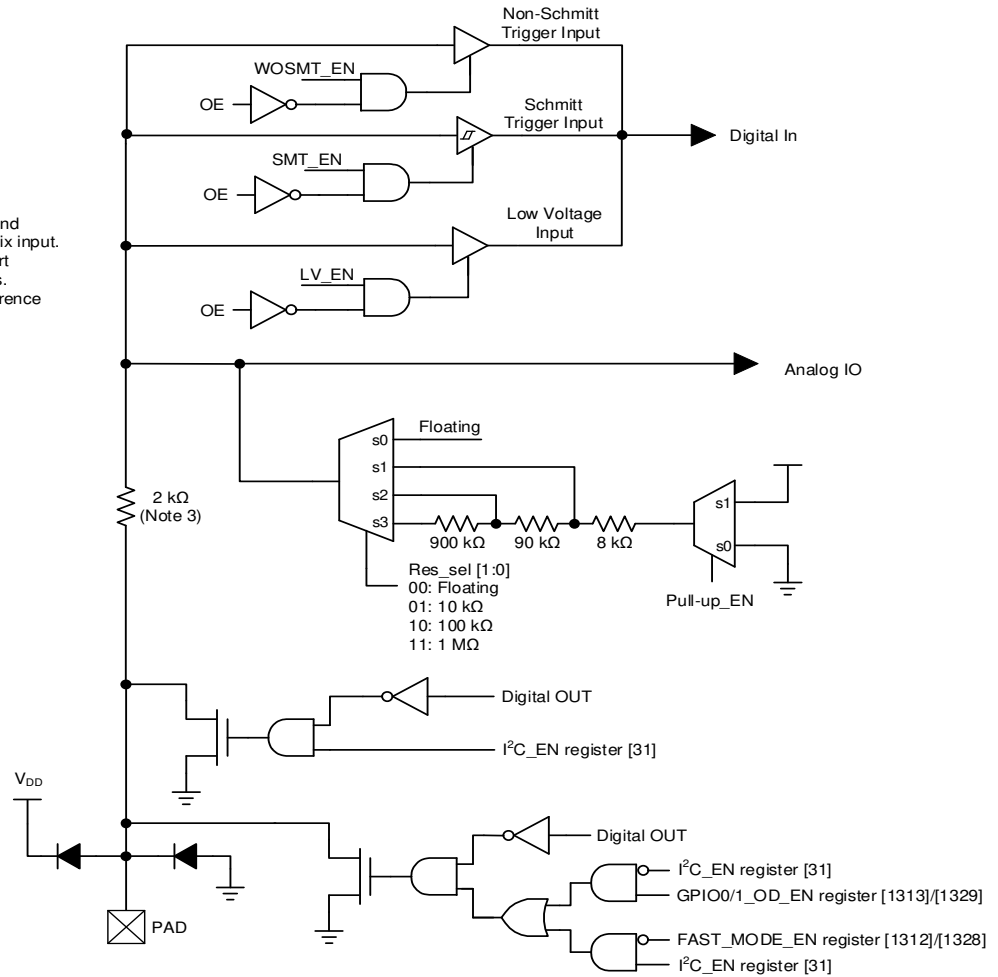


Figure 4: GPIO with I²C Mode IO Structure Diagram

SLG47512/13

Low Voltage GreenPAK Programmable Mixed-Signal Matrix

5.7 MATRIX OE IO STRUCTURE

5.7.1 Matrix OE IO Structure (from GPIO0 to GPIO11)

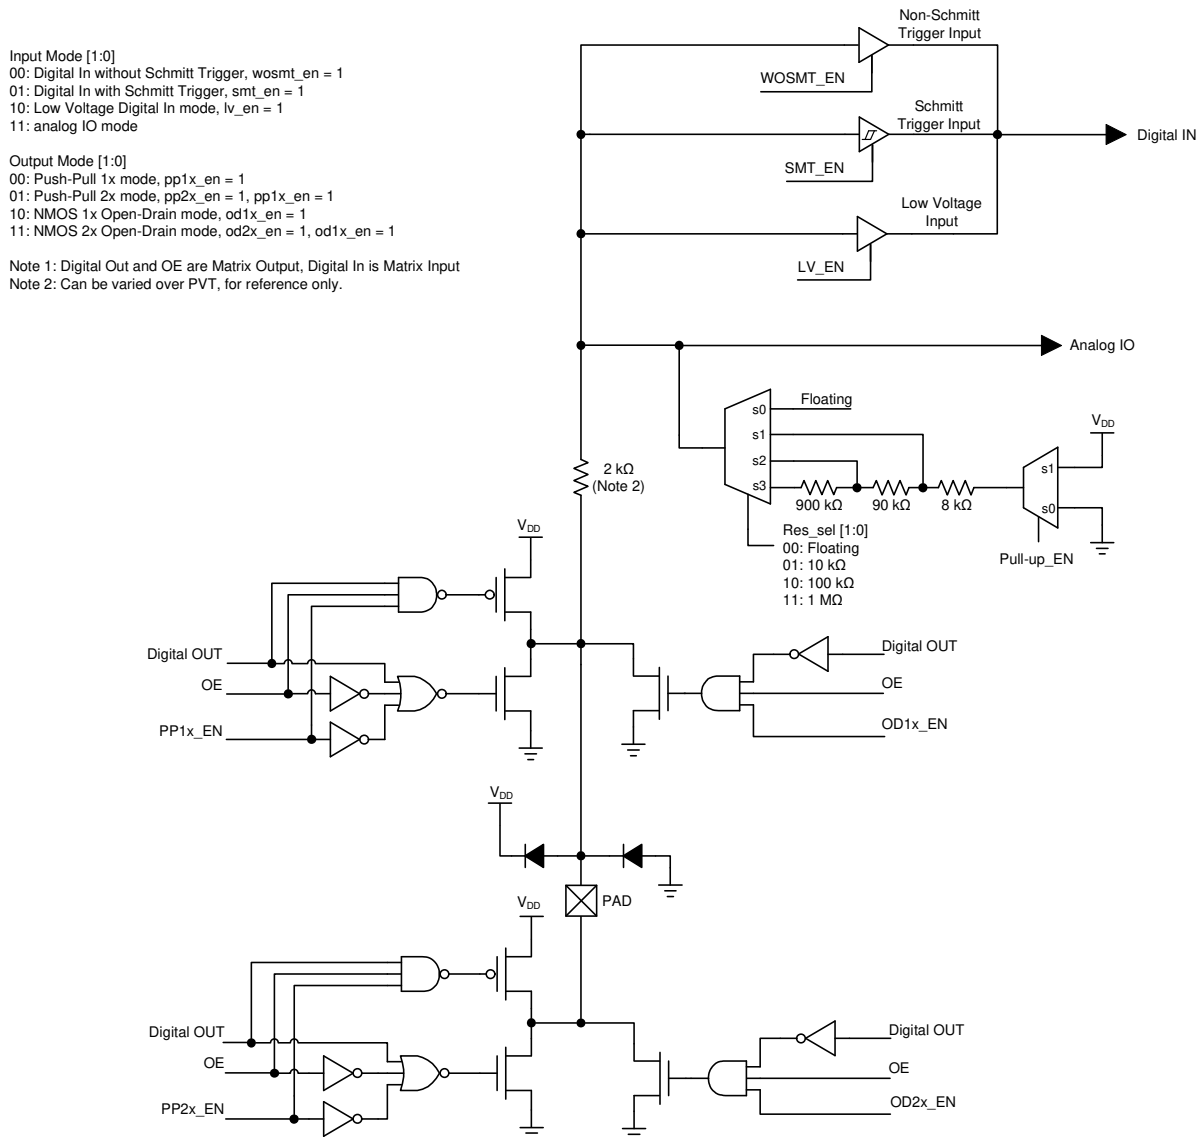


Figure 5: Matrix OE IO Structure Diagram

SLG47512/13

Low Voltage GreenPAK Programmable Mixed-Signal Matrix

5.8 IO TYPICAL PERFORMANCE

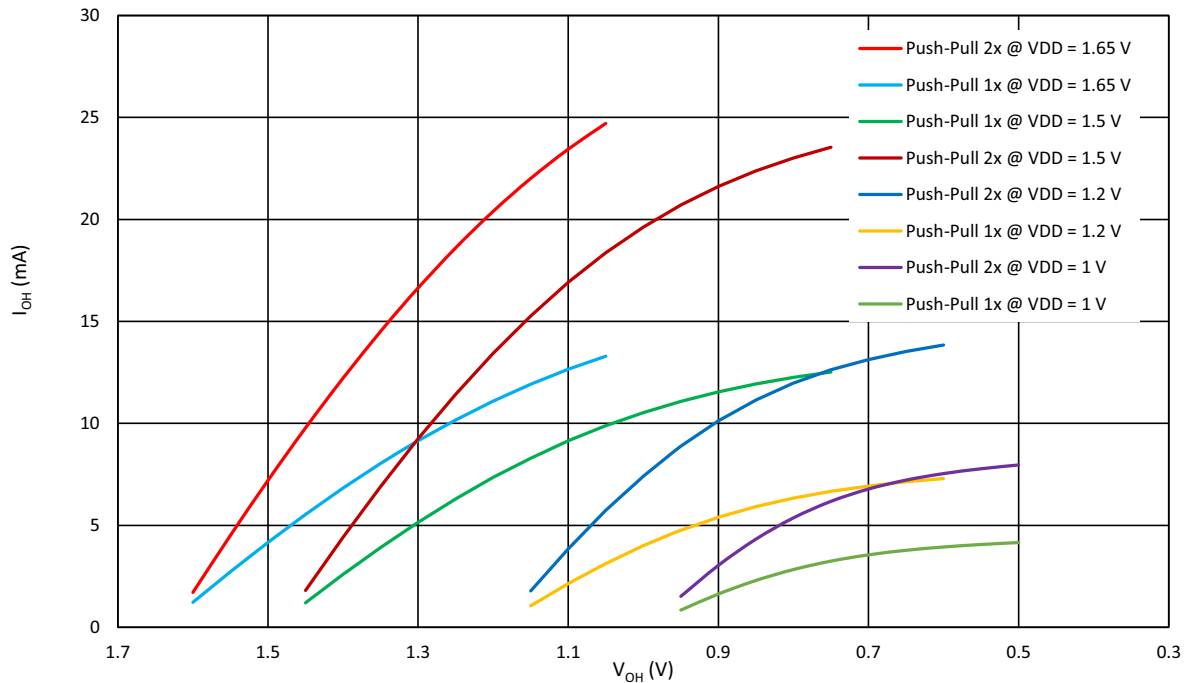


Figure 6: Typical High Level Output Current vs. High Level Output Voltage at $T = +25\text{ }^{\circ}\text{C}$

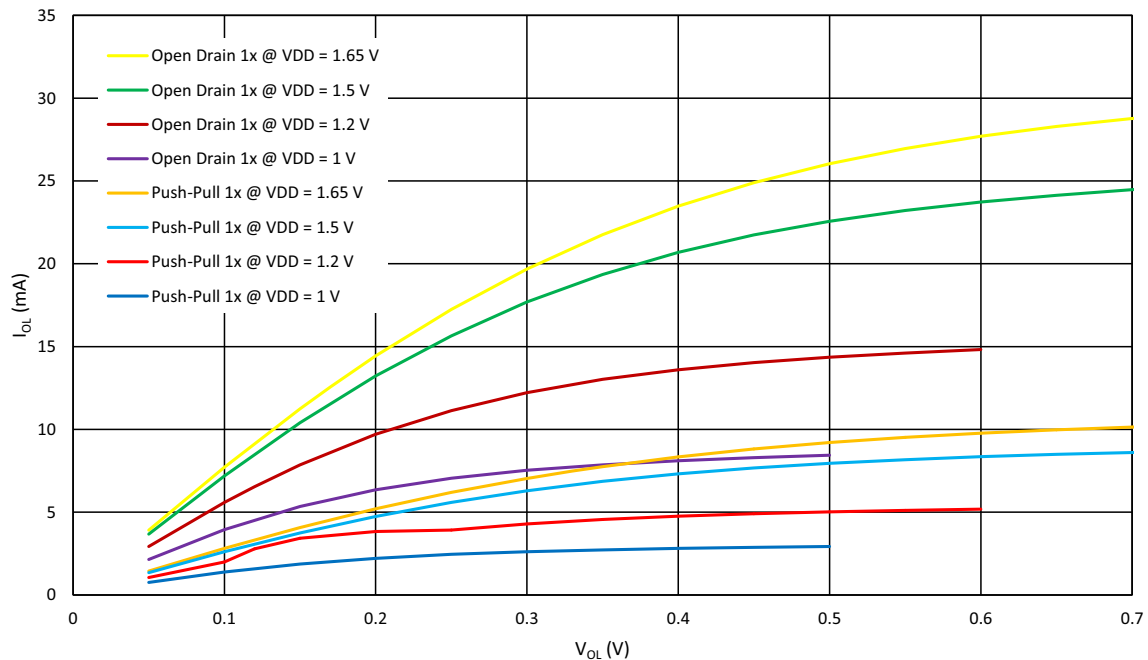


Figure 7: Typical Low Level Output Current vs. Low Level Output Voltage, 1x Drive at $T = +25\text{ }^{\circ}\text{C}$, Full Range

SLG47512/13

Low Voltage GreenPAK Programmable Mixed-Signal Matrix

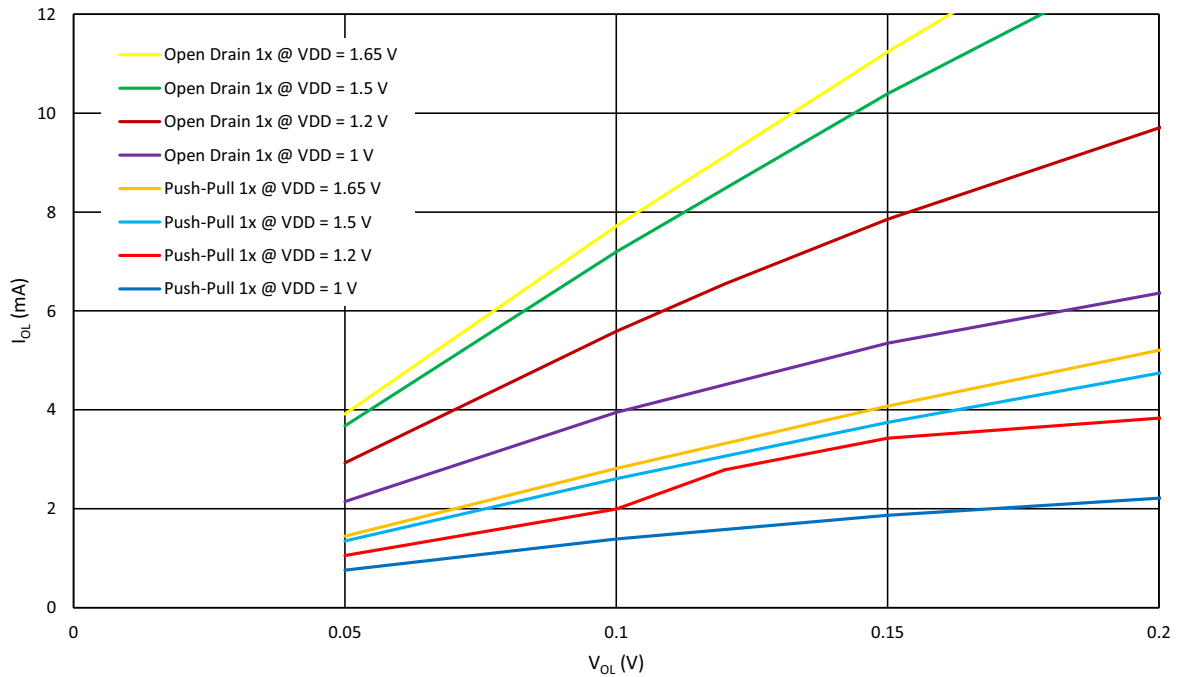


Figure 8: Typical Low Level Output Current vs. Low Level Output Voltage, 1x Drive at T = +25 °C

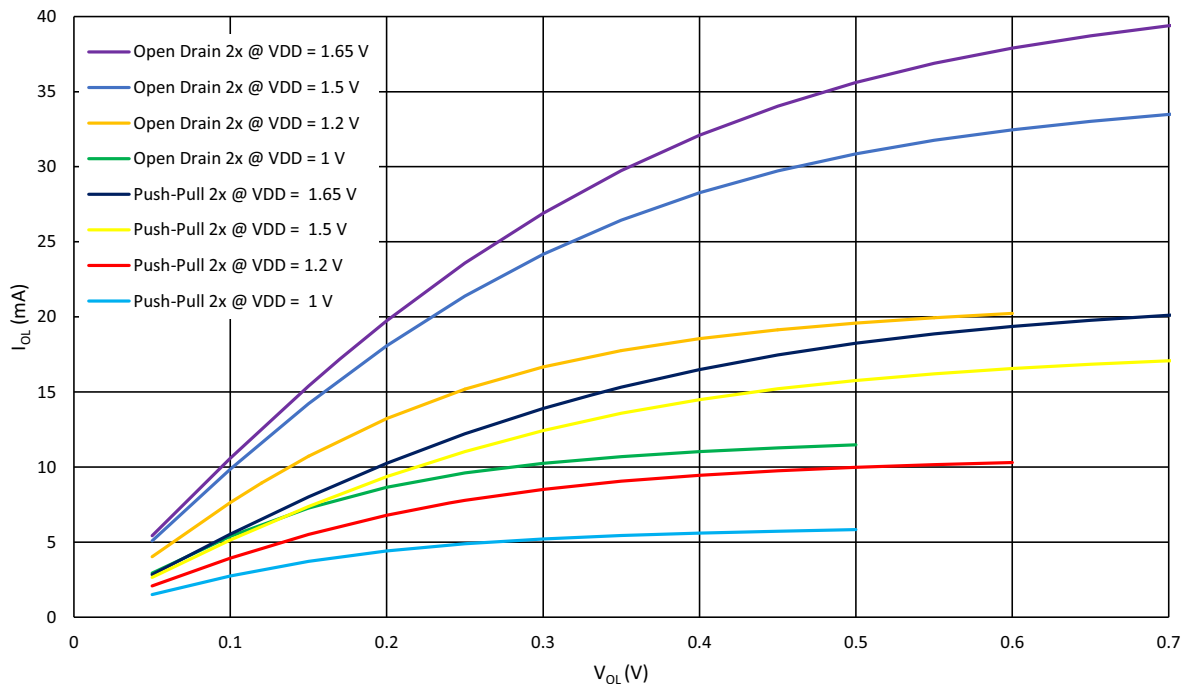


Figure 9: Typical Low Level Output Current vs. Low Level Output Voltage, 2x Drive at T = +25 °C, Full Range

SLG47512/13

Low Voltage GreenPAK Programmable Mixed-Signal Matrix

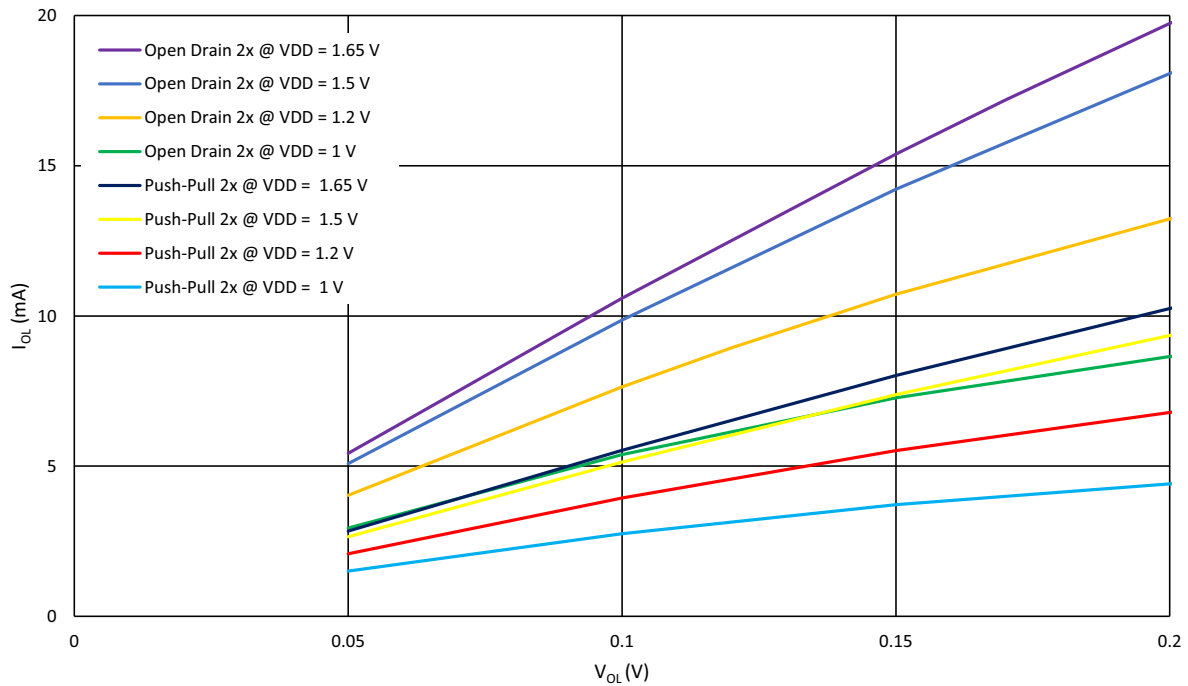


Figure 10: Typical Low Level Output Current vs. Low Level Output Voltage, 2x Drive at $T = +25^{\circ}\text{C}$

SLG47512/13

Low Voltage GreenPAK Programmable Mixed-Signal Matrix

6 Connection Matrix

The Connection Matrix in the SLG47512/13 is used to create an internal routing for internal functional macrocells of the device once it is programmed. The registers are programmed from the one time programmable (OTP) NVM cell during Test Mode Operation. The output of each functional macrocell within the SLG47512/13 has a specific digital bit code assigned to it, that is either set to active “High” or inactive “Low”, based on the design that is created. Once the 2048 register bits within the SLG47512/13 are programmed, a fully custom circuit will be created.

The Connection Matrix has 64 inputs and 98 outputs. Each of the 64 inputs to the Connection Matrix is hard-wired to the digital output of a particular source macrocell, including IO pins, LUTs, analog comparators, other digital resources, such as V_{DD} and GND. The input to a digital macrocell uses a 6-bit register to select one of these 64 input lines.

For a complete list of the SLG47512/13's register table, see section 17.

Matrix Input Signal Functions	N					
GND	0					
2 bit LUT0/DFF0 output/Shift_Reg0 output	1					
2-bit LUT1/DFF1 output/Shift_Reg1 output	2					
2-bit LUT2/DFF2 output/Shift_Reg2 output	3					
⋮	⋮					
POR	62					
V_{DD}	63					
Matrix Inputs		N	0	1	2	⋮
		Registers	registers [45:40]	registers [51:46]	registers [57:52]	⋮
Matrix Outputs		Function	Matrix OUT: IN0 of 2-bit LUT0 or Clock Input of DFF0 or Clock Input of Shift_Reg0	Matrix OUT: IN1 of 2-bit LUT0 or Data Input of DFF0 or Data Input of Shift_Reg0	Matrix OUT: IN0 of 2-bit LUT1 or Clock Input of DFF1 or Clock Input of Shift_Reg1	⋮
						97
						registers [627:622]
						Matrix OUT: Oscillator1 ENABLE

Figure 11: Connection Matrix

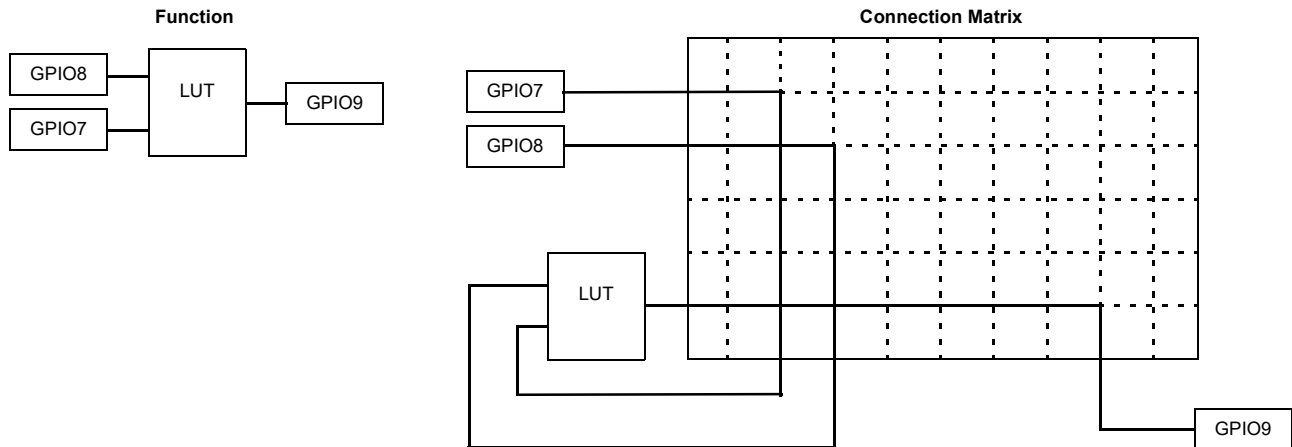


Figure 12: Connection Matrix Usage Example

SLG47512/13

Low Voltage GreenPAK Programmable Mixed-Signal Matrix

6.1 MATRIX INPUT TABLE

Table 20: Matrix Input Table

Matrix Input Number	Matrix Input Signal Function	Matrix Decode					
		5	4	3	2	1	0
0	GND	0	0	0	0	0	0
1	2-bit LUT0/DFF0 output/Shift_Reg0 output	0	0	0	0	0	1
2	2-bit LUT1/DFF1 output/Shift_Reg1 output	0	0	0	0	1	0
3	2-bit LUT2/DFF2 output/Shift_Reg2 output	0	0	0	0	1	1
4	2-bit LUT3/PGen output	0	0	0	1	0	0
5	3-bit LUT0/DFF3 output/Shift_Reg3 output	0	0	0	1	0	1
6	3-bit LUT1/DFF4 output/Shift_Reg4 output	0	0	0	1	1	0
7	3-bit LUT2/DFF5 output/Shift_Reg5 output	0	0	0	1	1	1
8	3-bit LUT3/DFF6 output/Shift_Reg6 output	0	0	1	0	0	0
9	3-bit LUT4/DFF7 output/Shift_Reg7 output	0	0	1	0	0	1
10	3-bit LUT5/DFF8 output/Shift_Reg8 output	0	0	1	0	1	0
11	3-bit LUT6/DFF9 output/Shift_Reg9 output	0	0	1	0	1	1
12	3-bit LUT7/DFF10 output/Shift_Reg10 output	0	0	1	1	0	0
13	3-bit LUT8/DFF11 output/Shift_Reg11 output	0	0	1	1	0	1
14	3-bit LUT9/DFF12 output/Shift_Reg12 output	0	0	1	1	1	0
15	4-bit LUT0/DFF13 output/Shift_Reg13 output	0	0	1	1	1	1
16	CNT0 output	0	1	0	0	0	0
17	MLT0_LUT4_1/DFF14_OUT	0	1	0	0	0	1
18	CNT1 output	0	1	0	0	1	0
19	MLT1_LUT3_10/DFF15_OUT	0	1	0	0	1	1
20	CNT2 output	0	1	0	1	0	0
21	MLT2_LUT3_11/DFF16_OUT	0	1	0	1	0	1
22	CNT3 output	0	1	0	1	1	0
23	MLT3_LUT3_12/DFF17_OUT	0	1	0	1	1	1
24	CNT4 output	0	1	1	0	0	0
25	MLT4_LUT3_13/DFF18_OUT	0	1	1	0	0	1
26	CNT5 output	0	1	1	0	1	0
27	MLT5_LUT3_14/DFF19_OUT	0	1	1	0	1	1
28	CNT6 output	0	1	1	1	0	0
29	MLT6_LUT3_15/DFF20_OUT	0	1	1	1	0	1
30	CNT7 output	0	1	1	1	1	0
31	MLT7_LUT3_16/DFF21_OUT	0	1	1	1	1	1
32	GPIO0 digital input or I ² C_virtual_0 Input	1	0	0	0	0	0
33	GPIO1 digital input or I ² C_virtual_1 Input	1	0	0	0	0	1
34	I ² C_virtual_2 Input	1	0	0	0	1	0

**Low Voltage GreenPAK Programmable
Mixed-Signal Matrix**
Table 20: Matrix Input Table (Continued)

Matrix Input Number	Matrix Input Signal Function	Matrix Decode					
		5	4	3	2	1	0
35	I ² C_virtual_3 Input	1	0	0	0	1	1
36	I ² C_virtual_4 Input	1	0	0	1	0	0
37	I ² C_virtual_5 Input	1	0	0	1	0	1
38	I ² C_virtual_6 Input	1	0	0	1	1	0
39	I ² C_virtual_7 Input	1	0	0	1	1	1
40	Programmable Delay Edge Detect Output	1	0	1	0	0	0
41	Edge Detect Filter Output	1	0	1	0	0	1
42	GPI Digital Input	1	0	1	0	1	0
43	GPIO2 Digital Input	1	0	1	0	1	1
44	GPIO3 Digital Input	1	0	1	1	0	0
45	GPIO4 Digital Input	1	0	1	1	0	1
46	GPIO5 Digital Input	1	0	1	1	1	0
47	GPIO6 Digital Input	1	0	1	1	1	1
48	GPIO7 Digital Input	1	1	0	0	0	0
49	GPIO8 Digital Input	1	1	0	0	0	1
50	GPIO9 Digital Input (Note 1)	1	1	0	0	1	0
51	GPIO10 Digital Input (Note 1)	1	1	0	0	1	1
52	GPIO11 Digital Input (Note 1)	1	1	0	1	0	0
53	GPIO12 Digital Input (Note 1)	1	1	0	1	0	1
54	Reserved	1	1	0	1	1	0
55	Reserved	1	1	0	1	1	1
56	Reserved	1	1	1	0	0	0
57	Oscillator0 output 0	1	1	1	0	0	1
58	Oscillator0 output 1	1	1	1	0	1	0
59	Oscillator1 output	1	1	1	0	1	1
60	ACMP0H Output	1	1	1	1	0	0
61	ACMP1H Output	1	1	1	1	0	1
62	POR	1	1	1	1	1	0
63	V _{DD}	1	1	1	1	1	1

Note 1 GPIO 9, 10, 11, and 12 are available in 16-pin package only.

Low Voltage GreenPAK Programmable Mixed-Signal Matrix

6.2 MATRIX OUTPUT TABLE

Table 21: Matrix Output Table

Register Bit Address	Matrix Output Signal Function	Matrix Output Number
[45:40]	IN0 of 2-bit LUT0 or Clock Input of DFF0 or Clock Input of Shift_Reg0	0
[51:46]	IN1 of 2-bit LUT0 or Data Input of DFF0 or Data Input of Shift_Reg0	1
[57:52]	IN0 of 2-bit LUT1 or Clock Input of DFF1 or Clock Input of Shift_Reg1	2
[63:58]	IN1 of 2-bit LUT1 or Data Input of DFF1 or Data Input of Shift_Reg1	3
[69:64]	IN0 of 2-bit LUT2 or Clock Input of DFF2 or Clock Input of Shift_Reg2	4
[75:70]	IN1 of 2-bit LUT2 or Data Input of DFF2 or Data Input of Shift_Reg2	5
[81:76]	IN0 of 2-bit LUT3 or Clock Input of PGen	6
[87:82]	IN1 of 2-bit LUT3 or nRST of PGen	7
[93:88]	IN0 of 3-bit LUT0 or Clock Input of DFF3 or Clock Input of Shift_Reg3	8
[99:94]	IN1 of 3-bit LUT0 or Data Input of DFF3 or Data Input of Shift_Reg3	9
[105:100]	IN2 of 3-bit LUT0 or nRST(nSET) of DFF3 or nRST(nSET) of Shift_Reg3	10
[111:106]	IN0 of 3-bit LUT1 or Clock Input of DFF4 or Clock Input of Shift_Reg4	11
[117:112]	IN1 of 3-bit LUT1 or Data Input of DFF4 or Data Input of Shift_Reg4	12
[123:118]	IN2 of 3-bit LUT1 or nRST(nSET) of DFF4 or nRST(nSET) of Shift_Reg4	13
[129:124]	IN0 of 3-bit LUT2 or Clock Input of DFF5 or Clock Input of Shift_Reg5	14
[135:130]	IN1 of 3-bit LUT2 or Data Input of DFF5 or Data Input of Shift_Reg5	15
[141:136]	IN2 of 3-bit LUT2 or nRST(nSET) of DFF5 or nRST(nSET) of Shift_Reg5	16
[147:142]	IN0 of 3-bit LUT3 or Clock Input of DFF6 or Clock Input of Shift_Reg6	17
[153:148]	IN1 of 3-bit LUT3 or Data Input of DFF6 or Data Input of Shift_Reg6	18
[159:154]	IN2 of 3-bit LUT3 or nRST(nSET) of DFF6 or nRST(nSET) of Shift_Reg6	19
[165:160]	IN0 of 3-bit LUT4 or Clock Input of DFF7 or Clock Input of Shift_Reg7	20
[171:166]	IN1 of 3-bit LUT4 or Data Input of DFF7 or Data Input of Shift_Reg7	21
[177:172]	IN2 of 3-bit LUT4 or nRST(nSET) of DFF7 or nRST(nSET) of Shift_Reg7	22
[183:178]	IN0 of 3-bit LUT5 or Clock Input of DFF8 or Clock Input of Shift_Reg8	23
[189:184]	IN1 of 3-bit LUT5 or Data Input of DFF8 or Data Input of Shift_Reg8	24
[195:190]	IN2 of 3-bit LUT5 or nRST(nSET) of DFF8 or nRST(nSET) of Shift_Reg8	25
[201:196]	IN0 of 3-bit LUT6 or Clock Input of DFF9 or Clock Input of Shift_Reg9	26
[207:202]	IN1 of 3-bit LUT6 or Data Input of DFF9 or Data Input of Shift_Reg9	27
[213:208]	IN2 of 3-bit LUT6 or nRST(nSET) of DFF9 or nRST(nSET) of Shift_Reg9	28
[219:214]	IN0 of 3-bit LUT7 or Clock Input of DFF10 or Clock Input of Shift_Reg10	29
[225:220]	IN1 of 3-bit LUT7 or Data Input of DFF10 or Data Input of Shift_Reg10	30
[231:226]	IN2 of 3-bit LUT7 or nRST(nSET) of DFF10 or nRST(nSET) of Shift_Reg10	31
[237:232]	IN0 of 3-bit LUT8 or Clock Input of DFF11 or Clock Input of Shift_Reg11	32
[243:238]	IN1 of 3-bit LUT8 or Data Input of DFF11 or Data Input of Shift_Reg11	33
[249:244]	IN2 of 3-bit LUT8 or nRST(nSET) of DFF11 or nRST(nSET) of Shift_Reg11	34
[255:250]	IN0 of 3-bit LUT9 or Clock Input of DFF12 or Clock Input of Shift_Reg12	35

Table 21: Matrix Output Table (Continued)

Register Bit Address	Matrix Output Signal Function	Matrix Output Number
[261:256]	IN1 of 3-bit LUT9 or Data Input of DFF12 or Data Input of Shift_Reg12	36
[267:262]	IN2 of 3-bit LUT9 or nRST(nSET) of DFF12 or nRST(nSET) of Shift_Reg12	37
[273:268]	IN0 of 4-bit LUT0 or Clock Input of DFF13 or Clock Input of Shift_Reg13	38
[279:274]	IN1 of 4-bit LUT0 or Data Input of DFF13 or Data Input of Shift_Reg13	39
[285:280]	IN2 of 4-bit LUT0 or nRST(nSET) of DFF13 or nRST(nSET) of Shift_Reg13	40
[291:286]	IN3 of 4-bit LUT0 or Clock Enable of DFF13 or Clock Enable of Shift_Reg13	41
[297:292]	IN0 of MLT0_LUT4_1 or Clock Input of DFF14 or Delay0 Input (or Counter0 nRST Input)	42
[303:298]	IN1 of MLT0_LUT4_1 or nRST (nSET) of DFF14 or Delay0 Input (or Counter0 nRST Input or External Clock Source)	43
[309:304]	IN2 of MLT0_LUT4_1 or Data Input of DFF14 or Delay0 Input (or Counter0 nRST Input)	44
[315:310]	IN3 of MLT0_LUT4_1	45
[321:316]	IN0 of MLT1_LUT3_10 or Clock Input of DFF15 or Delay1 Input (or Counter1 nRST Input)	46
[327:322]	IN1 of MLT1_LUT3_10 or nRST (nSET) of DFF15 or Delay1 Input (or Counter1 nRST Input or External Clock Source)	47
[333:328]	IN2 of MLT1_LUT3_10 or Data Input of DFF15 or Delay1 Input (or Counter1 nRST Input)	48
[339:334]	IN0 of MLT2_LUT3_11 or Clock Input of DFF16 or Delay2 Input (or Counter2 nRST Input)	49
[345:340]	IN1 of MLT2_LUT3_11 or nRST (nSET) of DFF16 or Delay2 Input (or Counter2 nRST Input or External Clock Source)	50
[351:346]	IN2 of MLT2_LUT3_11 or Data Input of DFF16 or Delay2 Input (or Counter2 nRST Input)	51
[357:352]	IN0 of MLT3_LUT3_12 or Clock Input of DFF17 or Delay3 Input (or Counter3 nRST Input)	52
[363:358]	IN1 of MLT3_LUT3_12 or nRST (nSET) of DFF17 or Delay3 Input (or Counter3 nRST Input or External Clock Source)	53
[369:364]	IN2 of MLT3_LUT3_12 or Data Input of DFF17 or Delay3 Input (or Counter3 nRST Input)	54
[375:370]	IN0 of MLT4_LUT3_13 or Clock Input of DFF18 or Delay4 Input (or Counter4 nRST Input)	55
[381:376]	IN1 of MLT4_LUT3_13 or nRST (nSET) of DFF18 or Delay4 Input (or Counter4 nRST Input or External Clock Source)	56
[387:382]	IN2 of MLT4_LUT3_13 or Data Input of DFF18 or Delay4 Input (or Counter4 nRST Input)	57
[393:388]	IN0 of MLT5_LUT3_14 or Clock Input of DFF19 or Delay5 Input (or Counter5 nRST Input)	58
[399:394]	IN1 of MLT5_LUT3_14 or nRST (nSET) of DFF19 or Delay5 Input (or Counter5 nRST Input or External Clock Source)	59
[405:400]	IN2 of MLT5_LUT3_14 or Data Input of DFF19 or Delay5 Input (or Counter5 nRST Input)	60

SLG47512/13

Low Voltage GreenPAK Programmable Mixed-Signal Matrix

Table 21: Matrix Output Table (Continued)

Register Bit Address	Matrix Output Signal Function	Matrix Output Number
[411:406]	IN0 of MLT6_LUT3_15 or Clock Input of DFF20 or Delay6 Input (or Counter6 nRST Input)	61
[417:412]	IN1 of MLT6_LUT3_15 or nRST (nSET) of DFF20 or Delay6 Input (or Counter6 nRST Input or External Clock Source)	62
[423:418]	IN2 of MLT6_LUT3_15 or Data Input of DFF20 or Delay6 Input (or Counter6 nRST Input)	63
[429:424]	IN0 of MLT7_LUT3_16 or Clock Input of DFF21 or Delay7 Input (or Counter7 nRST Input)	64
[435:430]	IN1 of MLT7_LUT3_16 or nRST (nSET) of DFF21 or Delay7 Input (or Counter7 nRST Input or External Clock Source)	65
[441:436]	IN2 of MLT7_LUT3_16 or Data Input of DFF21 or Delay7 Input (or Counter7 nRST Input)	66
[447:442]	GPIO0 Digital Output	67
[453:448]	GPIO1 Digital Output	68
[459:454]	GPIO2 Digital Output OE	69
[465:460]	GPIO2 Digital Output	70
[471:466]	GPIO3 Digital Output OE	71
[477:472]	GPIO3 Digital Output	72
[483:478]	GPIO4 Digital Output OE	73
[489:484]	GPIO4 Digital Output	74
[495:490]	GPIO5 Digital Output OE	75
[501:496]	GPIO5 Digital Output	76
[507:502]	GPIO6 Digital Output OE	77
[513:508]	GPIO6 Digital Output	78
[519:514]	GPIO7 Digital Output OE	79
[525:520]	GPIO7 Digital Output	80
[531:526]	GPIO8 Digital Output OE	81
[537:532]	GPIO8 Digital Output	82
[543:538]	GPIO9 Digital Output OE (Note 2)	83
[549:544]	GPIO9 Digital Output (Note 2)	84
[555:550]	GPIO10 Digital Output OE (Note 2)	85
[561:556]	GPIO10 Digital Output (Note 2)	86
[567:562]	GPIO11 Digital Output OE (Note 2)	87
[573:568]	GPIO11 Digital Output (Note 2)	88
[579:574]	GPIO12 Digital Output OE (Note 2)	89
[585:580]	GPIO12 Digital Output (Note 2)	90
[591:586]	Filter/Edge Detect Input	91
[597:592]	Programmable Delay/Edge Detect Input	92
[603:598]	PWR UP of ACMP0_H	93

Low Voltage GreenPAK Programmable Mixed-Signal Matrix

Table 21: Matrix Output Table (Continued)

Register Bit Address	Matrix Output Signal Function	Matrix Output Number
[609:604]	PWR UP of ACMP1_H	94
[615:610]	Temp sensor, Vref Out_0 Power Up	95
[621:616]	Oscillator0 ENABLE	96
[627:622]	Oscillator1 ENABLE	97
Note 1 For each Address, the two most significant bits are unused. Note 2 GPIO 9, 10, 11, and 12 are available in 16-pin package only.		

6.3 CONNECTION MATRIX VIRTUAL INPUTS

As mentioned previously, the Connection Matrix inputs come from the outputs of various digital macrocells on the device. Eight of the Connection Matrix inputs have the special characteristic that the state of these signal lines comes from a corresponding data bit written as a register value via I²C. This gives the user the ability to write data via the serial channel, and have this information translated into signals that can be driven into the Connection Matrix and from the Connection Matrix to the digital inputs of other macrocells on the device. The I²C address for reading and writing these register values is at byte 0x1.

Six of the eight Connection Matrix Virtual Inputs are dedicated to this virtual input function. An I²C write command to these register bits will set the signal values going into the Connection Matrix to the desired state. A read command to these register bits will read either the original data values coming from the NVM memory bits (that were loaded during the initial device startup), or the values from a previous write command (if that has happened).

Two of the eight Connection Matrix Virtual Inputs are shared with Pin digital inputs (GPIO0 Digital or I²C_virtual_0 Input), and (GPIO1 Digital or I²C_virtual_1 Input). If the virtual input mode is selected, an I²C write command to these register bits will set the signal values going into the Connection Matrix to the desired state. A read command to these register bits will read either the original data values coming from the NVM memory bits (that were loaded during the initial device startup), or the values from a previous write command (if that has happened). The I²C disable/enable register bit [31] selects whether the Connection Matrix input comes from the Pin input or from the virtual register:

- Select SCL & Virtual Input 0 or GPIO0
- Select SDA & Virtual Input 1 or GPIO1

See [Table 22](#) for Connection Matrix Virtual Inputs.

Table 22: Connection Matrix Virtual Inputs

Matrix Input Number	Matrix Input Signal Function	Register Bit Addresses (d)
32	I ² C_virtual_0 Input	[8]
33	I ² C_virtual_1 Input	[9]
34	I ² C_virtual_2 Input	[10]
35	I ² C_virtual_3 Input	[11]
36	I ² C_virtual_4 Input	[12]
37	I ² C_virtual_5 Input	[13]
38	I ² C_virtual_6 Input	[14]
39	I ² C_virtual_7 Input	[15]

7 Combination Function Macrocells

The SLG47512/13 has 15 combination function macrocells that can serve as more than one logic or timing function. In each case, they can serve as a Look Up Table (LUT), or as another logic or timing function. See the list below for the functions that can be implemented in these macrocells.

- Three macrocells that can serve as 2-bit LUT or as D Flip-Flop, or as Shift Register
- Ten macrocells that can serve as either 3-bit LUTs or as D Flip-Flops with Set/Reset Input, or as Shift Register
- One macrocell that can serve as either 2-bit LUT or as Programmable Pattern Generator (PGen)
- One macrocell that can serve as either 4-bit LUT or as D Flip-Flop with Set/Reset Input, or as Shift Register

Inputs/Outputs for the 15 combination function macrocells are configured from the connection matrix with specific logic functions being defined by the state of configuration bits.

When used as a LUT to implement combinatorial logic functions, the outputs of the LUTs can be configured to any user defined function, including the following standard digital logic devices (AND, NAND, OR, NOR, XOR, XNOR).

7.1 2-BIT LUT OR D FLIP-FLOP OR SHIFT REGISTER MACROCELLS

There are three macrocells that can serve as 2-bit LUT or as DFF/LATCH, or as Shift Register. It is also possible to define the active level (Q or nQ) for the macrocell's output by registers [748], [753], [758]. DFF/Shift Register or LUT are selected by registers [744], [749], [754]. When used to implement LUT functions, the 2-bit LUT takes in two input signals from the connection matrix and produce a single output, which goes back into the connection matrix.

When used to implement Shift Register, the two input signals from the connection matrix go to the data (D_in), clock (CLK) inputs for the Shift Register, with the output going back to the connection matrix. The input data (D_in) writes into LSB. The Shift Register length (up to 4 bits/memory cells) is selected by registers [746:745], [751:750], [756:755], when these registers = 0 DFF/LATCH function is selected.

When used to implement DFF/LATCH function, the two input signals from the connection matrix go to the data (D_in), clock (CLK) inputs for the Flip-Flop, with the output going back to the connection matrix. LATCH or DFF configuration is selected by registers [747], [752], [757].

The operation of the D Flip-Flop and LATCH will follow the functional descriptions below:

DFF: CLK is rising edge triggered, then Q = D; otherwise Q will not change.

LATCH: when CLK is Low, then Q = D; otherwise Q remains its previous value (input D has no effect on the output, when CLK is High).

It's possible to read/write the Shift Register content via I²C (bytes 4Fh and 50h). See section [15.4.10](#) for more information.

SLG47512/13

Low Voltage GreenPAK Programmable Mixed-Signal Matrix

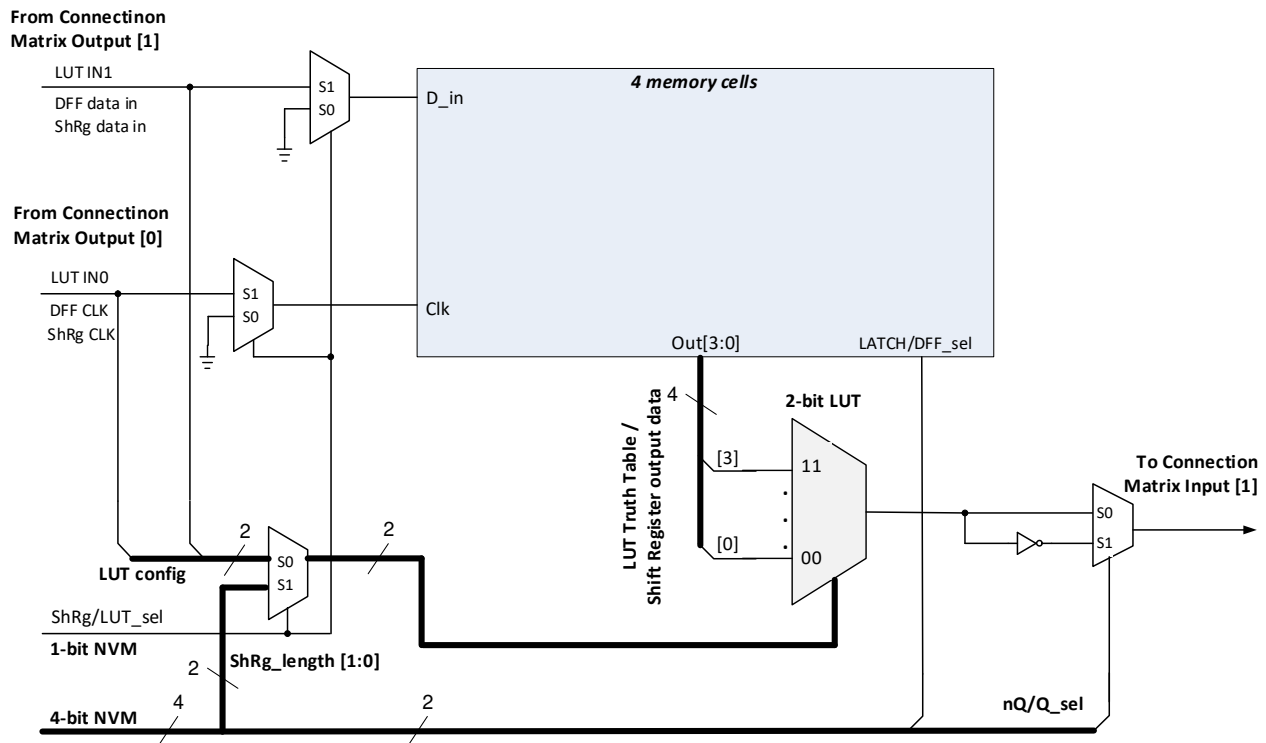


Figure 13: 2-bit LUT0 or DFF0 or Shift Register0

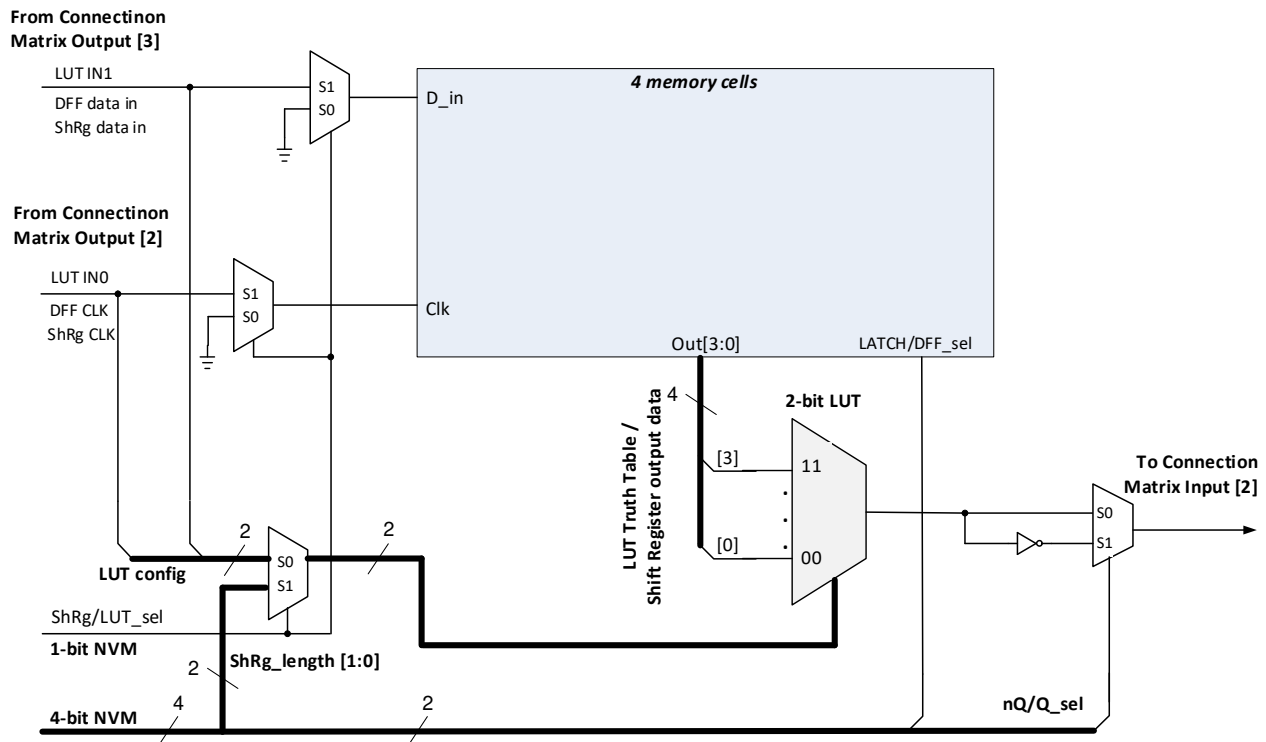


Figure 14: 2-bit LUT1 or DFF1 or Shift Register1


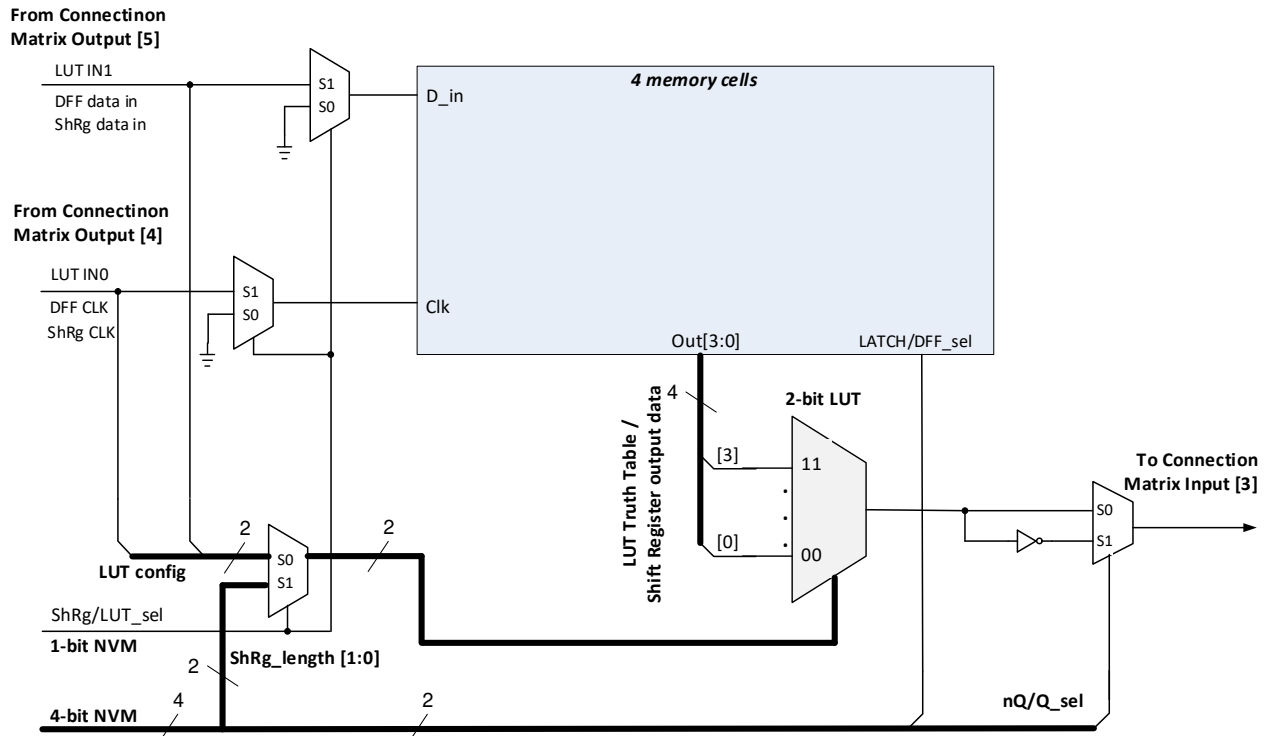



Figure 15: 2-bit LUT2 or DFF2 or Shift Register2

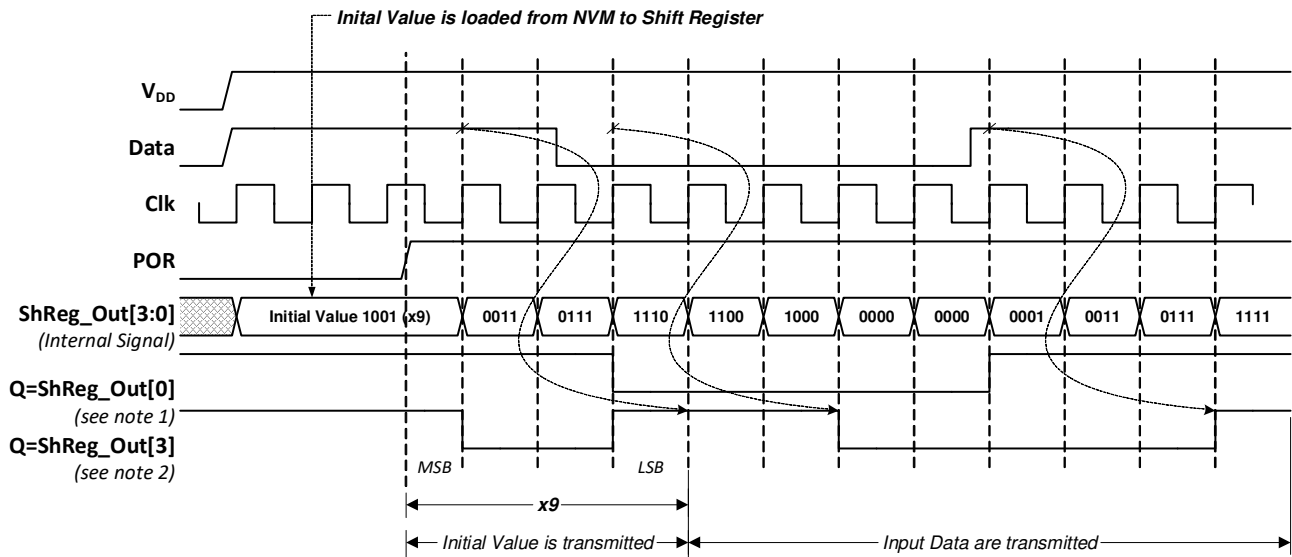

Note1 : Macrocell is configured as DFF

Note2 : Macrocell is configured as 4-bit Shift Register

Figure 16: DFF0 to DFF2 and Shift Register0 to Shift Register2 Operation

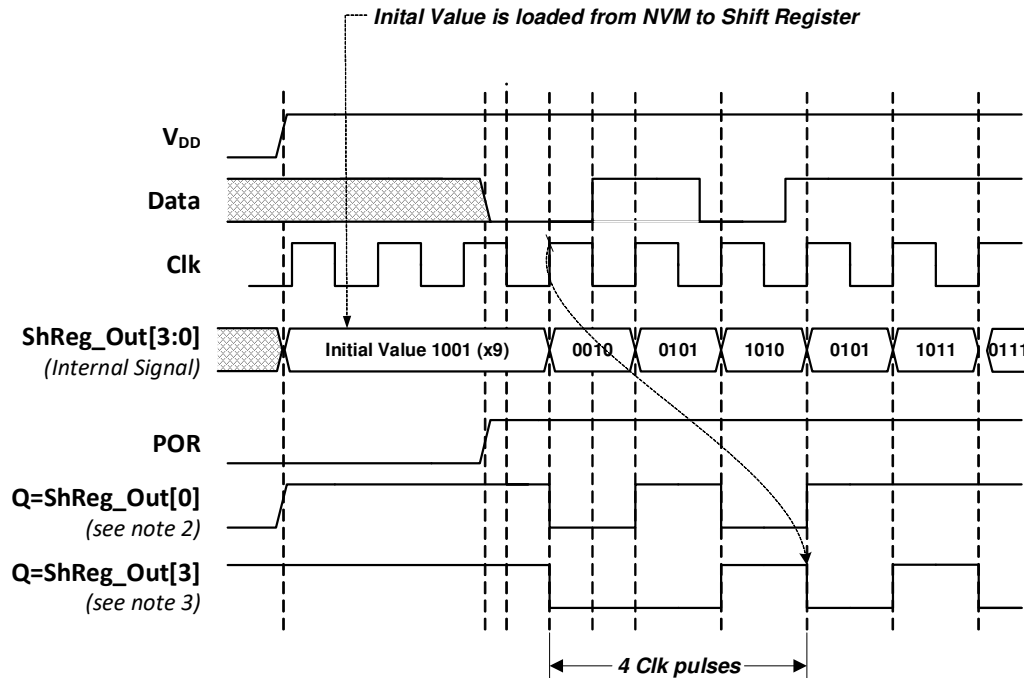

Note1 : DFF Setting "Initial Value: 1"

Note2 : Macrocell is configured as DFF

Note3 : Macrocell is configured as 4-bits ShReg

Figure 17: DFF0 to DFF2 and Shift Register0 to Shift Register2 Operation with DFF Initial Value = 1

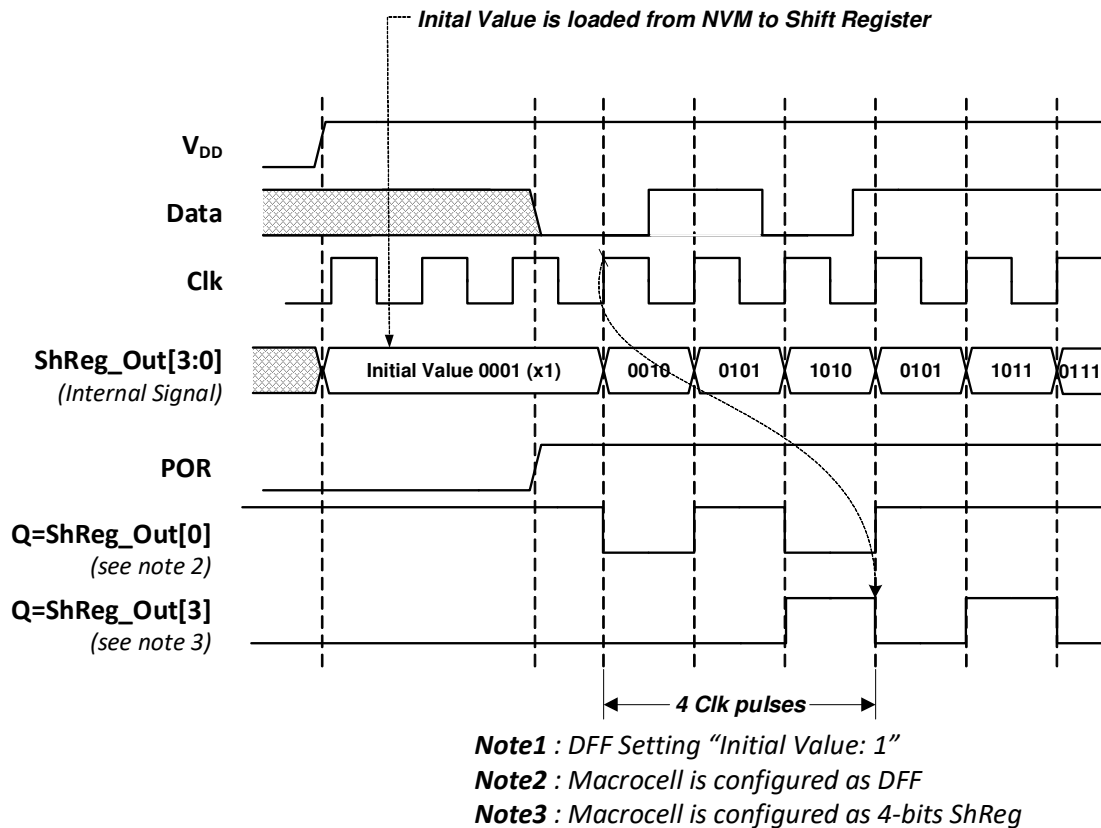


Figure 18: DFF0 to DFF2 and Shift Register0 to Shift Register2 Operation with Initial Value = b0001

SLG47512/13

Low Voltage GreenPAK Programmable Mixed-Signal Matrix

7.1.1 2-Bit LUT or D Flip-Flop Macrocell Used as 2-Bit LUT

This Macrocell, when programmed for a LUT function, uses a 4-bit register to define their output function:

2-bit LUT0 is defined by registers [635:632]

2-bit LUT1 is defined by registers [639:636]

2-bit LUT2 is defined by registers [643:640]

Table 23: 2-bit LUT0 to 2-bit LUT2 Truth Table

IN1	IN0	OUT 2-bit LUT0	OUT 2-bit LUT1	OUT 2-bit LUT2	
0	0	register [632]	register [636]	register [640]	LSB
0	1	register [633]	register [637]	register [641]	
1	0	register [634]	register [638]	register [642]	
1	1	register [635]	register [639]	register [643]	MSB

Table 24 shows the register bits for the standard digital logic devices (AND, NAND, OR, NOR, XOR, XNOR) that can be created within each of the 2-bit LUT logic cells.

Table 24: 2-bit LUT Standard Digital Functions

Function	MSB			LSB
AND-2	1	0	0	0
NAND-2	0	1	1	1
OR-2	1	1	1	0
NOR-2	0	0	0	1
XOR-2	0	1	1	0
XNOR-2	1	0	0	1

7.2 2-BIT LUT OR PROGRAMMABLE PATTERN GENERATOR

The SLG47512/13 has one combination function macrocell that can serve as a logic or a timing function. This macrocell can serve as a Look Up Table (LUT), or a Programmable Pattern Generator (PGen).

When used to implement LUT functions, the 2-bit LUT takes in two input signals from the connection matrix and produces a single output, which goes back into the connection matrix. When used as a LUT to implement combinatorial logic functions, the outputs of the LUT can be configured to any user defined function, including the following standard digital logic devices (AND, NAND, OR, NOR, XOR, XNOR). The user can also define the combinatorial relationship between inputs and outputs to be any selectable function.

It is possible to define the RST level for the PGen macrocell. There are both high level reset (RST) and a low level reset (nRST) options available, which are selected by register [760]. When operating as the Programmable Pattern Generator, the output of the macrocell will clock out a sequence of two to sixteen bits that are user selectable in their bit values, and user selectable in the number of bits (up to sixteen) that are output before the pattern repeats.

SLG47512/13

Low Voltage GreenPAK Programmable Mixed-Signal Matrix

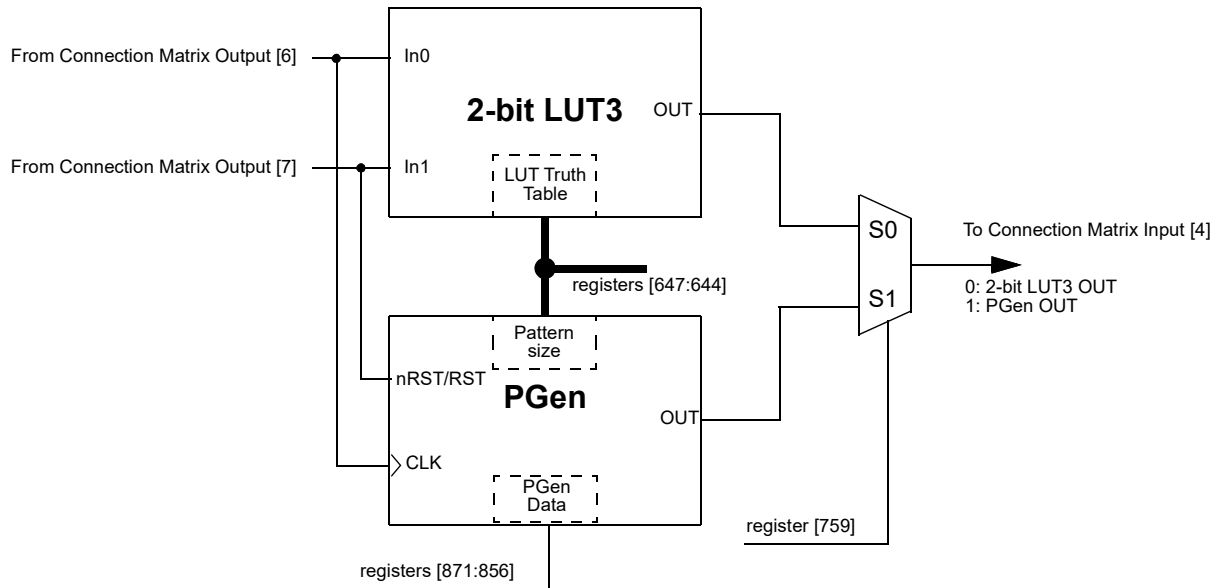


Figure 19: 2-bit LUT3 or PGen

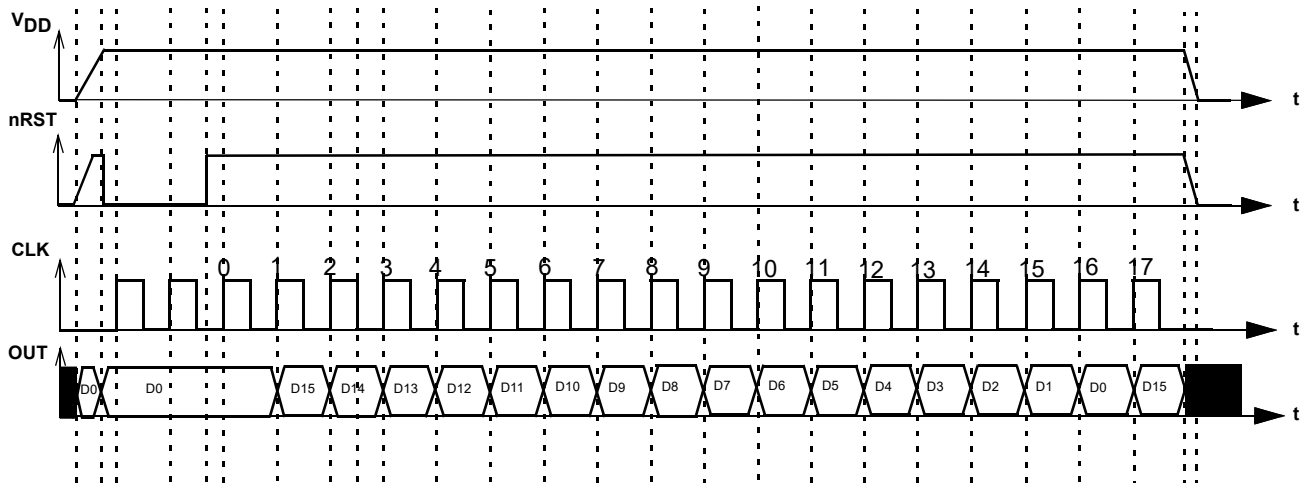


Figure 20: PGen Timing Diagram

Table 25: 2-bit LUT3 Truth Table

IN1	IN0	OUT	
0	0	register [647]	LSB
0	1	register [646]	
1	0	register [645]	
1	1	register [644]	MSB

This macrocell, when programmed for a LUT function, uses a 4-bit register to define their output function:

2-bit LUT3 is defined by registers [647:644]

Table 26 shows the register bits for the standard digital logic devices (AND, NAND, OR, NOR, XOR, XNOR) that can be created within each of the 2-bit LUT logic cells.

Table 26: 2-bit LUT Standard Digital Functions

Function	MSB			LSB
AND-2	1	0	0	0
NAND-2	0	1	1	1
OR-2	1	1	1	0
NOR-2	0	0	0	1
XOR-2	0	1	1	0
XNOR-2	1	0	0	1

7.3 3-BIT LUT OR D FLIP-FLOP WITH SET/RESET OR SHIFT REGISTER MACROCELLS

There are ten macrocells that can serve as 3-bit LUT or as DFF/LATCH, or as Shift Register. It is also possible to define the active level (Q or nQ) for the macrocell's output by registers [766], [774], [782], [790], [798], [806], [814], [822], [830], [838]. DFF/Shift Register or LUT are selected by registers [761], [769], [777], [785], [793], [801], [809], [817], [825], [833]. When used to implement LUT functions, the 3-bit LUT takes in three input signals from the connection matrix and produces a single output, which goes back into the connection matrix.

When used to implement Shift Register, the three input signals from the connection matrix go to the data (D_in), clock (CLK), and Set/Reset (nSET/nRST) inputs for the Shift Register, with the output going back to the connection matrix. It is possible to define the active level for the Set/Reset input of Shift Register macrocell which is selected by registers [768], [776], [784], [792], [800], [808], [816], [824], [832], [840]. The input data (D_in) writes into LSB. The Shift Register length (up to 8 bits/memory cells) is selected by registers [764:762], [772:770], [780:778], [788:786], [796:794], [804:802], [812:810], [820:818], [828:826], [836:834], [845:842], when these registers = 0 DFF/LATCH function is selected.

When used to implement D Flip-Flop/LATCH function, the three input signals from the connection matrix go to the data (D_in), clock (CLK), and Set/Reset (nSET/nRST) inputs for the Flip-Flop/LATCH, with the output going back to the connection matrix. It is possible to define the active level for the Set/Reset input (nSET/nRST_sel which is selected by register [767], [775], [783], [791], [799], [807], [815], [823], [831], [839]) of DFF/LATCH macrocell. LATCH or DFF configuration is selected by registers [765], [773], [781], [789], [797], [805], [813], [821], [829], [837].

The operation of the D Flip-Flop and LATCH will follow the functional descriptions below:

DFF: CLK is rising edge triggered, then Q = D; otherwise Q will not change.

LATCH: when CLK is Low, then Q = D; otherwise Q remains its previous value (input D has no effect on the output, when CLK is High).

It's possible to read/write the Shift Register content via I²C (bytes 51h, 52h, 53h, 54h, 55h, 56h, 57h, 58h, 59h and 5Ah). See section 15.4.10 for more information.



SLG47512/13

Low Voltage GreenPAK Programmable Mixed-Signal Matrix

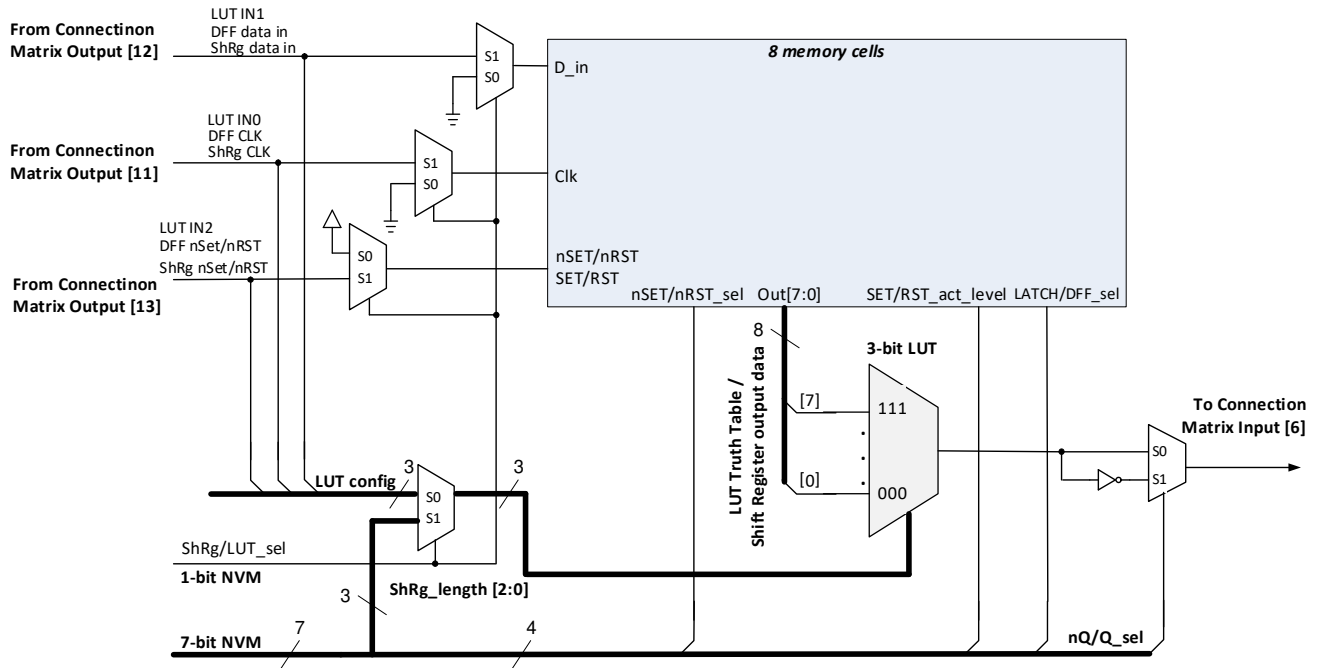


Figure 22: 3-bit LUT1 or DFF4 or Shift Register 4

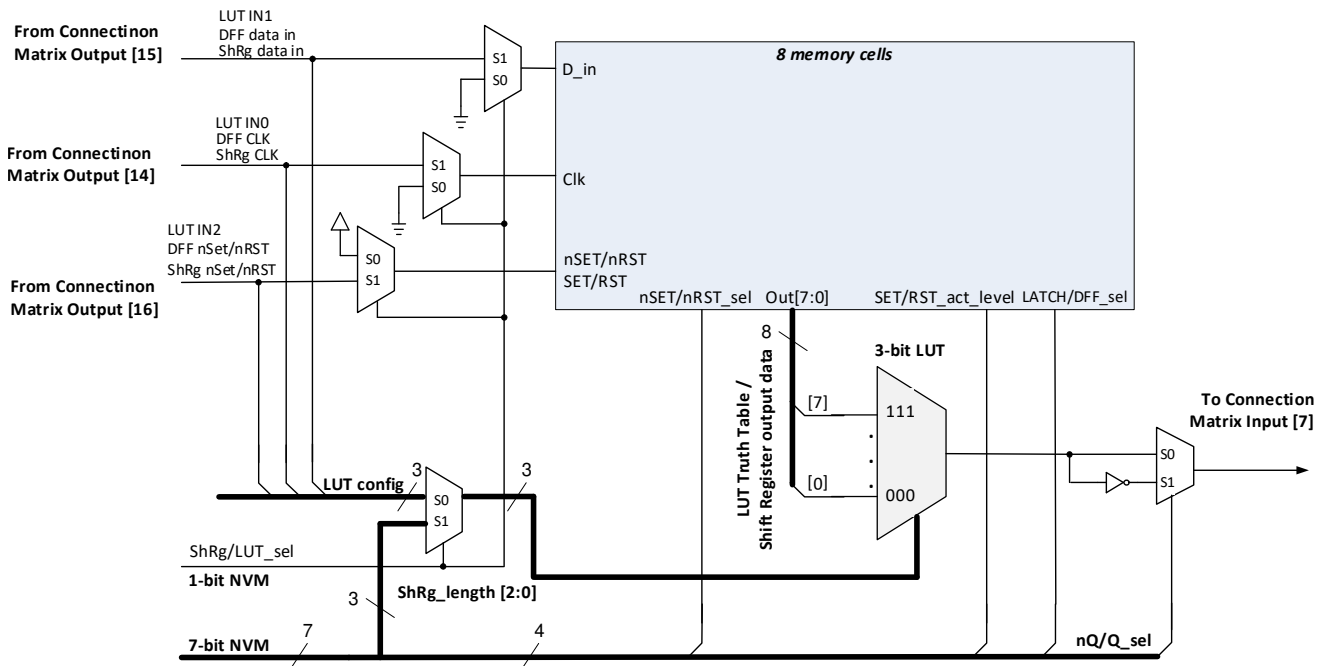


Figure 23: 3-bit LUT2 or DFF5 or Shift Register 5

Datasheet

[illegible]

The diagram illustrates the internal logic of the LUT configuration. It features several input signals from connection matrices and internal NVMs. The LUT configuration logic is implemented using a 3-bit LUT and various multiplexers (S1, S0). The LUT output is connected to the nQ/Q_sel input of the connection matrix.

- Inputs:**
 - From Connection Matrix Output [27]: LUT IN1 (DFF data in, ShRg data in)
 - From Connection Matrix Output [26]: LUT IN0 (DFF CLK, ShRg CLK)
 - From Connection Matrix Output [28]: LUT IN2 (DFF nSet/nRST, ShRg nSet/nRST)
 - LUT config (3 bits)
 - ShRg/LUT_sel (1-bit NVM)
 - ShRg_length [2:0] (3 bits)
 - nQ/Q_sel (7-bit NVM)
- Internal Logic:**
 - The LUT config (3 bits) is connected to a 3-bit LUT.
 - The LUT output is connected to the nQ/Q_sel input of the connection matrix.
 - The LUT output is also connected to the nSET/nRST_sel input of the connection matrix.
 - The LUT output is connected to the SET/RST_act_level input of the connection matrix.
 - The LUT output is connected to the LATCH/DFF_sel input of the connection matrix.

Datasheet

The diagram illustrates the internal configuration logic of a 3-bit LUT. It features a central block labeled "8 memory cells" with inputs D_in, Clk, nSET/nRST, and SET/RST. The output of the LUT is Out[7:0]. The LUT configuration logic is shown on the left, with inputs from Connection Matrix Outputs [33], [32], and [34]. These inputs are connected to various LUT configuration signals, including LUT IN0, LUT IN1, LUT IN2, DFF data in, ShRg data in, DFF CLK, ShRg CLK, DFF nSet/nRST, ShRg nSet/nRST, and LUT config. The LUT config signal is connected to a 3-bit LUT, which outputs a 3-bit LUT output data. The LUT output data is then connected to the LUT configuration logic, which also receives inputs from ShRg/LUT_sel (1-bit NVM) and ShRg_length [2:0] (3-bit NVM). The LUT configuration logic also receives inputs from a 7-bit NVM and a 4-bit NVM. The final output of the LUT configuration logic is connected to the LUT output data.

Datasheet

[illegible]

The diagram illustrates the timing of the SPI interface signals. The signals shown are V_{DD} , Data, Clk, POR, and ShReg_Out[7:0] (Internal Signal). The ShReg_Out[7:0] signal is shown as a sequence of 16 data words, each 9 bits wide (x9B). The first word is the Initial Value (10011011), and the subsequent words are the Input Data (00110111, 01101111, 11011110, 10111100, 01111000, 11110000, 11100000, 11000001, 10000011, 00000111, 00001111). The Data signal is shown as a sequence of 16 data words, each 9 bits wide (x9B). The Clk signal is a square wave. The POR signal is a pulse that occurs at the start of the data transmission. The diagram also shows the MSB (Most Significant Bit) and LSB (Least Significant Bit) of the data words. The initial value is transmitted first, followed by the input data. The timing of the Data signal is shown relative to the Clk signal, with the Data signal being sampled on the rising edge of the Clk signal. The POR signal is shown as a pulse that occurs at the start of the data transmission, indicating the start of the data transfer.

Note2 : Macrocell is configured as 8-bit Shift Register

Datasheet

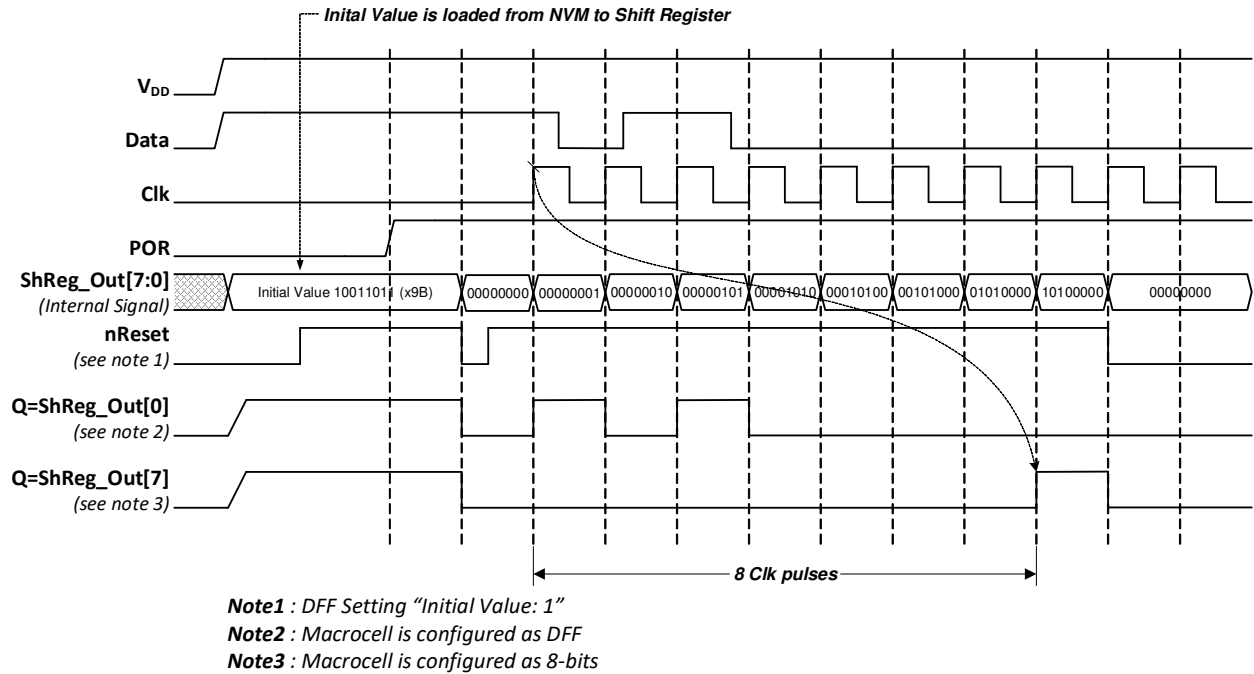


Figure 32: DFF3 to DFF12 and Shift Register 3 to Shift Register 12 Operation, nReset, Initial Value: b10011011

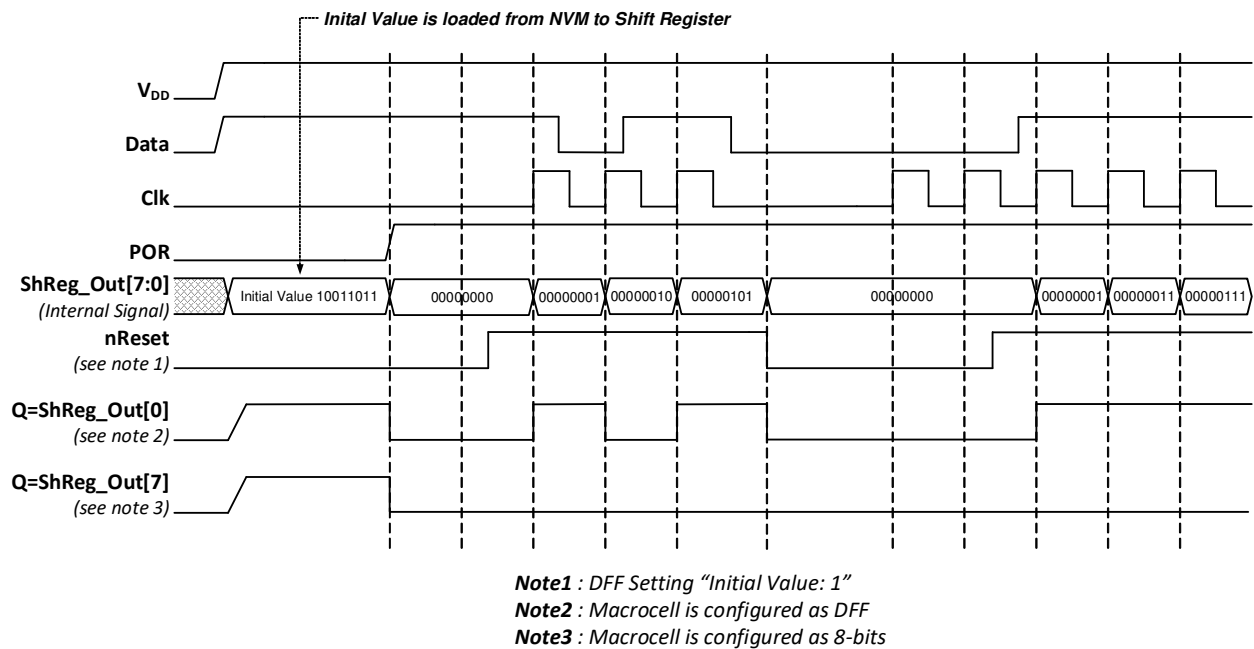


Figure 33: DFF3 to DFF12 and Shift Register3 to Shift Register12 Operation, nReset, Initial Value: b10011011, Case2

SLG47512/13

Low Voltage GreenPAK Programmable Mixed-Signal Matrix

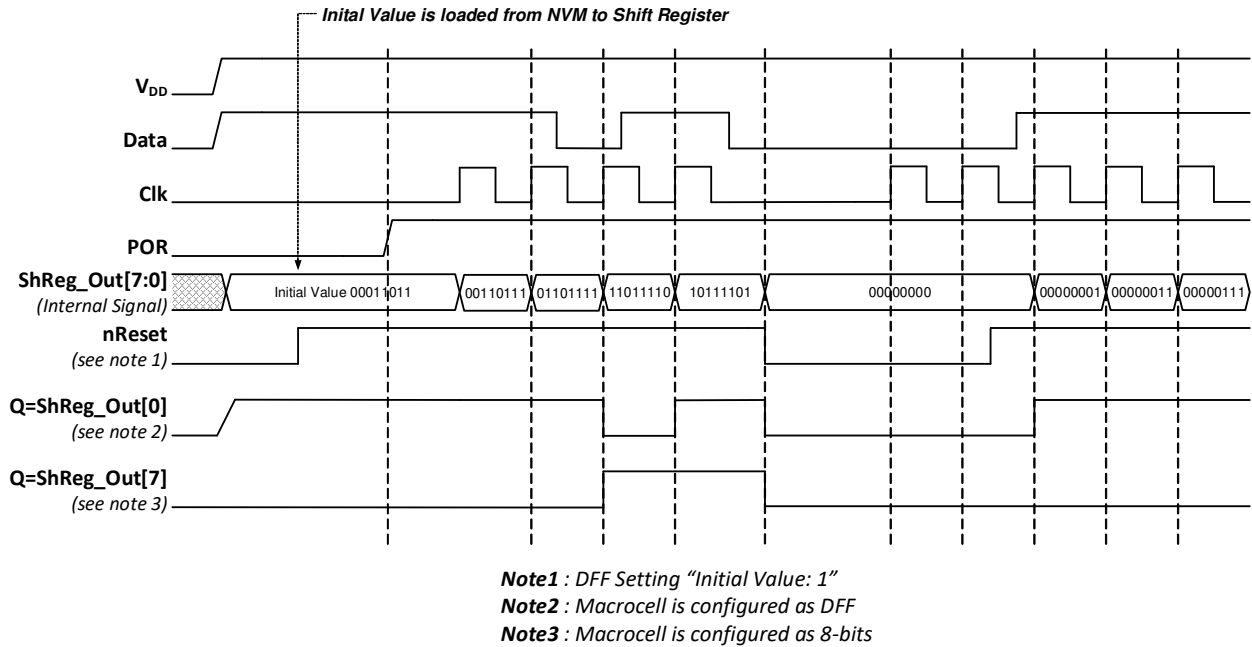


Figure 34: DFF3 to DFF12 and Shift Register 3 to Shift Register 12 Operation, nReset, Initial Value: b00011011

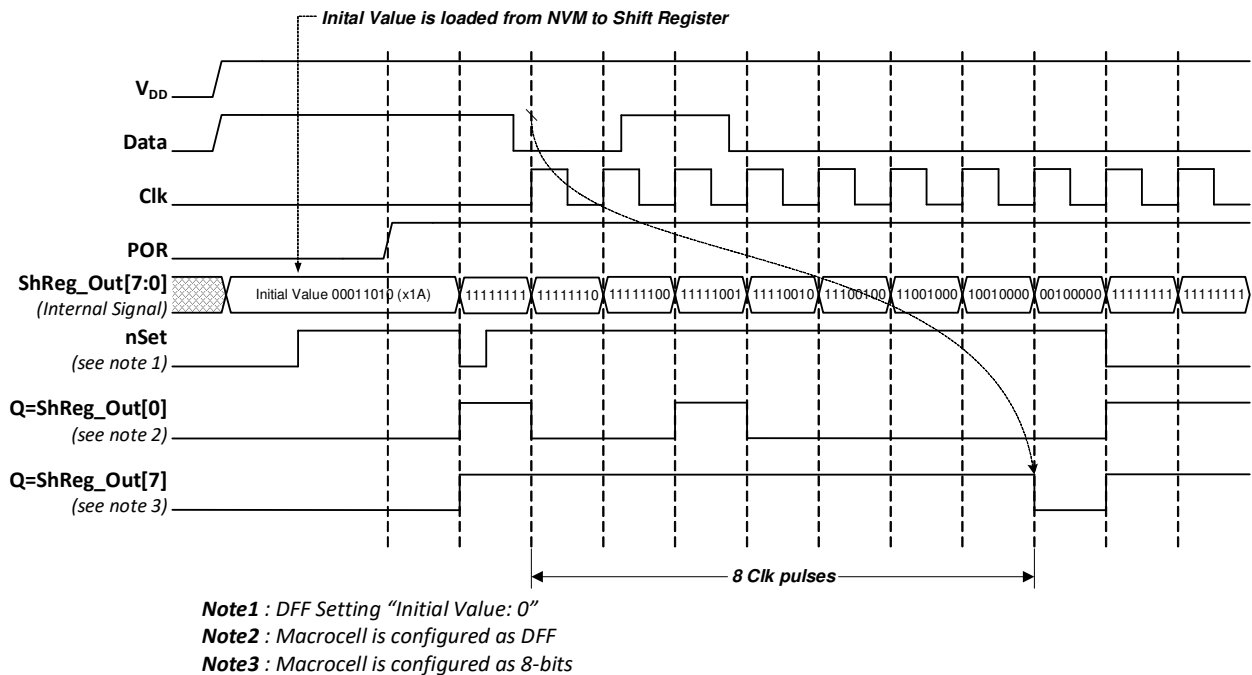


Figure 35: DFF3 to DFF12 and Shift Register 3 to Shift Register 12 Operation, nSet, Initial Value: b00011010

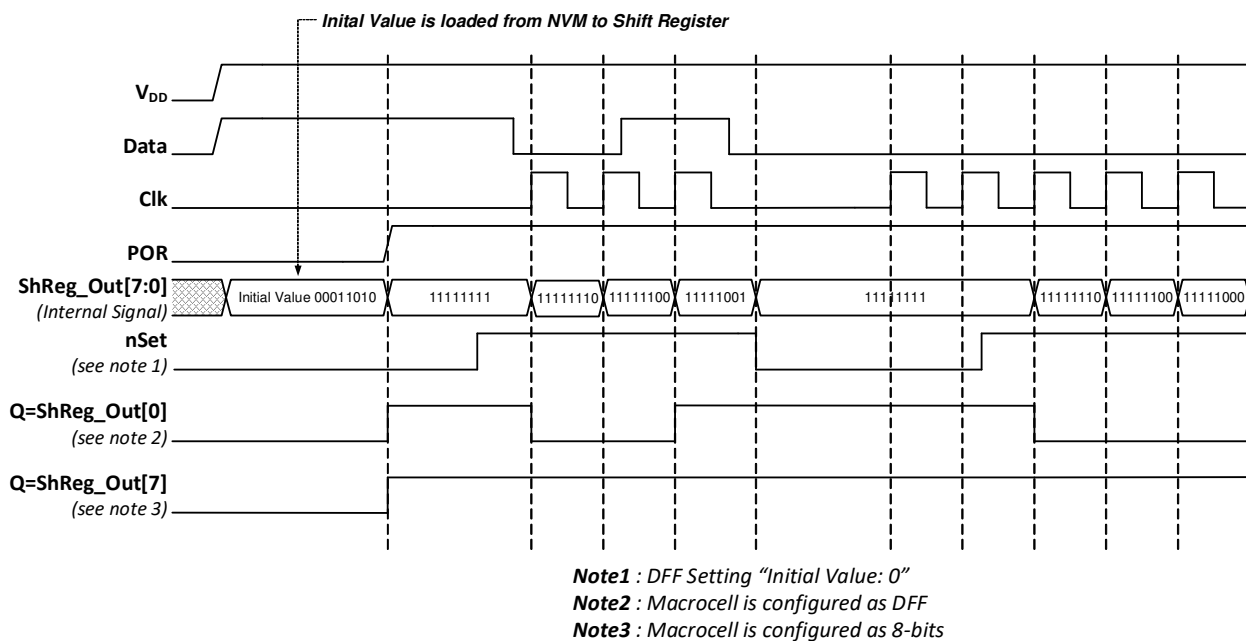


Figure 36: DFF3 to DFF12 and Shift Register 3 to Shift Register 12 Operation, nSet, Initial Value: b00011010, Case 2

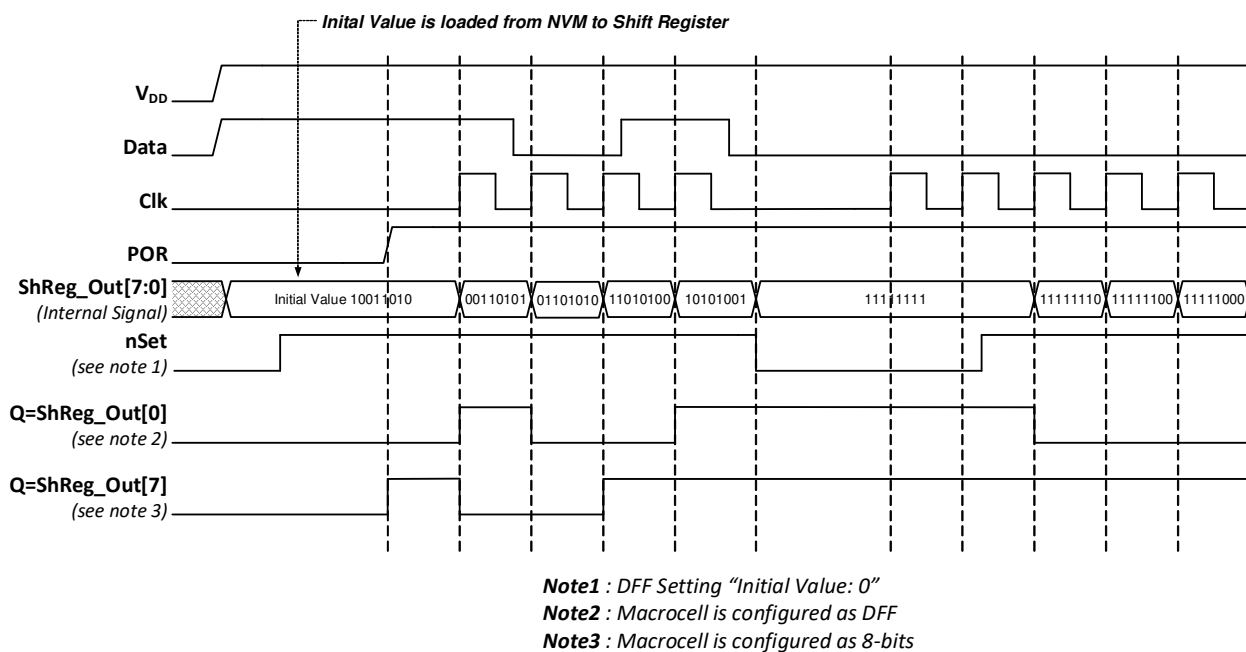


Figure 37: DFF3 to DFF12 and Shift Register 3 to Shift Register 12 Operation, nSet, Initial Value: b10011010

SLG47512/13

Low Voltage GreenPAK Programmable Mixed-Signal Matrix

7.3.1 3-Bit LUT or D Flip-Flop Macrocells Used as 3-Bit LUTs

Each macrocell, when programmed for a LUT function, uses an 8-bit register to define their output function:

3-bit LUT0 is defined by registers [655:648]

3-bit LUT1 is defined by registers [663:656]

3-bit LUT2 is defined by registers [671:664]

3-bit LUT3 is defined by registers [679:672]

3-bit LUT4 is defined by registers [687:680]

3-bit LUT5 is defined by registers [695:688]

3-bit LUT6 is defined by registers [703:696]

3-bit LUT7 is defined by registers [711:704]

3-bit LUT8 is defined by registers [719:712]

3-bit LUT9 is defined by registers [727:720]

Table 27: 3-bit LUT0 to 3-bit LUT9 Truth Table

IN2	IN1	IN0	OUT 3-bit LUT0	OUT 3-bit LUT1	OUT 3-bit LUT2	OUT 3-bit LUT3	OUT 3-bit LUT4	OUT 3-bit LUT5	OUT 3-bit LUT6	OUT 3-bit LUT7	OUT 3-bit LUT8	OUT 3-bit LUT9	
0	0	0	register [648]	register [656]	register [664]	register [672]	register [680]	register [688]	register [696]	register [704]	register [712]	register [720]	LSB
0	0	1	register [649]	register [657]	register [665]	register [673]	register [681]	register [689]	register [697]	register [705]	register [713]	register [721]	
0	1	0	register [650]	register [658]	register [666]	register [674]	register [682]	register [690]	register [698]	register [706]	register [714]	register [722]	
0	1	1	register [651]	register [659]	register [667]	register [675]	register [683]	register [691]	register [699]	register [707]	register [715]	register [723]	
1	0	0	register [652]	register [660]	register [668]	register [676]	register [684]	register [692]	register [700]	register [708]	register [716]	register [724]	
1	0	1	register [653]	register [661]	register [669]	register [677]	register [685]	register [693]	register [701]	register [709]	register [717]	register [725]	
1	1	0	register [654]	register [662]	register [670]	register [678]	register [686]	register [694]	register [702]	register [710]	register [718]	register [726]	
1	1	1	register [655]	register [663]	register [671]	register [679]	register [687]	register [695]	register [703]	register [711]	register [719]	register [727]	MSB

Table 28 shows the register bits for the standard digital logic devices (AND, NAND, OR, NOR, XOR, XNOR) that can be created within each of the four 3-bit LUT logic cells.

Table 28: 3-bit LUT Standard Digital Functions

Function	MSB							LSB
AND-3	1	0	0	0	0	0	0	0
NAND-3	0	1	1	1	1	1	1	1

SLG47512/13

Low Voltage GreenPAK Programmable Mixed-Signal Matrix

Table 28: 3-bit LUT Standard Digital Functions (Continued)

Function	MSB							LSB
OR-3	1	1	1	1	1	1	1	0
NOR-3	0	0	0	0	0	0	0	1
XOR-3	1	0	0	1	0	1	1	0
XNOR-3	0	1	1	0	1	0	0	1

Low Voltage GreenPAK Programmable Mixed-Signal Matrix

7.4 4-BIT LUT OR D FLIP-FLOP WITH SET/RESET OR SHIFT REGISTER MACROCELL

There is one macrocell that can serve as 4-bit LUT or as DFF/LATCH, or as Shift Register. It is also possible to define the active level (Q or nQ) for the macrocell's output by register [847]. DFF/Shift Register or LUT are selected by register [841]. When used to implement LUT functions, the 4-bit LUT takes in four input signals from the connection matrix and produces a single output, which goes back into the connection matrix.

When used to implement Shift Register, the four input signals from the connection matrix go to the data (D_in), clock (CLK), clock enable (CLK_enable), and Set/Reset (nSET/nRST) inputs for the Shift Register, with the output going back to the connection matrix. It is possible to define the active level for the reset/set input of Shift Register macrocell which is selected by register [849]. The input data (D_in) writes into LSB. The Shift Register length (up to 16 bits/memory cells) is selected by register [845:842]. Register [845:842] = 0 means that DFF/LATCH function is selected.

When used to implement D Flip-Flop function, the four input signals from the connection matrix go to the data (D_in), clock (CLK), clock enable (CLK_enable), and Set/Reset (nSET/nRST) inputs for the Flip-Flop, with the output going back to the connection matrix. Macrocell in LATCH configuration have three input signals: data (D_in), clock (CLK), and Set/Reset (nSET/nRST). It is possible to define the active level for the reset/set input (nSET/nRST_sel which are selected by register [848]) of DFF/LATCH macrocell. LATCH or DFF configuration is selected by register [846].

The operation of the D Flip-Flop and LATCH will follow the functional descriptions below:

DFF: CLK is rising edge triggered, then Q = D; otherwise Q will not change. When clock enable (CLK_enable) is low, macrocell doesn't react to any pulses at clock (CLK) input.

LATCH: when CLK is Low, then Q = D; otherwise Q remains its previous value (input D has no effect on the output, when CLK is High).

It's possible to read/write the Shift Register content via I²C (bytes 5Bh and 5Ch). See section 15.4.10 for more information.

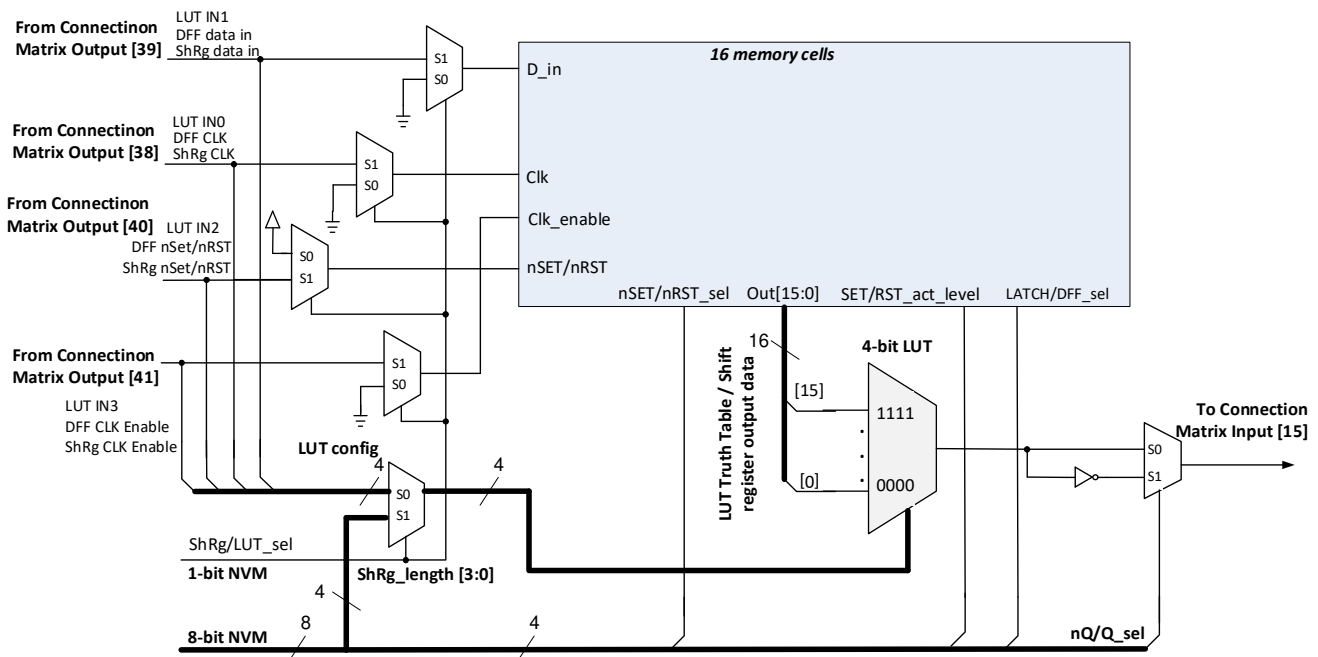


Figure 38: 4-bit LUT0 or DFF13 or Shift Register 13

SLG47512/13

Low Voltage GreenPAK Programmable Mixed-Signal Matrix

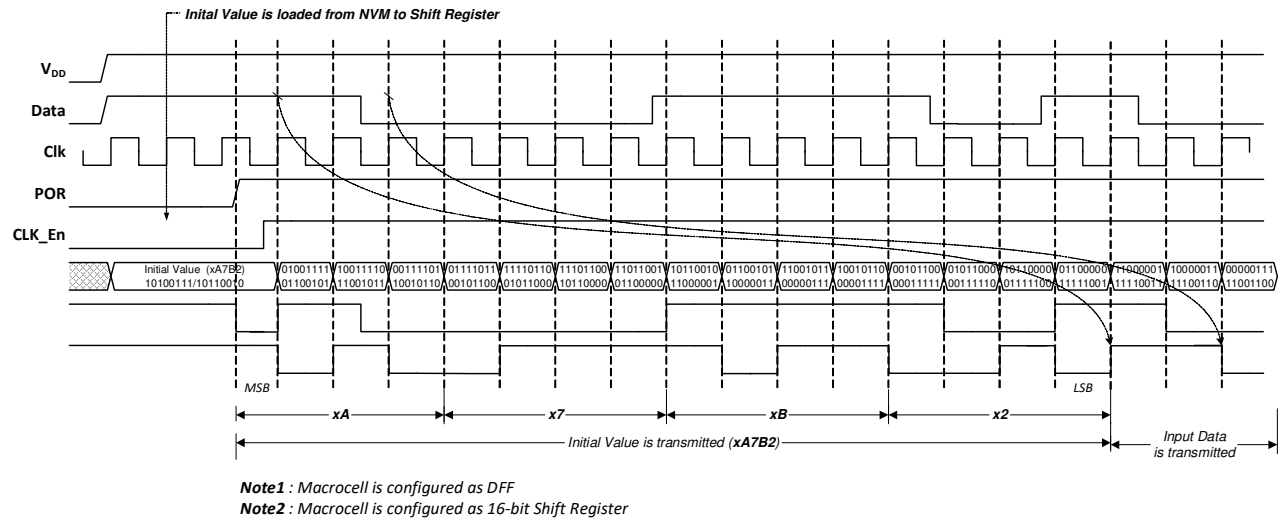


Figure 39: DFF13 and Shift Register 13 Operation

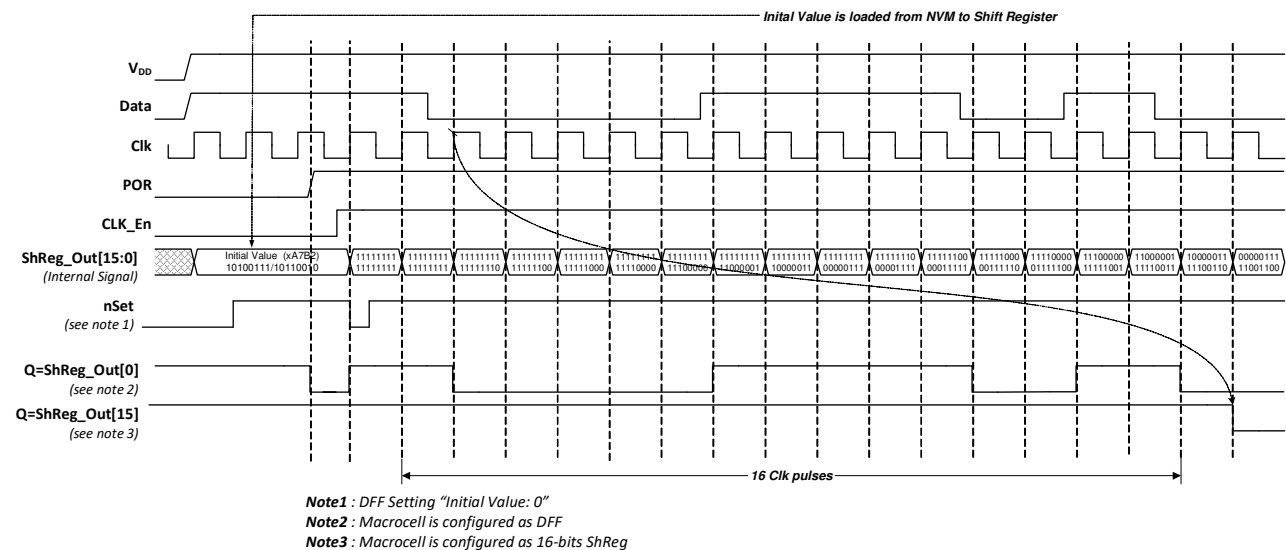


Figure 40: DFF13 and Shift Register 13 Operation, nSet, Initial Value: xA7B2

Low Voltage GreenPAK Programmable Mixed-Signal Matrix

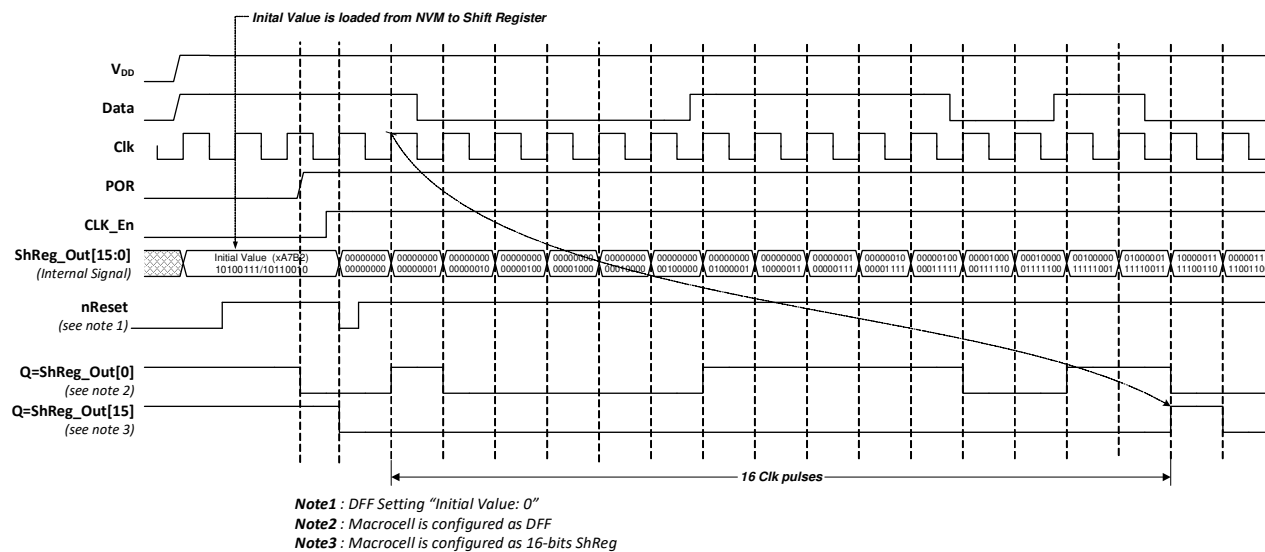


Figure 41: DFF13 and Shift Register 13 Operation, nReset, Initial Value: xA7B2

7.4.1 4-Bit LUT Macrocell Used as 4-Bit LUT

Table 29: 4-bit LUT0 Truth Table

IN3	IN2	IN1	IN0	OUT	
0	0	0	0	register [728]	LSB
0	0	0	1	register [729]	
0	0	1	0	register [730]	
0	0	1	1	register [731]	
0	1	0	0	register [732]	
0	1	0	1	register [733]	
0	1	1	0	register [734]	
0	1	1	1	register [735]	
1	0	0	0	register [736]	
1	0	0	1	register [737]	
1	0	1	0	register [738]	
1	0	1	1	register [739]	
1	1	0	0	register [740]	
1	1	0	1	register [741]	
1	1	1	0	register [742]	
1	1	1	1	register [743]	MSB

This macrocell, when programmed for a LUT function, uses a 16-bit register to define their output function:

SLG47512/13

Low Voltage GreenPAK Programmable Mixed-Signal Matrix

4-bit LUT0 is defined by registers [743:728]

Table 30: 4-bit LUT Standard Digital Functions

Function	MSB															LSB
AND-4	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
NAND-4	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
OR-4	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0
NOR-4	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1
XOR-4	0	1	1	0	1	0	0	1	1	0	0	1	0	1	1	0
XNOR-4	1	0	0	1	0	1	1	0	0	1	1	0	1	0	0	1

8 Multi-Function Macrocells

The SLG47512/13 has 8 Multi-Function macrocells that can serve as more than one logic or timing function. In each case, they can serve as a LUT, DFF with flexible settings, or as CNT/DLY with multiple modes such as One Shot, Frequency Detect, Edge Detect, and others. Also, the macrocell is capable to combine those functions: LUT/DFF connected to CNT/DLY or CNT/DLY connected to LUT/DFF, see [Figure 42](#).

See the list below for the functions that can be implemented in these macrocells:

- Seven macrocells that can serve as 3-bit LUTs/D Flip-Flops and as 8-Bit Counter/Delays
- One macrocell that can serve as a 4-bit LUT/D Flip-Flop and as 16-Bit Counter/Delay/FSM

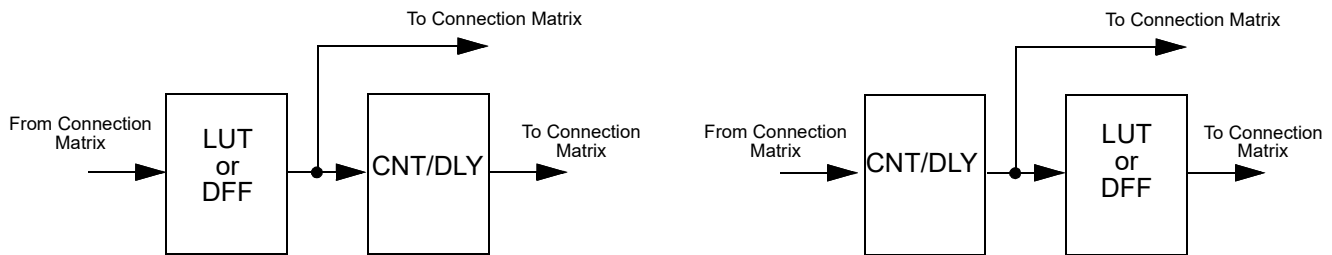


Figure 42: Possible Connections Inside Multi-Function Macrocell

Inputs/Outputs for the 8 Multi-Function function macrocells are configured from the connection matrix with specific logic functions being defined by the state of NVM bits.

When used as a LUT to implement combinatorial logic functions, the outputs of the LUTs can be configured to any user defined function, including the following standard digital logic devices (AND, NAND, OR, NOR, XOR, XNOR).

8.1 3-BIT LUT OR DFF/LATCH WITH 8-BIT COUNTER/DELAY MACROCELLS

There are seven macrocells that can serve as 3-bit LUTs/D Flip-Flops and as 8-Bit Counter/Delays.

When used to implement LUT functions, the 3-bit LUTs each takes in three input signals from the connection matrix and produces a single output, which goes back into the connection matrix or can be connected to CNT/DLY's input.

When used to implement D Flip-Flop function, the three input signals from the connection matrix go to the data (D), clock (CLK), and Set/Reset (nRST/nSET) inputs of the Flip-Flop, with the output going back to the connection matrix or to the CNT/DLY's input.

The operation of the D Flip-Flop and LATCH will follow the functional descriptions below:

DFF: CLK is rising edge triggered, then $Q = D$; otherwise Q will not change.

LATCH: when CLK is High, then $Q = D$; otherwise Q remains its previous value (input D has no effect on the output, when CLK is Low).

When used to implement Counter/Delays, each macrocell has a dedicated matrix input connection. For flexibility, each of these macrocells has a large selection of internal and external clock sources, as well as the option to chain from the output of the previous (N-1) CNT/DLY macrocell, to implement longer count/delay circuits. These macrocells can also operate in a One-Shot mode, which will generate an output pulse of user-defined width. They can also operate in a Frequency Detection or Edge Detection mode.

Counter/Delay macrocell has an initial value, which define its initial value after GPAK is powered up. It is possible to select initial Low or initial High, as well as initial value defined by a Delay In signal.

SLG47512/13

Low Voltage GreenPAK Programmable Mixed-Signal Matrix

For example, in case initial LOW option is used, the rising edge delay will start operation.

For timing diagrams refer to sections 7.1 and 8.3.

Note: After two DFF – counters initialize with counter data = 0 after POR.

Initial state = 1 – counters initialize with counter data = 0 after POR.

Initial state = 0 And After two DFF is bypass – counters initialize with counter data after POR.

CNT6 and CNT7 current count value can be read via I²C. However, it is possible to change the counter data (value counter starts operating from) for any macrocell using I²C write commands. In this mode, it is possible to load count data immediately (after two DFF) or after counter ends counting. See section 15.4.8 for further details.

8.1.1 3-Bit LUT or 8-Bit CNT/DLY Block Diagrams

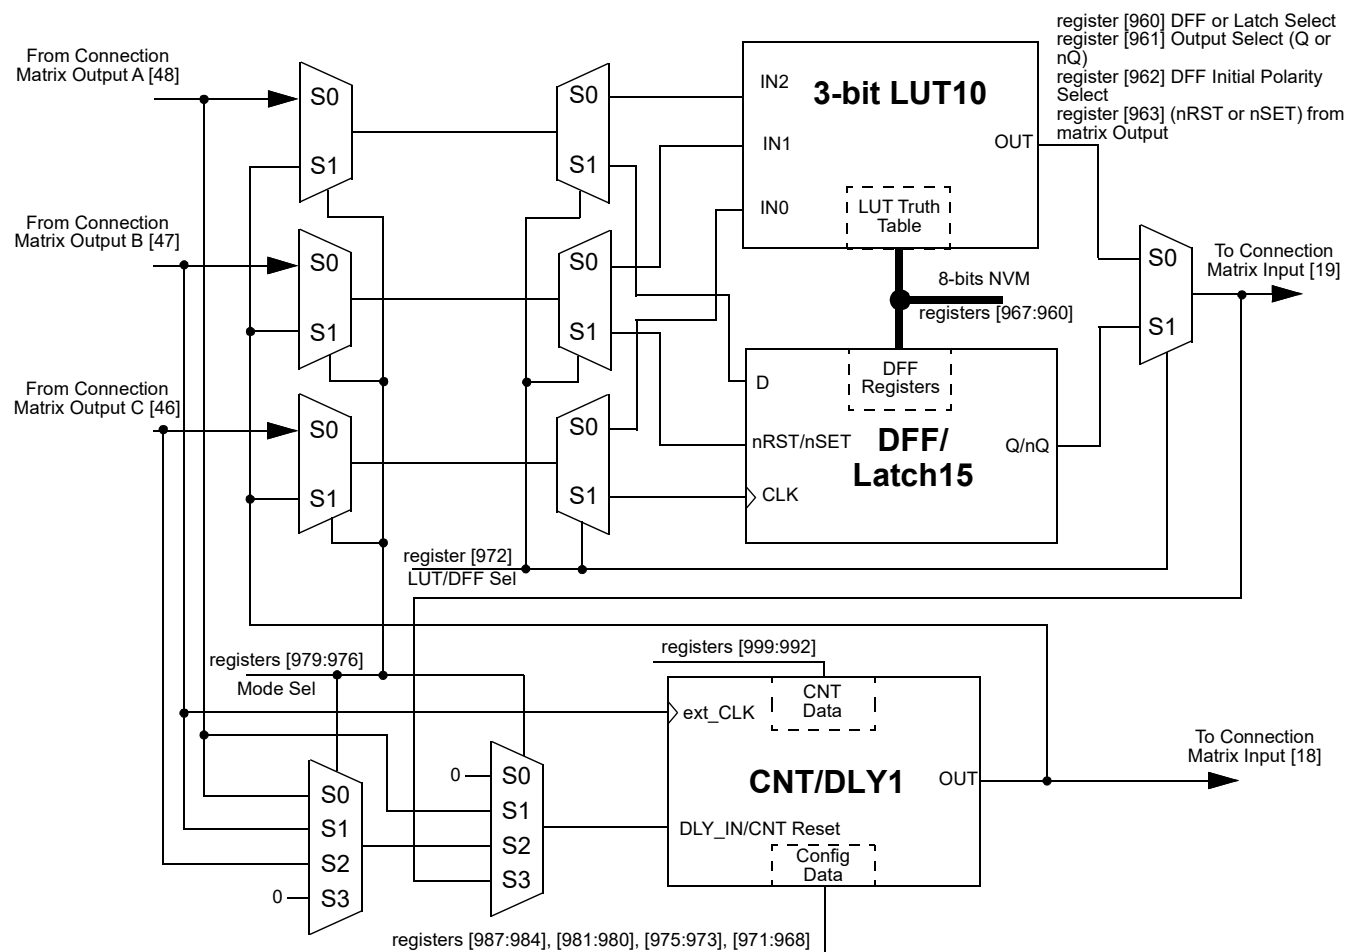


Figure 43: 8-bit Multi-Function Macrocells Block Diagram (3-bit LUT10/DFF15, CNT/DLY1)

SLG47512/13

Low Voltage GreenPAK Programmable Mixed-Signal Matrix

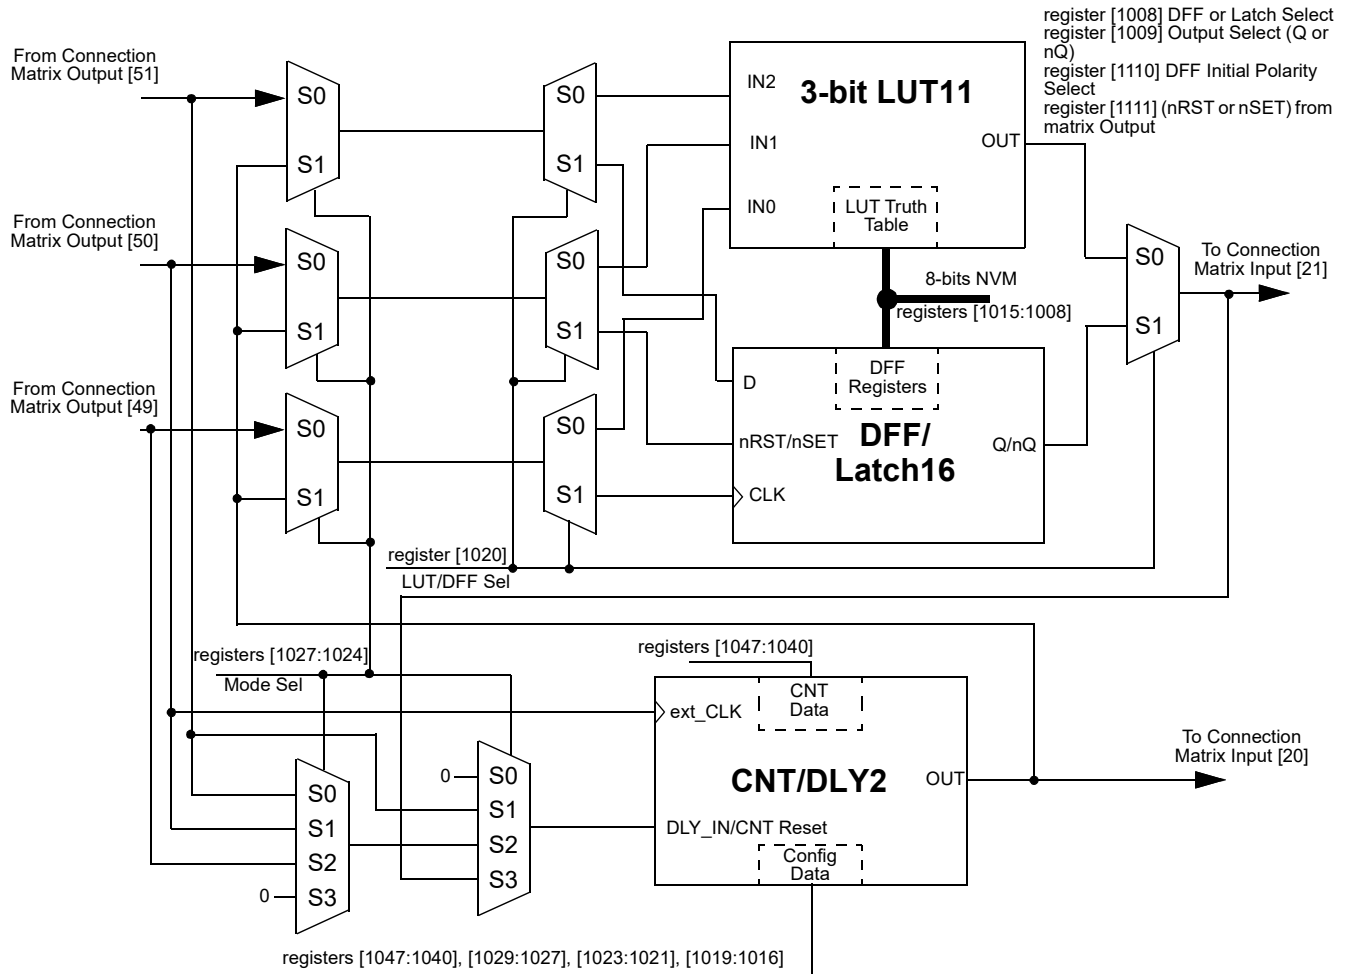


Figure 44: 8-bit Multi-Function Macrocells Block Diagram (3-bit LUT11/DFF16, CNT/DLY2)

SLG47512/13

Low Voltage GreenPAK Programmable Mixed-Signal Matrix

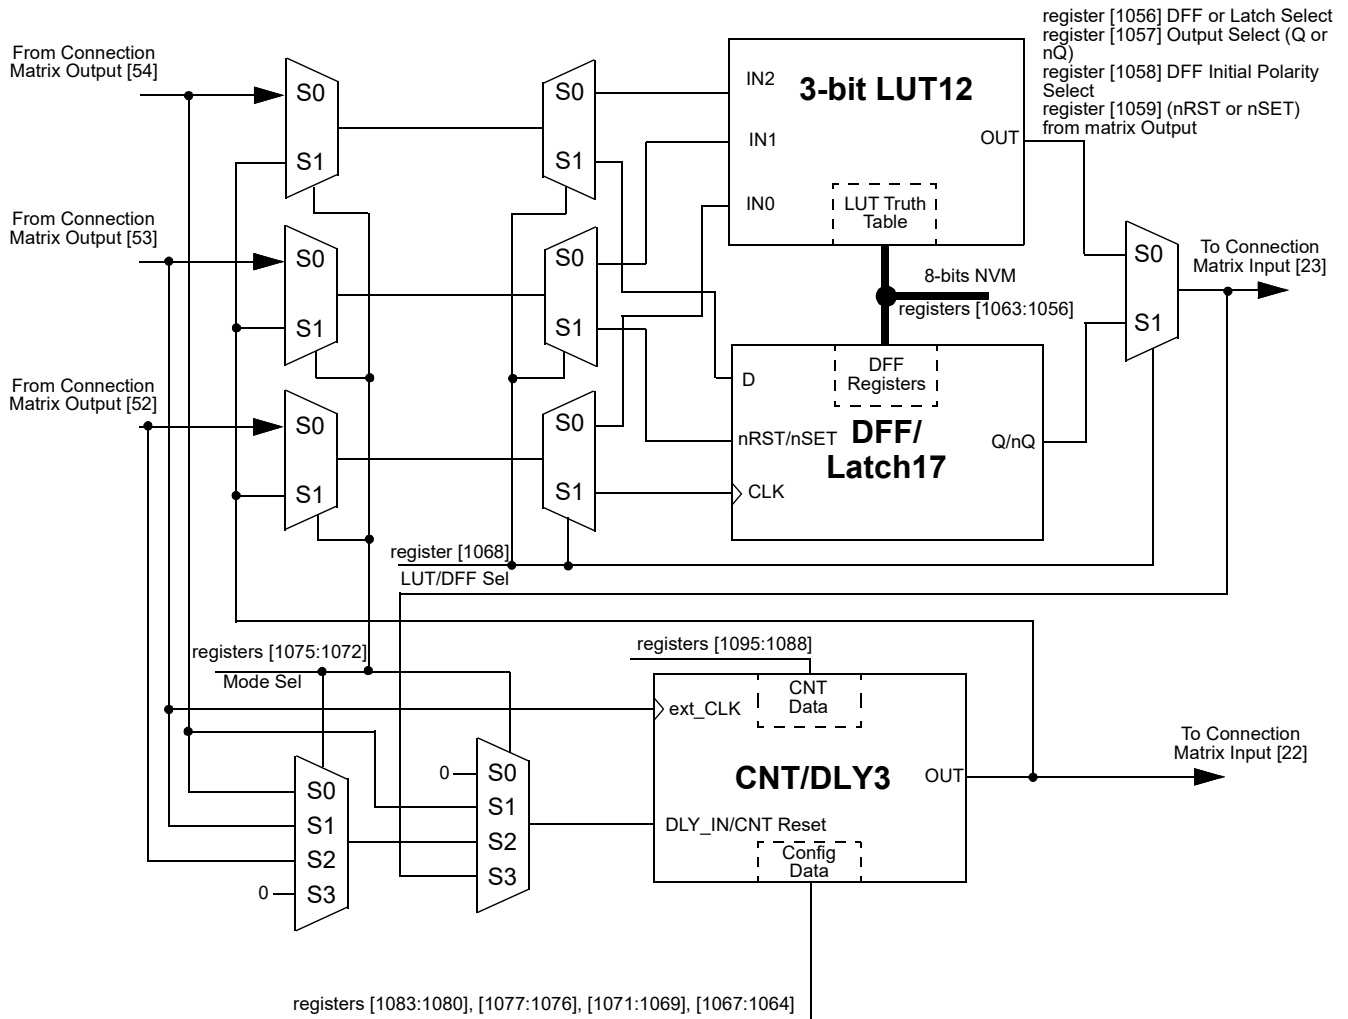


Figure 45: 8-bit Multi-Function Macrocells Block Diagram (3-bit LUT12/DFF17, CNT/DLY3)

SLG47512/13

Low Voltage GreenPAK Programmable Mixed-Signal Matrix

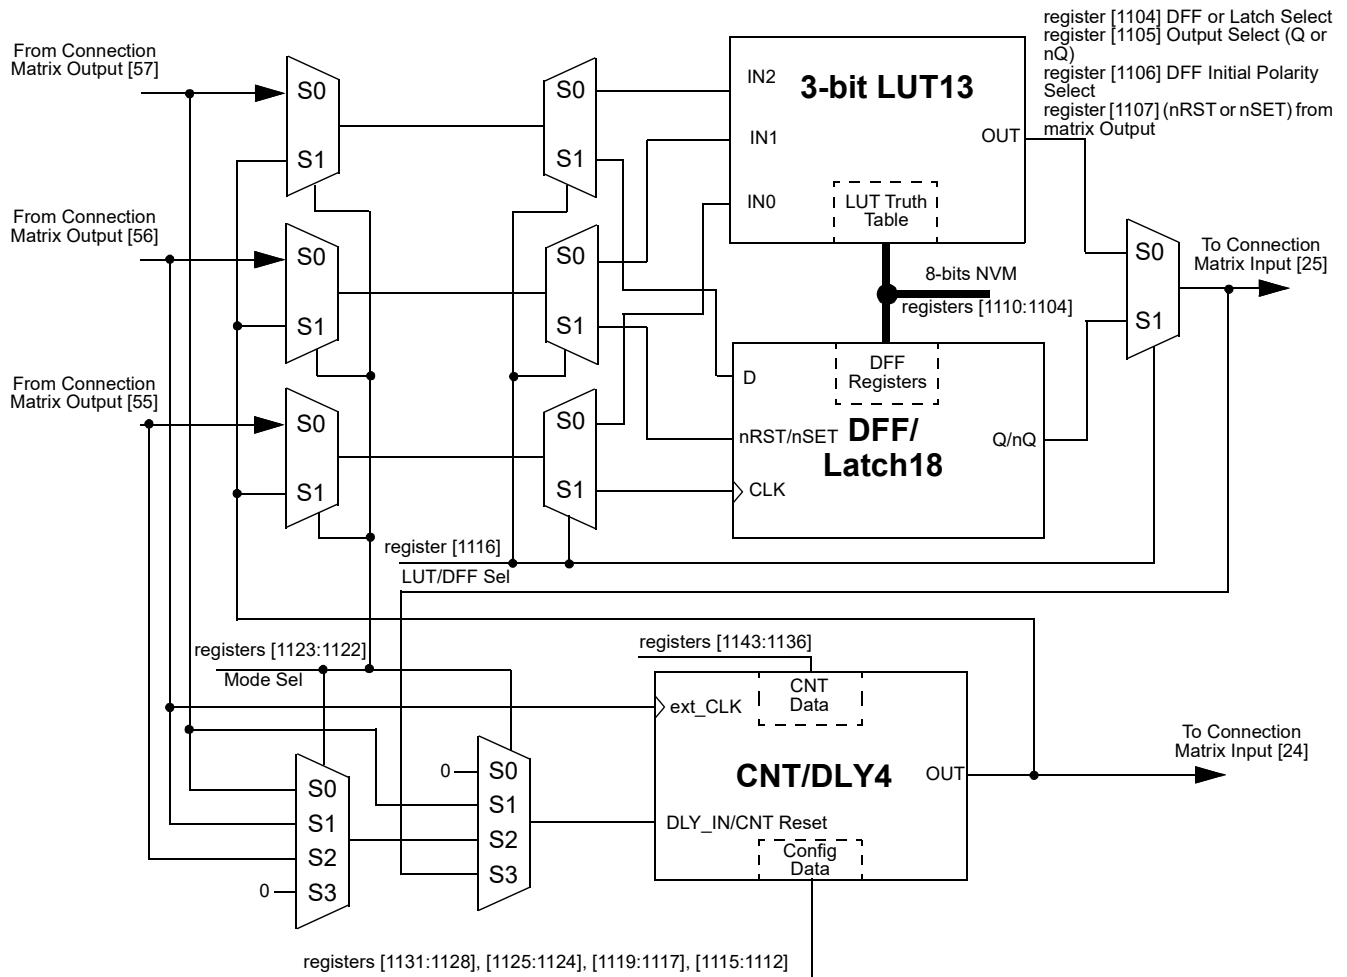


Figure 46: 8-bit Multi-Function Macrocells Block Diagram (3-bit LUT13/DFF18, CNT/DLY4)

SLG47512/13

Low Voltage GreenPAK Programmable Mixed-Signal Matrix

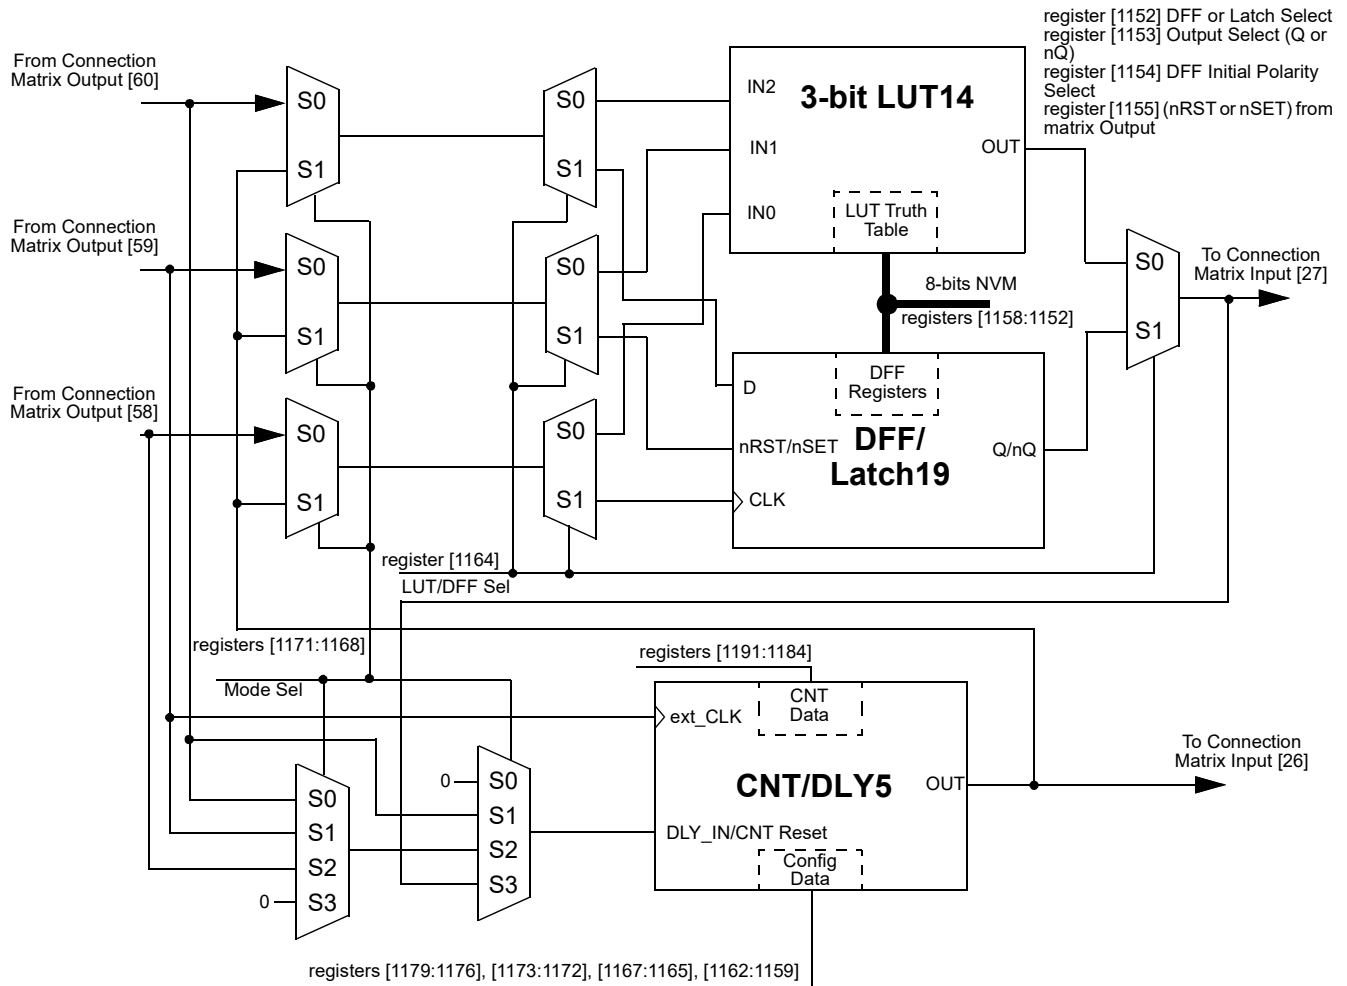


Figure 47: 8-bit Multi-Function Macrocells Block Diagram (3-bit LUT14/DFF19, CNT/DLY5)

SLG47512/13

Low Voltage GreenPAK Programmable Mixed-Signal Matrix

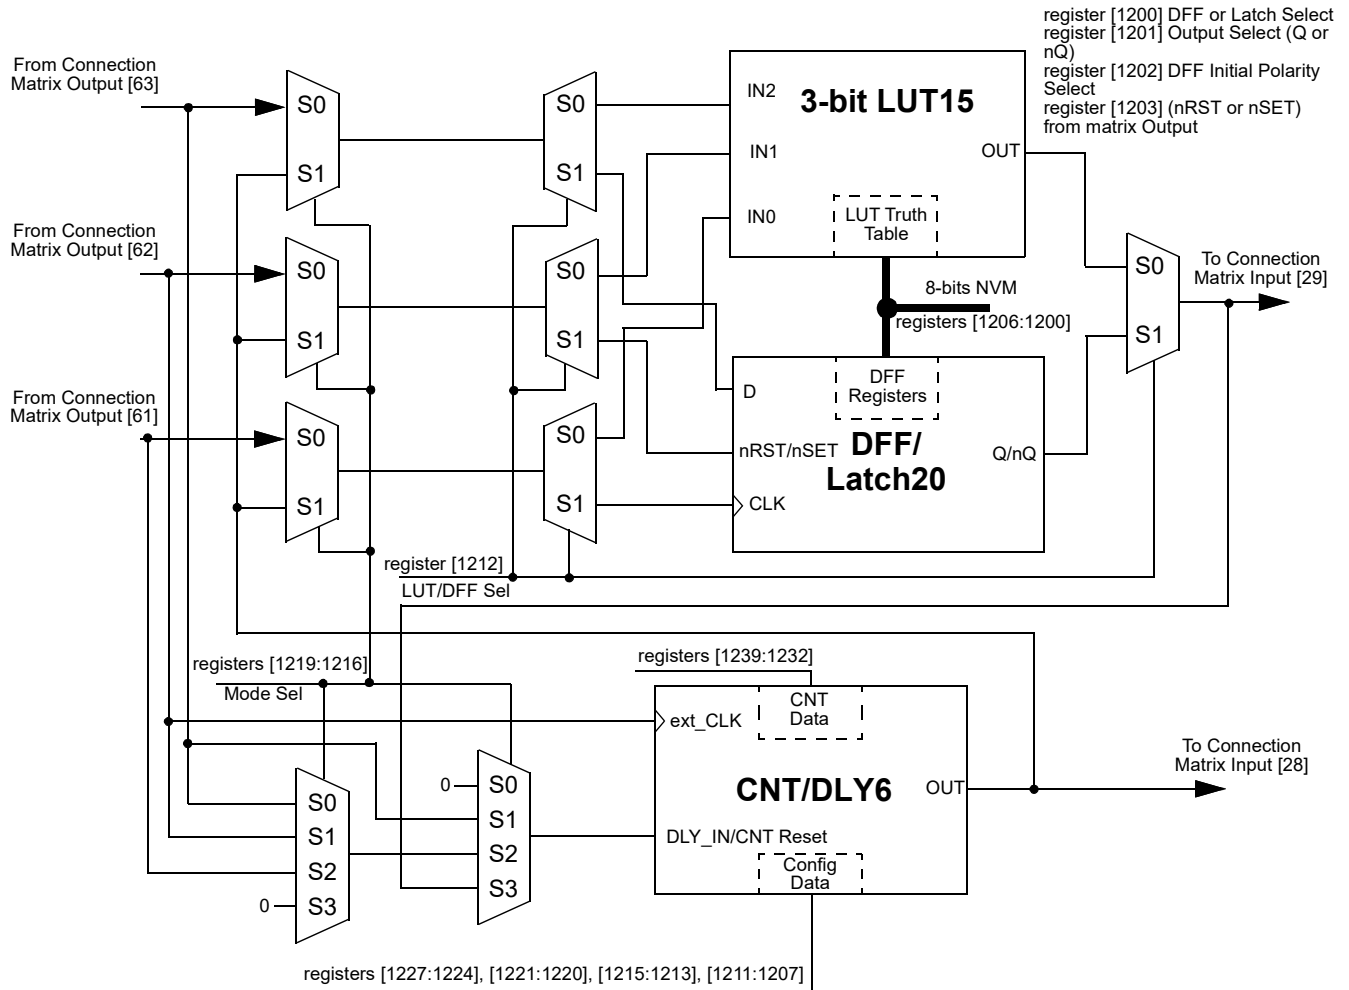


Figure 48: 8-bit Multi-Function Macrocells Block Diagram (3-bit LUT15/DFF20, CNT/DLY6)

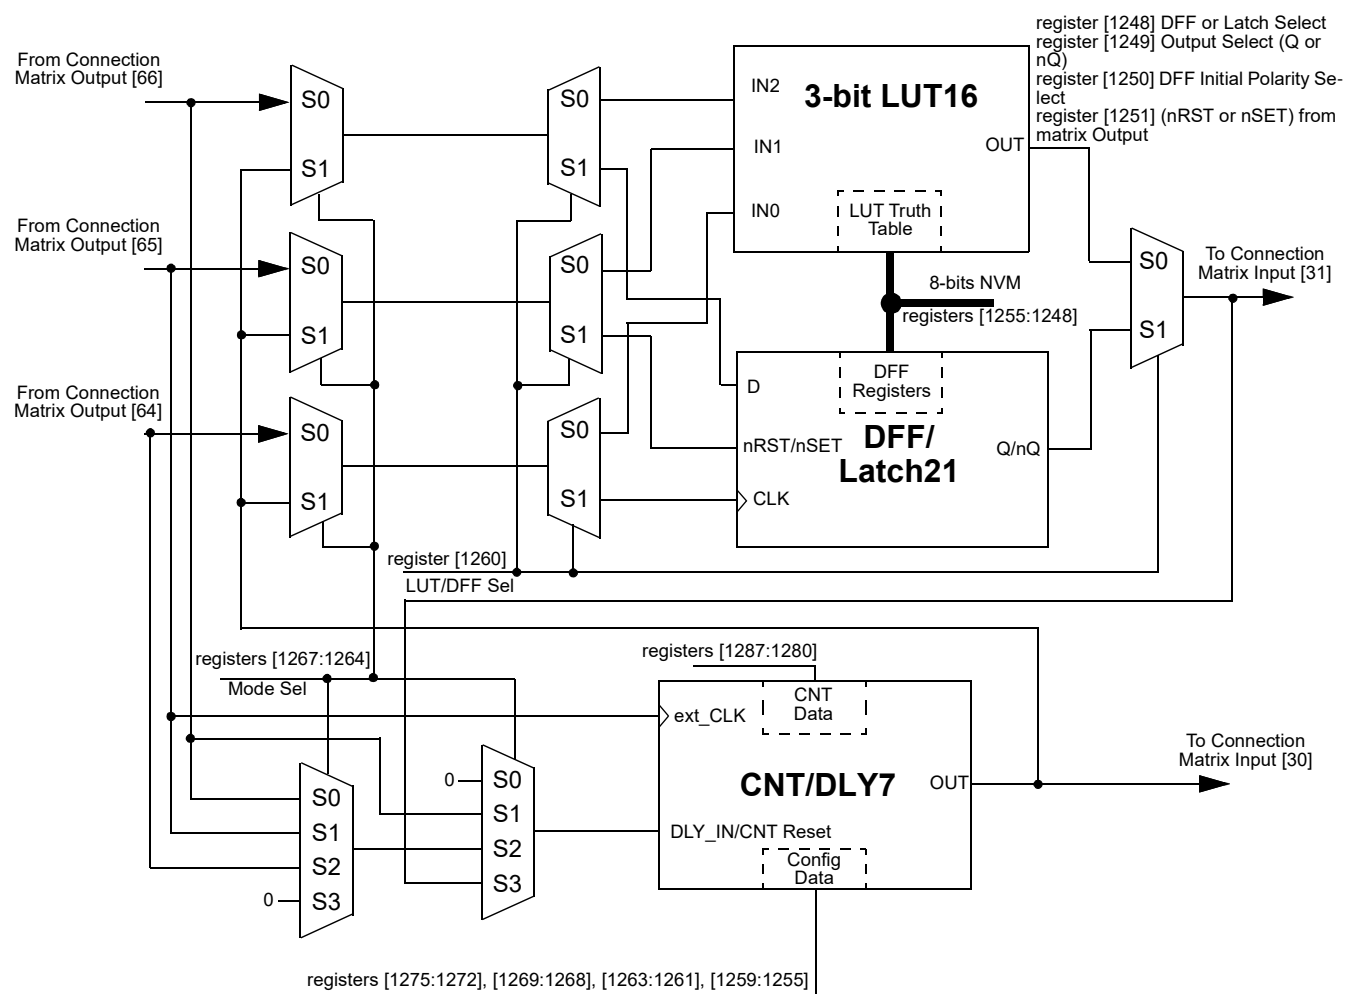


Figure 49: 8-bit Multi-Function Macrocells Block Diagram (3-bit LUT16/DFF21, CNT/DLY7)

As shown in Figures 22-28 there is a possibility to use LUT/DFF and CNT/DLY simultaneously.

Note: It is not possible to use LUT and DFF at once, one of these macrocells must be selected.

- Case 1. LUT/DFF in front of CNT/DLY. Three input signals from the connection matrix go to previously selected LUT or DFF's inputs and produce a single output which goes to a CNT/DLY input. In its turn Counter/Delay's output goes back to the matrix.
- Case 2. CNT/DLY in front of LUT/DFF. Two input signals from the connection matrix go to CNT/DLY's inputs (IN and CLK). Its output signal can be connected to any input of previously selected LUT or DFF, after which the signal goes back to the matrix.
- Case 3. Single LUT/DFF or CNT/DLY. Also, it is possible to use a standalone LUT/DFF or CNT/DLY. In this case, all inputs and output of the macrocell are connected to the matrix.

SLG47512/13

Low Voltage GreenPAK Programmable Mixed-Signal Matrix

8.1.2 3-Bit LUT or CNT/DLYs Used as 3-Bit LUTs

Table 31: 3-bit LUT10 to 3-bit LUT16 Truth Table

IN2	IN1	IN0	OUT 3-bit LUT10	OUT 3-bit LUT11	OUT 3-bit LUT12	OUT 3-bit LUT13	OUT 3-bit LUT14	OUT 3-bit LUT15	OUT 3-bit LUT16	
0	0	0	register [960]	register [1008]	register [1056]	register [1104]	register [1152]	register [1200]	register [1248]	LSB
0	0	1	register [961]	register [1009]	register [1057]	register [1105]	register [1153]	register [1201]	register [1249]	
0	1	0	register [962]	register [1010]	register [1058]	register [1106]	register [1154]	register [1202]	register [1250]	
0	1	1	register [963]	register [1011]	register [1059]	register [1107]	register [1155]	register [1203]	register [1251]	
1	0	0	register [964]	register [1012]	register [1060]	register [1108]	register [1156]	register [1204]	register [1252]	
1	0	1	register [965]	register [1013]	register [1061]	register [1109]	register [1157]	register [1205]	register [1253]	
1	1	0	register [966]	register [1014]	register [1062]	register [1110]	register [1158]	register [1206]	register [1254]	
1	1	1	register [967]	register [1015]	register [1063]	register [1111]	register [1159]	register [1207]	register [1255]	MSB

Each macrocell, when programmed for a LUT function, uses an 8-bit register to define their output function:

3-bit LUT10 is defined by registers [967:960]

3-bit LUT11 is defined by registers [1015:1008]

3-bit LUT12 is defined by registers [1063:1056]

3-bit LUT13 is defined by registers [1111:1104]

3-bit LUT14 is defined by registers [1159:1152]

3-bit LUT15 is defined by registers [1207:1200]

3-bit LUT16 is defined by registers [1255:1248]

Low Voltage GreenPAK Programmable Mixed-Signal Matrix

8.2 4-BIT LUT OR DFF/LATCH WITH 16-BIT COUNTER/DELAY MACROCELL

There is one macrocell that can serve as either 4-bit LUT or as 16-bit Counter/Delay. When used to implement LUT function, the 4-bit LUT takes in four input signals from the Connection Matrix and produces a single output, which goes back into the Connection Matrix. When used to implement 16-Bit Counter/Delay function, two of the four input signals from the connection matrix go to the external clock (EXT_CLK) and reset (DLY_IN/CNT Reset) for the counter/delay, with the output going back to the connection matrix.

This macrocell has an optional Finite State Machine (FSM) function. There are two additional matrix inputs for Up and Keep to support FSM functionality. FSM has an option to reset its counted value either to 0 or to user defined data.

The behavior of FSM macrocell is described below:

- FSM output Q goes to 1 if counter value reaches 0;
- FSM Set Selection Mode sets the initial counter value to counter data;
- RST Selection Mode sets the initial counter value to 0;
- Counter value reaches maximum and overloads, after that counting starts from 0. Otherwise, in case of counting down from maximum to 0, after overloading counter starts from 65535;

Mode signal synchronization (available for three inputs) adds two extra clocks to avoid metastability issue.

This macrocell can also operate in a one-shot mode, which will generate an output pulse of user-defined width.

This macrocell can also operate in a frequency detection or edge detection mode.

This macrocell can have its active count value read via I²C. See section [15.4.8](#) for further details.

Note: After two DFF – counters initialize with counter data = 0 after POR.

Initial state = 1 – counters initialize with counter data = 0 after POR.

Initial state = 0 And After two DFF is bypass – counters initialize with counter data after POR.

8.2.1 4-Bit LUT or DFF/LATCH with 16-Bit CNT/DLY Block Diagram



SLG47512/13

Low Voltage GreenPAK Programmable Mixed-Signal Matrix

8.2.2 4-Bit LUT or 16-Bit Counter/Delay Macrocells Used as 4-Bit LUTs

Table 32: 4-bit LUT1 Truth Table

IN3	IN2	IN1	IN0	OUT	
0	0	0	0	register [872]	LSB
0	0	0	1	register [873]	
0	0	1	0	register [874]	
0	0	1	1	register [875]	
0	1	0	0	register [876]	
0	1	0	1	register [877]	
0	1	1	0	register [878]	
0	1	1	1	register [879]	
1	0	0	0	register [880]	
1	0	0	1	register [881]	
1	0	1	0	register [882]	
1	0	1	1	register [883]	
1	1	0	0	register [884]	
1	1	0	1	register [885]	
1	1	1	0	register [886]	
1	1	1	1	register [887]	MSB

This macrocell, when programmed for a LUT function, uses a 16-bit register to define their output function:

4-bit LUT1 is defined by registers [887:872]

Table 33: 4-bit LUT Standard Digital Functions

Function	MSB															LSB
AND-4	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
NAND-4	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
OR-4	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0
NOR-4	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1
XOR-4	0	1	1	0	1	0	0	1	1	1	0	0	1	1	1	0
XNOR-4	1	0	0	1	0	1	1	0	0	0	1	1	0	0	0	1

SLG47512/13

Low Voltage GreenPAK Programmable Mixed-Signal Matrix

8.3 CNT/DLY TIMING DIAGRAMS

8.3.1 Delay Mode CNT/DLY0 to CNT/DLY7

Delay macrocell can automatically start/stop oscillator (Figure 51).

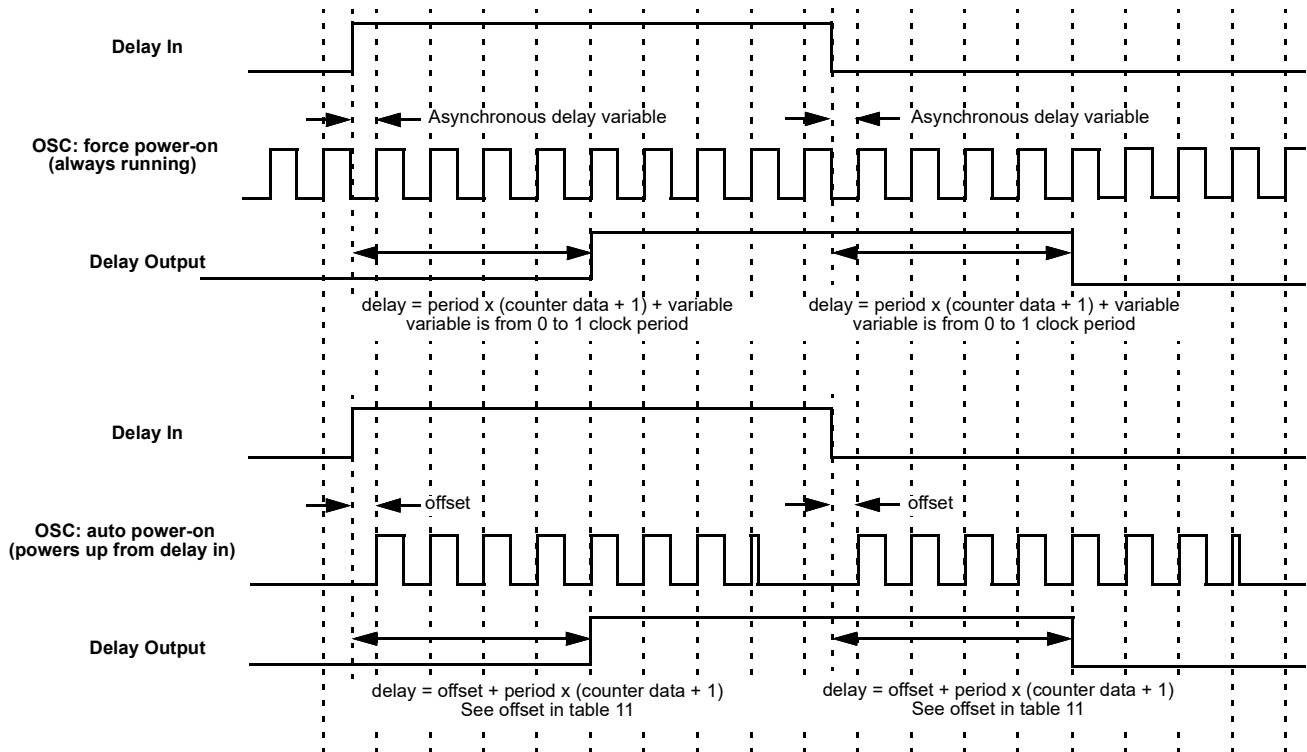


Figure 51: Delay Macrocell Behavior with Different Oscillators Options (Edge Select: Both, Counter Data: 3)

The macrocell shifts the respective edge to a set time and restarts by appropriate edge. It works as a filter if the input signal is shorter than the delay time.

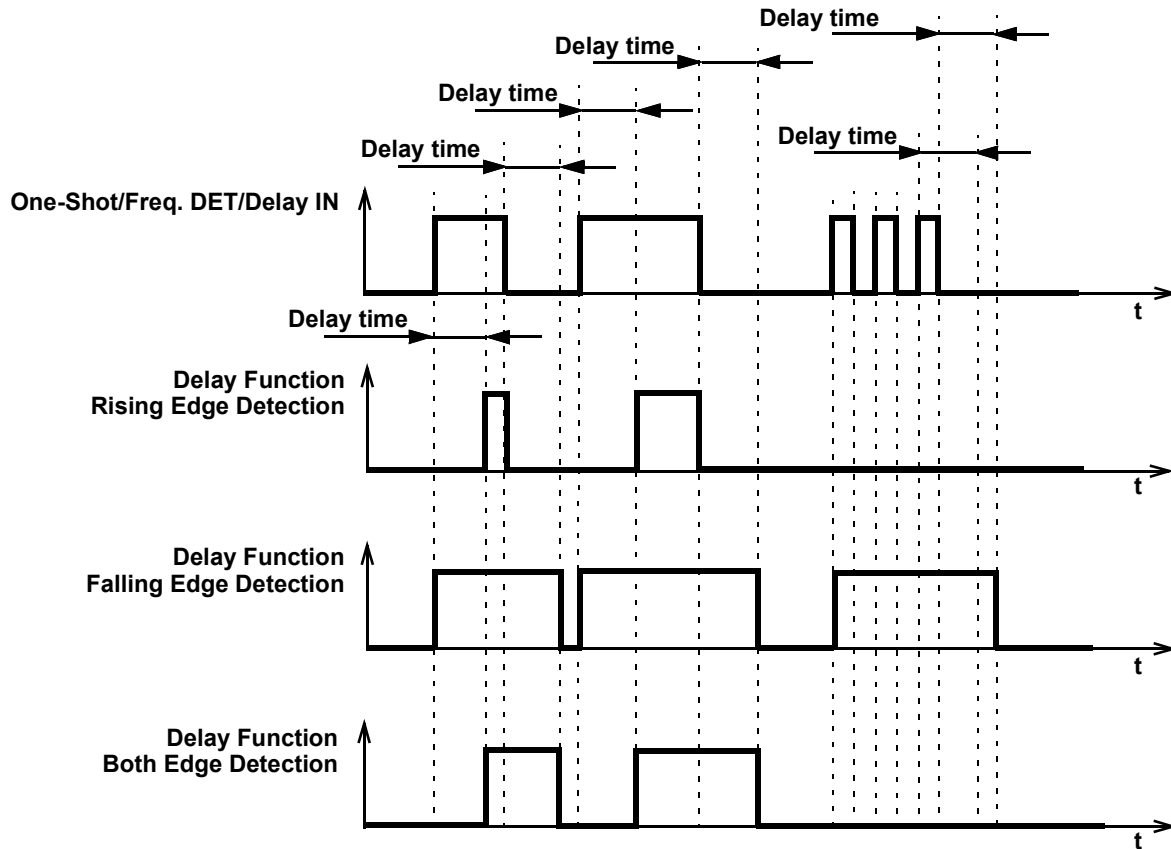


Figure 52: Delay Mode Timing Diagram (Rising, Falling, and Both Edge Detection)

8.3.2 Count Mode (Count Data: 3), Counter Reset (Rising Edge Detect) CNT/DLY0 to CNT/DLY7

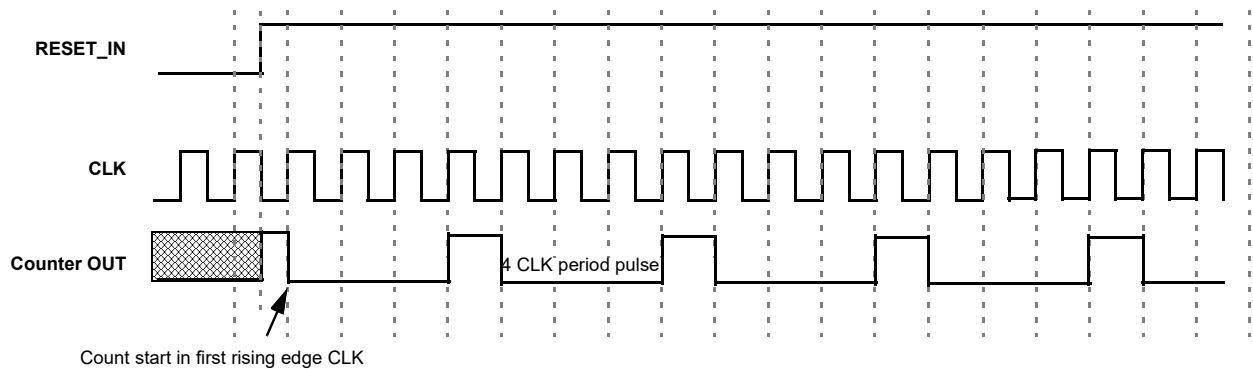


Figure 53: Counter Mode Timing Diagram without Two DFFs Synced Up

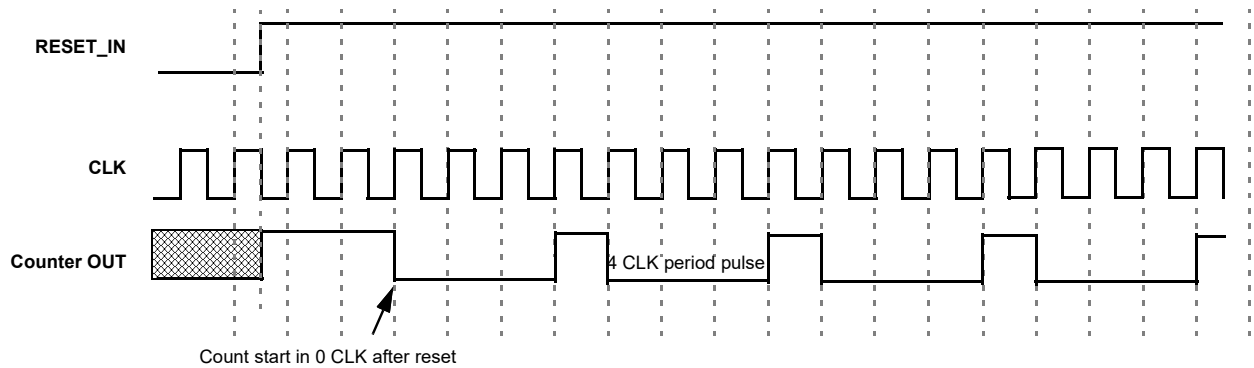


Figure 54: Counter Mode Timing Diagram with Two DFFs Synced Up

Low Voltage GreenPAK Programmable Mixed-Signal Matrix

8.3.3 One-Shot Mode CNT/DLY0 to CNT/DLY7

This macrocell will generate a pulse whenever a selected edge is detected on its input. Register bits set the edge selection. The pulse width is determined by counter data and clock selection properties. The output pulse polarity (non-inverted or inverted) is selected by register bit. Any incoming edges will be ignored during the pulse width generation. The following diagram shows one-shot function for non-inverted output.

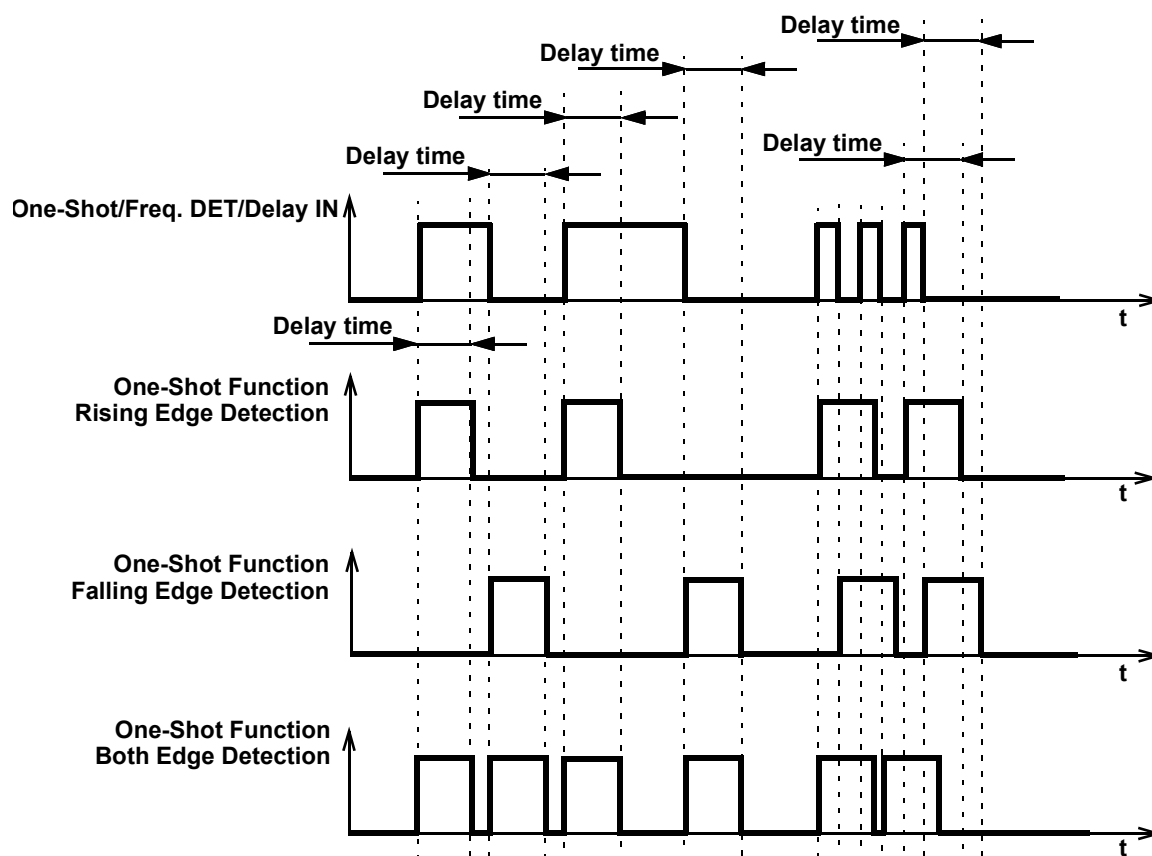


Figure 55: One-Shot Function Timing Diagram

This macrocell generates a high level pulse with a set width (defined by counter data) when detecting the respective edge. It does not restart while pulse is high.

8.3.4 Frequency Detection Mode CNT/DLY0 to CNT/DLY7

Rising Edge: The output goes high if the time between two successive edges is less than the delay. The output goes low if the second rising edge has not come after the last rising edge in specified time.

Falling Edge: The output goes high if the time between two falling edges is less than the set time. The output goes low if the second falling edge has not come after the last falling edge in specified time.

Both Edge: The output goes high if the time between the rising and falling edges is less than the set time, which is equivalent to the length of the pulse. The output goes low if after the last rising/falling edge and specified time, the second edge has not come.

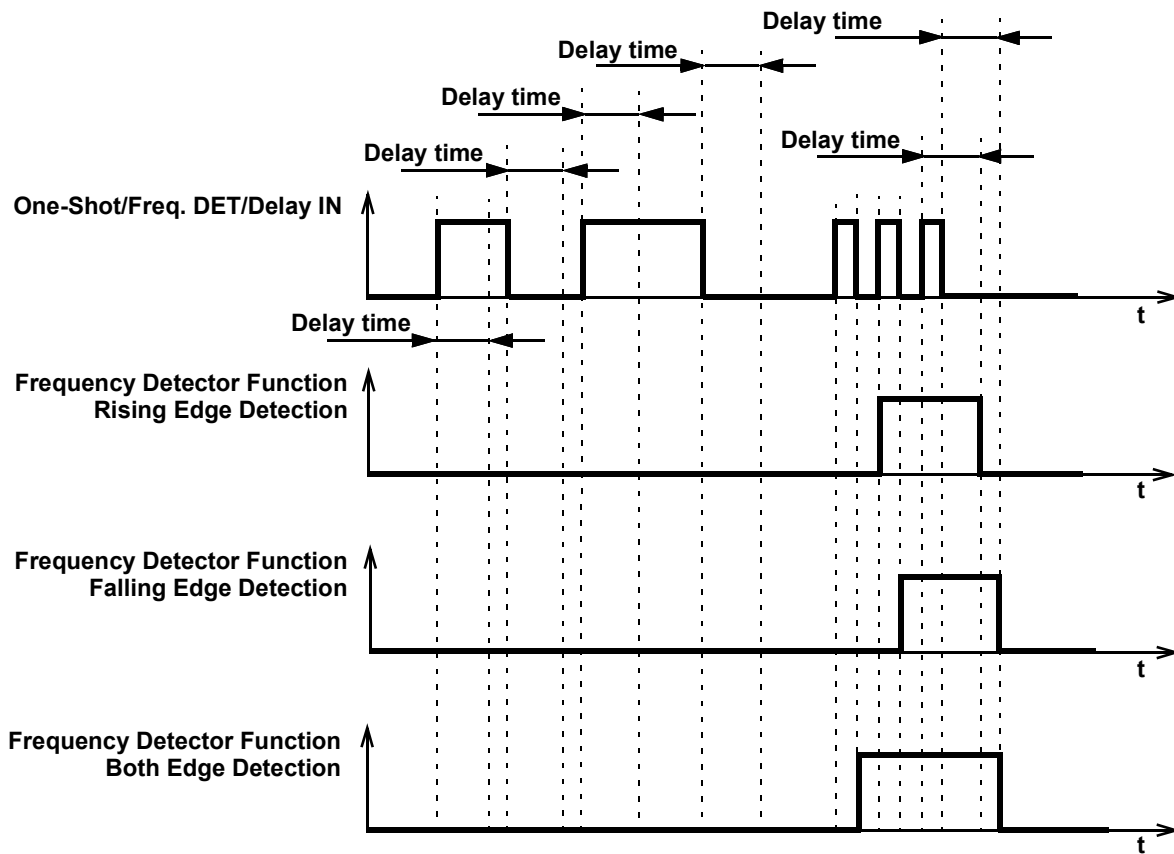


Figure 56: Frequency Detection Mode Timing Diagram

8.3.5 Edge Detection Mode CNT/DLY1 to CNT/DLY7

The macrocell generates high level short pulse when detecting the respective edge. See [Table 11](#).

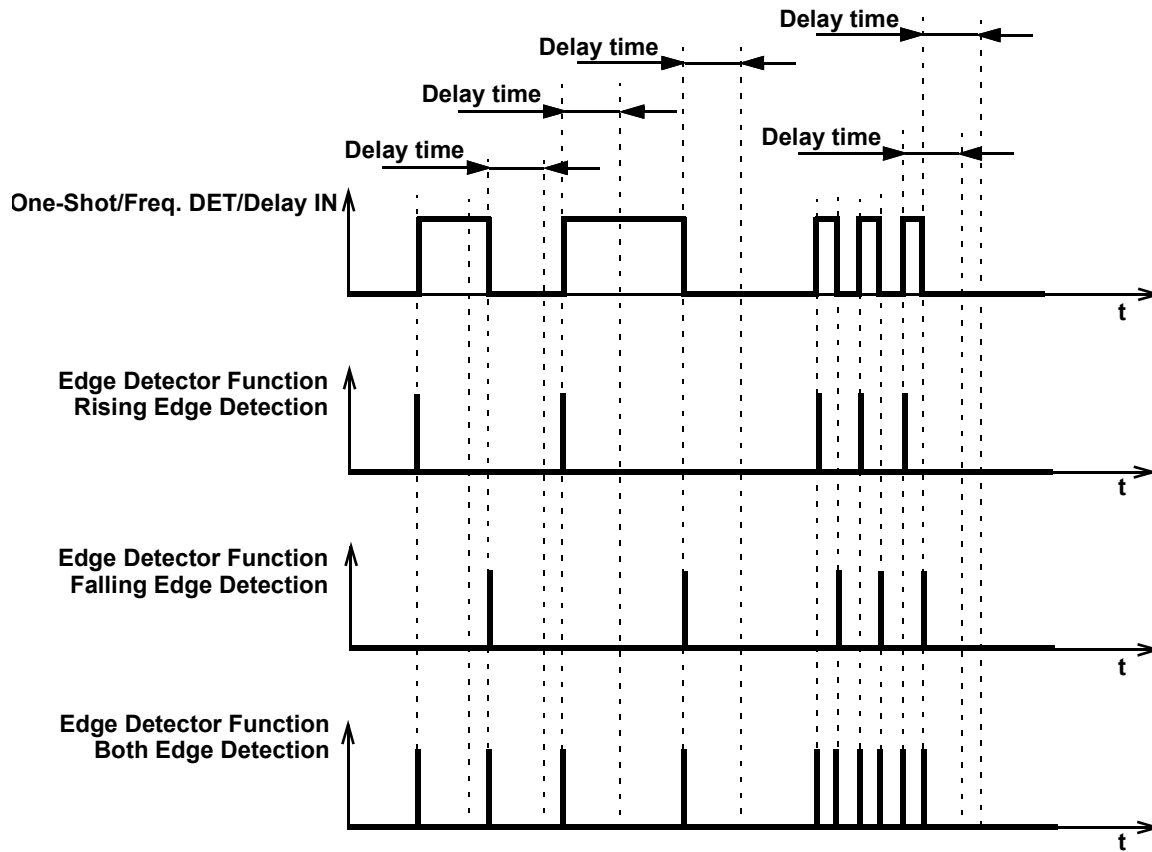


Figure 57: Edge Detection Mode Timing Diagram

8.3.6 Delayed Edge Detection Mode CNT/DLY0 to CNT/DLY7

In Delayed Edge Detection Mode, High level short pulses are generated on the macrocell output after the configured delay time, if the corresponding edge was detected on the input.

If the input signal is changed during the set delay time, the pulse will not be generated. See Figure 58.

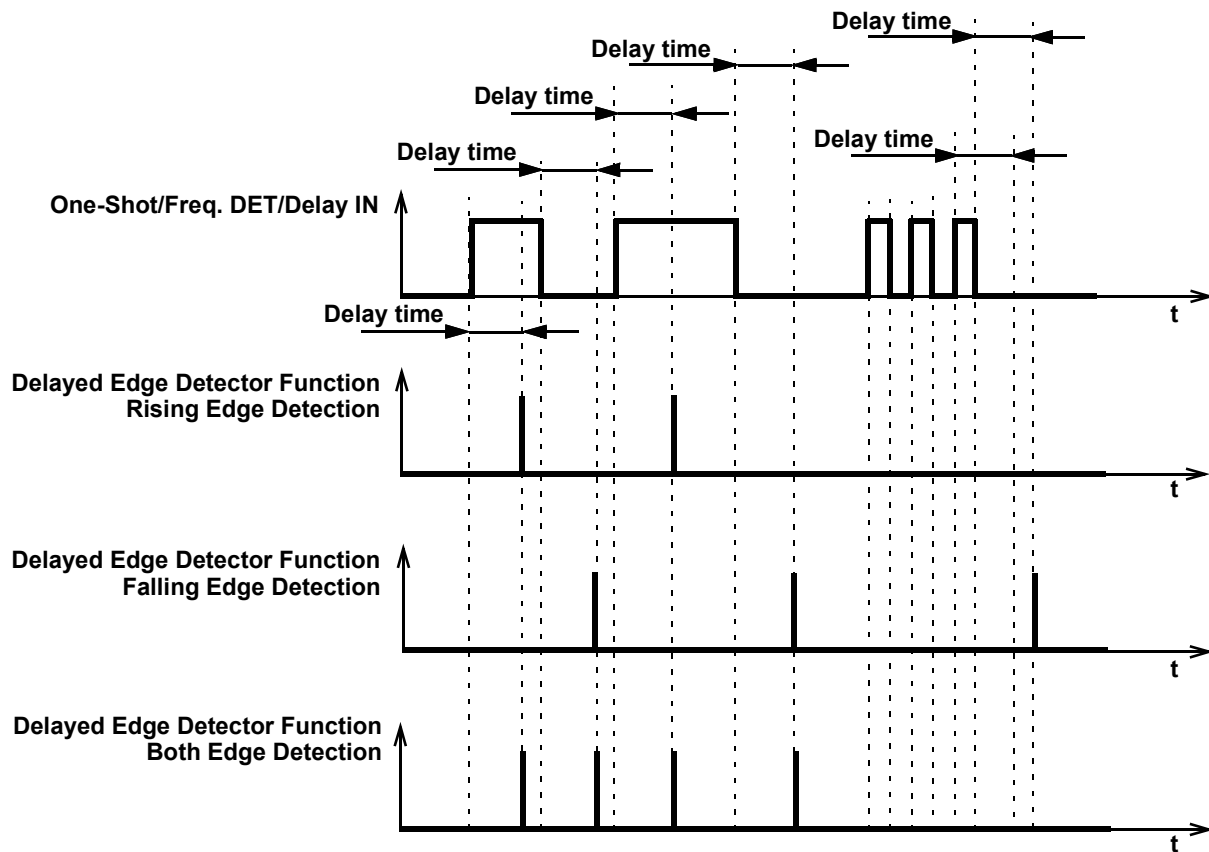


Figure 58: Delayed Edge Detection Mode Timing Diagram

SLG47512/13

Low Voltage GreenPAK Programmable Mixed-Signal Matrix

8.3.7 Difference in Counter Value for Counter, Delay, One-Shot, and Frequency Detect Modes

There is a difference in counter value for Counter and Delay/One-Shot/Frequency Detect modes. Compared to Counter mode, in Delay/One-Shot/Frequency Detect modes the counter value is shifted for two rising edges of the clock signal. See Figure 59:

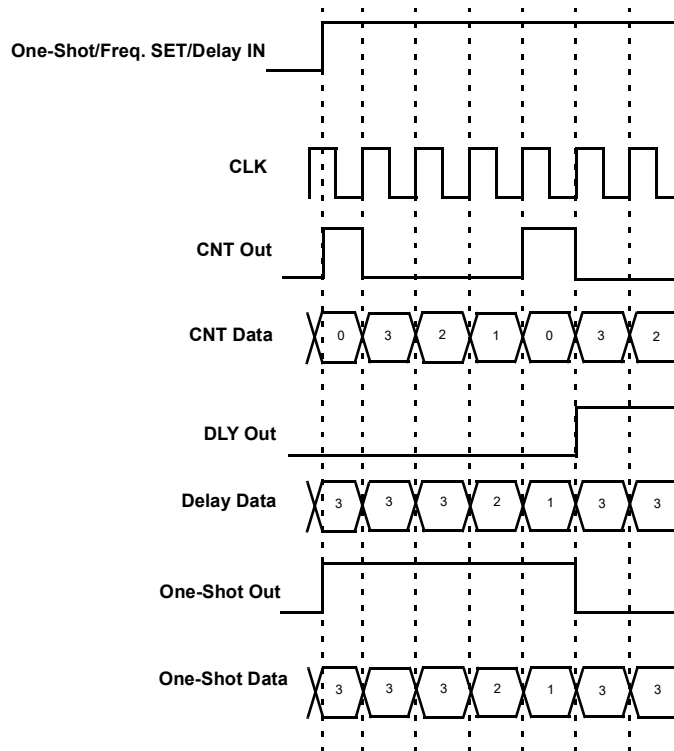


Figure 59: Counter Value, Counter Data = 3

8.4 FSM TIMING DIAGRAMS

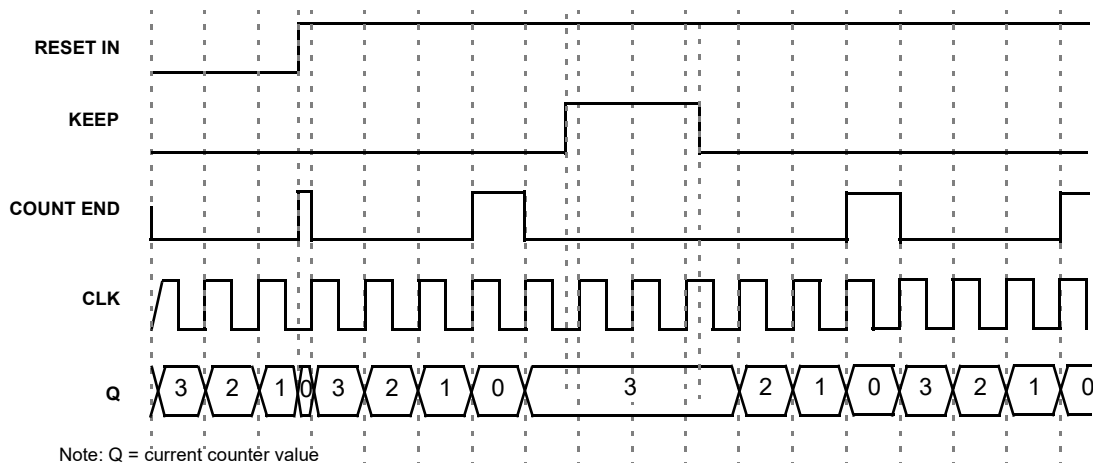


Figure 60: CNT/FSM Mode Timing Diagram (Reset Rising Edge Mode, OSC is Forced On, UP = 0) for CNT Data = 3

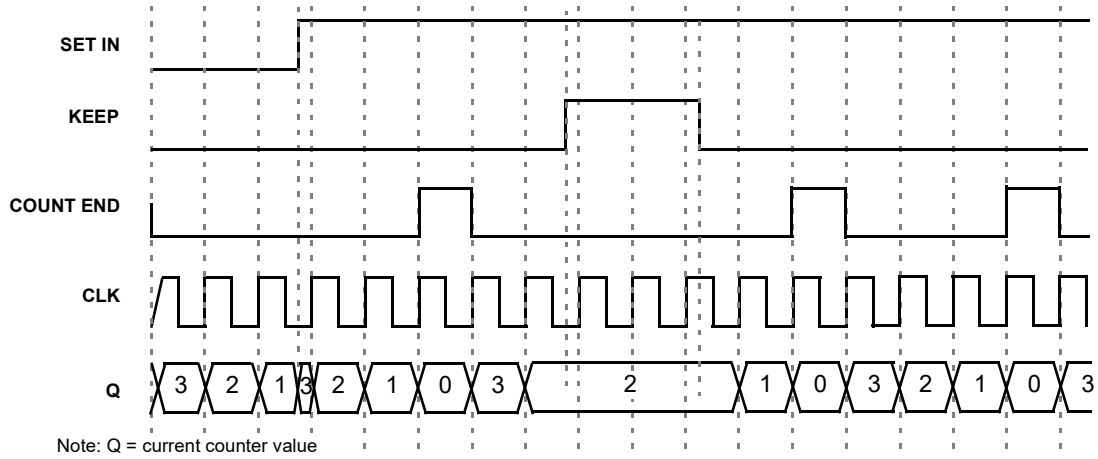
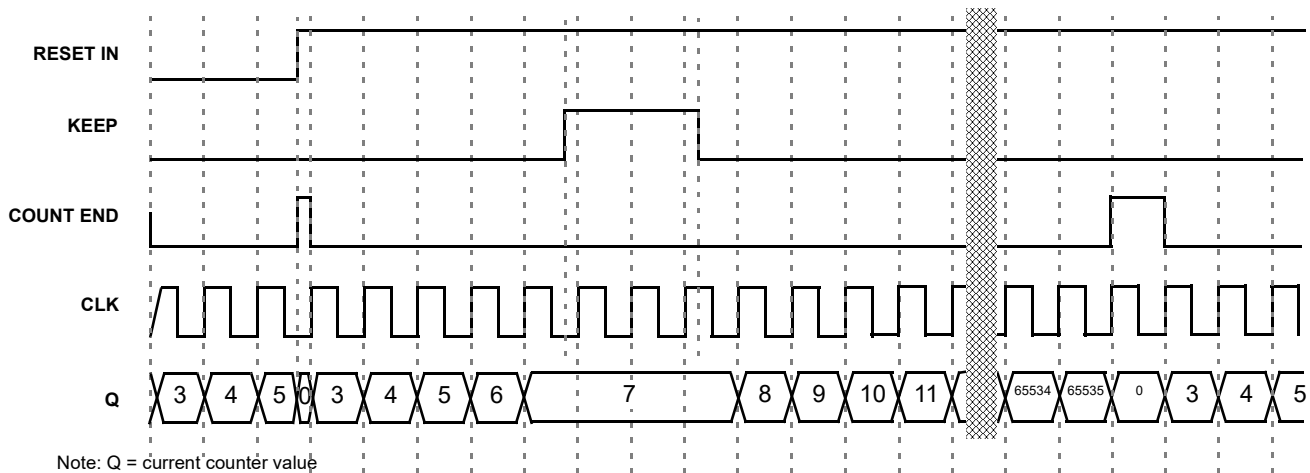
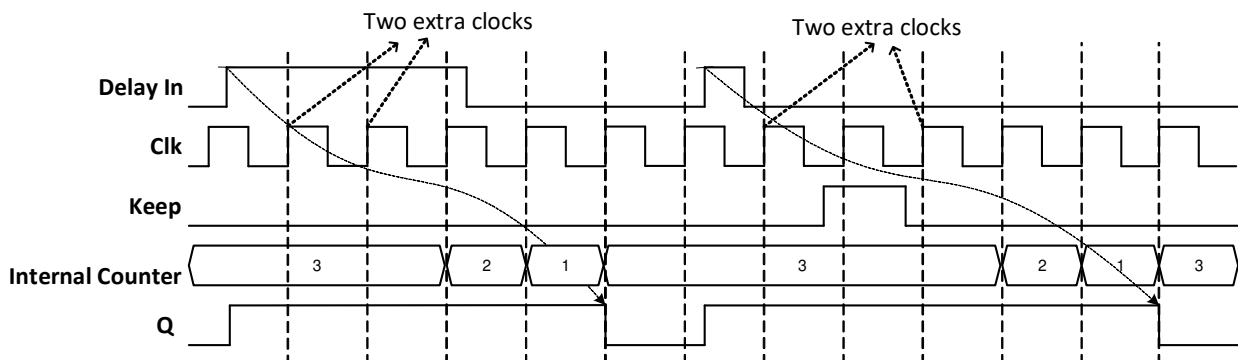
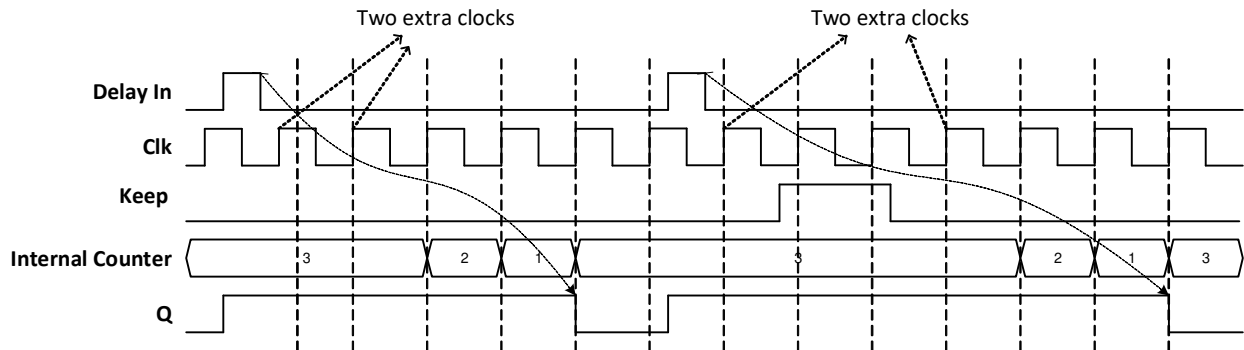
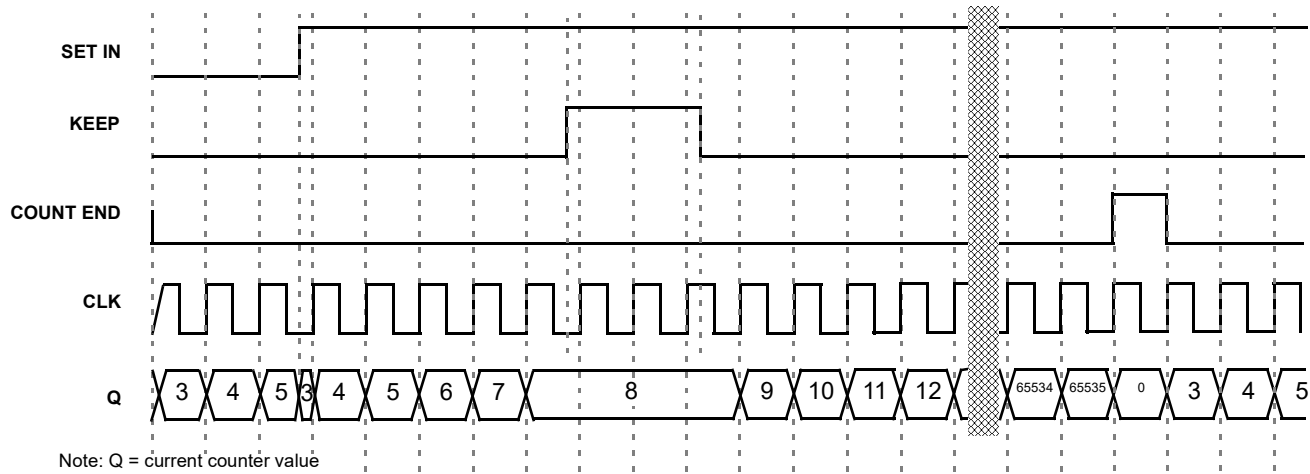


Figure 61: CNT/FSM Mode Timing Diagram (Set Rising Edge Mode, OSC is Forced On, UP = 0) for CNT Data = 3





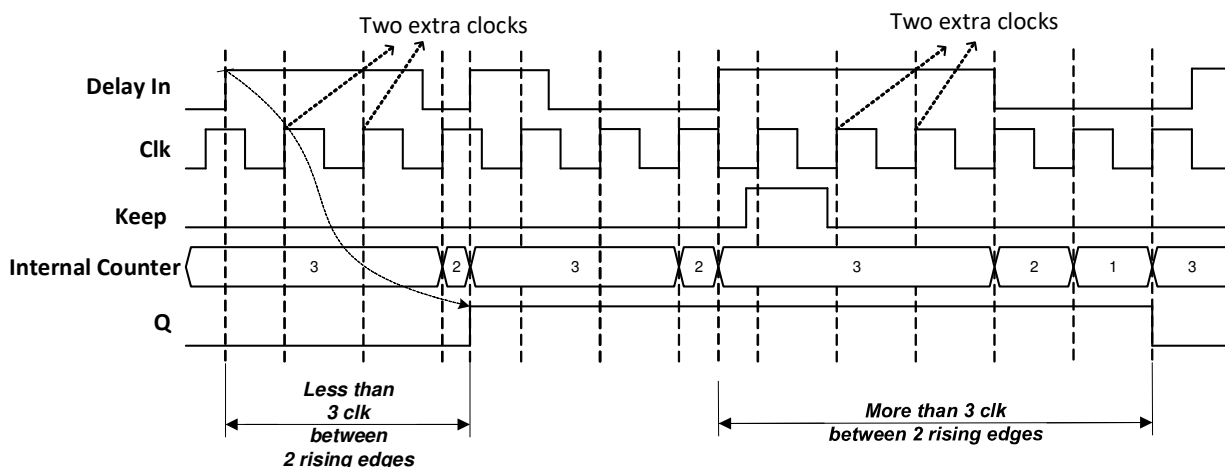


Figure 66: Freq. Detector/FSM Mode, Rising Edge, OSC is Forced On, DFFs Synced Up, UP = 0, CNT Data = 3

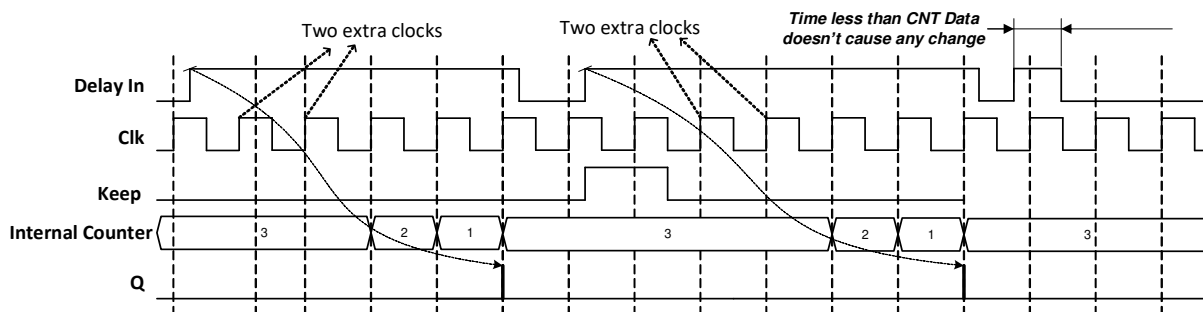


Figure 67: Delayed Edge Detector/FSM Mode, Rising Edge, OSC is Forced On, DFFs Synced Up, UP = 0, CNT Data = 3

8.5 WAKE AND SLEEP CONTROLLER

SLG47512/13 has a Wake and Sleep function for all ACMPs. The macrocell CNT/DLY0 can be reconfigured for this purpose registers [953:952] = 11 and register [948] = 1. The WS serves for power saving, it allows to switch on and off selected ACMPs on selected bit of 16-bit counter.

Note 1: BG/Analog_Good time is long and should be considered in wake and sleep timing in case it dynamically powers on/off.

Note 2: Wake time should be long enough to make sure ACMP and Vref have enough time to get a sample before going to sleep.

SLG47512/13

Low Voltage GreenPAK Programmable Mixed-Signal Matrix



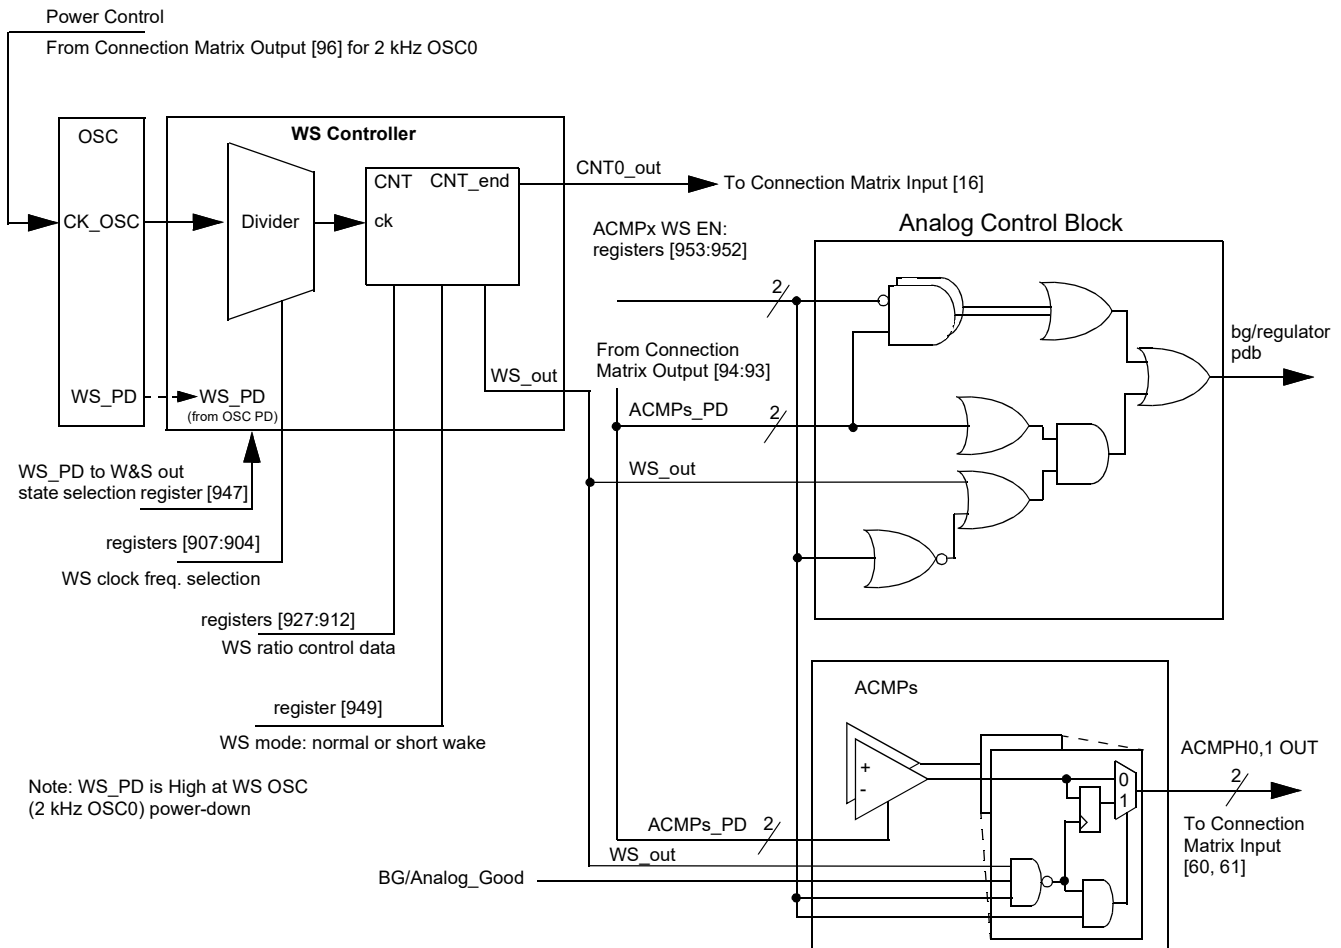


Figure 68: Wake/Sleep Controller

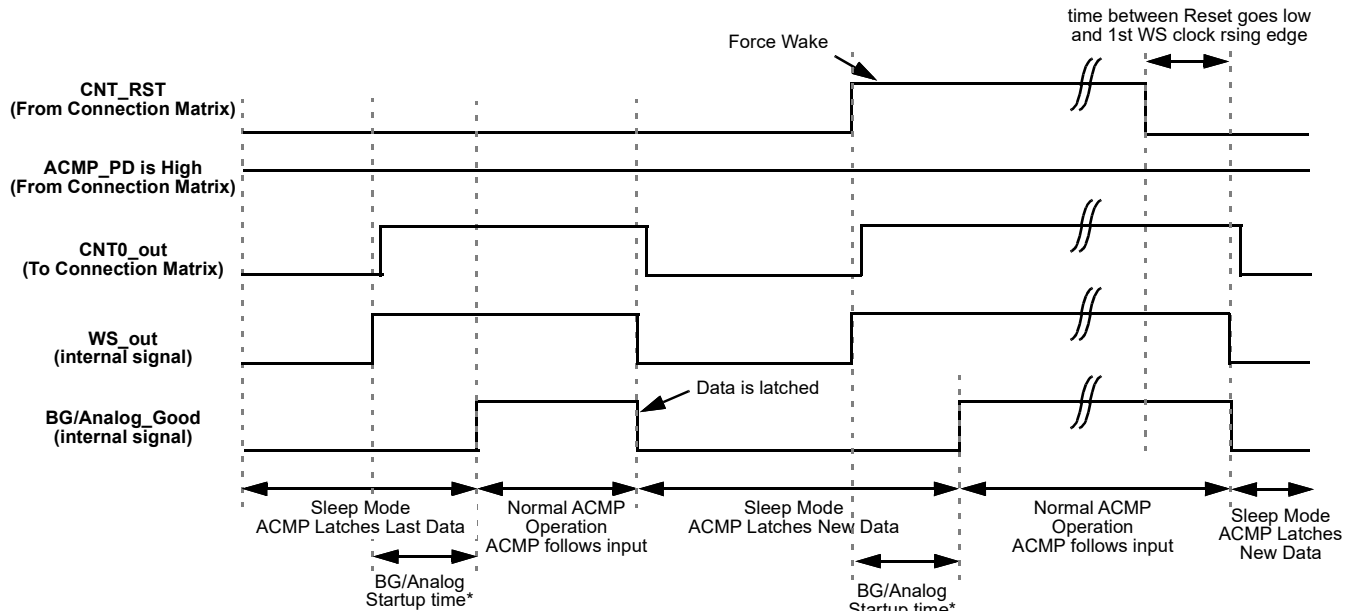

Note: CNT0_out is a delayed WS_out signal for 1us to make sure the data is correct during LATCH.


Figure 69: Wake/Sleep Timing Diagram, Normal Wake Mode, Counter Reset is Used

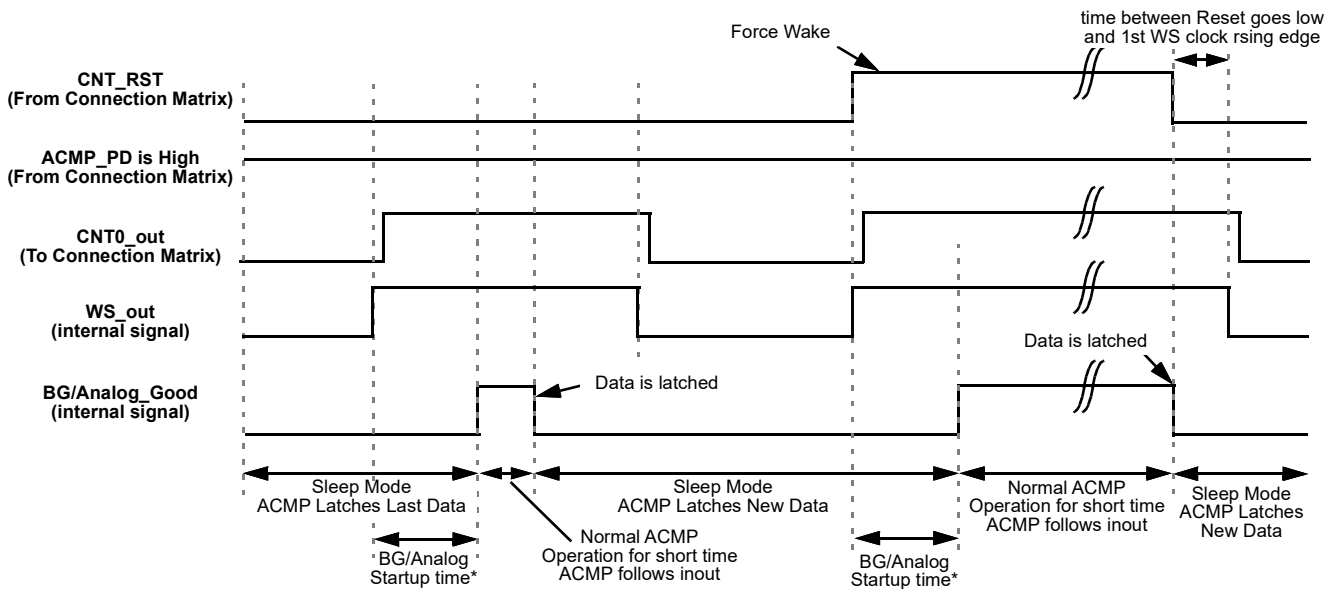

Note: CNT0_out is a delayed WS_out signal for 1us to make sure the data is correct during LATCH.


Figure 70: Wake/Sleep Timing Diagram, Short Wake Mode, Counter Reset is Used

Low Voltage GreenPAK Programmable Mixed-Signal Matrix

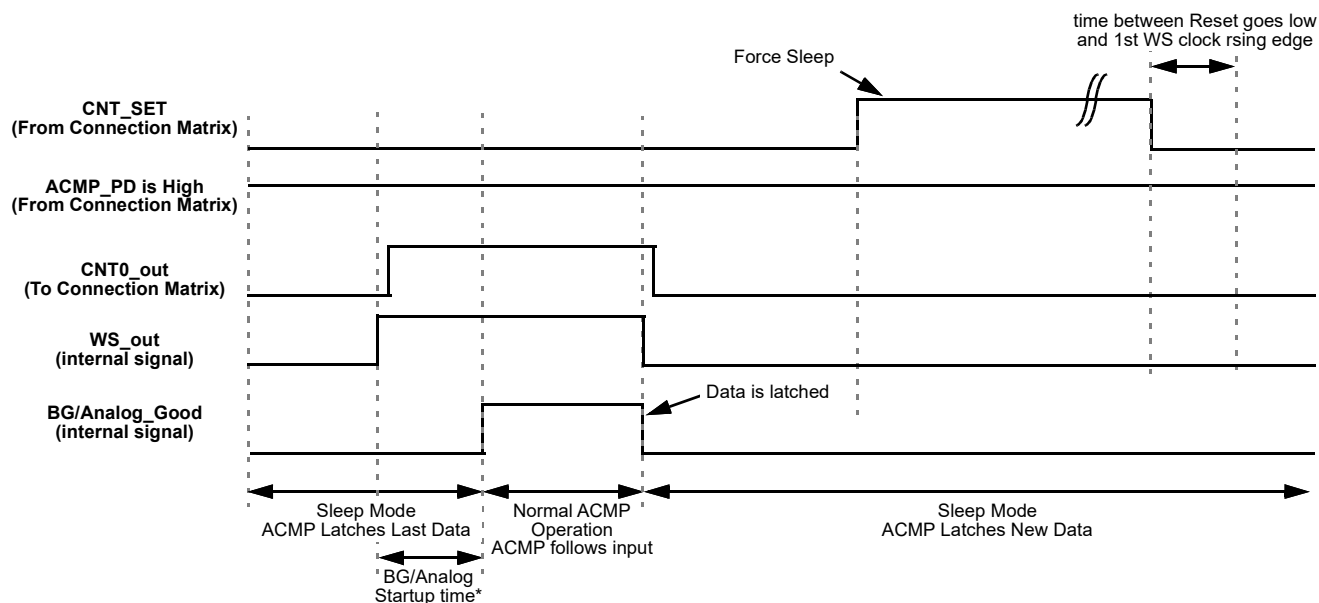

Note: CNT0_out is a delayed WS_out signal for 1us to make sure the data is correct during LATCH.

Figure 71: Wake/Sleep Timing Diagram, Normal Wake Mode, Counter Set is Used

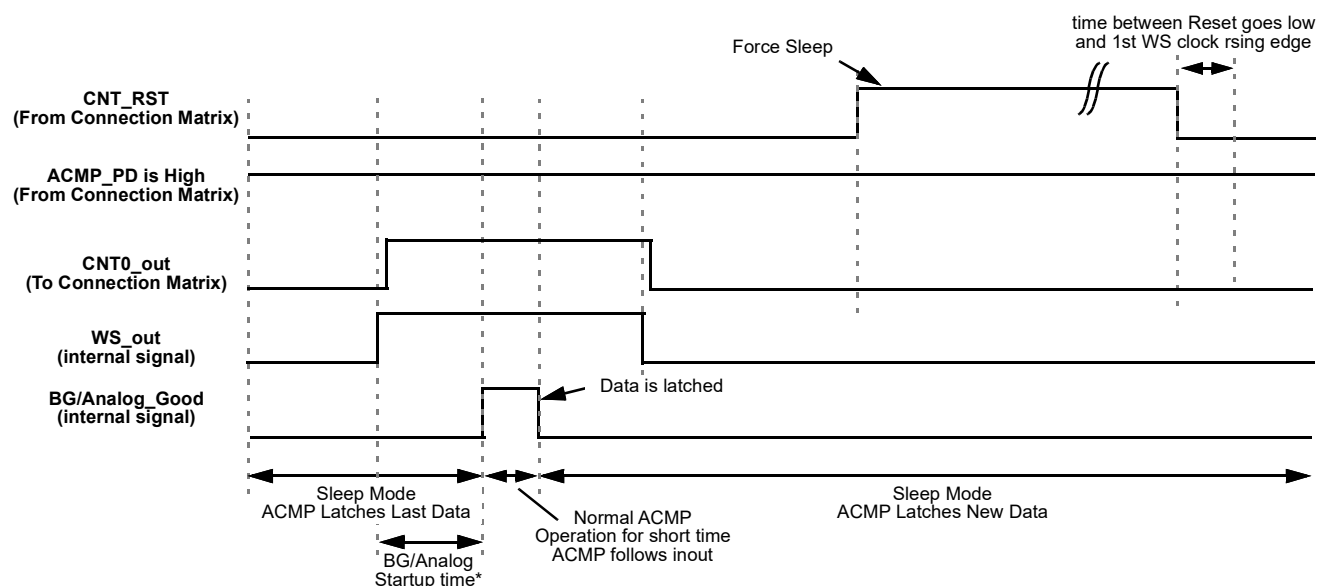

Note: CNT0_out is a delayed WS_out signal for 1us to make sure the data is correct during LATCH.

Figure 72: Wake/Sleep Timing Diagram, Short Wake Mode, Counter Set is Used

Note: If low power BG is powered on/off by WS, the wake time should be longer than 2.1 ms. The BG/analog start up time will take maximal 2 ms. Therefore, 8 periods of the Oscillator0 is recommended for the wake time, when BG is configured to Auto Power mode. If low power BG is always on, Oscillator0 period is longer than required wake time. The BG/analog start up time will take maximal 450 us for ACMP0/1. The short wake mode can be used to reduce the current consumption.

Low Voltage GreenPAK Programmable Mixed-Signal Matrix

To use any ACMP under WS controller, the following settings must be done:

- ACMP Power Up Input from matrix = 1 (for each ACMP separately);
- CNT/DLY0 must be set to Wake and Sleep Controller function (for all ACMP);
- Register WS → enable (for each ACMP separately);
- CNT/DLY0 set/reset input = 0 (for all ACMP).

The user can select a period of time while the ACMP is sleeping in a range of 1 - 65535 clock cycles. Before they are sent to sleep their outputs are latched, so the ACMPs remain their state (High or Low) while sleeping.

WS controller has the following settings:

- Wake and Sleep Output State (High/Low)
 - If OSC is powered off (Power-down option is selected; Power-down input = 1) and Wake and Sleep Output State = High, the ACMP is continuously on.
 - If OSC is powered off (Power-down option is selected; Power-down input = 1) and Wake and Sleep Output State = Low, the ACMP is continuously off.
 - Both cases WS function is turned off.
- Counter Data (Range: 1 - 65535)
 - User can select wake and sleep ratio of the ACMP; counter data = sleep time, one clock = wake time.
- Q mode - defines the state of WS counter data when Set/Reset signal appears
 - Reset - when active signal appears, the WS counter will reset to zero and High level signal on its output will turn on the ACMPs. When Reset signal goes out, the WS counter will go Low and turn off the ACMP until the counter counts up to the end.
 - Set - when active signal appears, the WS counter will stop and Low level signal on its output will turn off the ACMP. When Set signal goes out, the WS counter will go on counting and High level signal will turn on the ACMP while counter is counting up to the end.

Note: The OSC0 matrix power-down to control ACMP WS is not supported for short wait time option.

- Edge Select defines the edge for Q mode. High level Set/Reset - switches mode Set/Reset when level is High.

Note: Q mode operates only in case of "High Level Set/Reset".

- Wake time selection - time required for wake signal to turn the ACMPxH on.

Normal Wake Time - when WS signal is High, it takes BG/analog start up time to turn the ACMPs on. They will stay on until WS signal is Low again. Wake time is one clock period. It should be longer than BG turn on time and minimal required comparing time of the ACMP.

Short Wake Time - when WS signal is High, it takes BG/analog start up time to turn the ACMPs on. They will stay on for 1 μ s and turn off regardless of WS signal. The WS signal width does not matter.

- Keep - pauses counting while Keep = 1
- Up - reverses counting
 - If Up = 1, CNT is counting up from user selected value to 65535.
 - If Up = 0, CNT is counting down from user selected value to 0.

9 Analog Comparators

There are two High Speed Rail-to-Rail General Purpose Analog Comparators (ACMP) macrocells in the SLG47512/13. For the ACMP cells to be used in a GreenPAK design, the power up signals (ACMP0H PWR UP and ACMP1H PWR UP) need to be active. By connecting to signals coming from the Connection Matrix, it is possible to have each ACMP be ON continuously, OFF continuously, or switched on periodically, based on a digital signal coming from the Connection Matrix. When ACMP is powered down, its output is low. It is possible to decrease Power-On time of ACMP by forcing internal bias current generator, register [1532] = 1.

Each of the ACMP cells has a positive input signal that can be provided by a variety of external sources, and can also have a selectable gain stage (1x, 0.5x) before connection to the analog comparator. The gain divider is unbuffered and has input resistance of 1.2 M Ω (typ.) for 0.5x and 100 M Ω for 1x. Each of the ACMP cells has a negative input signal that is either created from an internal Vref or provided by any external source (GPIO 2). Note that the external Vref signal is filtered with a 2nd order low pass filter with 300 kHz typical bandwidth, see [Figure 73](#) to [Figure 74](#).

Input bias current < 1 nA (typ).

PWR UP = 1 => ACMP is powered up.

PWR UP = 0 => ACMP is powered down.

During power-up, the ACMP output will remain LOW, and then becomes valid after power up signal goes high for ACMP0H and ACMP1H (see parameter t_{start} in [Table 18](#)).

It is possible to enable Low Pass Filter (LPF) either on ACMP IN+ or on ACMP out, registers [1497:1496] and register [1513:1512].

Each cell also has a hysteresis selection, to offer hysteresis of (0, 25, 50, 150) mV. The hysteresis option is available when using an internal Vref only.

ACMP0H IN+ options are GPIO and V_{DD} .

ACMP1H IN+ options are GPIO, ACMP0H IN+ MUX output, Temperature Sensor.

See [Table 34](#) for ACMP Inputs selection.


Table 34: ACMP Input Selection

Register [1530]	Register [1500]	Register [1516]	ACMP0H Positive Input	ACMP1H Positive Input
0	0	0	ACMP0H+ PIN	ACMP1H+ PIN
0	0	1	ACMP0H+ PIN	ACMP0H+ PIN
0	1	0	V_{DD}	ACMP1H+ PIN
0	1	1	V_{DD}	V_{DD}
1	0	0	ACMP0H+ PIN	Temp Sensor
1	0	1	ACMP0H+ PIN	Temp Sensor
1	1	0	V_{DD}	Temp Sensor
1	1	1	V_{DD}	Temp Sensor

SLG47512/13

Low Voltage GreenPAK Programmable Mixed-Signal Matrix

9.1 ACMP0H BLOCK DIAGRAM

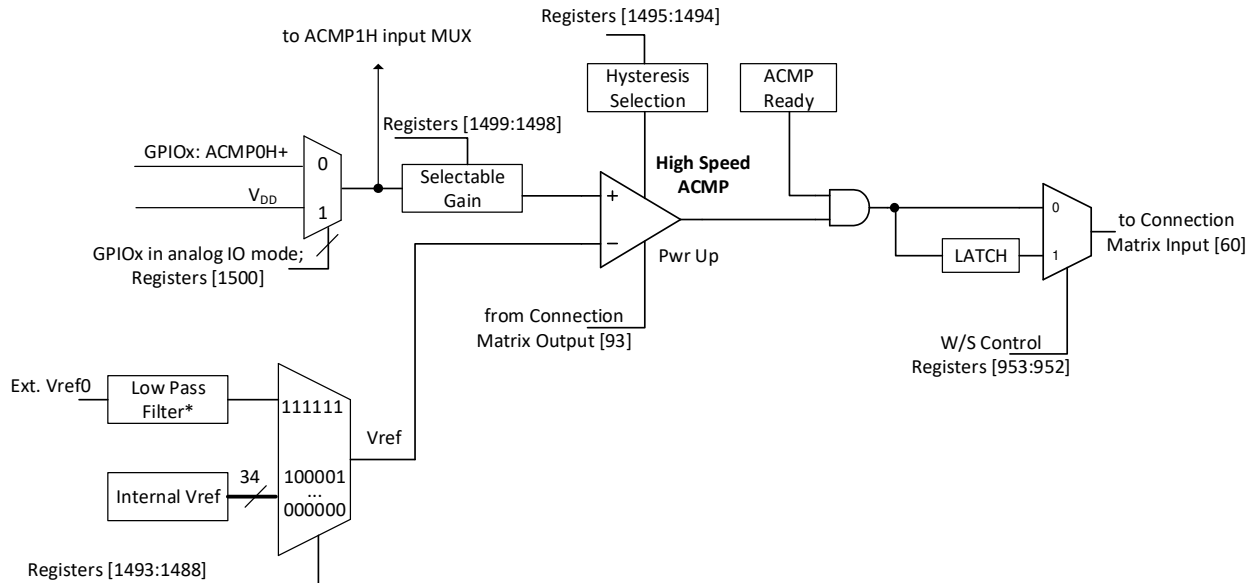


Note*: 2nd order low pass filter
typical bandwidth is 300 kHz

Figure 73: ACMP0H Block Diagram

SLG47512/13

Low Voltage GreenPAK Programmable Mixed-Signal Matrix

9.2 ACMP1H BLOCK DIAGRAM

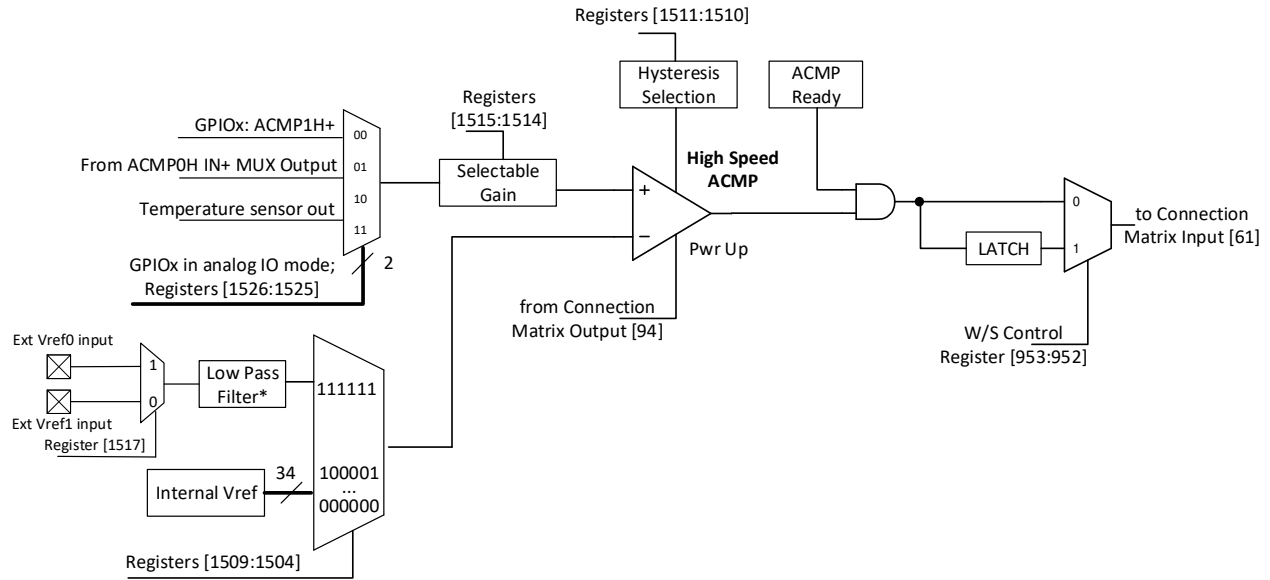

Note*: 2nd order low pass filter
typical bandwidth is 300 kHz

Figure 74: ACMP1H Block Diagram

SLG47512/13

Low Voltage GreenPAK Programmable Mixed-Signal Matrix

9.3 ACMP TYPICAL PERFORMANCE

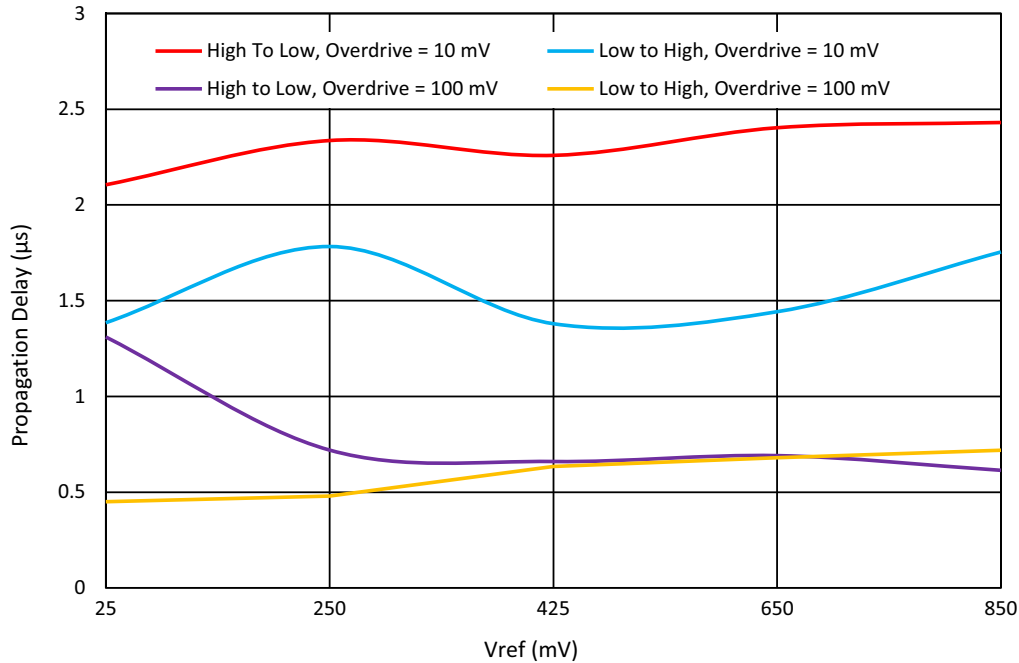


Figure 75: Typical Propagation Delay vs. Vref for ACMPxH at T = +25 °C, Gain = 1, Hysteresis = 0, V_{DD} = 1.0 V to 1.65 V

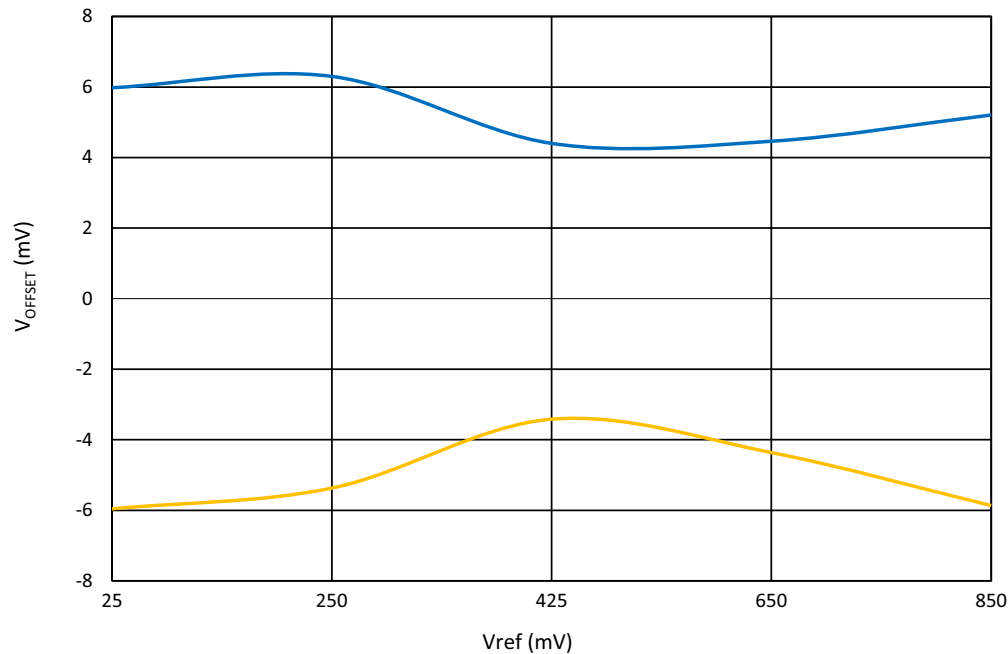


Figure 76: ACMPxH Input Offset Voltage vs. Vref at T = -40 °C to +85 °C, V_{DD} = 1.0 V to 1.65 V

SLG47512/13

Low Voltage GreenPAK Programmable Mixed-Signal Matrix

10 Programmable Delay/Edge Detector

The SLG47512/13 has a programmable time delay logic cell that can generate a delay that is selectable from one of four timings configured in the GreenPAK Designer. The programmable time delay cell can generate one of four different delay patterns, rising edge detection, falling edge detection, both edge detection, and both edge delay. These four patterns can be further modified with the addition of delayed edge detection, which adds an extra unit of delay, as well as glitch rejection during the delay period. See [Figure 77](#) and [Figure 78](#) for further information.

Note: The input signal must be longer than the delay, otherwise it will be filtered out.

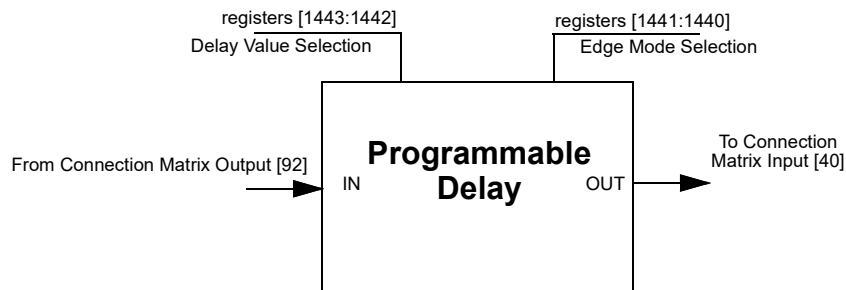


Figure 77: Programmable Delay

10.1 PROGRAMMABLE DELAY TIMING DIAGRAM - EDGE DETECTOR OUTPUT

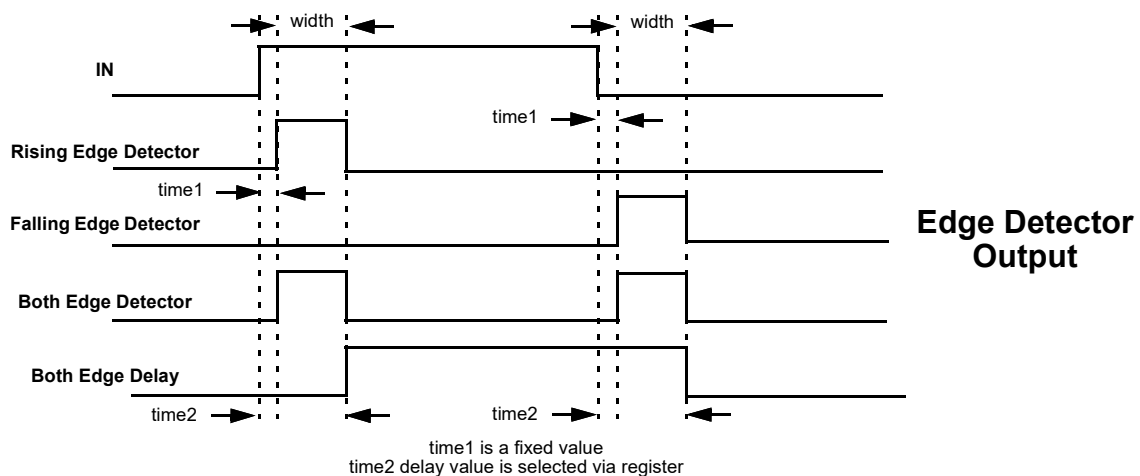


Figure 78: Edge Detector Output

Please refer to [Table 11](#).

SLG47512/13

Low Voltage GreenPAK Programmable Mixed-Signal Matrix

11 Additional Logic Function. Deglitch Filter

The SLG47512/13 has one Deglitch Filter macrocell with inverter function that is connected directly to the Connection Matrix inputs and outputs. The filter blocks the input signal for pulse width $< t_{\text{block}}$ (at typical temperature $+25^{\circ}\text{C}$. See Table 14) and pass the input signal for pulse width $> t_{\text{pass}}$ (at typical temperature $+25^{\circ}\text{C}$). For width in between, the output pulse width will be reduced.

In addition, this macrocell can be configured as an Edge Detector, with the following settings:

- Rising Edge Detector
- Falling Edge Detector
- Both Edge Detector
- Both Edge Delay

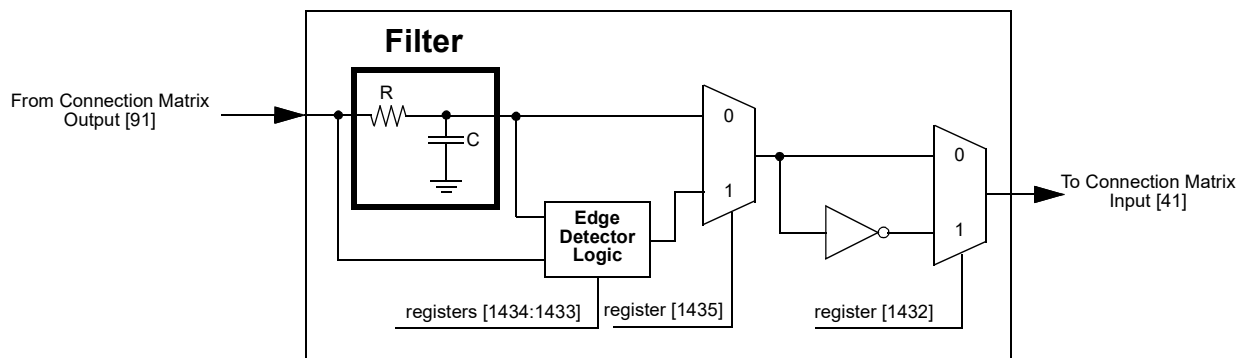


Figure 79: Deglitch Filter/Edge Detector Simplified Structure

SLG47512/13

Low Voltage GreenPAK Programmable Mixed-Signal Matrix

12 Voltage Reference

12.1 VOLTAGE REFERENCE OVERVIEW

The SLG47512/13 has a Voltage Reference (Vref) macrocell to provide references to the two analog comparators. This macrocell can supply a user selection of fixed voltage references, or temperature sensor output. The macrocell also has the option to output reference voltages on GPIO. See [Table 35](#) for the available selections for each analog comparator.

When changing power-down source settings or power-down register settings in a Voltage Reference block, similar changes of these settings automatically occur in an Analog Temperature Sensor block.

Also see [Figure 80](#), which shows the reference output structure.

12.2 VREF SELECTION TABLE

Table 35: Vref Selection Table

SEL[5:0]	Vref	SEL[5:0]	Vref
0	0.025	18	0.475
1	0.05	19	0.5
2	0.075	20	0.525
3	0.1	21	0.55
4	0.125	22	0.575
5	0.15	23	0.6
6	0.175	24	0.625
7	0.2	25	0.65
8	0.225	26	0.675
9	0.25	27	0.7
10	0.275	28	0.725
11	0.3	29	0.75
12	0.325	30	0.775
13	0.35	31	0.8
14	0.375	32	0.825
15	0.4	33	0.850
16	0.425	34 to 62	0.850
17	0.45	63	Ext. Vref

SLG47512/13

Low Voltage GreenPAK Programmable Mixed-Signal Matrix

12.3 VREF BLOCK DIAGRAM

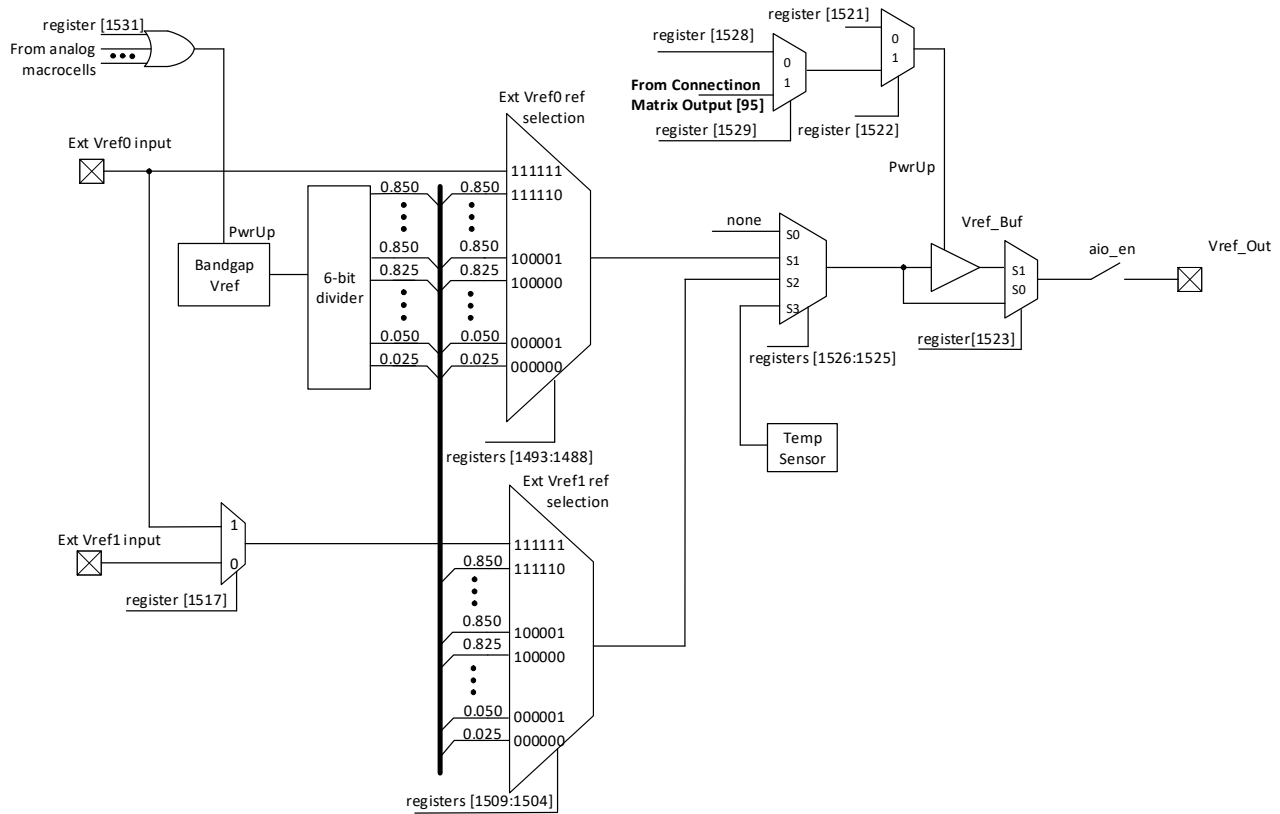


Figure 80: Voltage Reference Block Diagram

SLG47512/13

Low Voltage GreenPAK Programmable Mixed-Signal Matrix

12.4 VREF TYPICAL PERFORMANCE

Note: It is not recommended to use Vref connected to external pin without buffer.

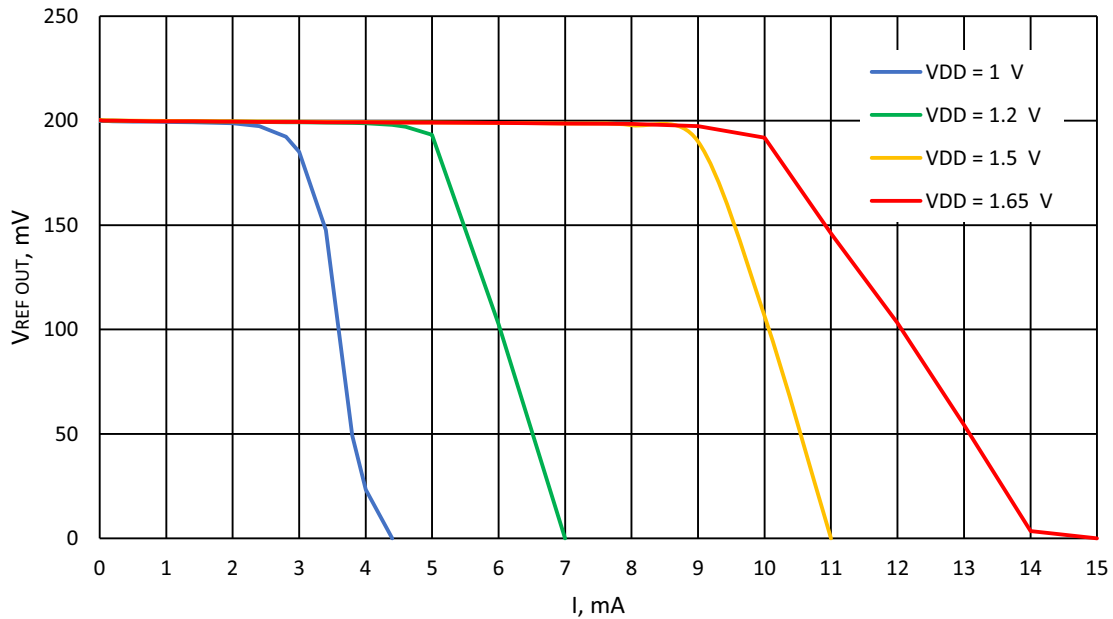


Figure 81: Typical Load Regulation, Vref = 200 mV, T = -40 °C to +85 °C, Buffer - Enable

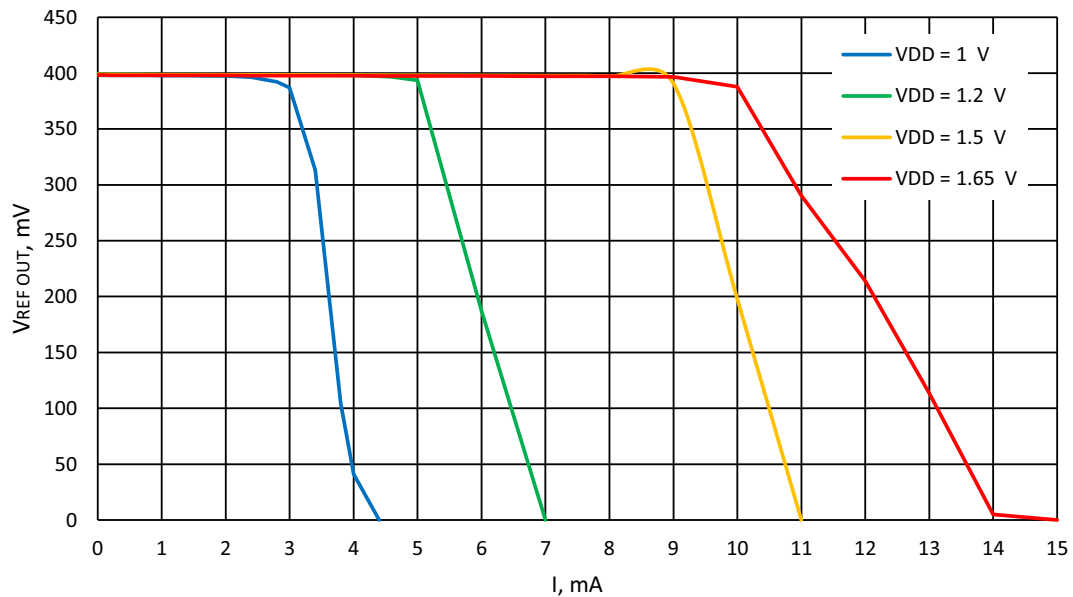


Figure 82: Typical Load Regulation, Vref = 400 mV, T = -40 °C to +85 °C, Buffer - Enable

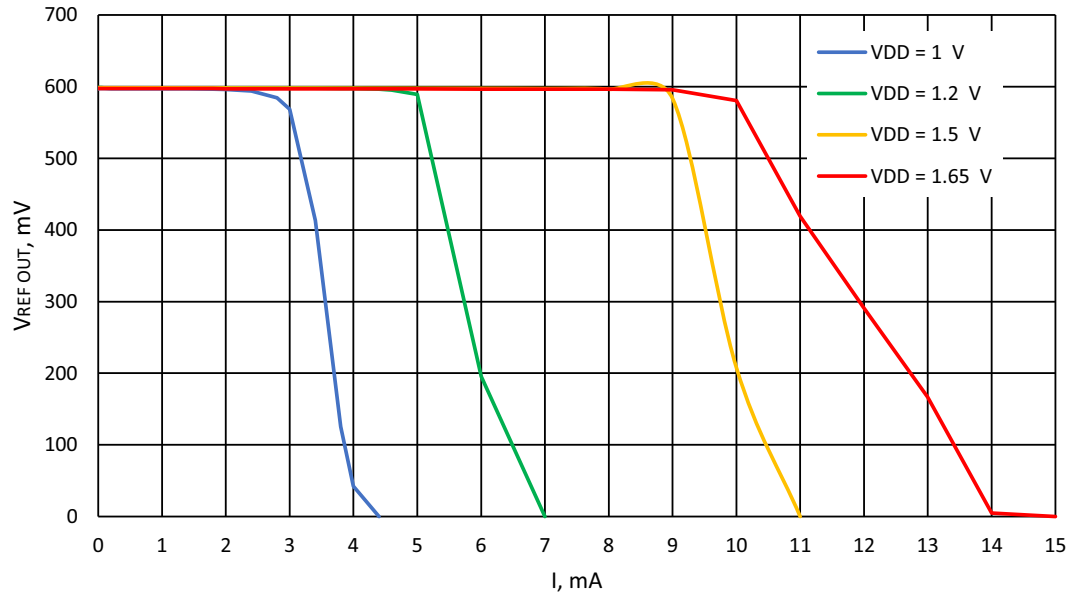


Figure 83: Typical Load Regulation, Vref = 600 mV, T = -40 °C to +85 °C, Buffer - Enable

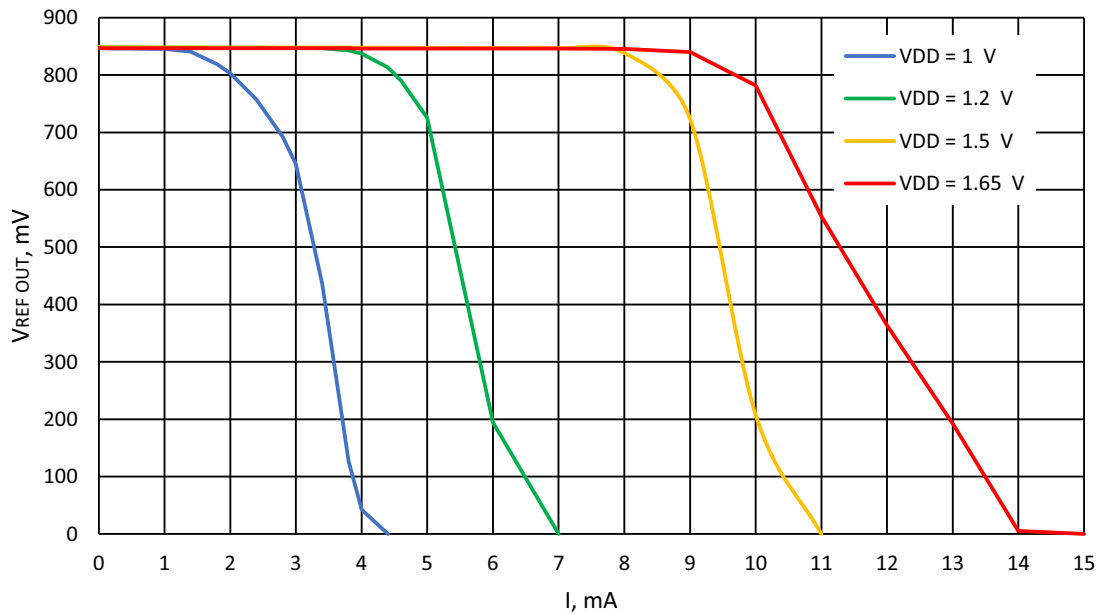


Figure 84: Typical Load Regulation, Vref = 850 mV, T = -40 °C to +85 °C, Buffer - Enable

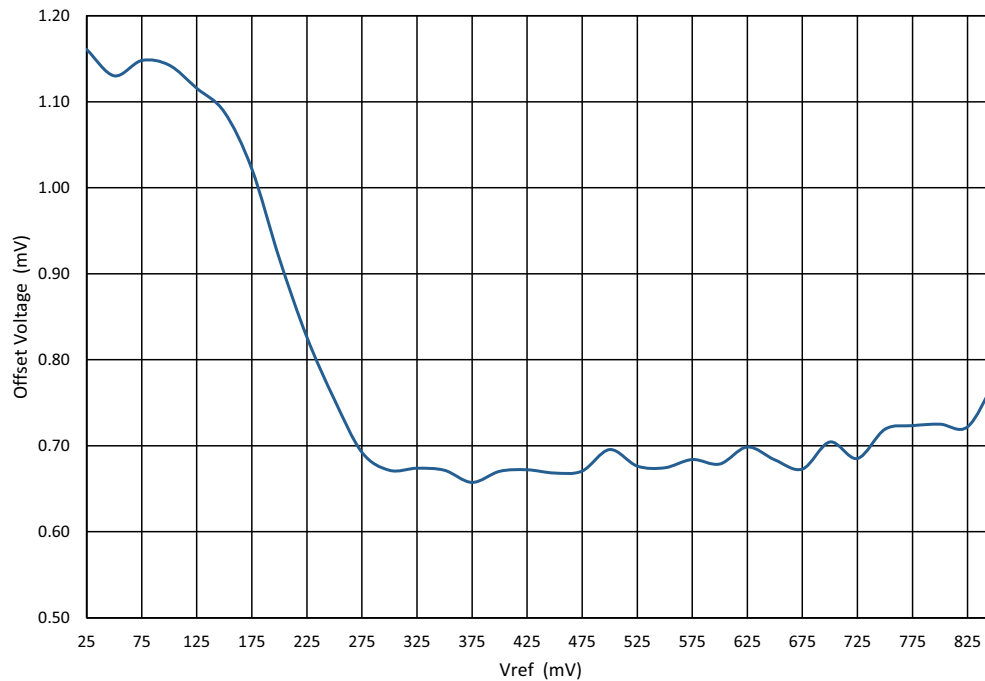


Figure 85: Typical Input Offset Voltage vs. Vref at $V_{DD} = 1.2\text{ V}$, $T = +25\text{ }^{\circ}\text{C}$

SLG47512/13

Low Voltage GreenPAK Programmable Mixed-Signal Matrix

13 Clocking

13.1 OSC GENERAL DESCRIPTION

The SLG47512/13 has two internal oscillators to support a variety of applications:

- Oscillator0 (2.048 kHz)
- Oscillator1 (25 MHz).

There are two divider stages for each oscillator that give the user flexibility for introducing clock signals to connection matrix, as well as various other macrocells. The pre-divider (first stage) for Oscillator0 allows the selection of /1, /2, /4, or /8 to divide down frequency from the fundamental. The pre-divider (first stage) for Oscillator1 allows the selection of /1, /2, /4, /8, /12, /24, /48, /96 to divide down frequency from the fundamental. The second stage divider of oscillators has an input of frequency from the pre-divider, and outputs one of eight different frequencies divided by /1, /2, /3, /4, /8, /12, /24, or /64 on Connection Matrix Input lines [57], [58] and [59]. Please see [Figure 86](#), [Figure 87](#), and [Figure 88](#) for more details on the SLG47512/13 clock scheme.

Oscillator1 (25 MHz) has an additional function of 100 ns delayed startup, which can be enabled/disabled by register [1480]. This function is recommended to use when analog blocks are used along with the Oscillator.

The Matrix Power-down/Force On function allows switching off or force on the oscillator using an external pin. The Matrix Power-down/Force On (Connection Matrix Output [96], [97]) signal has the highest priority. The OSC operates according to the following table:

Table 36: Oscillator Operation Mode Configuration Settings

POR	External Clock Selection	Signal From Connection Matrix	Register: Power-Down or Force On by Matrix Input	Register: Auto Power-On or Force On	OSC Enable Signal from CNT/DLY Macrocells	OSC Operation Mode
0	X	X	X	X	X	OFF
1	1	X	X	X	X	Internal OSC is OFF, logic is ON
1	0	1	0	X	X	OFF
1	0	1	1	X	X	ON
1	0	0	X	1	X	ON
1	0	0	X	0	CNT/DLY requires OSC	ON
1	0	0	X	0	CNT/DLY does not require OSC	OFF
Note 1 The OSC will run only when any macrocell that uses OSC is powered on.						

To avoid metastability issue user can select synchronization type for Power-down signal:

- registers [1483:1482], [1487:1486] = 00 – two-DFF synchronization. Oscillator will have from 1 to 2 output pulses after Power-

SLG47512/13

Low Voltage GreenPAK Programmable Mixed-Signal Matrix

down.

- registers [1483:1482], [1487:1486] = 01 – one-DFF synchronization by clock falling edge. When Oscillator Power-down signal comes, Oscillator generates full output pulse and then stops.
- registers [1483:1482], [1487:1486] = 10 or 11 – without synchronization (asynchronous reset). When Oscillator Power-down signal comes, Oscillator output goes low immediately.

If I²C is used to change the synchronization mode there will be a pulse at the Oscillator output when the synchronization mode is changed from 10 or 11 (asynchronous reset).

13.2 OSCILLATOR0 (2.048 kHz)

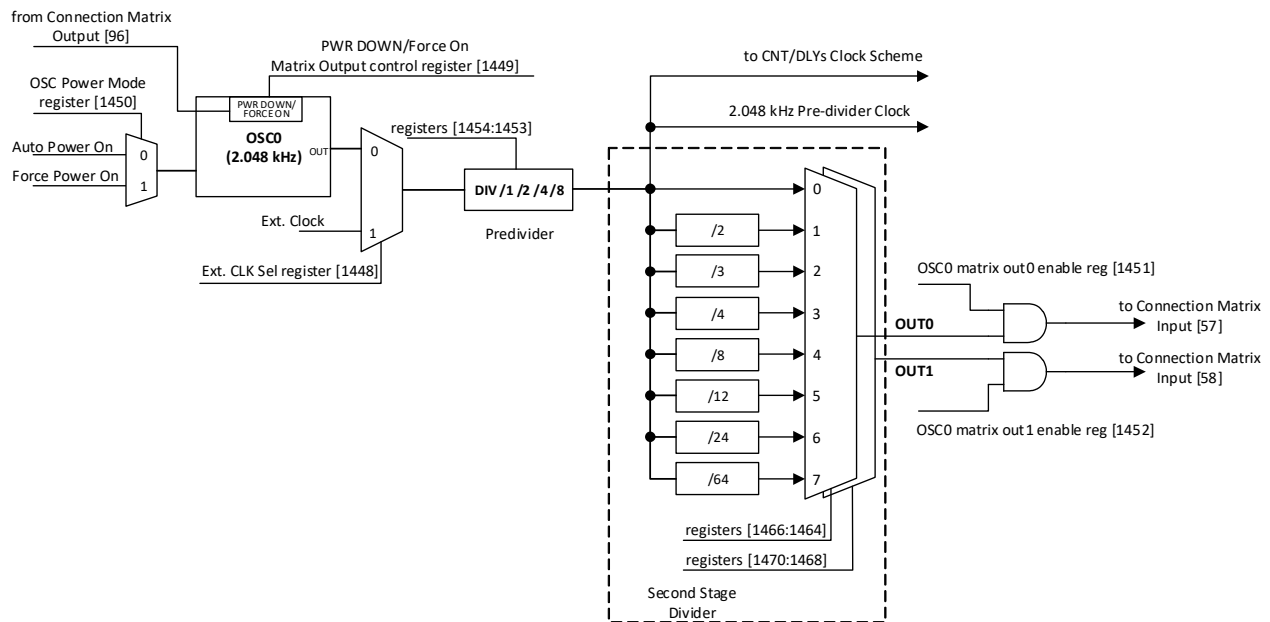


Figure 86: Oscillator0 Block Diagram

Note: It's highly recommended to use OSC0 without the startup delay (register[1484] = 1).

SLG47512/13

Low Voltage GreenPAK Programmable Mixed-Signal Matrix

13.3 OSCILLATOR1 (25 MHZ)

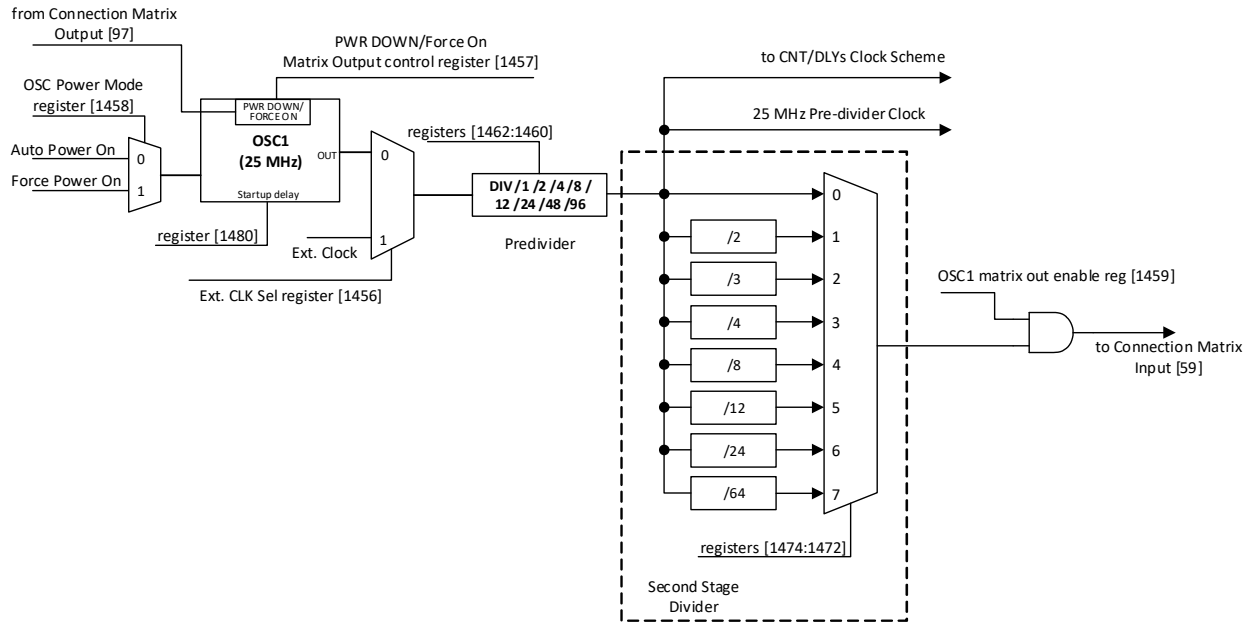


Figure 87: Oscillator1 Block Diagram

SLG47512/13

Low Voltage GreenPAK Programmable Mixed-Signal Matrix

13.4 CNT/DLY CLOCK SCHEME

Each CNT/DLY within Multi-Function macrocell has its own additional clock divider connected to oscillators pre-divider. Available dividers are:

- OSC0/1, OSC0/8, OSC0/64, OSC0/512, OSC0/4096, OSC0/32768, OSC0/262144
- OSC1/1, OSC1/4, OSC1/8, OSC1/64, OSC1/512

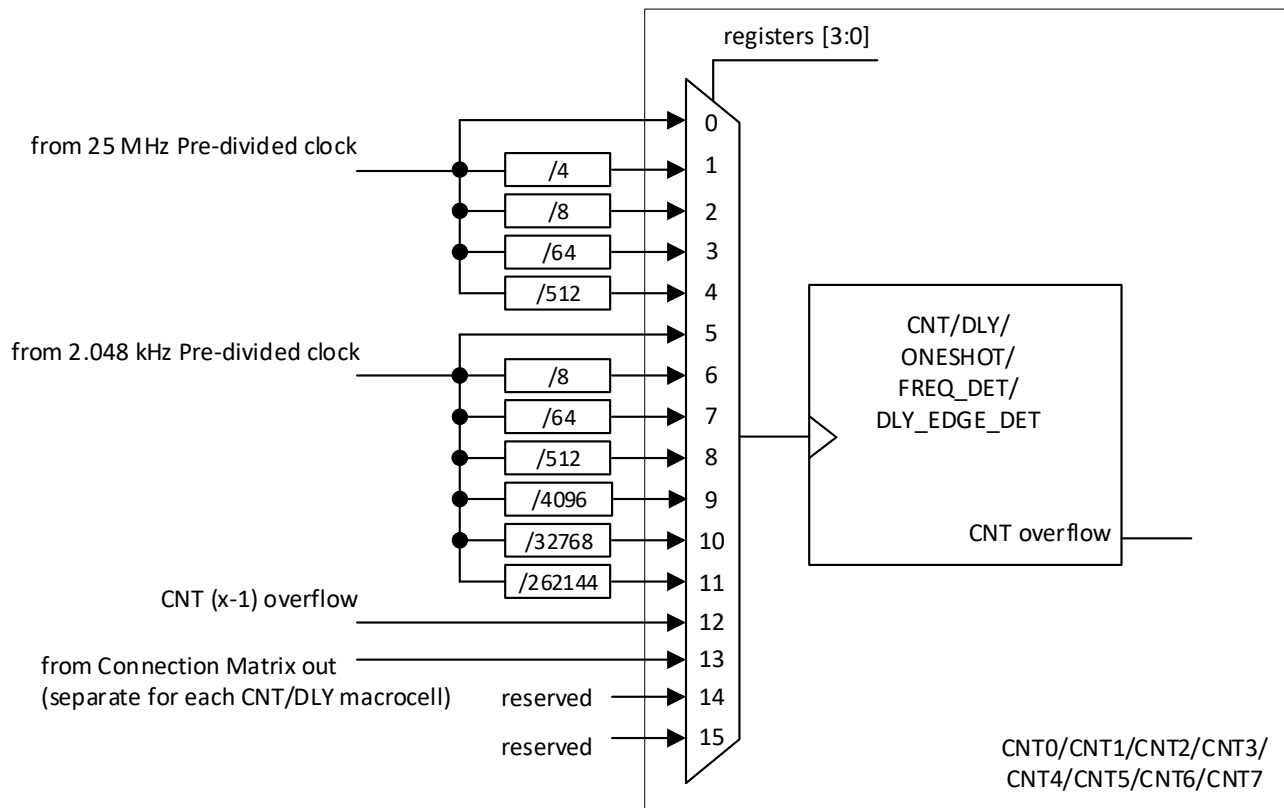


Figure 88: Clock Scheme

13.5 EXTERNAL CLOCKING

The SLG47512/13 supports several ways to use an external, higher accuracy clock as a reference source for internal operations.

13.5.1 GPIO Source for Oscillator0 (2.048 kHz)

When register [1448] is set to 1, an external clocking signal on GPIOx will be routed in place of the internal oscillator derived 2.048 kHz clock source. See [Figure 86](#). The low and high limits for external frequency that can be selected are 0 MHz and 10 MHz.

13.5.2 GPIO Source for Oscillator1 (25 MHz)

When register [1456] is set to 1, an external clocking signal on GPIOx will be routed in place of the internal oscillator derived 25 MHz clock source. See [Figure 87](#).

SLG47512/13

Low Voltage GreenPAK Programmable Mixed-Signal Matrix

13.6 OSCILLATORS ACCURACY

Note: OSC power setting: Force Power-On; Clock to matrix input - enable; Bandgap: turn on by register - enable.

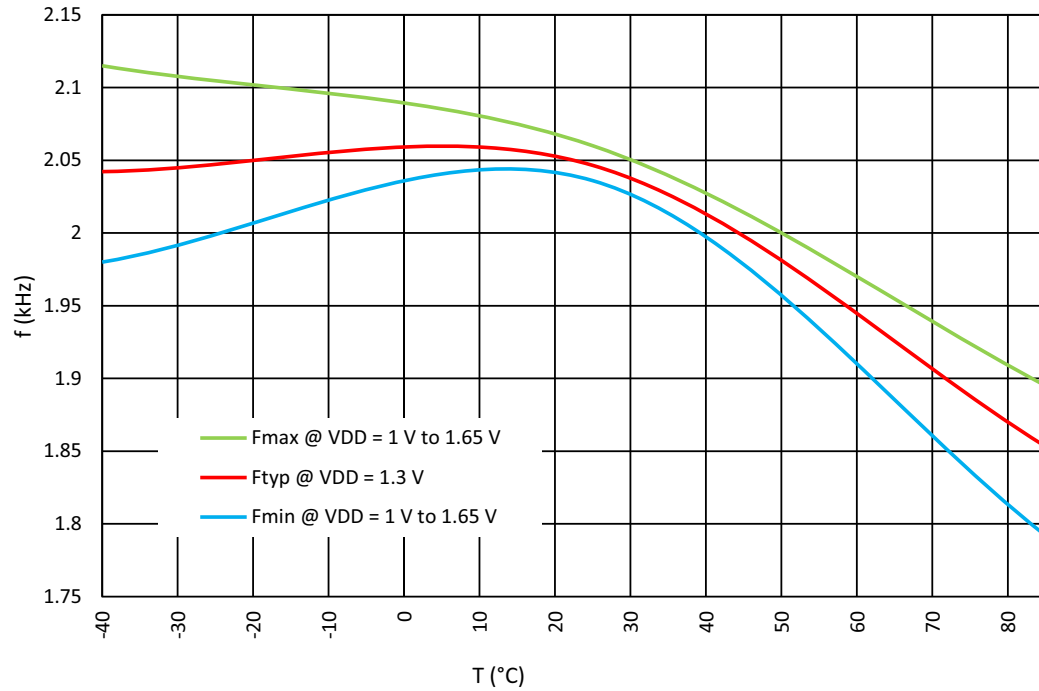


Figure 89: Oscillator0 Frequency vs. Temperature, OSC0 = 2.048 kHz

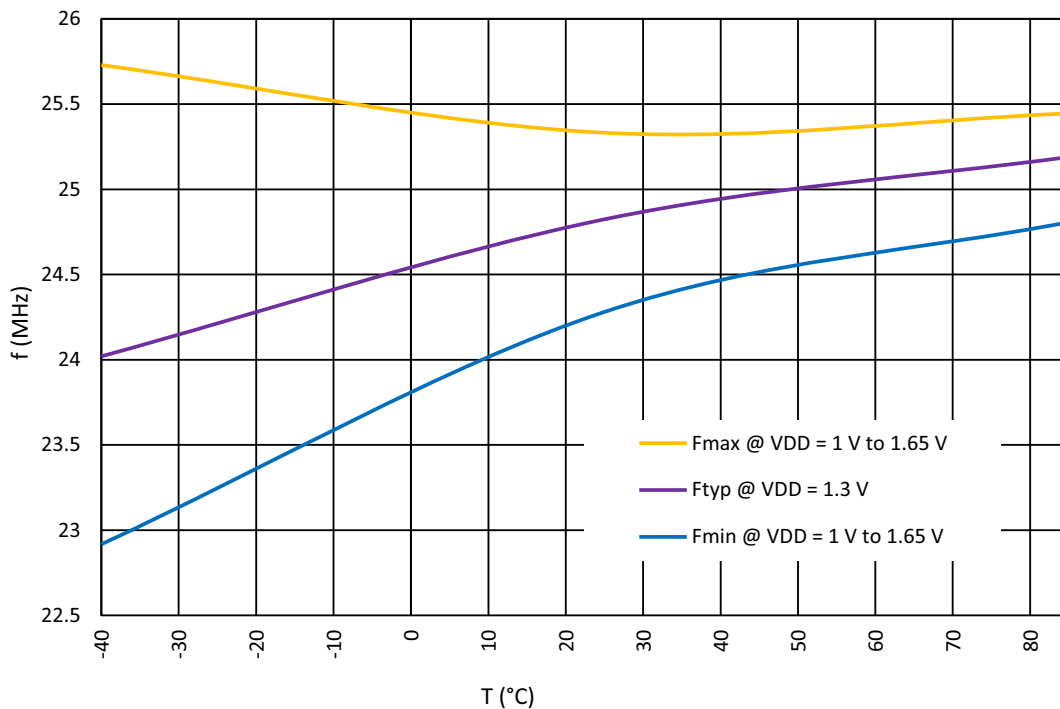


Figure 90: Oscillator1 Frequency vs. Temperature, OSC1 = 25 MHz

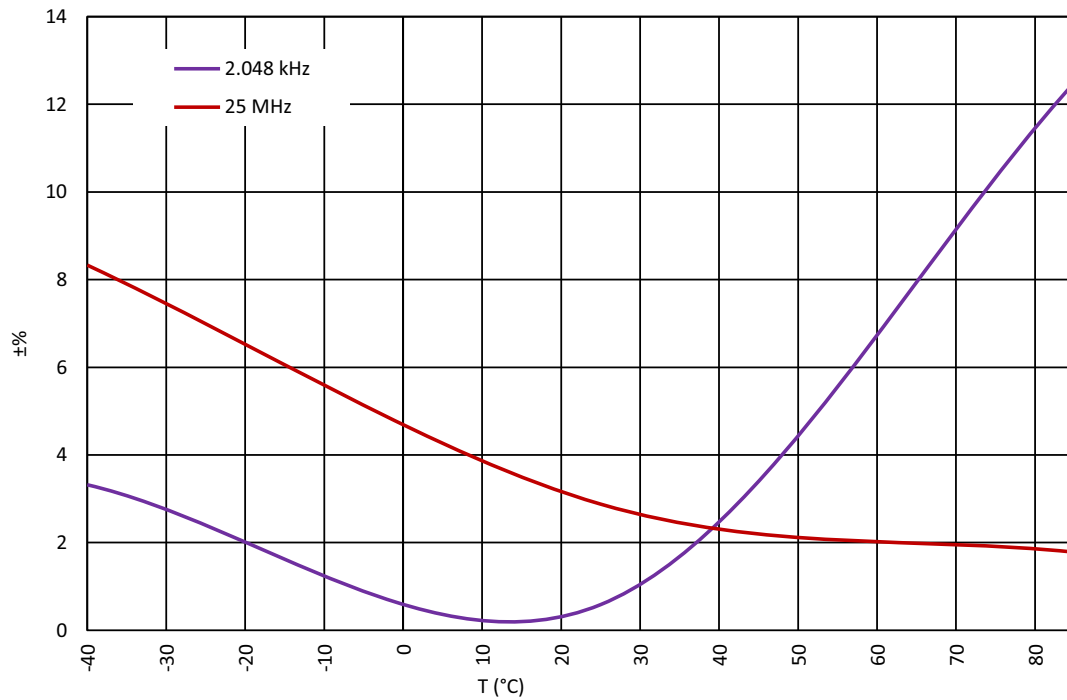


Figure 91: Oscillators Total Error vs. Temperature, $V_{DD} = 1.0 \text{ V to } 1.65 \text{ V}$

Note: For more information see section [3.9](#).

SLG47512/13

Low Voltage GreenPAK Programmable Mixed-Signal Matrix

13.7 OSCILLATORS SETTLING TIME

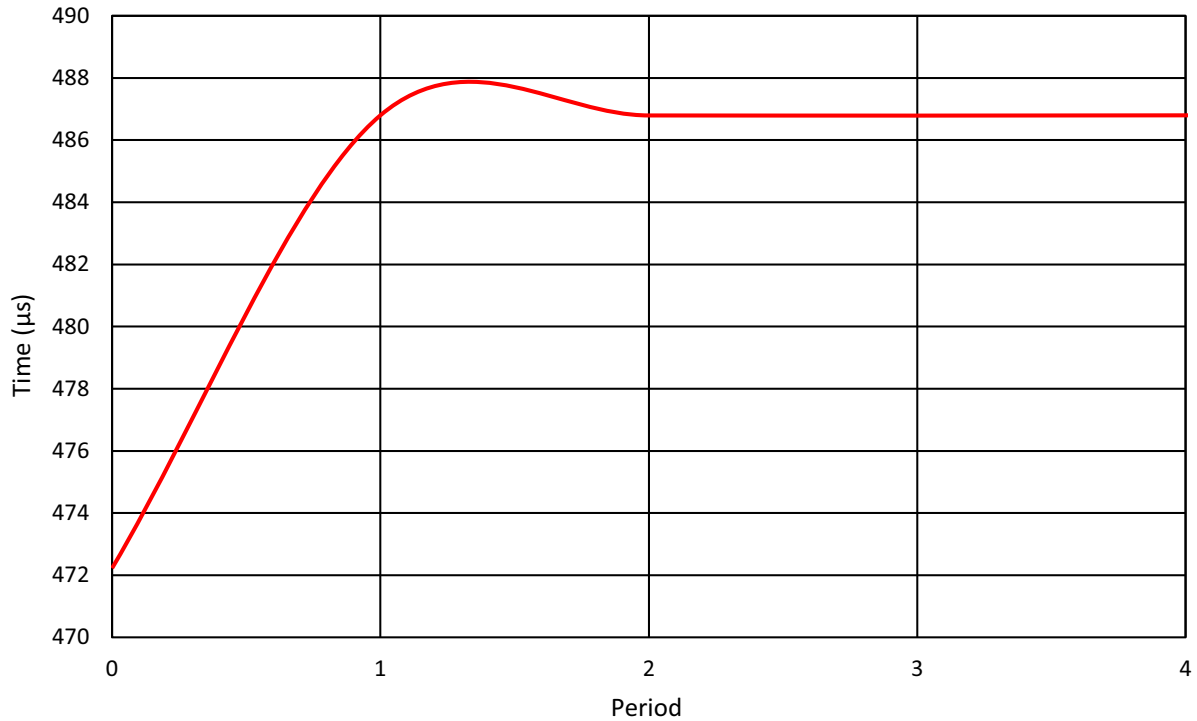


Figure 92: Oscillator0 Settling Time, $V_{DD} = 1.2\text{ V}$, $T = +25\text{ }^{\circ}\text{C}$, $\text{OSC0} = 2.048\text{ kHz}$

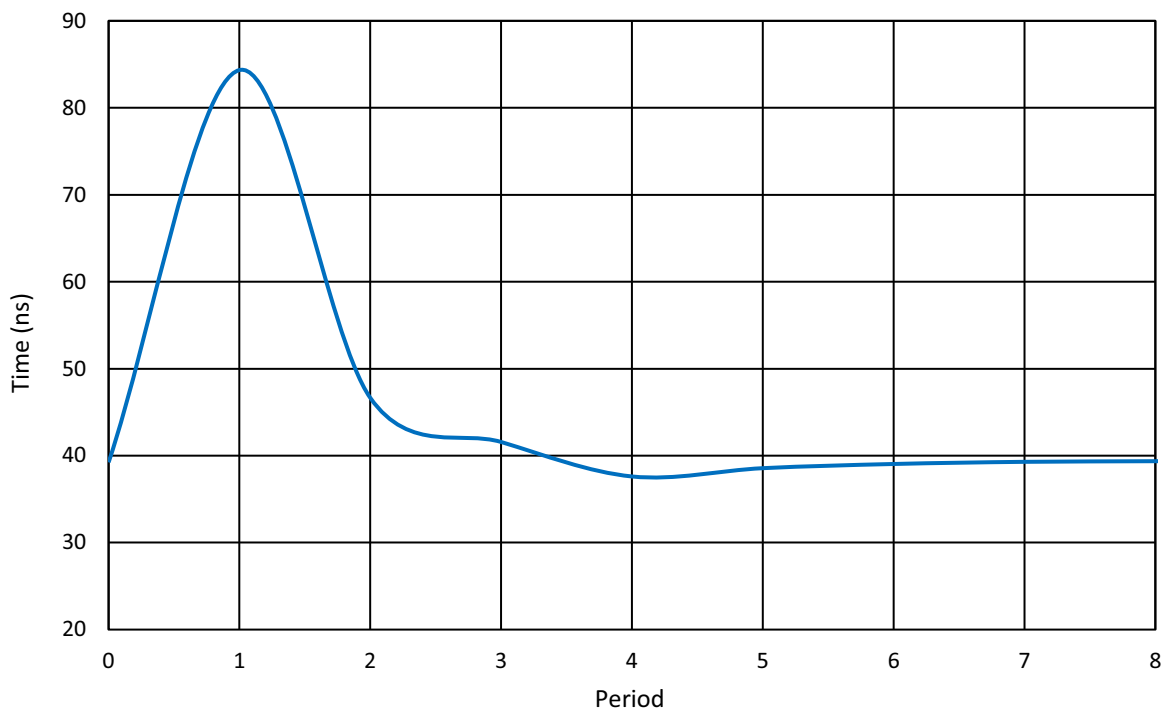


Figure 93: Oscillator1 Settling Time, $V_{DD} = 1.2\text{ V}$, $T = +25\text{ }^{\circ}\text{C}$, $\text{OSC1} = 25\text{ MHz}$ (Normal Start)

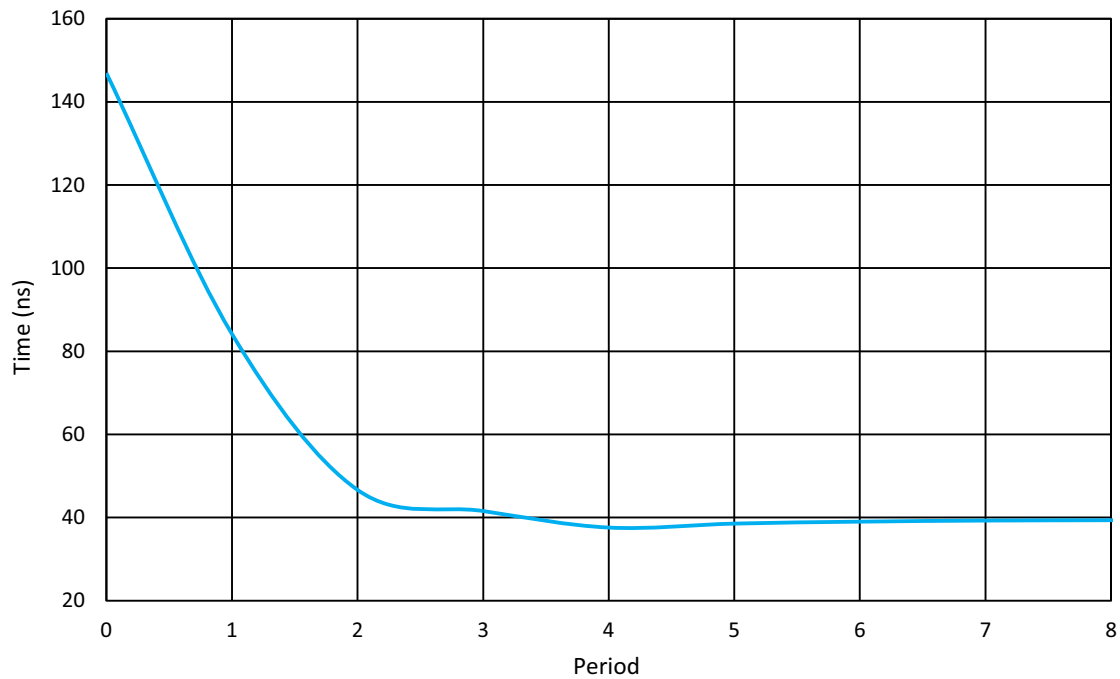


Figure 94: Oscillator1 Settling Time, $V_{DD} = 1.2\text{ V}$, $T = +25\text{ }^{\circ}\text{C}$, $\text{OSC1} = 25\text{ MHz}$ (Start with Delay)

SLG47512/13

Low Voltage GreenPAK Programmable Mixed-Signal Matrix

14 Power-On Reset

The SLG47512/13 has a Power-On Reset (POR) macrocell to ensure correct device initialization and operation of all macrocells in the device. The purpose of the POR circuit is to have consistent behavior and predictable results when the V_{DD} power is first ramping to the device, and also while the V_{DD} is falling during power-down. To accomplish this goal, the POR drives a defined sequence of internal events that trigger changes to the states of different macrocells inside the device, and finally to the state of the I/Os.

14.1 GENERAL OPERATION

The SLG47512/13 is guaranteed to be powered down and non-operational when the V_{DD} voltage (voltage on PIN1) is less than Power-Off Threshold (see in [Table 6](#)), but not less than -0.6 V. Another essential condition for the chip to be powered down is that no voltage higher (Note) than the V_{DD} voltage is applied to any other PIN. For example, if V_{DD} voltage is 0.3 V, applying a voltage higher than 0.3 V to any other PIN is incorrect, and can lead to incorrect or unexpected device behavior.

Note: There is a 0.6 V margin due to forward drop voltage of the ESD protection diodes.

To start the POR sequence in the SLG47512/13, the voltage applied on the V_{DD} should be higher than the Power-On Threshold (Note). The full operational V_{DD} range for the SLG47512/13 is 1.0 V to 1.65 V. This means that the V_{DD} voltage must ramp up to the operational voltage value, but the POR sequence will start earlier, as soon as the V_{DD} voltage rises to the Power-On Threshold. After the POR sequence has started, the SLG47512/13 will have a typical period of time to go through all the steps in the sequence (noted in the datasheet for that device) and will be ready and completely operational after the POR sequence is complete.

Note: The Power-On Threshold is defined in [Table 5](#).

To power down the chip the V_{DD} voltage should be lower than the operational and to guarantee that chip is powered down it should be less than Power-Off Threshold.

All PINs are in high impedance state when the chip is powered down and while the POR sequence is taking place. The last step in the POR sequence releases the IO structures from the high impedance state, at which time the device is operational. The pin configuration at this point in time is defined by the design programmed into the chip. Also, as it was mentioned before the voltage on PINs can't be bigger than the V_{DD} , this rule also applies to the case when the chip is powered on.

SLG47512/13

Low Voltage GreenPAK Programmable Mixed-Signal Matrix

14.2 POR SEQUENCE

The POR system generates a sequence of signals that enable certain macrocells. The sequence is shown in [Figure 95](#).

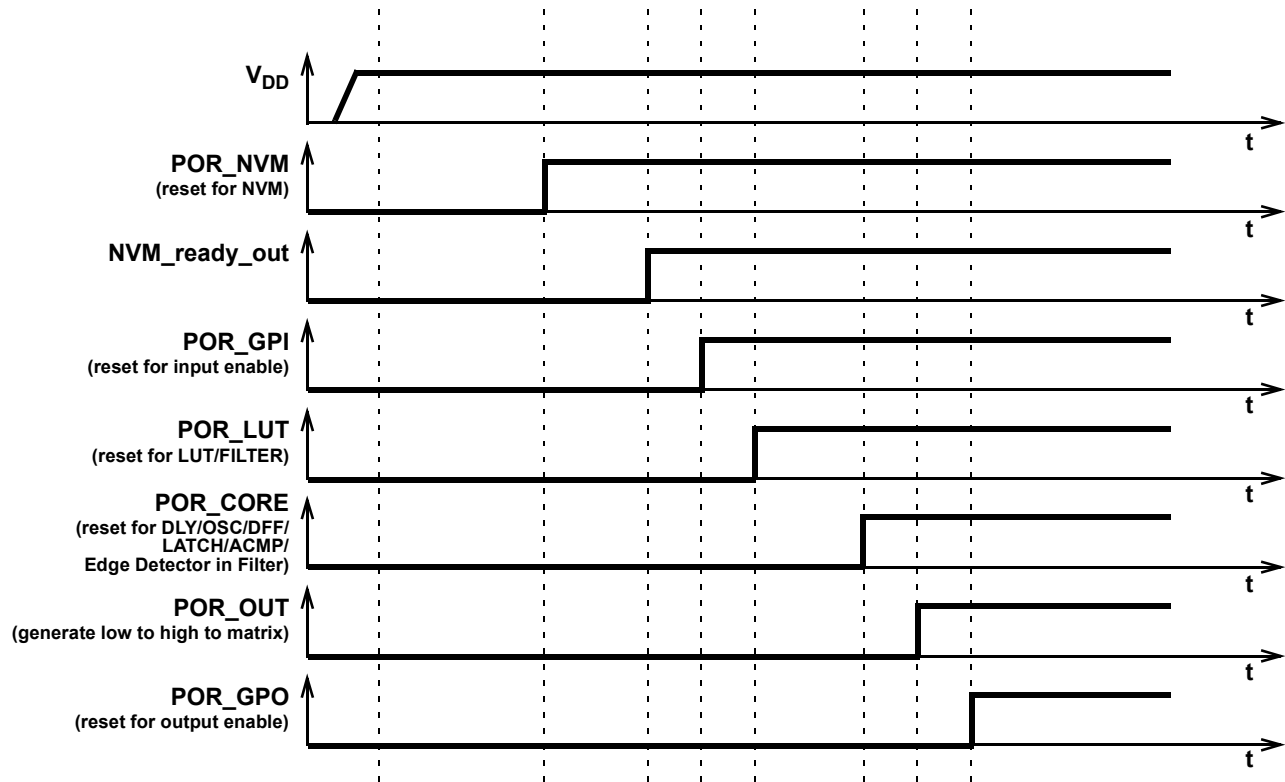


Figure 95: POR Sequence

As can be seen from [Figure 95](#) after the V_{DD} has start ramping up and crosses the Power-On Threshold, first, the on-chip NVM memory is reset. Next, the chip reads the data from NVM, and transfers this information to a CMOS LATCH, that serves to configure each macrocell, and the Connection Matrix which routes signals between macrocells. The third stage causes the reset of the input pins, and then to enable them. After that, the LUTs are reset and become active. After LUTs the Delay cells, RC OSC, DFFs, and LATCHES are initialized. Only after all macrocells are initialized internal POR signal (POR macrocell output) goes from LOW to HIGH. The last portion of the device to be initialized are the output pins, which transition from high impedance to active at this point.

The typical time that takes to complete the POR sequence varies by device type in the GreenPAK family. It also depends on many environmental factors, such as: slew rate, V_{DD} value, temperature, and even will vary from chip to chip (process influence).

14.3 MACROCELLS OUTPUT STATES DURING POR SEQUENCE

To have a full picture of SLG47512/13 operation during powering and POR sequence, review the overview the macrocell output states during the POR sequence ([Figure 96](#) describes the output signals states).

First, before the NVM has been reset, all macrocells have their output set to logic LOW (except the output pins which are in high impedance state). On the next step, some of the macrocells start initialization: input pins output state becomes LOW; LUTs also output LOW. Only P DLY macrocell configured as edge detector becomes active at this time. After that input pins are enabled.

Low Voltage GreenPAK Programmable Mixed-Signal Matrix

Next, only LUTs are configured. Next, all other macrocells are initialized. After macrocells are initialized, internal POR matrix signal switches from LOW to HIGH. The last are output pins that become active and determined by the input signals.

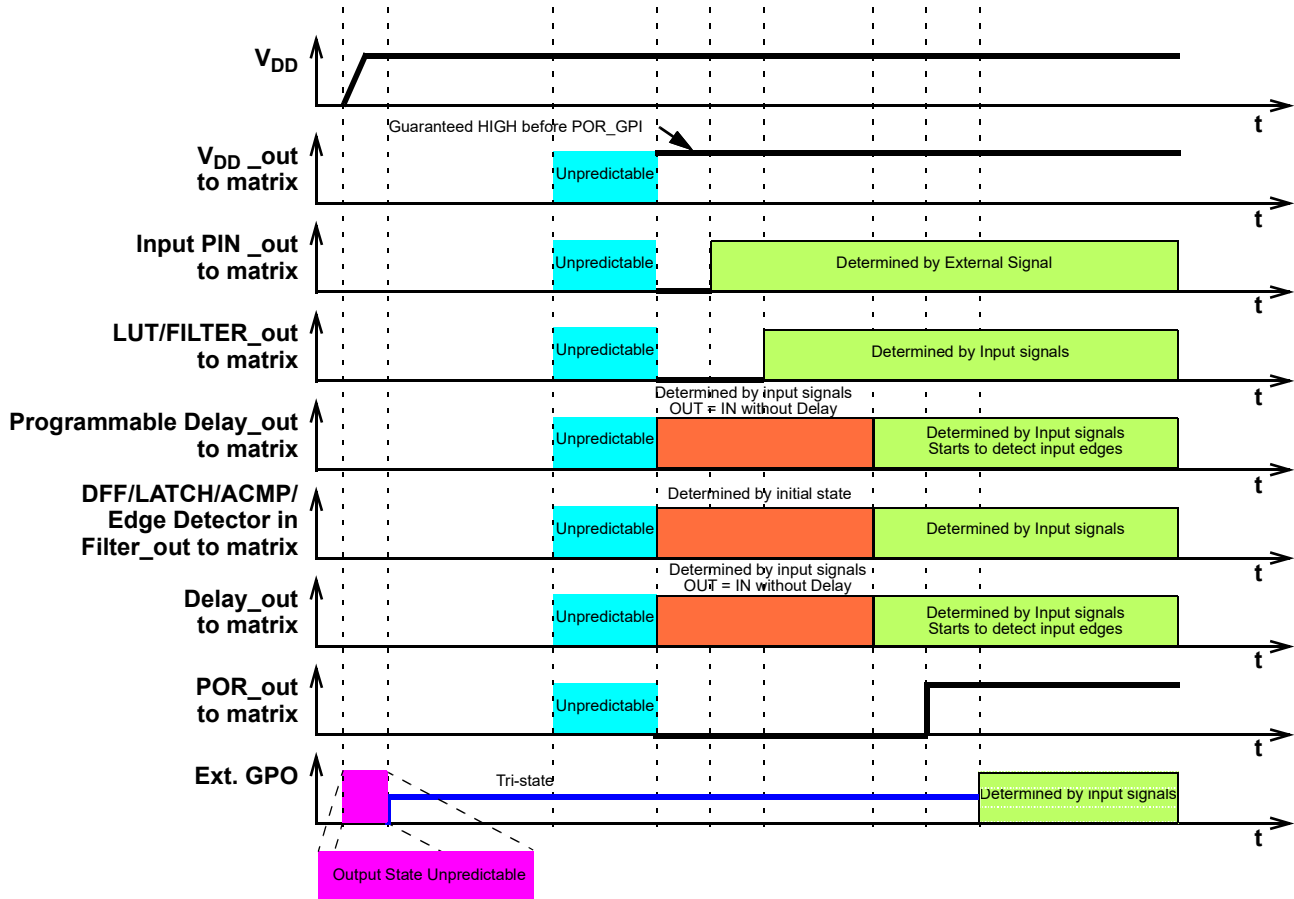


Figure 96: Internal Macrocell States During POR Sequence

14.3.1 Initialization

All internal macrocells by default have initial low level. Starting from indicated power-up time of 0.811 V to 1.078 V, macrocells in SLG47512/13 are powered on while forced to the reset state. All outputs are in Hi-Z and chip starts loading data from NVM. Then the reset signal is released for internal macrocells and they start to initialize according to the following sequence:

1. Input pins, ACMP, Pull-up/down.
2. LUTs.
3. DFFs, Delays/Counters.
4. POR output to matrix.
5. Output pin corresponds to the internal logic.

The Vref output pin driving signal can precede POR output signal going high by 3 μs to 5 μs. The POR signal going high indicates the mentioned power-up sequence is complete.

Note: The maximum voltage applied to any pin should not be higher than the V_{DD} level. There are ESD Diodes between pin → V_{DD} and pin → GND on each pin. So, if the input signal applied to pin is higher than V_{DD}, then current will sink through the diode to V_{DD}. Exceeding V_{DD} results in leakage current on the input pin, and V_{DD} will be pulled up, following the voltage on the input pin. There is no effect from input pin when input voltage is applied at the same time as V_{DD}.

SLG47512/13

Low Voltage GreenPAK Programmable Mixed-Signal Matrix

14.3.2 Power-Down

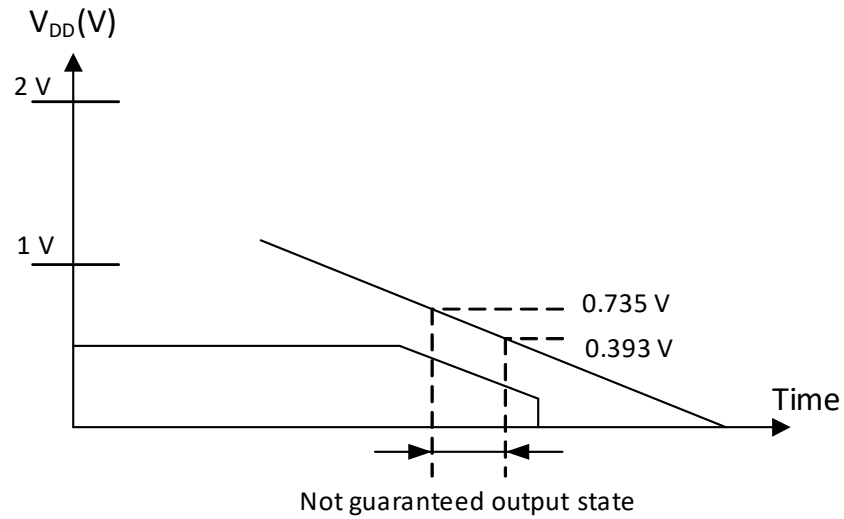


Figure 97: Power-Down

During Power-down, macrocells in SLG47512/13 are powered off after V_{DD} falling down below Power-Off Threshold. Please note that during a slow rampdown, outputs can possibly switch state during this time.

15 I²C Serial Communications Macrocell

15.1 I²C SERIAL COMMUNICATIONS MACROCELL OVERVIEW

In the standard use case for the GreenPAK devices, the configuration choices made by the user are stored as bit settings in the Non-Volatile Memory (NVM), and this information is transferred at startup time to volatile RAM registers that enable the configuration of the macrocells. Other RAM registers in the device are responsible for setting the connections in the Connection Matrix to route signals in the manner most appropriate for the user's application.

The I²C Serial Communications Macrocell in this device allows an I²C bus Controller to read and write this information via a serial channel directly to the RAM registers, allowing the remote re-configuration of macrocells, and remote changes to signal chains within the device.

The I²C bus Controller is also able to read and write other register bits that are not associated with NVM memory.

The user has the flexibility to control read access and write access via registers bits registers [1723:1720]. See section 15.5 for more details on I²C read/write memory protection.

It is possible to use I²C in Standard/fast mode or Fast mode+. To use I²C in Fast mode+ registers [1312], [1328] should be enabled.

Note that extra current consumption can occur if I²C transaction was corrupted and Stop condition was not received. Next correct I²C transaction restores normal current consumption.

15.2 I²C SERIAL COMMUNICATIONS DEVICE ADDRESSING

Each command to the I²C Serial Communications macrocell begins with a Control Byte. The bits inside this Control Byte are shown in Figure 98. After the Start condition, the next seven bits are a target address. The four MSB in a target address can be sourced independently from the register or by value defined externally by GPI, GPIO3, GPIO4, and GPIO8. The bit4 of the target address is defined by the value of GPI, while the bit7 is defined by the value of GPIO8. The address source (either register bit or PIN) for each bit is defined by registers [30:24]. This gives the user flexibility on the chip level addressing of this device and other devices on the same I²C bus. The last bit in the Control Byte is the R/W bit, which selects whether a read command or write command is requested, with a "1" selecting for a Read command, and a "0" selecting for a Write command. This Control Byte will be followed by an Acknowledge bit (ACK), which is sent by this device to indicate successful communication of the Control Byte data.

In the I²C-bus specification and user manual, there are two groups of eight addresses (0000 xxx and 1111 xxx) that are reserved for the special functions, such as a system General Call address. If the user of this device chooses to set the first 4 bits of a device address to either "1111" or "0000" in a system with other target device, please consult the I²C-bus specification and user manual to understand the addressing and implementation of these special functions, to ensure reliable operation.

In the read and write command address structure, there are a total of 11 bits of addressing, each pointing to a unique byte of information, resulting in a total address space of 2K bytes. Of this 2K byte address space, the valid addresses accessible to the I²C Macrocell on the SLG47512/13 are in the range from 0 (0x00) to 255 (0xFF).

With the exception of the Current Address Read command, all commands will have the Control Byte followed by the Word Address. Figure 98 shows this basic command structure.

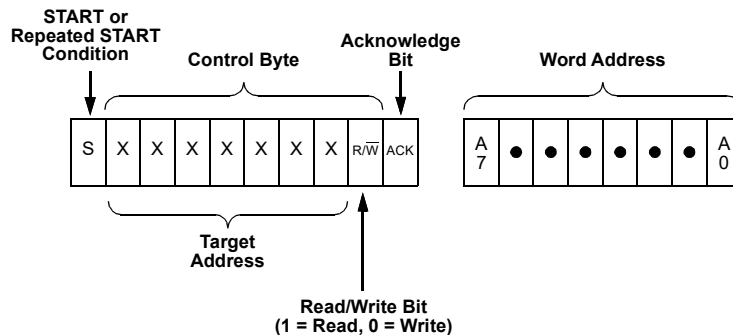


Figure 98: Basic Command Structure

15.3 I²C SERIAL GENERAL TIMING

General timing characteristics for the I²C Serial Communications macrocell are shown in Figure 99. Timing specifications can be found in the AC Characteristics section.

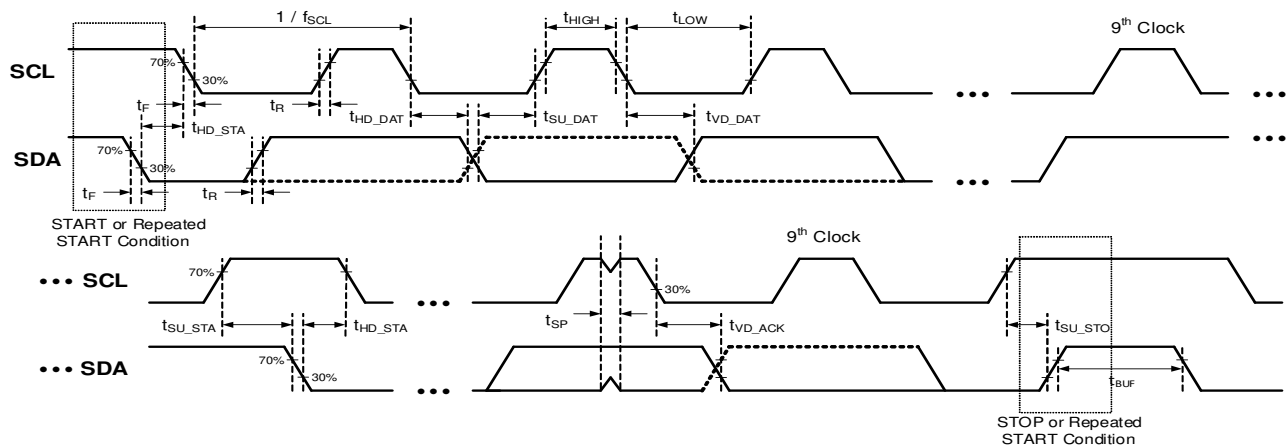


Figure 99: I²C General Timing Characteristics

15.4 I²C SERIAL COMMUNICATIONS COMMANDS

15.4.1 Byte Write Command

Following the Start condition from the Controller, the Target Address [7 bits], and the R/W bit (set to "0"), are placed onto the I²C bus by the Controller. After the SLG47512/13 sends an Acknowledge bit (ACK), the next byte transmitted by the Controller is the Word Address. The Word Address (A7 through A0) set the internal address pointer in the SLG47512/13, where the data byte is to be written. After the SLG47512/13 sends another Acknowledge bit, the Controller will transmit the data byte to be written into the addressed memory location. The SLG47512/13 again provides an Acknowledge bit and then the Controller generates a Stop condition. The internal write cycle for the data will take place at the time that the SLG47512/13 generates the Acknowledge bit.

It is possible to latch all IOs during I²C write command, register [1425] = 1 - Enable. It means that IOs will remain their state until the write command is done.

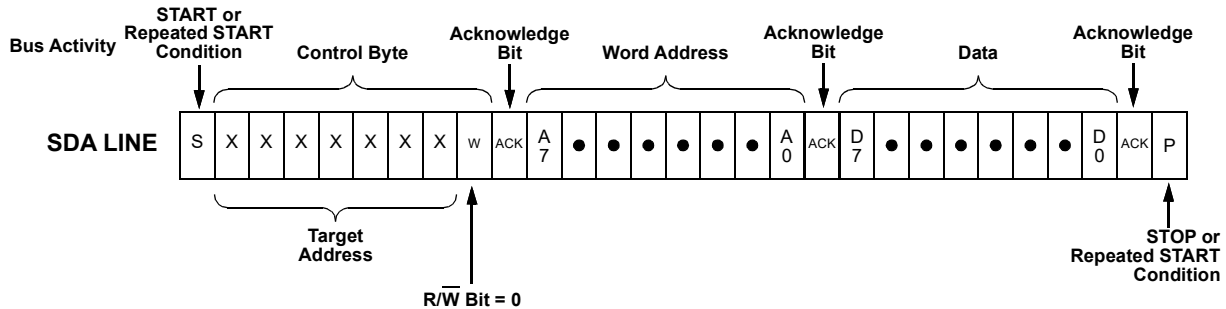


Figure 100: Byte Write Command, $R/\bar{W} = 0$

15.4.2 Sequential Write Command

The write Control Byte, Word Address and the first data byte are transmitted to the SLG47512/13 in the same way as in a Byte Write command. However, instead of generating a Stop condition, the Bus Controller continues to transmit data bytes to the SLG47512/13. Each subsequent data byte will increment the internal address counter, and will be written into the next higher byte in the command addressing. As in the case of the Byte Write command, the internal write cycle will take place at the time that the SLG47512/13 generates the Acknowledge bit.


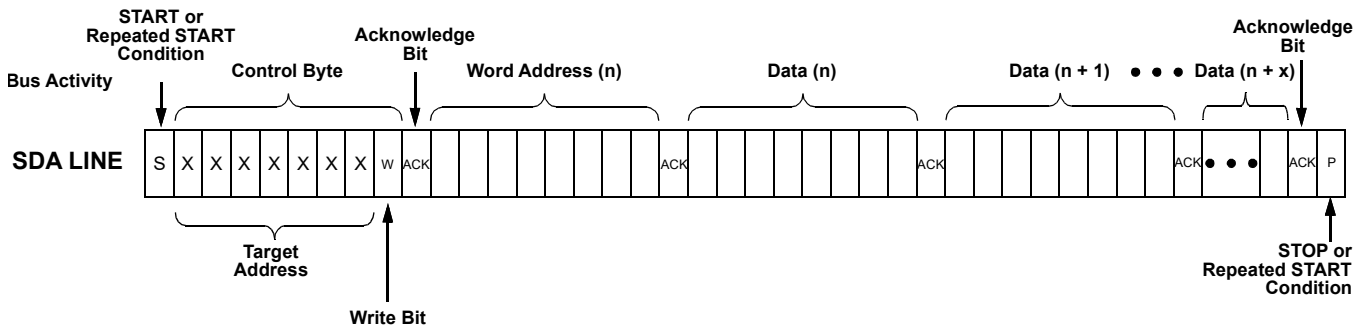


Figure 101: Sequential Write Command


15.4.3 Current Address Read Command

The Current Address Read Command reads from the current pointer address location. The address pointer is incremented at the first STOP condition following any write control byte. For example, if a Sequential Read command (which contains a write control byte) reads data up to address n , the address pointer would get incremented to $n + 1$ upon the STOP of that command. Subsequently, a Current Address Read that follows would start reading data at $n + 1$. The Current Address Read Command contains the Control Byte sent by the Controller, with the $R/\bar{W}$ bit = "1". The SLG47512/13 will issue an Acknowledge bit, and then transmit eight data bits for the requested byte. The Controller will not issue an Acknowledge bit, and follow immediately with a Stop condition.

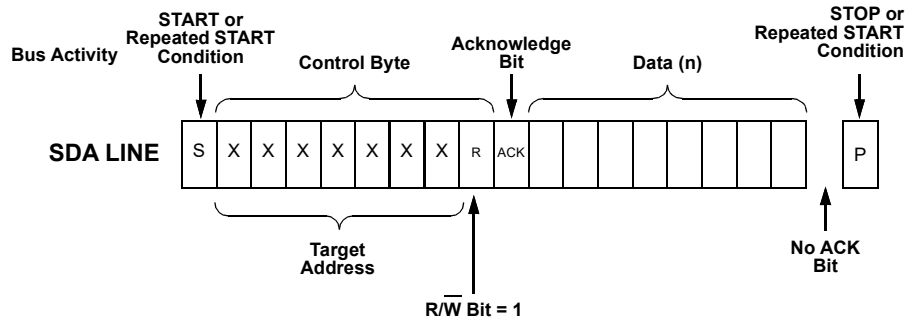

15.4.4 Random Read Command

The Random Read command starts with a Control Byte (with R/W bit set to "0", indicating a write command) and Word Address to set the internal byte address, followed by a Start condition, and then the Control Byte for the read (exactly the same as the Byte Write command). The Start condition in the middle of the command will halt the decoding of a Write command, but will set the internal address counter in preparation for the second half of the command. After the Start condition, the Bus Controller issues a second control byte with the R/W bit set to "1", after which the SLG47512/13 issues an Acknowledge bit, followed by the requested eight data bits.

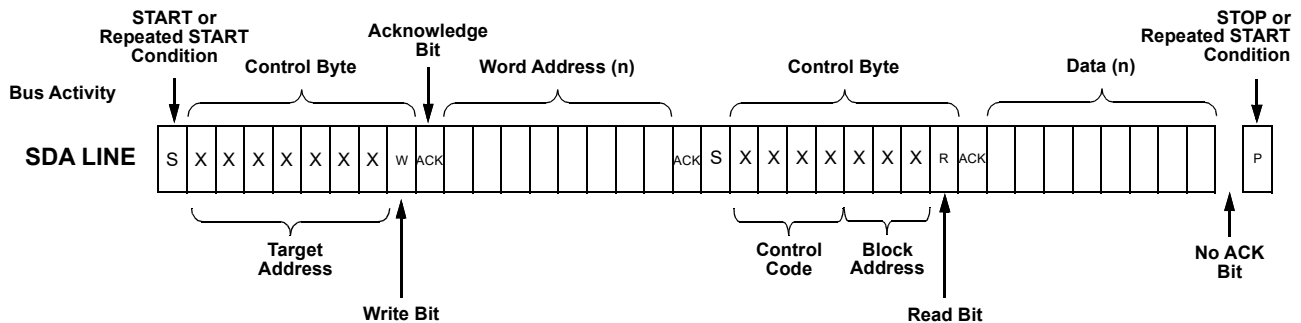

SLG47512/13

Low Voltage GreenPAK Programmable Mixed-Signal Matrix

15.4.5 Sequential Read Command

The Sequential Read command is initiated in the same way as a Random Read command, except that once the SLG47512/13 transmits the first data byte, the Bus Controller issues an Acknowledge bit as opposed to a Stop condition in a random read. The Bus Controller can continue reading sequential bytes of data, and will terminate the command with a Stop condition.

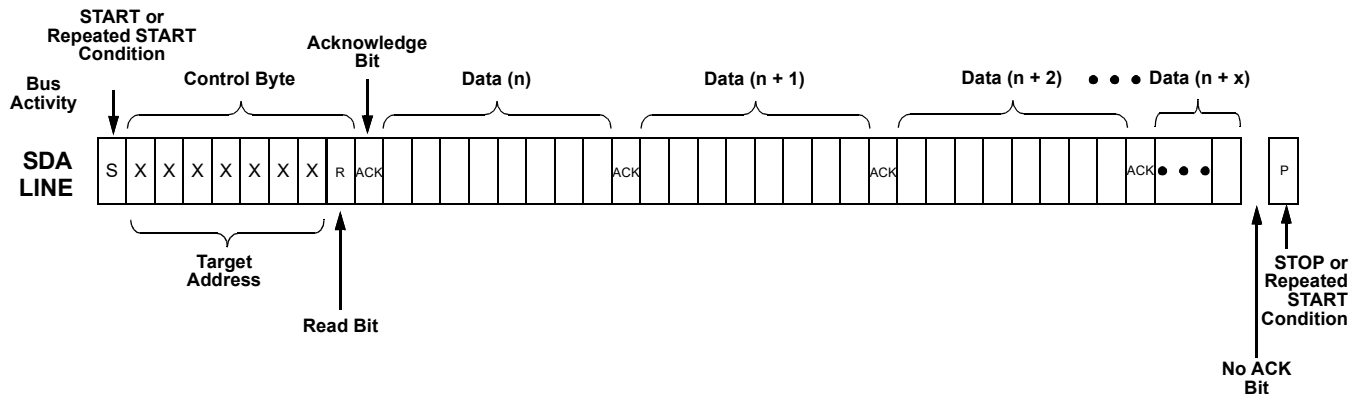


Figure 104: Sequential Read Command

15.4.6 I²C Serial Reset Command

If I²C serial communication is established with the device, it is possible to reset the device to initial power up conditions, including configuration of all macrocells, and all connections provided by the Connection Matrix. This is implemented by setting register [17:16] I²C reset bit to "1", which causes the device to re-enable the Power-On Reset (POR) sequence, including the reload of all register data from NVM. During the POR sequence, the outputs of the device will be in tri-state. After the reset has taken place, the contents of register [17:16] will be set to "0" automatically. Figure 105 illustrates the sequence of events for this reset function.

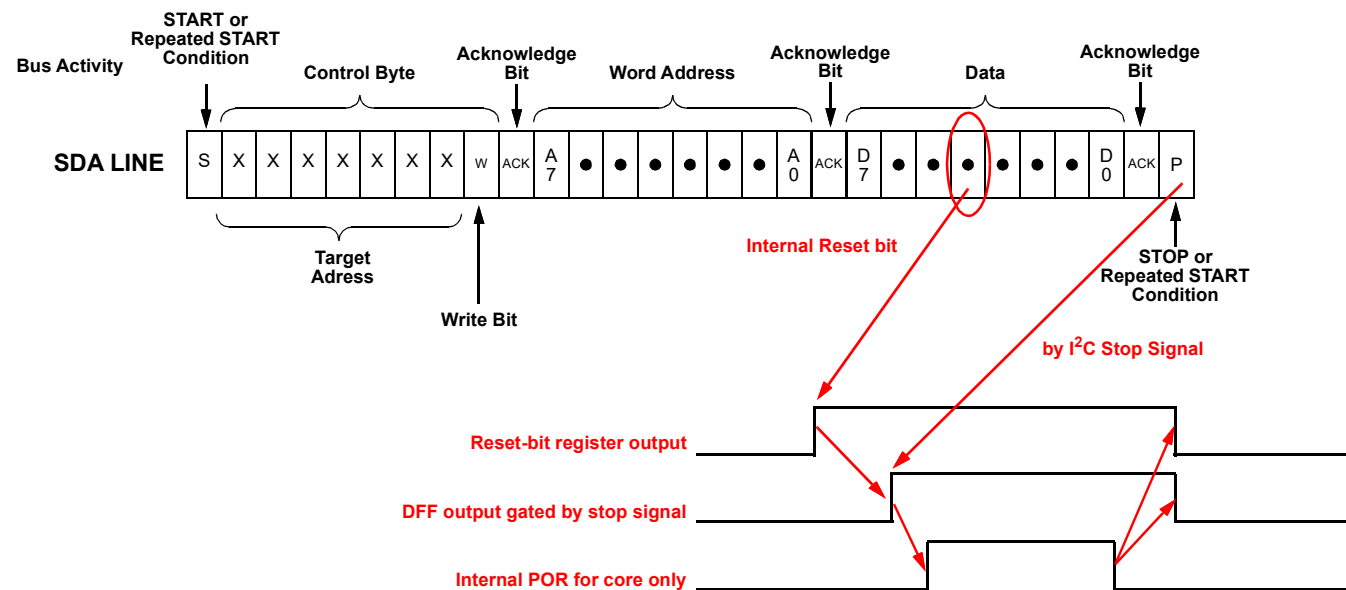


Figure 105: Reset Command Timing

SLG47512/13

Low Voltage GreenPAK Programmable Mixed-Signal Matrix

15.4.7 I²C Additional Options

When Output latching during I²C write, register fc[1425] = 1 allows all PINs output value to be latched until I²C write is done. It will protect the output change due to configuration process during I²C write in case multiple register bytes are changed. Inputs and internal macrocells retain their status during I²C write.

If the user sets GPIO0 and GPIO1 function to a selection other than SDA and SCL, all access via I²C will be disabled.

Note: Any write commands that come to the device via I²C that are not blocked, based on the protection bits, will change the contents of the RAM register bits that mirror the NVM bits. These write commands will not change the NVM bits themselves, and a POR event will restore the register bits to original programmed contents of the NVM.

See section 17 for detailed information on all registers.

15.4.8 Reading Counter Data via I²C

The current count value in all counters in the device can be read via I²C.

15.4.9 I²C Byte Write Bit Masking

The I²C macrocell inside SLG47512/13 supports masking of individual bits within a byte that is written to the RAM memory space. This function is supported across the entire RAM memory space. To implement this function, the user performs a Byte Write Command (see section 15.4.1 for details) on the I²C Byte Write Mask Register (address 0F6H) with the desired bit mask pattern. This sets a bit mask pattern for the target memory location that will take effect on the next Byte Write Command to this register byte. Any bit in the mask that is set to "1" in the I²C Byte Write Mask Register will mask the effect of changing that particular bit in the target register, during the next Byte Write Command. The contents of the I²C Byte Write Mask Register are reset (set to 00h) after valid Byte Write Command. If the next command received by the device is not a Byte Write Command, the effect of the bit masking function will be aborted, and the I²C Byte Write Mask Register will be reset with no effect. Figure 106 shows an example of this function.

User Actions

- Byte Write Command, Address = F6h, Data = 11110000b [sets mask bits]
- Byte Write Command, Address = 74h, Data = 10101010b [writes data with mask]

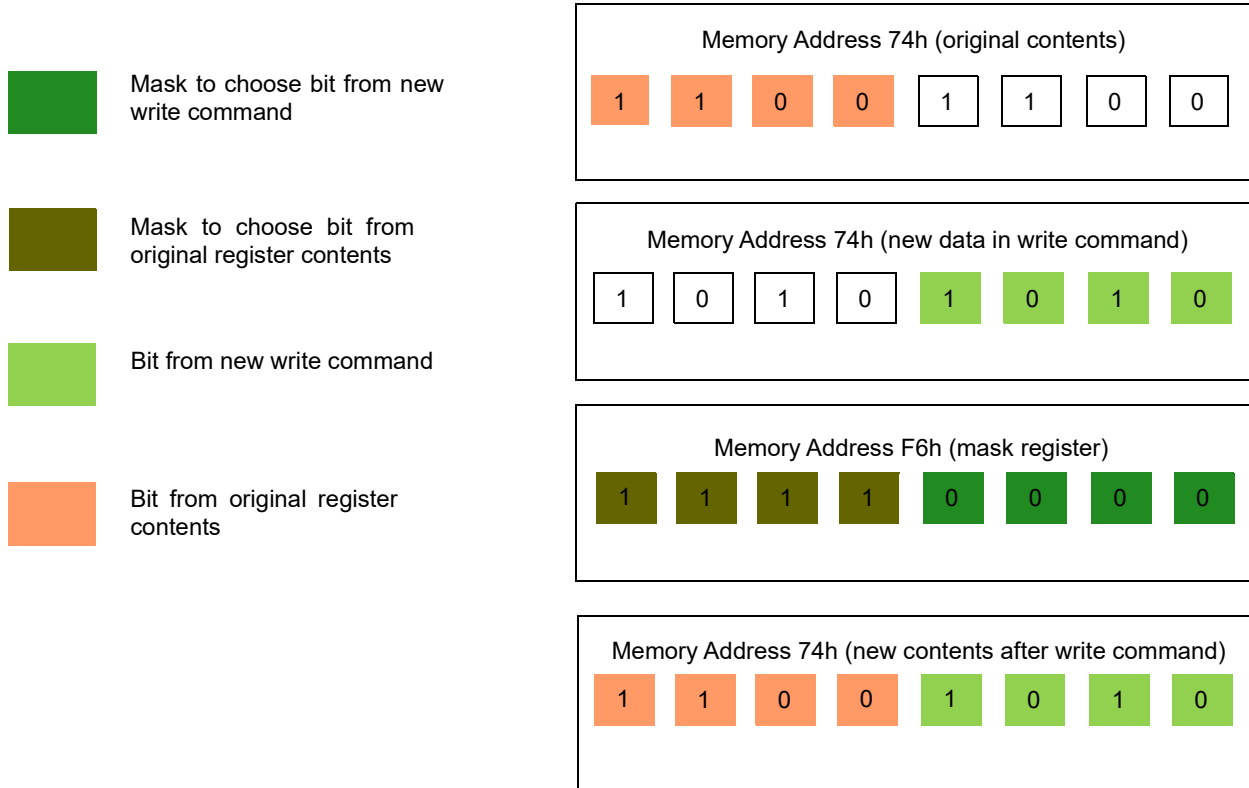


Figure 106: Example of I²C Byte Write Bit Masking

15.4.10 Writing a New Value to the Shift Register via I²C

The new value can be written to the Shift Register if low logic level presents at the CLK input of the macrocell. Otherwise, if the logic level at CLK input is high, the new value will be ignored.

It's recommended to perform the following actions to write the new value to the Shift Register:

- Read Shift Register value (Old_Value);
- Write new Shift Register value;
- Read Shift Register value (New_Value) and compare it with the result of the last read (Old_Value). If New_Value isn't equal to the Old_Value, the writing procedure was successful. Otherwise, if New_Value is equal to the Old_Value, the content of the Shift Register hasn't been updated (the logic level at the CLK input is high). I²C Controller should perform the following steps:
 - Connect the CLK input of the Shift Register to the GND (connect the corresponding matrix output to the matrix input x00);
 - Analyze the LSB, if the new value to be written to the Shift Register, for example xxxx xxx(y). y is the LSB of the 8-bit value to be written to the Shift Register.

If (y) is 0, then connect D input of the Shift Register to GND (connect the corresponding matrix output to the matrix input x00);

Low Voltage GreenPAK Programmable Mixed-Signal Matrix

If (y) is 1, then connect D input of the Shift Register to V_{DD} (connect the corresponding matrix output to the matrix input x3F);

- Shift the new value to one bit right and write it to the Shift Register, for example if the data to be written to the Shift Register is x5A (1010 0101), then the I²C Controller should write x52 (01010010) to the Shift Register.
- Connect CLK input of the Shift Register to its original source (change the matrix output setting from x00 to original source code). This will clock the Shift Register to one bit left.
- Connect D input of the Shift Register to its original source (change the matrix output setting from V_{DD} (x3F) or GND (x00) to the original source code).

15.5 I²C SERIAL COMMAND REGISTER MAP

There are seven read/write protect modes for the design sequence from being corrupted or copied. See [Table 37](#) for details.

Table 37: Read/Write Protection Options

Configurations	Protection Modes Configuration									Data Output From	Register Address
	Unlock	Partly Lock Read	Partly Lock Write	Partly Lock Read/Write	Partly Lock Read & Lock Write	Lock Read & Partly Lock Write	Lock Read	Lock Write	Lock Read/Write		
RPR[1:0]	00	01	00	01	01	10	10	00	10		
WPR[1:0]	00	00	01	01	10	01	00	10	10		
I ² C Write Mask Control Register (section 15.4.9)	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	Memory	00
I ² C Virtual Input Control Register (section 6.3)	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	Macro-cell	01
I ² C Reset Control Register (section 15.4.6)	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	Memory	02
I ² C Configuration Register	R/W	R/W	R	R	R	R	R/W	R	R	Memory	03~04
Matrix Output Configuration (section 6.2)	R/W	W	R	-	-	-	W	R	-	Memory	05~4E
Combination Function Macrocell Configuration	R/W	W	R	-	-	-	W	R	-	Memory	4F~6C
Multi-Function Macrocell Configuration	R/W	W	R	-	-	-	W	R	-	Memory	6D~A1
IO Configuration	R/W	W	R	-	-	-	W	R	-	Memory	A2~B2
OSC, ACMP, Vref Configuration	R/W	W	R	-	-	-	W	R	-	Memory	B3~C0

R/W	Allow Read and Write Data
W	Allow Write Data Only
R	Allow Read Data Only
-	The Data is protected for Read and Write

**Low Voltage GreenPAK Programmable
Mixed-Signal Matrix**

It is possible to read some data from macrocells, such as counter current value, connection matrix, and connection matrix virtual inputs. The I²C write will not have any impact on data in case data comes from macrocell output, except Connection Matrix Virtual Inputs. The silicon identification service bits allows identifying silicon family, its revision, and others.

See section [17](#) for detailed information on all registers.

16 Analog Temperature Sensor

The SLG47512/13 has an Analog Temperature Sensor (TS) with an output voltage linearly-proportional to the Centigrade temperature. The TS cell shares buffer with Vref 0, so it is impossible to use both cells simultaneously, its output can be connected directly to the GPIO or to the ACPM1_H positive input. Using buffer causes low-output impedance, linear output and makes interfacing to readout or control circuitry especially easy. The TS is rated to operate over a -40 °C to +85 °C temperature range. The error in the whole temperature range does not exceed $\pm 2.5\%$. TS output voltage variation over V_{DD} at constant temperature is less than $\pm 1.5\%$. When changing power-down source settings or enable temperature sensor settings in the Analog Temperature Sensor block, similar changes of these settings automatically occur in the Voltage Reference block. For more details refer to section 3.11.

The equation below calculates the typical analog voltage passed from the TS to the ACMPs' IN+ source input. It is important to note that there will be a chip to chip variation of about $\pm 2\text{ }^{\circ}\text{C}$.

$$V_{TS} = -1.95 \times T + 734$$

where:

V_{TS} (mV) - TS Output Voltage

T (°C) - Temperature

Temperature hysteresis can be setup by enabling the GreenPAK's internal ACMP hysteresis.

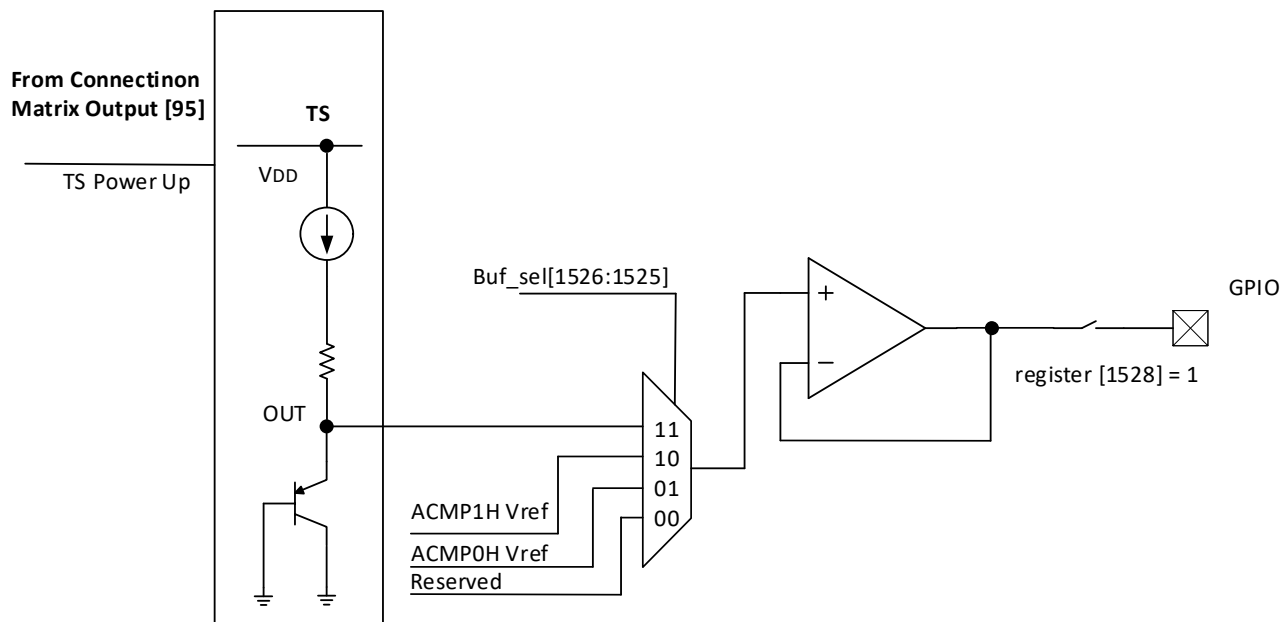


Figure 107: Analog Temperature Sensor Structure Diagram

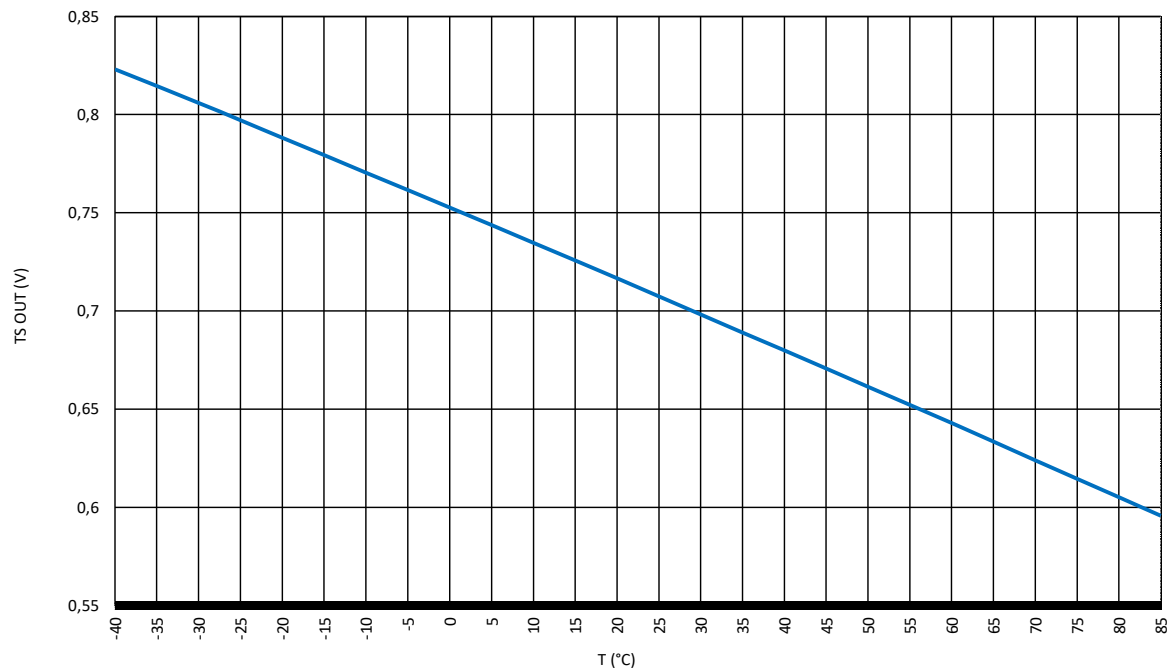


Figure 108: TS Output vs. Temperature, $V_{DD} = 1.0\text{ V to }1.65\text{ V}$

17 Register Definitions

17.1 REGISTER MAP

Table 38: Register Map

Address		Signal Function	Register Bit Definition
Byte	Register Bit		
Matrix Output			
0	0	I ² C Write Mask Control	Host write data bit-mask: 0: write 1: mask (don't change) (This mask does not effect on NVM write and masks register update)
	1		
	2		
	3		
	4		
	5		
	6		
	7		
1	8	I ² C Virtual Input Control	Host Virtual Input Bit 0
	9		Host Virtual Input Bit 1
	10		Host Virtual Input Bit 2
	11		Host Virtual Input Bit 3
	12		Host Virtual Input Bit 4
	13		Host Virtual Input Bit 5
	14		Host Virtual Input Bit 6
	15		Host Virtual Input Bit 7
2	16	I ² C Reset Control	0: Normal 1: Reset (Self-Clear Bit. Shuts down device (simulates a Chip POR))
	17		Reserved
	18		Reserved
	19		Reserved
	20		Reserved
	21		Reserved
	22		Reserved
	23		Reserved
3	24	I ² C Target Address LSB	Bits [30:24] are I ² C Target Address Bits [30:27] can be selected optionally to GPIOx with I2C_CONTROL_CODE_BITx_SEL configuration
	25	I ² C Target Address	
	26	I ² C Target Address	
	27	I ² C Target Address	
	28	I ² C Target Address	
	29	I ² C Target Address	
	30	I ² C Target Address MSB	
	31	I ² C Mode Enable	0: I ² C mode disable 1: I ² C mode enable

SLG47512/13

Low Voltage GreenPAK Programmable Mixed-Signal Matrix

Table 38: Register Map (Continued)

Address		Signal Function	Register Bit Definition
Byte	Register Bit		
4	32	I ² C CONTROL CODE BIT3 SEL	0: Used I2C_CONTROL_CODE Value 1: Use SLA_0 Value
	33	I ² C CONTROL CODE BIT4 SEL	0: Used I2C_CONTROL_CODE Value 1: Use SLA_1 Value
	34	I ² C CONTROL CODE BIT5 SEL	0: Used I2C_CONTROL_CODE Value 1: Use SLA_2 Value
	35	I ² C CONTROL CODE BIT6 SEL	0: Used I2C_CONTROL_CODE Value 1: Use SLA_3 Value
	36		Reserved
	37		Reserved
	38		Reserved
	39		Reserved
5	40	2-bit LUT0 & DFF0	OUT0: IN0 of 2-bit LUT0 or Clock Input of DFF0 or Clock Input of Shift_Reg0
	41		
	42		
	43		
	44		
	45		
	46		
	47		
6	48	2-bit LUT1 & DFF1	OUT1: IN1 of 2-bit LUT0 or Data Input of DFF0 or Data Input of Shift_Reg0
	49		
	50		
	51		
	52		
	53		
	54		
	55		
7	56	2-bit LUT1 & DFF1	OUT2: IN0 of 2-bit LUT1 or Clock Input of DFF1 or Clock Input of Shift_Reg1
	57		
	58		
	59		
	60		
	61		
	62		
	63		
8	64	2-bit LUT2 & DFF2	OUT3: IN1 of 2-bit LUT1 or Data Input of DFF1 or Data Input of Shift_Reg1
	65		
	66		
	67		
	68		
	69		
	70	2-bit LUT2 & DFF2	OUT4: IN0 of 2-bit LUT2 or Clock Input of DFF2 or Clock Input of Shift_Reg2
	71		
	72		
	73		
	74		
	75		

Table 38: Register Map (Continued)

Address		Signal Function	Register Bit Definition
Byte	Register Bit		
8	70	2-bit LUT2 & DFF2	OUT5: IN1 of 2-bit LUT2 or Data Input of DFF2 or Data Input of Shift_Reg2
	71		
9	72		
	73		
	74		
	75		
	76		OUT6: IN0 of 2-bit LUT3 or Clock Input of PGen0
	77		
	78		
	79		
	80		
A	81	2-bit LUT3 & PGen	OUT7: IN1 of 2-bit LUT3 or nRST of PGen0
	82		
	83		
	84		
	85		
	86		
	87		
B	88	3-bit LUT0 & DFF3	OUT8: IN0 of 3-bit LUT0 or Clock Input of DFF3 or Clock Input of Shift_Reg3
	89		
	90		
	91		
	92		
	93		OUT9: IN1 of 3-bit LUT0 or Data Input of DFF3 or Data Input of Shift_Reg3
	94		
	95		
	96		
	97		
C	98		OUT10: IN2 of 3-bit LUT0 or nRST(nSET) of DFF3 or nRST (nSET) of Shift_Reg3
	99		
	100		
	101		
	102		
	103		
	104	3-bit LUT1 & DFF4	OUT11: IN0 of 3-bit LUT1 or Clock Input of DFF4 or Clock Input of Shift_Reg4
D	105		
	106		
	107		
	108		
	109		
	110		
	111		

Table 38: Register Map (Continued)

Address		Signal Function	Register Bit Definition
Byte	Register Bit		
E	112	3-bit LUT1 & DFF4	OUT12: IN1 of 3-bit LUT1 or Data Input of DFF4 or Data Input of Shift_Reg4
	113		
	114		
	115		
	116		
	117		
	118		
F	119	3-bit LUT1 & DFF4	OUT13: IN2 of 3-bit LUT1 or nRST (nSET) of DFF4 or nRST(nSET) of Shift_Reg4
	120		
	121		
	122		
	123		
	124		
	125		
10	126	3-bit LUT2 & DFF5	OUT14: IN0 of 3-bit LUT2 or Clock Input of DFF5 or Clock Input of Shift_Reg5
	127		
	128		
	129		
	130		
	131		
	132		
11	133	3-bit LUT2 & DFF5	OUT15: IN1 of 3-bit LUT2 or Data Input of DFF5 or Data Input of Shift_Reg5
	134		
	135		
	136		
	137		
	138		
	139		
12	140	3-bit LUT3 & DFF6	OUT16: IN2 of 3-bit LUT2 or nRST(nSET) of DFF5 or nRST(nSET) of Shift_Reg5
	141		
	142		
	143		
	144		
	145		
	146		
13	147	3-bit LUT3 & DFF6	OUT17: IN0 of 3-bit LUT3 or Clock Input of DFF6 or Clock Input of Shift_Reg6
	148		
	149		
	150		
	151		
	152		
	153		
13	154	3-bit LUT3 & DFF6	OUT18: IN1 of 3-bit LUT3 or Data Input of DFF6 or Data Input of Shift_Reg6
	155		
	156		
	157		
	158		
	159		
	159		
13	152	3-bit LUT3 & DFF6	OUT19: IN2 of 3-bit LUT3 or nRST(nSET) of DFF6 or nRST(nSET) of Shift_Reg6
	153		
	154		
	155		
	156		
	157		
	158		
	159		

**Low Voltage GreenPAK Programmable
Mixed-Signal Matrix**
Table 38: Register Map (Continued)

Address		Signal Function	Register Bit Definition
Byte	Register Bit		
14	160	3-bit LUT4 & DFF7	OUT20: IN0 of 3-bit LUT4 or Clock Input of DFF7 or Clock Input of Shift_Reg7
	161		
	162		
	163		
	164		
	165		
	166		
	167		
15	168		OUT21: IN1 of 3-bit LUT4 or Data Input of DFF7 or Data Input of Shift_Reg7
	169		
	170		
	171		OUT22: IN2 of 3-bit LUT4 or nRST(nSET) of DFF7 or nRST(nSET) of Shift_Reg7
	172		
	173		
	174		
	175		
16	176		OUT23: IN0 of 3-bit LUT5 or Clock Input of DFF8 or Clock Input of Shift_Reg8
	177		
	178		
	179		
	180		
	181		
	182		
	183		
17	184	3-bit LUT5 & DFF8	OUT24: IN1 of 3-bit LUT5 or Data Input of DFF8 or Data Input of Shift_Reg8
	185		
	186		
	187		
	188		
	189		
	190		
	191		OUT25: IN2 of 3-bit LUT5 or nRST(nSET) of DFF8 or nRST(nSET) of Shift_Reg8
	192		
	193		
	194		
	195		
	196		
	197		
18	198		OUT26: IN0 of 3-bit LUT6 or Clock Input of DFF9 or Clock Input of Shift_Reg9
	199		
	200		
	201		
	202		
	203		
	204		
19	205	3-bit LUT6 & DFF9	OUT27: IN1 of 3-bit LUT6 or Data Input of DFF9 or Data Input of Shift_Reg9
	206		
	207		
	208		
	209		
	210		
	211		

Table 38: Register Map (Continued)

Address		Signal Function	Register Bit Definition
Byte	Register Bit		
1A	208	3-bit LUT6 & DFF9	OUT28: IN2 of 3-bit LUT6 or nRST(nSET) of DFF9 or nRST(nSET) of Shift_Reg9
	209		
	210		
	211		
	212		
	213		
	214		
1B	215	3-bit LUT7 & DFF10	OUT29: IN0 of 3-bit LUT7 or Clock Input of DFF10 or Clock Input of Shift_Reg10
	216		
	217		
	218		
	219		
	220		
	221		
1C	222		OUT30: IN1 of 3-bit LUT7 or Data Input of DFF10 or Data Input of Shift_Reg10
	223		
	224		
	225		
	226		
	227		
	228		
1D	229		OUT31: IN2 of 3-bit LUT7 or nRST(nSET) of DFF10 or nRST(nSET) of Shift_Reg10
	230		
	231		
	232		
	233		
	234		
	235		
1E	236	3-bit LUT8 & DFF11	OUT32: IN0 of 3-bit LUT8 or Clock Input of DFF11 or Clock Input of Shift_Reg11
	237		
	238		
	239		
	240		
	241		
	242		
1F	243		OUT33: IN1 of 3-bit LUT8 or Data Input of DFF11 or Data Input of Shift_Reg11
	244		
	245		
	246		
	247		
	248		
	249		
	248		OUT34: IN2 of 3-bit LUT8 or nRST(nSET) of DFF11 or nRST(nSET) of Shift_Reg11
	249		

SLG47512/13

Low Voltage GreenPAK Programmable Mixed-Signal Matrix

Table 38: Register Map (Continued)

Address		Signal Function	Register Bit Definition
Byte	Register Bit		
1F	250	3-bit LUT9 & DFF12	OUT35: IN0 of 3-bit LUT9 or Clock Input of DFF12 or Clock Input of Shift_Reg12
	251		
	252		
	253		
	254		
	255		
20	256		OUT36: IN1 of 3-bit LUT9 or Data Input of DFF12 or Data Input of Shift_Reg12
	257		
	258		
	259		
	260		
	261		
21	262		OUT37: IN2 of 3-bit LUT9 or nRST(nSET) of DFF12 or nRST(nSET) of Shift_Reg12
	263		
	264		
	265		
	266		
	267		
22	268	4-bit LUT0 & DFF13	OUT38: IN0 of 4-bit LUT0 or Clock Input of DFF13 or Clock Input of Shift_Reg13
	269		
	270		
	271		
	272		
	273		
23	274		OUT39: IN1 of 4-bit LUT0 or Data Input of DFF13 or Data Input of Shift_Reg13
	275		
	276		
	277		
	278		
	279		
24	280		OUT40: IN2 of 4-bit LUT0 or nRST(nSET) of DFF13 or nRST(nSET) of Shift_Reg13
	281		
	282		
	283		
	284		
	285		
	286		OUT41: IN3 of 4-bit LUT0 or Clock Enable of DFF13 or Clock Enable of Shift_Reg13
	287		
	288		
	289		
	290		
	291		

SLG47512/13

Low Voltage GreenPAK Programmable Mixed-Signal Matrix

Table 38: Register Map (Continued)

Address		Signal Function	Register Bit Definition
Byte	Register Bit		
24	292	Multi-function0	OUT42: IN0 of MLT0_LUT4_1 or Clock Input of DFF14 or Delay0 Input (or Counter0 nRST Input)
	293		
	294		
	295		
25	296		OUT43: IN1 of MLT0_LUT4_1 or nRST of DFF14 or Delay0 Input (or Counter0 nRST Input or External Clock Source)
	297		
	298		
	299		
	300		
	301		
26	302		OUT44: IN2 of IN2 of MLT0_LUT4_1 or nSET of DFF14 or KEEP of Delay0/Counter0
	303		
	304		
	305		
	306		
	307		
27	308		OUT45: IN3 of MLT0_LUT4_1 or Data Input of DFF14 or UP of Delay0/Counter0
	309		
	310		
	311		
	312		
	313		
28	314	Multi-function1	OUT46: IN0 of MLT1_LUT3_10 or Clock Input of DFF15 or Delay1 Input (or Counter1 nRST Input)
	315		
	316		
	317		
	318		
	319		
	320		OUT47: IN1 of MLT1_LUT3_10 or nRST(nSET) of DFF15 or Delay1 Input (or Counter1 nRST Input or External Clock Source)
	321		
	322		
	323		
	324		
	325		
	326		
	327		

**Low Voltage GreenPAK Programmable
Mixed-Signal Matrix**
Table 38: Register Map (Continued)

Address		Signal Function	Register Bit Definition
Byte	Register Bit		
29	328	Multi-function1	OUT48: IN2 of MLT1_LUT3_10 or Data Input of DFF15 or Delay1 Input (or Counter1 nRST Input)
	329		
	330		
	331		
	332		
	333		
	334		
2A	335	Multi-function2	OUT49: IN0 of MLT2_LUT3_11 or Clock Input of DFF16 or Delay2 Input (or Counter2 nRST Input)
	336		
	337		
	338		
	339		
	340		
	341		
2B	342		OUT50: IN1 of MLT2_LUT3_11 or nRST(nSET) of DFF16 or Delay2 Input (or Counter2 nRST Input or External Clock Source)
	343		
	344		
	345		
	346		
	347		
	348		
2C	349	OUT51: IN2 of MLT2_LUT3_11 or Data Input of DFF16 or Delay2 Input (or Counter2 nRST Input)	
	350		
	351		
	352		
	353		
	354		
	355		
2D	356	OUT52: IN0 of MLT3_LUT3_12 or Clock Input of DFF17 or Delay3 Input (or Counter3 nRST Input)	
	357		
	358		
	359		
	360		
	361		
	362		
2E	363	OUT53: IN1 of MLT3_LUT3_12 or nRST(nSET) of DFF17 or Delay3 Input (or Counter3 nRST Input or External Clock Source)	
	364		
	365		
	366		
	367		
	368		
	369		
2E	370	Multi-function4	OUT54: IN2 of MLT3_LUT3_12 or Data Input of DFF17 or Delay3 Input (or Counter3 nRST Input)
	371		
	372		
	373		
	374		
	375		
	376		

**Low Voltage GreenPAK Programmable
Mixed-Signal Matrix**
Table 38: Register Map (Continued)

Address		Signal Function	Register Bit Definition
Byte	Register Bit		
2F	376	Multi-function4	OUT56: IN1 of MLT4_LUT3_13 or nRST(nSET) of DFF18 or Delay4 Input (or Counter4 nRST Input or External Clock Source)
	377		
	378		
	379		
	380		
	381		
	382		
30	383	Multi-function5	OUT57: IN2 of MLT4_LUT3_13 or Data Input of DFF18 or Delay4 Input (or Counter4 nRST Input)
	384		
	385		
	386		
	387		
	388		
	389		
31	390	Multi-function6	OUT58: IN0 of MLT5_LUT3_14 or Clock Input of DFF19 or Delay5 Input (or Counter5 nRST Input)
	391		
	392		
	393		
	394		
	395		
	396		
32	397	Multi-function7	OUT59: IN1 of MLT5_LUT3_14 or nRST(nSET) of DFF19 or Delay5 Input (or Counter5 nRST Input or External Clock Source)
	398		
	399		
	400		
	401		
	402		
	403		
33	404	Multi-function8	OUT60: IN2 of MLT5_LUT3_14 or Data Input of DFF19 or Delay5 Input (or Counter5 nRST Input)
	405		
	406		
	407		
	408		
	409		
	410		
34	411	Multi-function9	OUT61: IN0 of MLT6_LUT3_15 or Clock Input of DFF20 or Delay6 Input (or Counter6 nRST Input)
	412		
	413		
	414		
	415		
	416		
	417		
35	418	Multi-function10	OUT62: IN1 of MLT6_LUT3_15 or nRST(nSET) of DFF20 or Delay6 Input (or Counter6 nRST Input or External Clock Source)
	419		
	420		
	421		
	422		
	423		
	424		

**Low Voltage GreenPAK Programmable
Mixed-Signal Matrix**
Table 38: Register Map (Continued)

Address		Signal Function	Register Bit Definition
Byte	Register Bit		
35	424	Multi-function7	OUT64: IN0 of MLT7_LUT3_16 or Clock Input of DFF21 or Delay7 Input (or Counter7 nRST Input)
	425		
	426		
	427		
	428		
	429		
	430		
	431		OUT65: IN1 of MLT7_LUT3_16 or nRST(nSET) of DFF21 or Delay7 Input (or Counter7 nRST Input or External Clock Source)
	432		
	433		
	434		
	435		
	436		
	437		
36	438		OUT66: IN2 of MLT7_LUT3_16 or Data Input of DFF21 or Delay7 Input (or Counter7 nRST Input)
	439		
	440		
	441		
	442		
	443		
	444		
37	445	GPIO0	OUT67: GPIO0 Digital Output
	446		
	447		
	448		
	449		
	450		
	451		
38	452	GPIO1	OUT68: GPIO1 Digital Output
	453		
	454		
	455		
	456		
	457		
	458		
39	459	GPIO2	OUT69: GPIO2 Digital Output OE
	460		
	461		
	462		
	463		
	464		
	465		
3A	466	GPIO3	OUT70: GPIO2 Digital Output
	467		
	468		
	469		
	470		
	471		
	471		
3A	466	GPIO3	OUT71: GPIO3 Digital Output OE
	467		
	468		
	469		
	470		
	471		
	471		

Table 38: Register Map (Continued)

Address		Signal Function	Register Bit Definition
Byte	Register Bit		
3B	472	GPIO3	OUT72: GPIO3 Digital Output
	473		
	474		
	475		
	476		
	477		
	478		
3C	479	GPIO4	OUT73: GPIO4 Digital Output OE
	480		
	481		
	482		
	483		
	484		
	485		
3D	486	GPIO5	OUT74: GPIO4 Digital Output
	487		
	488		
	489		
	490		
	491		
	492		
3E	493	GPIO6	OUT75: GPIO5 Digital Output OE
	494		
	495		
	496		
	497		
	498		
	499		
3F	500	GPIO7	OUT76: GPIO5 Digital Output
	501		
	502		
	503		
	504		
	505		
	506		
40	507	GPIO8	OUT77: GPIO6 Digital Output OE
	508		
	509		
	510		
	511		
	512		
	513		
41	514	GPIO9	OUT78: GPIO6 Digital Output
	515		
	516		
	517		
	518		
	519		
	520		

SLG47512/13

Low Voltage GreenPAK Programmable Mixed-Signal Matrix

Table 38: Register Map (Continued)

Address		Signal Function	Register Bit Definition
Byte	Register Bit		
41	520	GPIO7	OUT80: GPIO7 Digital Output
	521		
	522		
	523		
	524		
	525		
	526		
42	527	GPIO8	OUT81: GPIO8 Digital Output OE
	528		
	529		
	530		
	531		
	532		
	533		
43	534	GPIO9	OUT82: GPIO8 Digital Output
	535		
	536		
	537		
	538		
	539		
	540		
44	541	GPIO10	OUT83: GPIO9 Digital Output OE (16-PIN Version)
	542		
	543		
	544		
	545		
	546		
	547		
45	548	GPIO11	OUT84: GPIO9 Digital Output (16-PIN Version)
	549		
	550		
	551		
	552		
	553		
	554		
46	555	GPIO12	OUT85: GPIO10 Digital Output OE (16-PIN Version)
	556		
	557		
	558		
	559		
	560		
	561		
47	562	GPIO13	OUT86: GPIO10 Digital Output (16-PIN Version)
	563		
	564		
	565		
	566		
	567		
	568		
48	569	GPIO14	OUT87: GPIO11 Digital Output OE (16-PIN Version)
	570		
	571		
	572		
	573		
	574		
	575		

SLG47512/13

Low Voltage GreenPAK Programmable Mixed-Signal Matrix

Table 38: Register Map (Continued)

Address		Signal Function	Register Bit Definition
Byte	Register Bit		
47	568	GPIO11	OUT88: GPIO11 Digital Output (16-PIN Version)
	569		
	570		
	571		
	572		
	573		
	574		
48	575	GPIO12	OUT89: GPIO12 Digital Output OE (16-PIN Version)
	576		
	577		
	578		
	579		
	580		
	581		
49	582	Filter/Edge detect	OUT90: GPIO12 Digital Output (16-PIN Version)
	583		
	584		
	585		
	586		
	587		
	588		
4A	589	Filter/Edge detect	OUT91: Filter/Edge detect input
	590		
	591		
	592		
	593		
	594		
	595		
4B	596	Programmable delay/edge detect	OUT92: Programmable delay/edge detect input
	597		
	598		
	599		
	600		
	601		
	602		
4C	603	ACMP0H	OUT93: Power Up of ACMP0_H
	604		
	605		
	606		
	607		
	608		
	609		
4C	610	ACMP1H	OUT94: Power Up of ACMP1_H
	611		
	612		
	613		
	614		
	615		
4C	616	Temp sensor	OUT95: Temp sensor, Vref Out_0 Power Up
	617		
	618		
	619		
	620		
	621		
	622		

**Low Voltage GreenPAK Programmable
Mixed-Signal Matrix**
Table 38: Register Map (Continued)

Address		Signal Function	Register Bit Definition
Byte	Register Bit		
4D	616	OSC0	OUT96: Oscillator0 (LFOSC) ENABLE
	617		
	618		
	619		
	620		
	621		
	622		
4E	623	OSC1	OUT97: Oscillator1 (RINGOSC) ENABLE
	624		
	625		
	626		
	627		
	628		
	629		
4F	630	Reserved	
	631	Reserved	
	632	LUT2_0_DFF0_SHR0	2-bit LUT0 bit[0]/Shift_Reg0 bit[0]
	633		2-bit LUT0 bit[1]/Shift_Reg0 bit[1]
	634		2-bit LUT0 bit[2]/Shift_Reg0 bit[2]
	635		2-bit LUT0 bit[3]/DFF0 /Shift_Reg0 bit[3]
50	636	LUT2_1_DFF1_SHR1	2-bit LUT1 bit[0]/Shift_Reg1 bit[0]
	637		2-bit LUT1 bit[1]/Shift_Reg1 bit[1]
	638		2-bit LUT1 bit[2]/Shift_Reg1 bit[2]
	639		2-bit LUT1 bit[3]/DFF1 /Shift_Reg1 bit[3]
	640	LUT2_2_DFF2_SHR2	2-bit LUT2 bit[0]/Shift_Reg2 bit[0]
	641		2-bit LUT2 bit[1]/Shift_Reg2 bit[1]
	642		2-bit LUT2 bit[2]/Shift_Reg2 bit[2]
	643		2-bit LUT2 bit[3]/DFF2 /Shift_Reg2 bit[3]
51	644	LUT2_3_PGEN0	2-bit LUT3 bit[0]/PGEN0 Size bit [0]
	645		2-bit LUT3 bit[1]/PGEN0 Size bit [1]
	646		2-bit LUT3 bit[2]/PGEN0 Size bit [2]
	647		2-bit LUT3 bit[3]/PGEN0 Size bit [3]
	648	LUT3_0_DFF3_SHR3	3-bit LUT0 bit[0]/Shift_Reg3 bit[0]
	649		3-bit LUT0 bit[1]/Shift_Reg3 bit[1]
	650		3-bit LUT0 bit[2]/Shift_Reg3 bit[2]
	651		3-bit LUT0 bit[3]/Shift_Reg3 bit[3]
	652		3-bit LUT0 bit[4]/Shift_Reg3 bit[4]
	653		3-bit LUT0 bit[5]/Shift_Reg3 bit[5]
	654		3-bit LUT0 bit[6]/Shift_Reg3 bit[6]
52	655		3-bit LUT0 bit[7]/DFF3/Shift_Reg3 bit[7]
	656	LUT3_1_DFF4_SHR4	3-bit LUT1 bit[0]/Shift_Reg4 bit[0]
	657		3-bit LUT1 bit[1]/Shift_Reg4 bit[1]
	658		3-bit LUT1 bit[2]/Shift_Reg4 bit[2]
	659		3-bit LUT1 bit[3]/Shift_Reg4 bit[3]
	660		3-bit LUT1 bit[4]/Shift_Reg4 bit[4]
	661		3-bit LUT1 bit[5]/Shift_Reg4 bit[5]
	662		3-bit LUT1 bit[6]/Shift_Reg4 bit[6]
	663		3-bit LUT1 bit[7]/DFF4/Shift_Reg4 bit[7]

**Low Voltage GreenPAK Programmable
Mixed-Signal Matrix**
Table 38: Register Map (Continued)

Address		Signal Function	Register Bit Definition
Byte	Register Bit		
53	664	LUT3_2_DFF5_SHR5	3-bit LUT2 bit[0]/Shift_Reg5 bit[0]
	665		3-bit LUT2 bit[1]/Shift_Reg5 bit[1]
	666		3-bit LUT2 bit[2]/Shift_Reg5 bit[2]
	667		3-bit LUT2 bit[3]/Shift_Reg5 bit[3]
	668		3-bit LUT2 bit[4]/Shift_Reg5 bit[4]
	669		3-bit LUT2 bit[5]/Shift_Reg5 bit[5]
	670		3-bit LUT2 bit[6]/Shift_Reg5 bit[6]
	671		3-bit LUT2 bit[7]/DFF5/Shift_Reg5 bit[7]
54	672	LUT3_3_DFF6_SHR6	3-bit LUT3 bit[0]/Shift_Reg6 bit[0]
	673		3-bit LUT3 bit[1]/Shift_Reg6 bit[1]
	674		3-bit LUT3 bit[2]/Shift_Reg6 bit[2]
	675		3-bit LUT3 bit[3]/Shift_Reg6 bit[3]
	676		3-bit LUT3 bit[4]/Shift_Reg6 bit[4]
	677		3-bit LUT3 bit[5]/Shift_Reg6 bit[5]
	678		3-bit LUT3 bit[6]/Shift_Reg6 bit[6]
	679		3-bit LUT3 bit[7]/DFF6/Shift_Reg6 bit[7]
55	680	LUT3_4_DFF7_SHR7	3-bit LUT4 bit[0]/Shift_Reg7 bit[0]
	681		3-bit LUT4 bit[1]/Shift_Reg7 bit[1]
	682		3-bit LUT4 bit[2]/Shift_Reg7 bit[2]
	683		3-bit LUT4 bit[3]/Shift_Reg7 bit[3]
	684		3-bit LUT4 bit[4]/Shift_Reg7 bit[4]
	685		3-bit LUT4 bit[5]/Shift_Reg7 bit[5]
	686		3-bit LUT4 bit[6]/Shift_Reg7 bit[6]
	687		3-bit LUT4 bit[7]/DFF7/Shift_Reg7 bit[7]
56	688	LUT3_5_DFF8_SHR8	3-bit LUT5 bit[0]/Shift_Reg8 bit[0]
	689		3-bit LUT5 bit[1]/Shift_Reg8 bit[1]
	690		3-bit LUT5 bit[2]/Shift_Reg8 bit[2]
	691		3-bit LUT5 bit[3]/Shift_Reg8 bit[3]
	692		3-bit LUT5 bit[4]/Shift_Reg8 bit[4]
	693		3-bit LUT5 bit[5]/Shift_Reg8 bit[5]
	694		3-bit LUT5 bit[6]/Shift_Reg8 bit[6]
	695		3-bit LUT5 bit[7]/DFF8/Shift_Reg8 bit[7]
57	696	LUT3_6_DFF9_SHR9	3-bit LUT6 bit[0]/Shift_Reg9 bit[0]
	697		3-bit LUT6 bit[1]/Shift_Reg9 bit[1]
	698		3-bit LUT6 bit[2]/Shift_Reg9 bit[2]
	699		3-bit LUT6 bit[3]/Shift_Reg9 bit[3]
	700		3-bit LUT6 bit[4]/Shift_Reg9 bit[4]
	701		3-bit LUT6 bit[5]/Shift_Reg9 bit[5]
	702		3-bit LUT6 bit[6]/Shift_Reg9 bit[6]
	703		3-bit LUT6 bit[7]/DFF9/Shift_Reg9 bit[7]
58	704	LUT3_7_DFF10_SHR10	3-bit LUT7 bit[0]/Shift_Reg10 bit[0]
	705		3-bit LUT7 bit[1]/Shift_Reg10 bit[1]
	706		3-bit LUT7 bit[2]/Shift_Reg10 bit[2]
	707		3-bit LUT7 bit[3]/Shift_Reg10 bit[3]
	708		3-bit LUT7 bit[4]/Shift_Reg10 bit[4]
	709		3-bit LUT7 bit[5]/Shift_Reg10 bit[5]
	710		3-bit LUT7 bit[6]/Shift_Reg10 bit[6]
	711		3-bit LUT7 bit[7]/DFF10/Shift_Reg10 bit[7]

**Low Voltage GreenPAK Programmable
Mixed-Signal Matrix**
Table 38: Register Map (Continued)

Address		Signal Function	Register Bit Definition
Byte	Register Bit		
59	712	LUT3_8_DFF11_SHR11	3-bit LUT8 bit[0]/Shift_Reg11 bit[0]
	713		3-bit LUT8 bit[1]/Shift_Reg11 bit[1]
	714		3-bit LUT8 bit[2]/Shift_Reg11 bit[2]
	715		3-bit LUT8 bit[3]/Shift_Reg11 bit[3]
	716		3-bit LUT8 bit[4]/Shift_Reg11 bit[4]
	717		3-bit LUT8 bit[5]/Shift_Reg11 bit[5]
	718		3-bit LUT8 bit[6]/Shift_Reg11 bit[6]
	719		3-bit LUT8 bit[7]/DFF11/Shift_Reg11 bit[7]
5A	720	LUT3_9_DFF12_SHR12	3-bit LUT9 bit[0]/Shift_Reg12 bit[0]
	721		3-bit LUT9 bit[1]/Shift_Reg12 bit[1]
	722		3-bit LUT9 bit[2]/Shift_Reg12 bit[2]
	723		3-bit LUT9 bit[3]/Shift_Reg12 bit[3]
	724		3-bit LUT9 bit[4]/Shift_Reg12 bit[4]
	725		3-bit LUT9 bit[5]/Shift_Reg12 bit[5]
	726		3-bit LUT9 bit[6]/Shift_Reg12 bit[6]
	727		3-bit LUT9 bit[7]/DFF12/Shift_Reg12 bit[7]
5B	728	LUT4_0_DFF13_SHR13	4-bit LUT0 bit[0]/Shift_Reg13 bit[0]
	729		4-bit LUT0 bit[1]/Shift_Reg13 bit[1]
	730		4-bit LUT0 bit[2]/Shift_Reg13 bit[2]
	731		4-bit LUT0 bit[3]/Shift_Reg13 bit[3]
	732		4-bit LUT0 bit[4]/Shift_Reg13 bit[4]
	733		4-bit LUT0 bit[5]/Shift_Reg13 bit[5]
	734		4-bit LUT0 bit[6]/Shift_Reg13 bit[6]
	735		4-bit LUT0 bit[7]/Shift_Reg13 bit[7]
5C	736		4-bit LUT0 bit[8]/Shift_Reg13 bit[8]
	737		4-bit LUT0 bit[9]/Shift_Reg13 bit[9]
	738		4-bit LUT0 bit[10]/Shift_Reg13 bit[10]
	739		4-bit LUT0 bit[11]/Shift_Reg13 bit[11]
	740		4-bit LUT0 bit[12]/Shift_Reg13 bit[12]
	741		4-bit LUT0 bit[13]/Shift_Reg13 bit[13]
	742		4-bit LUT0 bit[14]/Shift_Reg13 bit[14]
	743		4-bit LUT0 bit[15]/DFF13/Shift_Reg13 bit[15]
5D	744	LUT2_0_DFF0_SHR0 DFF/Latch/Shift or LUT Select	0: LUT 1: DFF/Latch/Shift Register
	745	LUT2_0_DFF0_SHR0 Shift Register Length	Value = 0 DFF/Latch Mode, Value = 1 Length = 2, Value = 2 Length = 3, Value = 3 Length = 4...
	746		
	747	LUT2_0_DFF0_SHR0 DFF or Latch Select	0: DFF 1: Latch (Only valid when LUT_SEL = 0 and SHR_LEN = 0)
	748	LUT2_0_DFF0_SHR0 Output Polarity Select	0: Non-inverted 1: Inverted
	749	LUT2_1_DFF1_SHR1 DFF/Latch/Shift or LUT Select	0: LUT 1: DFF/Latch/Shift Register
	750	LUT2_1_DFF1_SHR1 Shift Register Length	Value = 0 DFF/Latch Mode, Value = 1 Length = 2, Value = 2 Length = 3, Value = 3 Length = 4...
	751		

**Low Voltage GreenPAK Programmable
Mixed-Signal Matrix**
Table 38: Register Map (Continued)

Address		Signal Function	Register Bit Definition
Byte	Register Bit		
5E	752	LUT2_1_DFF1_SHR1 DFF or Latch Select	0: DFF 1: Latch (Only valid when LUT_SEL = 0 and SHR_LEN = 0)
	753	LUT2_1_DFF1_SHR1 Output Polarity Select	0: Non-inverted 1: Inverted
	754	LUT2_2_DFF2_SHR2 DFF/Latch/Shift or LUT Select	0: LUT 1: DFF/Latch/Shift Register
	755	LUT2_2_DFF2_SHR2 Shift Register Length	Value = 0 DFF/Latch Mode, Value = 1 Length = 2, Value = 2 Length = 3, Value = 3 Length = 4...
	756		
	757	LUT2_2_DFF2_SHR2 DFF or Latch Select	0: DFF 1: Latch (Only valid when LUT_SEL = 0 and SHR_LEN = 0)
	758	LUT2_2_DFF2_SHR2 Output Polarity Select	0: Non-inverted 1: Inverted
	759	LUT2_3_PGEN0 Function Select	0: LUT 1: Pattern Generator
5F	760	LUT2_3_PGEN0 Active Level Selection for RST/SET	0: Active Low Level for reset/set 1: Active High Level for reset/set
	761	LUT3_0_DFF3_SHR3 DFF/Latch/Shift or LUT Select	0: LUT 1: DFF/Latch/Shift Register
	762	LUT3_0_DFF3_SHR3 Shift Register Length	Value = 0 DFF/Latch Mode, Value = 1 Length = 2, Value = 2 Length = 3, Value = 3 Length = 4...
	763		
	764		
	765	LUT3_0_DFF3_SHR3 DFF or Latch Select	0: DFF 1: Latch (Only valid when LUT_SEL = 0 and SHR_LEN = 0)
	766	LUT3_0_DFF3_SHR3 Output Polarity Select	0: Non-inverted 1: Inverted
	767	LUT3_0_DFF3_SHR3 nRST/nSet Select	0: DFF/SHR use nRST 1: DFF/SHR use nSET (Only valid in DFF/Latch mode)
60	768	LUT3_0_DFF3_SHR3 Set/Reset active level select	0: Active Low 1: Active High
	769	LUT3_1_DFF4_SHR4 DFF/Latch/Shift or LUT Select	0: LUT 1: DFF/Latch/Shift Register
	770	LUT3_1_DFF4_SHR4 Shift Register Length	Value = 0 DFF/Latch Mode, Value = 1 Length = 2, Value = 2 Length = 3, Value = 3 Length = 4...
	771		
	772		
	773	LUT3_1_DFF4_SHR4 DFF or Latch Select. Only valid when LUT_SEL=0 and SHR_LEN=0	0: DFF 1: Latch (Only valid when LUT_SEL = 0 and SHR_LEN = 0)
	774	LUT3_1_DFF4_SHR4 Output Polarity Select	0: Non-inverted 1: Inverted
	775	LUT3_1_DFF4_SHR4 nRST/nSet Select	0: DFF/SHR use nRST 1: DFF/SHR use nSET (Only valid in DFF/Latch mode)

**Low Voltage GreenPAK Programmable
Mixed-Signal Matrix**
Table 38: Register Map (Continued)

Address		Signal Function	Register Bit Definition
Byte	Register Bit		
61	776	LUT3_1_DFF4_SHR4 Set/Reset active level select	0: Active Low 1: Active High
	777	LUT3_2_DFF5_SHR5 DFF/Latch/Shift or LUT Select	0: LUT 1: DFF/Latch/Shift Register
	778	LUT3_2_DFF5_SHR5 Shift Register Length	Value = 0 DFF/Latch Mode, Value = 1 Length = 2, Value = 2 Length = 3, Value = 3 Length = 4...
	779		
	780		
	781	LUT3_2_DFF5_SHR5 DFF or Latch Select	0: DFF 1: Latch (Only valid when LUT_SEL = 0 and SHR_LEN = 0)
	782	LUT3_2_DFF5_SHR5 Output Polarity Select	0: Non-inverted 1: Inverted
	783	LUT3_2_DFF5_SHR5 nRST/nSet Select	0: DFF/SHR use nRST 1: DFF/SHR use nSET (Only valid in DFF/Latch mode)
62	784	LUT3_2_DFF5_SHR5 Set/Reset active level select	0: Active Low 1: Active High
	785	LUT3_3_DFF6_SHR6 DFF/Latch/Shift or LUT Select	0: LUT 1: DFF/Latch/Shift Register
	786	LUT3_3_DFF6_SHR6 Shift Register Length	Value = 0 DFF/Latch Mode, Value = 1 Length = 2, Value = 2 Length = 3, Value = 3 Length = 4...
	787		
	788		
	789	LUT3_3_DFF6_SHR6 DFF or Latch Select	0: DFF 1: Latch (Only valid when LUT_SEL = 0 and SHR_LEN = 0)
	790	LUT3_3_DFF6_SHR6 Output Polarity Select	0: Non-inverted 1: Inverted
	791	LUT3_3_DFF6_SHR6 nRST/nSet Select	0: DFF/SHR use nRST 1: DFF/SHR use nSET (Only valid in DFF/Latch mode)
63	792	LUT3_3_DFF6_SHR6 Set/Reset active level select	0: Active Low 1: Active High
	793	LUT3_4_DFF7_SHR7 DFF/Latch/Shift or LUT Select	0: LUT 1: DFF/Latch/Shift Register
	794	LUT3_4_DFF7_SHR7 Shift Register Length	Value = 0 DFF/Latch Mode, Value = 1 Length = 2, Value = 2 Length = 3, Value = 3 Length = 4...
	795		
	796		
	797	LUT3_4_DFF7_SHR7 DFF or Latch Select	0: DFF 1: Latch (Only valid when LUT_SEL = 0 and SHR_LEN = 0)
	798	LUT3_4_DFF7_SHR7 Output Polarity Select	0: Non-inverted 1: Inverted
	799	LUT3_4_DFF7_SHR7 nRST/nSet Select	0: DFF/SHR use nRST 1: DFF/SHR use nSET (Only valid in DFF/Latch mode)
64	800	LUT3_4_DFF7_SHR7 Set/Reset active level select	0: Active Low 1: Active High

Low Voltage GreenPAK Programmable Mixed-Signal Matrix

Table 38: Register Map (Continued)

Address		Signal Function	Register Bit Definition
Byte	Register Bit		
64	801	LUT3_5_DFF8_SHR8 DFF/Latch/Shift or LUT Select	0: LUT 1: DFF/Latch/Shift Register
	802	LUT3_5_DFF8_SHR8 Shift Register Length	Value = 0 DFF/Latch Mode, Value = 1 Length = 2, Value = 2 Length = 3, Value = 3 Length = 4...
	803		
	804		
	805	LUT3_5_DFF8_SHR8 DFF or Latch Select.	0: DFF 1: Latch (Only valid when LUT_SEL = 0 and SHR_LEN = 0)
	806	LUT3_5_DFF8_SHR8 Output Polarity Select	0: Non-inverted 1: Inverted
	807	LUT3_5_DFF8_SHR8 nRST/nSet Select	0: DFF/SHR use nRST 1: DFF/SHR use nSET (Only valid in DFF/Latch mode)
65	808	LUT3_5_DFF8_SHR8 Set/Reset active level select	0: Active Low 1: Active High
	809	LUT3_6_DFF9_SHR9 DFF/Latch/Shift or LUT Select	0: LUT 1: DFF/Latch/Shift Register
	810	LUT3_6_DFF9_SHR9 Shift Register Length	Value = 0 DFF/Latch Mode, Value = 1 Length = 2, Value = 2 Length = 3, Value = 3 Length = 4...
	811		
	812		
	813	LUT3_6_DFF9_SHR9 DFF or Latch Select	0: DFF 1: Latch (Only valid when LUT_SEL = 0 and SHR_LEN = 0)
	814	LUT3_6_DFF9_SHR9 Output Polarity Select	0: Non-inverted 1: Inverted
	815	LUT3_6_DFF9_SHR9 nRST/nSet Select	0: DFF/SHR use nRST 1: DFF/SHR use nSET (Only valid in DFF/Latch mode)
66	816	LUT3_6_DFF9_SHR9 Set/Reset active level select	0: Active Low 1: Active High
	817	LUT3_7_DFF10_SHR10 DFF/Latch/Shift or LUT Select	0: LUT 1: DFF/Latch/Shift Register
	818	LUT3_7_DFF10_SHR10 Shift Register Length	Value = 0 DFF/Latch Mode, Value = 1 Length = 2, Value = 2 Length = 3, Value = 3 Length = 4...
	819		
	820		
	821	LUT3_7_DFF10_SHR10 DFF or Latch Select	0: DFF 1: Latch (Only valid when LUT_SEL = 0 and SHR_LEN = 0)
	822	LUT3_7_DFF10_SHR10 Output Polarity Select	0: Non-inverted 1: Inverted
	823	LUT3_7_DFF10_SHR10 nRST/nSet Select	0: DFF/SHR use nRST 1: DFF/SHR use nSET (Only valid in DFF/Latch mode)
67	824	LUT3_7_DFF10_SHR10 Set/Reset active level select	0: Active Low 1: Active High
	825	LUT3_8_DFF11_SHR11 DFF/Latch/Shift or LUT Select	0: LUT 1: DFF/Latch/Shift Register

**Low Voltage GreenPAK Programmable
Mixed-Signal Matrix**
Table 38: Register Map (Continued)

Address		Signal Function	Register Bit Definition
Byte	Register Bit		
67	826	LUT3_8_DFF11_SHR11 Shift Register Length	Value = 0 DFF/Latch Mode, Value = 1 Length = 2, Value = 2 Length = 3, Value = 3 Length = 4...
	827		
	828		
	829	LUT3_8_DFF11_SHR11 DFF or Latch Select	0: DFF 1: Latch (Only valid when LUT_SEL = 0 and SHR_LEN = 0)
	830	LUT3_8_DFF11_SHR11 Output Polarity Select	0: Non-inverted 1: Inverted
	831	LUT3_8_DFF11_SHR11 nRST/nSet Select	0: DFF/SHR use nRST 1: DFF/SHR use nSET (Only valid in DFF/Latch mode)
68	832	LUT3_8_DFF11_SHR11 Set/Reset active level select	0: Active Low 1: Active High
	833	LUT3_9_DFF12_SHR12 DFF/Latch/Shift or LUT Select	0: LUT 1: DFF/Latch/Shift Register
	834	LUT3_9_DFF12_SHR12 Shift Register Length	Value = 0 DFF/Latch Mode, Value = 1 Length = 2, Value = 2 Length = 3, Value = 3 Length = 4...
	835		
	836		
	837	LUT3_9_DFF12_SHR12 DFF or Latch Select	0: DFF 1: Latch (Only valid when LUT_SEL = 0 and SHR_LEN = 0)
	838	LUT3_9_DFF12_SHR12 Output Polarity Select	0: Non-inverted 1: Inverted
	839	LUT3_9_DFF12_SHR12 nRST/nSet Select	0: DFF/SHR use nRST 1: DFF/SHR use nSET (Only valid in DFF/Latch mode)
69	840	LUT3_9_DFF12_SHR12 Set/Reset active level select	0: Active Low 1: Active High
	841	LUT4_0_DFF13_SHR13 DFF/Latch/Shift or LUT Select	0: LUT 1: DFF/Latch/Shift Register
	842	LUT4_0_DFF13_SHR13 Shift Register Length	Value = 0 DFF/Latch Mode, Value = 1 Length = 2, Value = 2 Length = 3, Value = 3 Length = 4...
	843		
	844		
	845		
	846	LUT4_0_DFF13_SHR13 DFF or Latch Select	0: DFF 1: Latch (Only valid when LUT_SEL = 0 and SHR_LEN = 0)
	847	LUT4_0_DFF13_SHR13 Output Polarity Select	0: Non-inverted 1: Inverted
6A	848	LUT4_0_DFF13_SHR13 nRST/nSet Select	0: DFF/SHR use nRST 1: DFF/SHR use nSET (Only valid in DFF/Latch mode)
	849	LUT4_0_DFF13_SHR13 Set/Reset active level select	0: Active Low 1: Active High
	850	Reserved	
	851	Reserved	
	852	Reserved	
	853	Reserved	
	854	Reserved	
	855	Reserved	

**Low Voltage GreenPAK Programmable
Mixed-Signal Matrix**
Table 38: Register Map (Continued)

Address		Signal Function	Register Bit Definition
Byte	Register Bit		
6B	856	LUT2_3_PGEN0_DATA_LSB[7:0]	Pattern Data LSB
	857		
	858		
	859		
	860		
	861		
	862		
	863		
6C	864	LUT2_3_PGEN0_DATA_MSB[7:0]	Pattern Data MSB
	865		
	866		
	867		
	868		
	869		
	870		
	871		
6D	872	LUT4_1_DFF14_CNTDLY0	MLT0_LUT4_1 bit[0]/DFF14 DFF or Latch Select: 0: LUT: LUT[0]; DFF: DFF function 1: LUT: LUT[0]; DFF: Latch function
	873		MLT0_LUT4_1 bit[1]/DFF14 Output Select: 0: LUT: LUT[1]; DFF: Q output 1: LUT: LUT[1]; DFF: QB output
	874		MLT0_LUT4_1 bit[2]/DFF14 Initial Polarity Select: 0: LUT: LUT[2]; DFF: Low 1: LUT: LUT[2]; DFF: High
	875		MLT0_LUT4_1 bit[3]
	876		MLT0_LUT4_1 bit[4]
	877		MLT0_LUT4_1 bit[5]
	878		MLT0_LUT4_1 bit[6]
	879		MLT0_LUT4_1 bit[7]
6E	880		MLT0_LUT4_1 bit[8]
	881		MLT0_LUT4_1 bit[9]
	882		MLT0_LUT4_1 bit[10]
	883		MLT0_LUT4_1 bit[11]
	884		MLT0_LUT4_1 bit[12]
	885		MLT0_LUT4_1 bit[13]
	886		MLT0_LUT4_1 bit[14]
	887		MLT0_LUT4_1 bit[15]

**Low Voltage GreenPAK Programmable
Mixed-Signal Matrix**
Table 38: Register Map (Continued)

Address		Signal Function	Register Bit Definition
Byte	Register Bit		
6F	888	CNTDLY0 Function and Edge mode selection	0000: Both edge Delay
	889		0001: Falling edge Delay
	890		0010: Rising edge Delay
	891		0011: Prohibited
			0100: Both edge One Shot
			0101: Falling edge One Shot
			0110: Rising edge One Shot
0111: Prohibited			
1000: Both edge frequency detect			
1001: Falling edge frequency detect			
1010: Rising edge frequency detect			
1011: Prohibited			
1100: Both edge reset CNT			
1101: Falling edge reset CNT			
1110: Rising edge reset CNT			
1111: High level reset CNT			
892	MLT0_LUT4_1_DFF14 LUT/DFF Function Select	0: LUT 1: DFF/Latch	
893	CNT0 CNT/DLY output Polarity selection	0: Default Output 1: Inverted Output	
894	CNT0 DLY mode edge detection selection	0: Normal 1: Enable DLY mode edge detection	
895	CNT0 CNT mode synchronizer selection	0: Bypass synchronizer 1: Enable synchronizer (after two DFFs)	
70	896	LUT4_1_DFF14_CNTDLY0 Multi function selection	00: Single LUT or DFF (DLY input is low)
	897		01: Single CNT/DLY (DLY output connect to LUT/DFF)
	898	MLT0_LUT4_1_DFF14_CNTDLY0 CNT/DLY and LUT or DFF connection (only works when multi_func_sel_reg is 2'b10)	10: CNT/DLY connected to LUT or DFF
	899		11: LUT or DFF connected to CNT/DLY
			00: DLY input from matrix A; DLY output connected to LUT's In3 or DFF's D
			01: DLY input from matrix B; DLY output connected to LUT's In2 or DFF's nSET
	900	CNT0 CNT/DLY initial value selection	10: DLY input from matrix C; DLY output connected to LUT's In1 or DFF's nRST
	901		11: DLY input from matrix D; DLY output connected to LUT's In0 or DFF's CLK
902	00: Bypass the initial 01: Bypass the initial 10: Initial 0 11: Initial 1		
903	CNT0 CNT external clock selection (only works when multi_func_sel_reg is not 2'b00)	00: Connected to LOW 01: Form matrix B 10: From matrix C 11: Connected to LOW	

SLG47512/13

Low Voltage GreenPAK Programmable Mixed-Signal Matrix

Table 38: Register Map (Continued)

Address		Signal Function	Register Bit Definition
Byte	Register Bit		
71	904	CNT0 CNT/DLY clock source selection	0000: RingOSC(25 MHz) 0001: RingOSC(25 MHz)/4 0010: RingOSC(25 MHz)/8 0011: RingOSC(25 MHz)/64 0100: RingOSC(25 MHz)/512 0101: LFOSC(2 kHz) 0110: LFOSC(2 kHz)/8 0111: LFOSC(2 kHz)/64 1000: LFOSC(2KkHz)/512 1001: LFOSC(2 kHz)/4096 1010: LFOSC(2 kHz)/32768 1011: LFOSC(2 kHz)/262144 1100: CNTx_END 1101: External 1110: Not used 1111: Not used
	905		
	906		
	907		
	908		
	909		
	910		
	911		
72	912	CNT0 MSB of CNT Data	Data [15:8]
	913		
	914		
	915		
	916		
	917		
	918		
	919		
73	920	CNT0 LSB of CNT Data	Data [7:0]
	921		
	922		
	923		
	924		
	925		
	926		
	927		
74	928	CNT0 MSB of Current CNT Value	Data [15:8]
	929		
	930		
	931		
	932		
	933		
	934		
	935		
75	936	CNT0 LSB of Current CNT Value	Data [7:0]
	937		
	938		
	939		
	940		
	941		
	942		
	943		

**Low Voltage GreenPAK Programmable
Mixed-Signal Matrix**
Table 38: Register Map (Continued)

Address		Signal Function	Register Bit Definition
Byte	Register Bit		
76	944	CNT0 CNT set or rest selection	0: Reset to 0 1: Set to data
	945	CNT0 CNT up signal synchronizer selection	0: Bypass synchronizer 1: Enable synchronizer (after two DFFs)
	946	CNT0 CNT keep signal synchronizer selection	0: Bypass synchronizer 1: Enable synchronizer (after two DFFs)
	947	CNT0 Wake sleep power-down state selection	0: Low 1: High
	948	CNT0 CNT wake sleep mode selection	0: Default mode 1: Wake-up sleep mode (func_sel_reg configure as CNT mode)
	949	CNT0 ACMP Wake/Sleep time selection	0: Normal 1: Short Time
	950	CNT0 Allow short wake-up signal	0: Disable 1: Enable
	951	Reserved	
77	952	ACMP0 wake sleep enable	0: Disable 1: Enable
	953	ACMP1 wake sleep enable	0: Disable 1: Enable
	954	Reserved	
	955	Reserved	
	956	Reserved	
	957	Reserved	
	958	Reserved	
	959	Reserved	
78	960	LUT3_10_DFF15_CNTDLY1	MLT1_LUT3_10 bit[0]/DFF15 DFF or Latch Select: 0: LUT: LUT[0]; DFF: DFF function 1: LUT: LUT[0]; DFF: Latch function
	961		MLT1_LUT3_10 bit[1]/DFF15 Output Select: 0: LUT: LUT[1]; DFF: Q output 1: LUT: LUT[1]; DFF: QB output
	962		MLT1_LUT3_10 bit[2]/DFF15 Initial Polarity Select: 0: LUT: LUT[2]; DFF: Low 1: LUT: LUT[2]; DFF: High
	963		MLT1_LUT3_10 bit[3]/DFF15 nRST or nSET Select: 0: LUT: LUT[3]; DFF: nRST 1: LUT: LUT[3]; DFF: nSET
	964		MLT1_LUT3_10 bit[4]
	965		MLT1_LUT3_10 bit[5]
	966		MLT1_LUT3_10 bit[6]
	967		MLT1_LUT3_10 bit[7]

**Low Voltage GreenPAK Programmable
Mixed-Signal Matrix**
Table 38: Register Map (Continued)

Address		Signal Function	Register Bit Definition
Byte	Register Bit		
79	968	CNTDLY1 Function and Edge mode selection	0000: both edge Delay
	969		0001: falling edge Delay
	970		0010: rising edge Delay
	971		0011: both edge One Shot
			0100: falling edge One Shot
			0101: rising edge One Shot
			0110: both edge freq detect
			0111: falling edge freq detect
972	1000: rising edge freq detect		
	1001: both edge detect		
	1010: falling edge detect		
	1011: rising edge detect		
	1100: both edge reset CNT		
	1101: falling edge reset CNT		
	1110: rising edge reset CNT		
1111: high level reset CNT			
972	MLT1_LUT3_10_DFF15 LUT/DFF Function Select	0: LUT 1: DFF/Latch	
973	CNT1 CNT/DLY output Polarity selection	0: Default Output 1: Inverted Output	
974	CNT1 DLY mode edge detection selection	0: Normal 1: Enable DLY mode edge detection	
975	CNT1 CNT mode synchronizer selection	0: Bypass synchronizer 1: Enable synchronizer (after two DFFs)	
7A	976	LUT3_10_DFF15_CNTDLY1 Multi function selection	00: Single LUT or DFF (DLY input is low)
	977		01: Single CNT/DLY (DLY output connect to LUT/DFF) 10: CNT/DLY connected to LUT or DFF 11: LUT or DFF connected to CNT/DLY
	978	MLT1_LUT3_10_DFF15_CNTDLY1 CNT/DLY and LUT or DFF connection (only works when multi_func_sel_reg is 2'b10)	00: DLY input from matrix A; DLY output connected to LUT's In2 or DFF's D
	979		01: DLY input from matrix B; DLY output connected to LUT's In1 or DFF's nSET/nRST
	10: DLY input from matrix C; DLY output connected to LUT's In0 or DFF's CLK		
	11: Prohibited		
	980	CNT1 CNT/DLY initial value selection	00: Bypass the initial
	981		01: Bypass the initial 10: Initial 0 11: Initial 1
	982	Reserved	
983	Reserved		
7B	984	CNT1 CNT/DLY clock source selection	0000: RingOSC(25 MHz)
	985		0001: RingOSC(25 MHz)/4
	986		0010: RingOSC(25 MHz)/8
	987		0011: RingOSC(25 MHz)/64
			0100: RingOSC(25 MHz)/512
			0101: LFOSC(2 kHz)
			0110: LFOSC(2 kHz)/8
987	0111: LFOSC(2 kHz)/64		
	1000: LFOSC(2 kHz)/512		
	1001: LFOSC(2 kHz)/4096		
7B	987	1010: LFOSC(2 kHz)/32768	
		1011:LFOSC(2 kHz)/262144	
		1100: CNTx_END	
		1101: External	
		1110: Not used	
		1111: Not used	
		987	0000: RingOSC(25 MHz)
			0001: RingOSC(25 MHz)/4
			0010: RingOSC(25 MHz)/8
			0011: RingOSC(25 MHz)/64
			0100: RingOSC(25 MHz)/512
987	0101: LFOSC(2 kHz)		
	0110: LFOSC(2 kHz)/8		
	0111: LFOSC(2 kHz)/64		
	1000: LFOSC(2 kHz)/512		
	1001: LFOSC(2 kHz)/4096		
	1010: LFOSC(2 kHz)/32768		

**Low Voltage GreenPAK Programmable
Mixed-Signal Matrix**
Table 38: Register Map (Continued)

Address		Signal Function	Register Bit Definition
Byte	Register Bit		
7B	988	Reserved	
	989	Reserved	
	990	Reserved	
	991	Reserved	
7C	992	CNT1 CNT Data	Data [7:0]
	993		
	994		
	995		
	996		
	997		
	998		
	999		
7D	1000	CNT1 Current CNT Value	Data [7:0]
	1001		
	1002		
	1003		
	1004		
	1005		
	1006		
	1007		
7E	1008	LUT3_11_DFF16_CNTDLY2	MLT2_LUT3_11 bit[0]/DFF16 DFF or Latch Select: 0: LUT: LUT[0]; DFF: DFF function 1: LUT: LUT[0]; DFF: Latch function
	1009		MLT2_LUT3_11 bit[1]/DFF16 Output Select: 0: LUT: LUT[1]; DFF: Q output 1: LUT: LUT[1]; DFF: QB output
	1010		MLT2_LUT3_11 bit[2]/DFF16 Initial Polarity Select: 0: LUT: LUT[2]; DFF: Low 1: LUT: LUT[2]; DFF: High
	1011		MLT2_LUT3_11 bit[3]/DFF16 nRST or nSET Select: 0: LUT: LUT[3]; DFF: nRST 1: LUT: LUT[3]; DFF: nSET
	1012		MLT2_LUT3_11 bit[4]
	1013		MLT2_LUT3_11 bit[5]
	1014		MLT2_LUT3_11 bit[6]
	1015		MLT2_LUT3_11 bit[7]

Low Voltage GreenPAK Programmable Mixed-Signal Matrix

Table 38: Register Map (Continued)

Address		Signal Function	Register Bit Definition
Byte	Register Bit		
7F	1016	CNTDLY2 Function and Edge mode selection	0000: both edge Delay
	1017		0001: falling edge delay
	1018		0010: rising edge delay
	1019		0011: both edge One Shot
			0100: falling edge One Shot
			0101: rising edge One Shot
			0110: both edge freq detect
1020	MLT2_LUT3_11_DFF16 LUT/DFF Function Select	0111: falling edge freq detect	
1021	CNT2 CNT/DLY output Polarity selection	1000: rising edge freq detect	
1022	CNT2 DLY mode edge detection selection	1001: both edge detect	
1023	CNT2 CNT mode synchronizer selection	1010: falling edge detect	
80	1024	LUT3_11_DFF16_CNTDLY2 Multi function selection	1011: rising edge detect
	1025		1100: both edge reset CNT
	1026	MLT2_LUT3_11_DFF16_CNTDLY2 CNT/DLY and LUT or DFF connection (only works when multi_func_sel_reg is 2'b10)	1101: falling edge reset CNT
	1027		1110: rising edge reset CNT
	1028		1111: high level reset CNT
	1029	CNT2 CNT/DLY initial value selection	0: LUT
	1030	Reserved	1: DFF/Latch
	1031	Reserved	0: Default Output
	81	1032	Matrix Divider Ratio Control
1033		0: Normal	
1034		1: Enable DLY mode edge detection	
1035		0: Bypass synchronizer	
		1: Enable synchronizer (after two DFFs)	
		00: Single LUT or DFF (DLY input is low)	
		01: Single CNT/DLY (DLY output connect to LUT/DFF)	
10: CNT/DLY connected to LUT or DFF			
11: LUT or DFF connected to CNT/DLY			
00: DLY input from matrix A; DLY output connected to LUT's In2 or DFF's D			
01: DLY input from matrix B; DLY output connected to LUT's In1 or DFF's nSET/nRST			
10: DLY input from matrix C; DLY output connected to LUT's In0 or DFF's CLK			
11: Prohibited			
00: Bypass the initial			
01: Bypass the initial			
10: Initial 0			
11: Initial 1			
0000: RingOSC(25 MHz)			
0001: RingOSC(25 MHz)/4			
0010: RingOSC(25 MHz)/8			
0011: RingOSC(25 MHz)/64			
0100: RingOSC(25MHz)/512			
0101: LFOSC(2 kHz)			
0110: LFOSC(2 kHz)/8			
0111: LFOSC(2 kHz)/64			
1000: LFOSC(2 kHz)/512			
1001: LFOSC(2 kHz)/4096			
1010: LFOSC(2 kHz)/32768			
1011: LFOSC(2 kHz)/262144			
1100: CNTx_END			
1101: External			
1110: Not used			
1111: Not used			

Table 38: Register Map (Continued)

Address		Signal Function	Register Bit Definition
Byte	Register Bit		
81	1036	Reserved	
	1037	Reserved	
	1038	Reserved	
	1039	Reserved	
82	1040	CNT2 CNT Data	Data [7:0]
	1041		
	1042		
	1043		
	1044		
	1045		
	1046		
83	1047		
	1048	CNT2 Current CNT Value	Data [7:0]
	1049		
	1050		
	1051		
	1052		
	1053		
84	1054		
	1055		
	1056	LUT3_12_DFF17_CNTDLY3	MLT3_LUT3_12 bit[0]/DFF17 DFF or Latch Select: 0: LUT: LUT[0]; DFF: DFF function 1: LUT: LUT[0]; DFF: Latch function
	1057		MLT3_LUT3_12 bit[1]/DFF17 Output Select: 0: LUT: LUT[1]; DFF: Q output 1: LUT: LUT[1]; DFF: QB output
	1058		MLT3_LUT3_12 bit[2]/DFF17 Initial Polarity Select: 0: LUT: LUT[2]; DFF: Low 1: LUT: LUT[2]; DFF: High
	1059		MLT3_LUT3_12 bit[3]/DFF17 nRST or nSET Select: 0: LUT: LUT[3]; DFF: nRST 1: LUT: LUT[3]; DFF: nSET
	1060		MLT3_LUT3_12 bit[4]
	1061		MLT3_LUT3_12 bit[5]
	1062		MLT3_LUT3_12 bit[6]
	1063		MLT3_LUT3_12 bit[7]

**Low Voltage GreenPAK Programmable
Mixed-Signal Matrix**
Table 38: Register Map (Continued)

Address		Signal Function	Register Bit Definition
Byte	Register Bit		
85	1064	CNTDLY3 Function and Edge mode selection	0000: both edge Delay
	1065		0001: falling edge Delay
	1066		0010: rising edge Delay
			0011: both edge One Shot
			0100: falling edge One Shot
			0101: rising edge One Shot
			0110: both edge freq detect
			0111: falling edge freq detect
	1067		1000: rising edge freq detect
			1001: both edge detect
			1010: falling edge detect
			1011: rising edge detect
			1100: both edge reset CNT
			1101: falling edge reset CNT
			1110: rising edge reset CNT
			1111: high level reset CNT
	1068	MLT3_LUT3_12_DFF17 LUT/DFF Function Select	0: LUT 1: DFF/Latch
	1069	CNT3 CNT/DLY output Polarity selection	0: Default Output 1: Inverted Output
	1070	CNT3 DLY mode edge detection selection	0: Normal 1: Enable DLY mode edge detection
	1071	CNT3 CNT mode synchronizer selection	0: Bypass synchronizer 1: Enable synchronizer (after two DFFs)
86	1072	LUT3_12_DFF17_CNTDLY3 Multi function selection	00: Single LUT or DFF (DLY input is low)
	1073		01: Single CNT/DLY (DLY output connect to LUT/DFF)
	1074	MLT3_LUT3_12_DFF17_CNTDLY3 CNT/DLY and LUT or DFF connection (only works when multi_func_sel_reg is 2'b10)	10: CNT/DLY connected to LUT or DFF
	1075		11: LUT or DFF connected to CNT/DLY
	1076	CNT3 CNT/DLY initial value selection	00: DLY input from matrix A; DLY output connected to LUT's In2 or DFF's D
	1077		01: DLY input from matrix B; DLY output connected to LUT's In1 or DFF's nSET/nRST
			10: DLY input from matrix C; DLY output connected to LUT's In0 or DFF's CLK
			11: Prohibited
	1078	Reserved	00: Bypass the initial 01: Bypass the initial
	1079	Reserved	10: Initial 0 11: Initial 1

Table 38: Register Map (Continued)

Address		Signal Function	Register Bit Definition
Byte	Register Bit		
87	1080	CNT3 CNT/DLY clock source selection	0000: RingOSC(25 MHz)
	1081		0001: RingOSC(25 MHz)/4
	1082		0010: RingOSC(25 MHz)/8
			0011: RingOSC(25 MHz)/64
			0100: RingOSC(25 MHz)/512
			0101: LFOSC(2 kHz)
			0110: LFOSC(2 kHz)/8
			0111: LFOSC(2 kHz)/64
	1083		1000: LFOSC(2 kHz)/512
			1001: LFOSC(2 kHz)/4096
			1010: LFOSC(2 kHz)/32768
			1011: LFOSC(2 kHz)/262144
			1100: CNTx_END
			1101: External
			1110: Not used
			1111: Not used
	1084	Reserved	
	1085	Reserved	
	1086	Reserved	
	1087	Reserved	
88	1088	CNT3 CNT Data	Data [7:0]
	1089		
	1090		
	1091		
	1092		
	1093		
	1094		
	1095		
89	1096	CNT3 Current CNT Value	Data [7:0]
	1097		
	1098		
	1099		
	1100		
	1101		
	1102		
	1103		
8A	1104	LUT3_13_DFF18_CNTDLY4	MLT4_LUT3_13 bit[0]/DFF18 DFF or Latch Select: 0: LUT: LUT[0]; DFF: DFF function 1: LUT: LUT[0]; DFF: Latch function
	1105		MLT4_LUT3_13 bit[1]/DFF18 Output Select: 0: LUT: LUT[1]; DFF: Q output 1: LUT: LUT[1]; DFF: QB output
	1106		MLT4_LUT3_13 bit[2]/DFF18 Initial Polarity Select: 0: LUT: LUT[2]; DFF: Low 1: LUT: LUT[2]; DFF: High
	1107		MLT4_LUT3_13 bit[3]/DFF18 nRST or nSET Select: 0: LUT: LUT[3]; DFF: nRST 1: LUT: LUT[3]; DFF: nSET
	1108		MLT4_LUT3_13 bit[4]
	1109		MLT4_LUT3_13 bit[5]
	1110		MLT4_LUT3_13 bit[6]
	1111		MLT4_LUT3_13 bit[7]

**Low Voltage GreenPAK Programmable
Mixed-Signal Matrix**
Table 38: Register Map (Continued)

Address		Signal Function	Register Bit Definition
Byte	Register Bit		
8B	1112	CNTDLY4 Function and Edge mode selection	0000: both edge Delay
	1113		0001: falling edge Delay
	1114		0010: rising edge Delay
	1115		0011: both edge One Shot
			0100: falling edge One Shot
			0101: rising edge One Shot
			0110: both edge freq detect
1116	MLT4_LUT3_13_DFF18 LUT/DFF Function Select	0111: falling edge freq detect	
1117	CNT4 CNT/DLY output Polarity selection	1000: rising edge freq detect	
1118	CNT4 DLY mode edge detection selection	1001: both edge detect	
1119	CNT4 CNT mode synchronizer selection	1010: falling edge detect	
8C	1120	LUT3_13_DFF18_CNTDLY4 Multi function selection	1011: rising edge detect
	1121		1100: both edge reset CNT
	1122	MLT4_LUT3_13_DFF18_CNTDLY4 CNT/DLY and LUT or DFF connection (only works when multi_func_sel_reg is 2'b10)	1101: falling edge reset CNT
	1123		1110: rising edge reset CNT
	1124	CNT4 CNT/DLY initial value selection	1111: high level reset CNT
	1125		0: LUT
	1126	Reserved	1: DFF/Latch
	1127	Reserved	0: Default Output
			1: Inverted Output

SLG47512/13

Low Voltage GreenPAK Programmable Mixed-Signal Matrix

Table 38: Register Map (Continued)

Address		Signal Function	Register Bit Definition
Byte	Register Bit		
8D	1128	CNT4 CNT/DLY clock source selection	0000: RingOSC(25 MHz)
	1129		0001: RingOSC(25 MHz)/4
	1130		0010: RingOSC(25 MHz)/8
			0011: RingOSC(25 MHz)/64
			0100: RingOSC(25 MHz)/512
			0101: LFOSC(2 kHz)
			0110: LFOSC(2 kHz)/8
			0111: LFOSC(2 kHz)/64
	1131		1000: LFOSC(2 kHz)/512
			1001: LFOSC(2 kHz)/4096
			1010: LFOSC(2 kHz)/32768
			1011: LFOSC(2 kHz)/262144
			1100: CNTx_END
			1101: External
			1110: Not used
			1111: Not used
	1132	Reserved	
	1133	Reserved	
	1134	Reserved	
	1135	Reserved	
8E	1136	CNT4 CNT Data	Data [7:0]
	1137		
	1138		
	1139		
	1140		
	1141		
	1142		
	1143		
8F	1144	CNT4 Current CNT Value	Data [7:0]
	1145		
	1146		
	1147		
	1148		
	1149		
	1150		
	1151		
90	1152	LUT3_14_DFF19_CNTDLY5	MLT5_LUT3_14 bit[0]/DFF19 DFF or Latch Select: 0: LUT: LUT[0]; DFF: DFF function 1: LUT: LUT[0]; DFF: Latch function
	1153		MLT5_LUT3_14 bit[1]/DFF19 Output Select: 0: LUT: LUT[1]; DFF: Q output 1: LUT: LUT[1]; DFF: QB output
	1154		MLT5_LUT3_14 bit[2]/DFF19 Initial Polarity Select: 0: LUT: LUT[2]; DFF: Low 1: LUT: LUT[2]; DFF: High
	1155		MLT5_LUT3_14 bit[3]/DFF19 nRST or nSET Select: 0: LUT: LUT[3]; DFF: nRST 1: LUT: LUT[3]; DFF: nSET
	1156		MLT5_LUT3_14 bit[4]
	1157		MLT5_LUT3_14 bit[5]
	1158		MLT5_LUT3_14 bit[6]
	1159		MLT5_LUT3_14 bit[7]

**Low Voltage GreenPAK Programmable
Mixed-Signal Matrix**
Table 38: Register Map (Continued)

Address		Signal Function	Register Bit Definition
Byte	Register Bit		
91	1160	CNTDLY5 Function and Edge mode selection	0000: both edge Delay
	1161		0001: falling edge Delay
	1162		0010: rising edge Delay
			0011: both edge One Shot
			0100: falling edge One Shot
			0101: rising edge One Shot
			0110: both edge freq detect
			0111: falling edge freq detect
	1163		1000: rising edge freq detect
			1001: both edge detect
			1010: falling edge detect
			1011: rising edge detect
			1100: both edge reset CNT
			1101: falling edge reset CNT
			1110: rising edge reset CNT
			1111: high level reset CNT
	1164	MLT5_LUT3_14_DFF19 LUT/DFF Function Select	0: LUT 1: DFF/Latch
	1165	CNT5 CNT/DLY output Polarity selection	0: Default Output 1: Inverted Output
	1166	CNT5 DLY mode edge detection selection	0: Normal 1: Enable DLY mode edge detection
	1167	CNT5 CNT mode synchronizer selection	0: Bypass synchronizer 1: Enable synchronizer (after two DFFs)
92	1168	LUT3_14_DFF19_CNTDLY5 Multi function selection	00: Single LUT or DFF (DLY input is low)
	1169		01: Single CNT/DLY (DLY output connect to LUT/DFF)
	1170	MLT5_LUT3_14_DFF19_CNTDLY5 CNT/DLY and LUT or DFF connection (only works when multi_func_sel_reg is 2'b10)	10: CNT/DLY connected to LUT or DFF
	1171		11: LUT or DFF connected to CNT/DLY
	1172	CNT5 CNT/DLY initial value selection	00: DLY input from matrix A; DLY output connected to LUT's In2 or DFF's D
	1173		01: DLY input from matrix B; DLY output connected to LUT's In1 or DFF's nSET/nRST
			10: DLY input from matrix C; DLY output connected to LUT's In0 or DFF's CLK
			11: Prohibited
	1174	Reserved	00: Bypass the initial
			01: Bypass the initial
			10: Initial 0
			11: Initial 1
	1175	Reserved	

Table 38: Register Map (Continued)

Address		Signal Function	Register Bit Definition
Byte	Register Bit		
93	1176	CNT5 CNT/DLY clock source selection	0000: RingOSC(25 MHz)
	1177		0001: RingOSC(25 MHz)/4
	1178		0010: RingOSC(25 MHz)/8
			0011: RingOSC(25 MHz)/64
			0100: RingOSC(25 MHz)/512
			0101: LFOSC(2 kHz)
			0110: LFOSC(2 kHz)/8
			0111: LFOSC(2 kHz)/64
	1179		1000: LFOSC(2 kHz)/512
			1001: LFOSC(2 kHz)/4096
			1010: LFOSC(2 kHz)/32768
			1011: LFOSC(2 kHz)/262144
			1100: CNTx_END
			1101: External
			1110: Not used
			1111: Not used
	1180	Reserved	
	1181	Reserved	
	1182	Reserved	
	1183	Reserved	
94	1184	CNT5 CNT Data	Data [7:0]
	1185		
	1186		
	1187		
	1188		
	1189		
	1190		
	1191		
95	1192	CNT5 Current CNT Value	Data [7:0]
	1193		
	1194		
	1195		
	1196		
	1197		
	1198		
	1199		
96	1200	LUT3_15_DFF20_CNTDLY6	MLT6_LUT3_15 bit[0]/DFF20 DFF or Latch Select: 0: LUT: LUT[0]; DFF: DFF function 1: LUT: LUT[0]; DFF: Latch function
	1201		MLT6_LUT3_15 bit[1]/DFF20 Output Select: 0: LUT: LUT[1]; DFF: Q output 1: LUT: LUT[1]; DFF: QB output
	1202		MLT6_LUT3_15 bit[2]/DFF20 Initial Polarity Select: 0: LUT: LUT[2]; DFF: Low 1: LUT: LUT[2]; DFF: High
	1203		MLT6_LUT3_15 bit[3]/DFF20 nRST or nSET Select: 0: LUT: LUT[3]; DFF: nRST 1: LUT: LUT[3]; DFF: nSET
	1204		MLT6_LUT3_15 bit[4]
	1205		MLT6_LUT3_15 bit[5]
	1206		MLT6_LUT3_15 bit[6]
	1207		MLT6_LUT3_15 bit[7]

**Low Voltage GreenPAK Programmable
Mixed-Signal Matrix**
Table 38: Register Map (Continued)

Address		Signal Function	Register Bit Definition
Byte	Register Bit		
97	1208	CNTDLY6 Function and Edge mode selection	0000: both edge Delay
	1209		0001: falling edge Delay
	1210		0010: rising edge Delay
	1211		0011: both edge One Shot
			0100: falling edge One Shot
			0101: rising edge One Shot
			0110: both edge freq detect
1212	MLT6_LUT3_15_DFF20 LUT/DFF Function Select	0111: falling edge freq detect	
1213	CNT6 CNT/DLY output Polarity selection	1000: rising edge freq detect	
1214	CNT6 DLY mode edge detection selection	1001: both edge detect	
1215	CNT6 CNT mode synchronizer selection	1010: falling edge detect	
98	1216	LUT3_15_DFF20_CNTDLY6 Multi function selection	1011: rising edge detect
	1217		1100: both edge reset CNT
	1218	MLT6_LUT3_15_DFF20_CNTDLY6 CNT/DLY and LUT or DFF connection (only works when multi_func_sel_reg is 2'b10)	1101: falling edge reset CNT
	1219		1110: rising edge reset CNT
	1220	CNT6 CNT/DLY initial value selection	1111: high level reset CNT
	1221		0: LUT
	1222	Reserved	1: DFF/Latch
	1223	Reserved	0: Default Output
			1: Inverted Output
		0: Normal	
		1: Enable DLY mode edge detection	
		0: Bypass synchronizer	
		1: Enable synchronizer (after two DFFs)	
		00: Single LUT or DFF (DLY input is low)	
		01: Single CNT/DLY (DLY output connect to LUT/DFF)	
		10: CNT/DLY connected to LUT or DFF	
		11: LUT or DFF connected to CNT/DLY	
		00: DLY input from matrix A;	
		DLY output connected to LUT's In2 or DFF's D	
		01: DLY input from matrix B;	
		DLY output connected to LUT's In1 or DFF's nSET/nRST	
		10: DLY input from matrix C;	
		DLY output connected to LUT's In0 or DFF's CLK	
		11: Prohibited	
		00: Bypass the initial	
		01: Bypass the initial	
		10: Initial 0	
		11: Initial 1	

SLG47512/13

Low Voltage GreenPAK Programmable Mixed-Signal Matrix

Table 38: Register Map (Continued)

Address		Signal Function	Register Bit Definition
Byte	Register Bit		
99	1224	CNT6 CNT/DLY clock source selection	0000: RingOSC(25 MHz)
	1225		0001: RingOSC(25 MHz)/4
	1226		0010: RingOSC(25 MHz)/8
			0011: RingOSC(25 MHz)/64
			0100: RingOSC(25 MHz)/512
			0101: LFOSC(2 kHz)
			0110: LFOSC(2 kHz)/8
			0111: LFOSC(2 kHz)/64
	1227		1000: LFOSC(2 kHz)/512
			1001: LFOSC(2 kHz)/4096
			1010: LFOSC(2 kHz)/32768
			1011: LFOSC(2 kHz)/262144
			1100: CNTx_END
			1101: External
			1110: Not used
			1111: Not used
	1228	Reserved	
	1229	Reserved	
	1230	Reserved	
	1231	Reserved	
9A	1232	CNT6 CNT Data	Data [7:0]
	1233		
	1234		
	1235		
	1236		
	1237		
	1238		
	1239		
9B	1240	CNT6 Current CNT Value	Data [7:0]
	1241		
	1242		
	1243		
	1244		
	1245		
	1246		
	1247		
9C	1248	LUT3_16_DFF21_CNTDLY7	MLT7_LUT3_16 bit[0]/DFF21 DFF or Latch Select: 0: LUT: LUT[0]; DFF: DFF function 1: LUT: LUT[0]; DFF: Latch function
	1249		MLT7_LUT3_16 bit[1]/DFF21 Output Select: 0: LUT: LUT[1]; DFF: Q output 1: LUT: LUT[1]; DFF: QB output
	1250		MLT7_LUT3_16 bit[2]/DFF21 Initial Polarity Select: 0: LUT: LUT[2]; DFF: Low 1: LUT: LUT[2]; DFF: High
	1251		MLT7_LUT3_16 bit[3]/DFF21 nRST or nSET Select: 0: LUT: LUT[3]; DFF: nRST 1: LUT: LUT[3]; DFF: nSET
	1252		MLT7_LUT3_16 bit[4]
	1253		MLT7_LUT3_16 bit[5]
	1254		MLT7_LUT3_16 bit[6]
	1255		MLT7_LUT3_16 bit[7]

**Low Voltage GreenPAK Programmable
Mixed-Signal Matrix**
Table 38: Register Map (Continued)

Address		Signal Function	Register Bit Definition			
Byte	Register Bit					
9D	1256	CNTDLY7 Function and Edge mode selection	0000: both edge Delay			
	1257		0001: falling edge Delay			
	1258		0010: rising edge Delay			
	1259		0011: both edge One Shot			
			0100: falling edge One Shot			
			0101: rising edge One Shot			
			0110: both edge freq detect			
			0111: falling edge freq detect			
1260	MLT7_LUT3_16_DFF21 LUT/DFF Function Select	1000: rising edge freq detect				
	1261	CNT7 CNT/DLY output Polarity selection	1001: both edge detect			
		1262	CNT7 DLY mode edge detection selection	1010: falling edge detect		
			1263	CNT7 CNT mode synchronizer selection	1011: rising edge detect	
				1264	LUT3_16_DFF21_CNTDLY7 Multi function selection	1100: both edge reset CNT
						1101: falling edge reset CNT
						1110: rising edge reset CNT
1265		1111: high level reset CNT				
9E	1266	MLT7_LUT3_16_DFF21_CNTDLY7 CNT/DLY and LUT or DFF connection (only works when multi_func_sel_reg is 2'b10)	0: LUT			
	1267		1: DFF/Latch			
	1268		0: Default Output			
	1269	CNT7 CNT/DLY initial value selection	1: Inverted Output			
	1270	Reserved	0: Normal			
	1271	Reserved	1: Enable DLY mode edge detection			
			0: Bypass synchronizer			
			1: Enable synchronizer (after two DFFs)			
9E	1264	LUT3_16_DFF21_CNTDLY7 Multi function selection	00: Single LUT or DFF (DLY input is low)			
	1265		01: Single CNT/DLY (DLY output connect to LUT/DFF)			
	1266	MLT7_LUT3_16_DFF21_CNTDLY7 CNT/DLY and LUT or DFF connection (only works when multi_func_sel_reg is 2'b10)	10: CNT/DLY connected to LUT or DFF			
	1267		11: LUT or DFF connected to CNT/DLY			
	1268	CNT7 CNT/DLY initial value selection	00: DLY input from matrix A; DLY output connected to LUT's In2 or DFF's D			
	1269		01: DLY input from matrix B; DLY output connected to LUT's In1 or DFF's nSET/nRST			
	1270	Reserved	10: DLY input from matrix C; DLY output connected to LUT's In0 or DFF's CLK			
	1271	Reserved	11: Prohibited			

SLG47512/13

Low Voltage GreenPAK Programmable Mixed-Signal Matrix

Table 38: Register Map (Continued)

Address		Signal Function	Register Bit Definition
Byte	Register Bit		
9F	1272	CNT7 CNT/DLY clock source selection	0000: RingOSC(25 MHz)
	1273		0001: RingOSC(25 MHz)/4
	1274		0010: RingOSC(25 MHz)/8
			0011: RingOSC(25 MHz)/64
			0100: RingOSC(25 MHz)/512
			0101: LFOSC(2 kHz)
			0110: LFOSC(2 kHz)/8
			0111: LFOSC(2kHz)/64
	1275		1000: LFOSC(2 kHz)/512
			1001: LFOSC(2 kHz)/4096
			1010: LFOSC(2 kHz)/32768
			1011: LFOSC(2 kHz)/262144
			1100: CNTx_END
			1101: External
			1110: Not used
			1111: Not used
	1276	Reserved	
	1277	Reserved	
	1278	Reserved	
	1279	Reserved	
A0	1280	CNT7 CNT Data	Data [7:0]
	1281		
	1282		
	1283		
	1284		
	1285		
	1286		
	1287		
A1	1288	CNT7 Current CNT Value	Data [7:0]
	1289		
	1290		
	1291		
	1292		
	1293		
	1294		
	1295		
A2	1296	GPIO input mode configuration	00: Digital in without Schmitt Trigger
	1297		01: Digital in with Schmitt Trigger
			10: Low voltage digital in mode
			11: Reserved/Analog IO
	1298	Reserved	
	1299	Reserved	
	1300	Reserved	
	1301	Reserved	
	1302	Reserved	
	1303	Reserved	

SLG47512/13

Low Voltage GreenPAK Programmable Mixed-Signal Matrix

Table 38: Register Map (Continued)

Address		Signal Function	Register Bit Definition
Byte	Register Bit		
A3	1304	GPIO0 input mode configuration	00: Digital in without Schmitt Trigger 01: Digital in with Schmitt Trigger 10: Low voltage digital in mode 11: Reserved/Analog IO
	1305		
	1306	Reserved	
	1307	Reserved	
	1308	Reserved	
	1309	GPIO0 Pull-up or Pull-down resistor selection	00: Floating (disconnected) 01: 10 k Ω 10: 100 k Ω 11: 1 M Ω
	1310		
	1311	GPIO0 Pull-up or Pull-down mode selection	0: Pull-down 1: Pull-up
A4	1312	GPIO0 I ² C fast mode plus enable	0: enable 1: disable
	1313	GPIO0 Open-Drain mode enable	0: disable (Output = HiZ) 1: enable (Applicable only when i2c_en = 0)
	1314	Reserved	
	1315	Reserved	
	1316	Reserved	
	1317	Reserved	
	1318	Reserved	
	1319	Reserved	
A5	1320	GPIO1 input mode configuration	00: Digital in without Schmitt Trigger 01: Digital in with Schmitt Trigger 10: Low voltage digital in mode 11: Reserved/Analog IO
	1321		
	1322	Reserved	
	1323	Reserved	
	1324	Reserved	
	1325	GPIO1 Pull-up or Pull-down resistor selection	00: Floating (disconnected) 01: 10 k Ω 10: 100 k Ω 11: 1 M Ω
	1326		
	1327	GPIO1 Pull-up or Pull-down mode selection	0: Pull-down 1: Pull-up
A6	1328	GPIO1 I ² C fast mode plus enable	0: enable 1: disable
	1329	GPIO1 Open-Drain mode enable	0: disable (Output = HiZ) 1: enable (Applicable only when i2c_en = 0)
	1330	Reserved	
	1331	Reserved	
	1332	Reserved	
	1333	Reserved	
	1334	Reserved	
	1335	Reserved	

**Low Voltage GreenPAK Programmable
Mixed-Signal Matrix**
Table 38: Register Map (Continued)

Address		Signal Function	Register Bit Definition
Byte	Register Bit		
A7	1336	GPIO2 input mode configuration	00: Digital in without Schmitt Trigger 01: Digital in with Schmitt Trigger 10: Low voltage digital in mode 11: Reserved/Analog IO
	1337		
	1338	GPIO2 output mode configuration	00: 1x Push-Pull 01: 2x Push-Pull 10: 1x Open-Drain pull down 11: 2x Open-Drain pull down
	1339		
	1340	Reserved	
	1341	GPIO2 Pull-up or Pull-down resistor selection	00: Floating (disconnected) 01: 10 k Ω 10: 100 k Ω 11: 1 M Ω
	1342		
	1343	GPIO2 Pull-up or Pull-down mode selection	0: Pull-down 1: Pull-up
A8	1344	GPIO3 input mode configuration	00: Digital in without Schmitt Trigger 01: Digital in with Schmitt Trigger 10: Low voltage digital in mode 11: Reserved/Analog IO
	1345		
	1346	GPIO3 output mode configuration	00: 1x Push-Pull 01: 2x Push-Pull 10: 1x Open-Drain pull down 11: 2x Open-Drain pull down
	1347		
	1348	Reserved	
	1349	GPIO3 Pull-up or Pull-down resistor selection	00: Floating (disconnected) 01: 10 k Ω 10: 100 k Ω 11: 1 M Ω
	1350		
	1351	GPIO3 Pull-up or Pull-down mode selection	0: Pull-down 1: Pull-up
A9	1352	GPIO4 input mode configuration	00: Digital in without Schmitt Trigger 01: Digital in with Schmitt Trigger 10: Low voltage digital in mode 11: Reserved/Analog IO
	1353		
	1354	GPIO4 output mode configuration	00: 1x Push-Pull 01: 2x Push-Pull 10: 1x Open-Drain pull down 11: 2x Open-Drain pull down
	1355		
	1356	Reserved	
	1357	GPIO4 Pull-up or Pull-down resistor selection	00: Floating (disconnected) 01: 10 k Ω 10: 100 k Ω 11: 1 M Ω
	1358		
	1359	GPIO4 Pull-up or Pull-down mode selection	0: Pull-down 1: Pull-up

**Low Voltage GreenPAK Programmable
Mixed-Signal Matrix**
Table 38: Register Map (Continued)

Address		Signal Function	Register Bit Definition
Byte	Register Bit		
AA	1360	GPIO5 input mode configuration	00: Digital in without Schmitt Trigger 01: Digital in with Schmitt Trigger 10: Low voltage digital in mode 11: Reserved/Analog IO
	1361		
	1362	GPIO5 output mode configuration	00: 1x Push-Pull 01: 2x Push-Pull 10: 1x Open-Drain pull down 11: 2x Open-Drain pull down
	1363		
	1364	Reserved	
	1365	GPIO5 Pull-up or Pull-down resistor selection	00: Floating (disconnected) 01: 10 k Ω 10: 100 k Ω 11: 1 M Ω
	1366		
	1367	GPIO5 Pull-up or Pull-down mode selection	0: Pull-down 1: Pull-up
AB	1368	GPIO6 input mode configuration	00: Digital in without Schmitt Trigger 01: Digital in with Schmitt Trigger 10: Low voltage digital in mode 11: Reserved/Analog IO
	1369		
	1370	GPIO6 output mode configuration	00: 1x Push-Pull 01: 2x Push-Pull 10: 1x Open-Drain pull down 11: 2x Open-Drain pull down
	1371		
	1372	Reserved	
	1373	GPIO6 Pull-up or Pull-down resistor selection	00: Floating (disconnected) 01: 10 k Ω 10: 100 k Ω 11: 1 M Ω
	1374		
	1375	GPIO6 Pull-up or Pull-down mode selection	0: Pull-down 1: Pull-up
AC	1376	GPIO7 input mode configuration	00: Digital in without Schmitt Trigger 01: Digital in with Schmitt Trigger 10: Low voltage digital in mode 11: Reserved/Analog IO
	1377		
	1378	GPIO7 output mode configuration	00: 1x Push-Pull 01: 2x Push-Pull 10: 1x Open-Drain pull down 11: 2x Open-Drain pull down
	1379		
	1380	Reserved	
	1381	GPIO7 Pull-up or Pull-down resistor selection	00: Floating (disconnected) 01: 10 k Ω 10: 100 k Ω 11: 1 M Ω
	1382		
	1383	GPIO7 Pull-up or Pull-down mode selection	0: Pull-down 1: Pull-up

**Low Voltage GreenPAK Programmable
Mixed-Signal Matrix**
Table 38: Register Map (Continued)

Address		Signal Function	Register Bit Definition
Byte	Register Bit		
AD	1384	GPIO8 input mode configuration	00: Digital in without Schmitt Trigger 01: Digital in with Schmitt Trigger 10: Low voltage digital in mode 11: Reserved/Analog IO
	1385		
	1386	GPIO8 output mode configuration	00: 1x Push-Pull 01: 2x Push-Pull 10: 1x Open-Drain pull down 11: 2x Open-Drain pull down
	1387		
	1388	Reserved	
	1389	GPIO8 Pull-up or Pull-down resistor selection	00: Floating (disconnected) 01: 10 kΩ 10: 100 kΩ 11: 1 MΩ
	1390		
AE	1391	GPIO8 Pull-up or Pull-down mode selection	0: Pull-down 1: Pull-up
	1392	GPIO9 input mode configuration	00: Digital in without Schmitt Trigger 01: Digital in with Schmitt Trigger 10: Low voltage digital in mode 11: Reserved/Analog IO
	1393		
	1394	GPIO9 output mode configuration	00: 1x Push-Pull 01: 2x Push-Pull 10: 1x Open-Drain pull down 11: 2x Open-Drain pull down
	1395		
	1396	Reserved	
	1397	GPIO9 Pull-up or Pull-down resistor selection	00: Floating (disconnected) 01: 10 kΩ 10: 100 kΩ 11: 1 MΩ
	1398		
AF	1399	GPIO9 Pull-up or Pull-down mode selection	0: Pull-down 1: Pull-up
	1400	GPIO10 input mode configuration	00: Digital in without Schmitt Trigger 01: Digital in with Schmitt Trigger 10: Low voltage digital in mode 11: Reserved/Analog IO
	1401		
	1402	GPIO10 output mode configuration	00: 1x Push-Pull 01: 2x Push-Pull 10: 1x Open-Drain pull down 11: 2x Open-Drain pull down
	1403		
	1404	Reserved	
	1405	GPIO10 Pull-up or Pull-down resistor selection	00: Floating (disconnected) 01: 10 kΩ 10: 100 kΩ 11: 1 MΩ
	1406		
	1407	GPIO10 Pull-up or Pull-down mode selection	0: Pull-down 1: Pull-up

**Low Voltage GreenPAK Programmable
Mixed-Signal Matrix**
Table 38: Register Map (Continued)

Address		Signal Function	Register Bit Definition
Byte	Register Bit		
B0	1408	GPIO11 input mode configuration	00: Digital in without Schmitt Trigger 01: Digital in with Schmitt Trigger 10: Low voltage digital in mode 11: Reserved/Analog IO
	1409		
	1410	GPIO11 output mode configuration	00: 1x Push-Pull 01: 2x Push-Pull 10: 1x Open-Drain pull down 11: 2x Open-Drain pull down
	1411		
	1412	Reserved	
	1413	GPIO11 Pull-up or Pull-down resistor selection	00: Floating (disconnected) 01: 10 kΩ 10: 100 kΩ 11: 1 MΩ
	1414		
	1415	GPIO11 Pull-up or Pull-down mode selection	0: Pull-down 1: Pull-up
B1	1416	GPIO12 input mode configuration	00: Digital in without Schmitt Trigger 01: Digital in with Schmitt Trigger 10: Low voltage digital in mode 11: Reserved/Analog IO
	1417		
	1418	GPIO12 output mode configuration	00: 1x Push-Pull 01: 2x Push-Pull 10: 1x Open-Drain pull down 11: 2x Open-Drain pull down
	1419		
	1420	Reserved	
	1421	GPIO12 Pull-up or Pull-down resistor selection	00: Floating (disconnected) 01: 10 kΩ 10: 100 kΩ 11: 1 MΩ
	1422		
	1423	GPIO12 Pull-up or Pull-down mode selection	0: Pull-down 1: Pull-up
B2	1424	Turn on I ² C open drain fast or slow	0: Turn on I ² C open drain fast 1: Turn on I ² C open drain slow
	1425	IO Latching Enable During Host Write	0: Disable 1: Pad digital output latches at previous state
	1426	Fast pull up or pull down during power up	0: Disable 1: Enable (During power-up, GPIO Pull-up/down resistance will switch to 2.6 kΩ initially and then it will switch to normal setting value)
	1427	Pull pad to high when gpi_from_pad is high	0: Disable 1: Enable
	1428	Reserved	
	1429	Reserved	
	1430	Reserved	
	1431	Reserved	
B3	1432	Filter/Edge Detector Output Polarity	0: Non-inverted 1: Inverted
	1433	Edge Detect Mode	00: Rising Edge Detector 01: Falling Edge Detector 10: Both Edge Detector 11: Both Edge Delay
	1434		
	1435	Edge Detect Filter Function Select	0: Filter 1: Edge Detect
	1436	Reserved	
	1437	Reserved	
	1438	Reserved	
	1439	Reserved	

**Low Voltage GreenPAK Programmable
Mixed-Signal Matrix**
Table 38: Register Map (Continued)

Address		Signal Function	Register Bit Definition
Byte	Register Bit		
B4	1440	Edge Detect Mode	00: Rising Edge Detector 01: Falling Edge Detector
	1441		10: Both Edge Detector 11: Both Edge Delay
	1442	Programmable Delay Selection	00: 125 ns 01: 250 ns
	1443		10: 375 ns 11: 500 ns
	1444	Reserved	
	1445	Reserved	
	1446	Reserved	
B5	1447	Reserved	
	1448	OSC0 Divider Clock Source	0: Use OSC 1: Use External Clock Source
	1449	OSC0 Matrix power down or on selection	0: Matrix Down 1: Matrix On
	1450	OSC0 turn on by register	0: Auto on by Multi-Func CNT 1: Always On
	1451	OSC0 Divider Output0 control by matrix	0: Disable 1: Enable
	1452	OSC0 Divider Output1 control by matrix	0: Disable 1: Enable
	1453	OSC0 Pre-Divider Selection	00: DIV1 01: DIV2
	1454		10: DIV4 11: DIV8
B6	1455	Reserved	
	1456	OSC1 Divider Clock Source	0: Use OSC 1: Use External Clock Source
	1457	OSC1 Matrix power down or on selection	0: Matrix Down 1: Matrix On
	1458	OSC1 turn on by register	0: Auto on by Multi-Func CNT 1: Always On
	1459	OSC1 Divider Output0 control by matrix	0: Disable 1: Enable
	1460	OSC1 Pre-Divider Selection	000: DIV1 001: DIV2
	1461		010: DIV4 011: DIV8
	1462	OSC1 Pre-Divider Selection	100: DIV12 101: DIV24
	1463		110: DIV48 111: DIV96
	1463	Reserved	

**Low Voltage GreenPAK Programmable
Mixed-Signal Matrix**
Table 38: Register Map (Continued)

Address		Signal Function	Register Bit Definition
Byte	Register Bit		
B7	1464	OSC0 OUT0 Post-Divider Selection	000: DIV1
	1465		001: DIV2
	1466		010: DIV3
			011: DIV4
	1467	100: DIV8	
		101: DIV12	
		110: DIV24	
		111: DIV64	
1468	Reserved		
1469			
1470		000: DIV1	
		001: DIV2	
1471	010: DIV3		
	011: DIV4		
	100: DIV8		
	101: DIV12		
1472	110: DIV24		
	111: DIV64		
	1473		
	1474		
B8	1475	OSC1 OUT0 Post-Divider Selection	000: DIV1
	1476		001: DIV2
	1477		010: DIV3
	1478		011: DIV4
	1479		100: DIV8
	1480		101: DIV12
	1481		110: DIV24
	1482		111: DIV64
B9	1483	Reserved	
	1484	Reserved	
	1485	Reserved	
	1486	Reserved	
	1487	Reserved	
	1488	Reserved	
	1489	Reserved	
	1490	Reserved	
B10	1491	Reserved	
	1492	Reserved	
	1493	Reserved	
	1494	Reserved	
	1495	Reserved	
	1496	Reserved	
	1497	Reserved	
	1498	Reserved	
B11	1499	Reserved	
	1500	Reserved	
	1501	Reserved	
	1502	Reserved	
	1503	Reserved	
	1504	Reserved	
	1505	Reserved	
	1506	Reserved	
B12	1507	Reserved	
	1508	Reserved	
	1509	Reserved	
	1510	Reserved	
	1511	Reserved	
	1512	Reserved	
	1513	Reserved	
	1514	Reserved	
B13	1515	Reserved	
	1516	Reserved	
	1517	Reserved	
	1518	Reserved	
	1519	Reserved	
	1520	Reserved	
	1521	Reserved	
	1522	Reserved	
B14	1523	Reserved	
	1524	Reserved	
	1525	Reserved	
	1526	Reserved	
	1527	Reserved	
	1528	Reserved	
	1529	Reserved	
	1530	Reserved	
B15	1531	Reserved	
	1532	Reserved	
	1533	Reserved	
	1534	Reserved	
	1535	Reserved	
	1536	Reserved	
	1537	Reserved	
	1538	Reserved	
B16	1539	Reserved	
	1540	Reserved	
	1541	Reserved	
	1542	Reserved	
	1543	Reserved	
	1544	Reserved	
	1545	Reserved	
	1546	Reserved	
B17	1547	Reserved	
	1548	Reserved	
	1549	Reserved	
	1550	Reserved	
	1551	Reserved	
	1552	Reserved	
	1553	Reserved	
	1554	Reserved	
B18	1555	Reserved	
	1556	Reserved	
	1557	Reserved	
	1558	Reserved	
	1559	Reserved	
	1560	Reserved	
	1561	Reserved	
	1562	Reserved	
B19	1563	Reserved	
	1564	Reserved	
	1565	Reserved	
	1566	Reserved	
	1567	Reserved	
	1568	Reserved	
	1569	Reserved	
	1570	Reserved	
B20	1571	Reserved	
	1572	Reserved	
	1573	Reserved	
	1574	Reserved	
	1575	Reserved	
	1576	Reserved	
	1577	Reserved	
	1578	Reserved	
B21	1579	Reserved	
	1580	Reserved	
	1581	Reserved	
	1582	Reserved	
	1583	Reserved	
	1584	Reserved	
	1585	Reserved	
	1586	Reserved	
B22	1587	Reserved	
	1588	Reserved	
	1589	Reserved	
	1590	Reserved	
	1591	Reserved	
	1592	Reserved	
	1593	Reserved	
	1594	Reserved	
B23	1595	Reserved	
	1596	Reserved	
	1597	Reserved	
	1598	Reserved	
	1599	Reserved	
	1600	Reserved	
	1601	Reserved	
	1602	Reserved	
B24	1603	Reserved	
	1604	Reserved	
	1605	Reserved	
	1606	Reserved	
	1607	Reserved	
	1608	Reserved	
	1609	Reserved	
	1610	Reserved	
B25	1611	Reserved	
	1612	Reserved	
	1613	Reserved	
	1614	Reserved	
	1615	Reserved	
	1616	Reserved	
	1617	Reserved	
	1618	Reserved	
B26	1619	Reserved	
	1620	Reserved	
	1621	Reserved	
	1622	Reserved	
	1623	Reserved	
	1624	Reserved	
	1625	Reserved	
	1626	Reserved	
B27	1627	Reserved	
	1628	Reserved	
	1629	Reserved	
	1630	Reserved	
	1631	Reserved	
	1632	Reserved	
	1633	Reserved	
	1634	Reserved	
B28	1635	Reserved	
	1636	Reserved	
	1637	Reserved	
	1638	Reserved	
	1639	Reserved	
	1640	Reserved	
	1641	Reserved	
	1642	Reserved	
B29	1643	Reserved	
	1644	Reserved	
	1645	Reserved	
	1646	Reserved	
	1647	Reserved	
	1648	Reserved	
	1649	Reserved	
	1650	Reserved	
B30	1651	Reserved	
	1652	Reserved	
	1653	Reserved	
	1654	Reserved	
	1655	Reserved	
	1656	Reserved	
	1657	Reserved	
	1658	Reserved	
B31	1659	Reserved	
	1660	Reserved	
	1661	Reserved	
	1662	Reserved	
	1663	Reserved	
	1664	Reserved	
	1665	Reserved	
	1666	Reserved	
B32	1667	Reserved	
	1668	Reserved	
	1669	Reserved	
	1670	Reserved	
	1671	Reserved	
	1672	Reserved	
	1673	Reserved	
	1674	Reserved	
B33	1675	Reserved	
	1676	Reserved	
	1677	Reserved	
	1678	Reserved	
	1679	Reserved	
	1680	Reserved	
	1681	Reserved	
	1682	Reserved	
B34	1683	Reserved	
	1684	Reserved	
	1685	Reserved	
	1686	Reserved	
	1687	Reserved	
	1688	Reserved	
	1689	Reserved	
	1690	Reserved	
B35	1691	Reserved	
	1692	Reserved	
	1693	Reserved	
	1694	Reserved	
	1695	Reserved	
	1696	Reserved	
	1697	Reserved	
	1698	Reserved	
B36	1699	Reserved	
	1700	Reserved	
	1701	Reserved	
	1702	Reserved	
	1703	Reserved	
	1704	Reserved	
	1705	Reserved	
	1706	Reserved	
B37	1707	Reserved	
	1708	Reserved	
	1709	Reserved	
	1710	Reserved	
	1711	Reserved	
	1712	Reserved	
	1713	Reserved	
	1714	Reserved	
B38	1715	Reserved	
	1716	Reserved	
	1717	Reserved	
	1718	Reserved	
	1719	Reserved	
	1720	Reserved	
	1721	Reserved	
	1722	Reserved	
B39	1723	Reserved	
	1724	Reserved	
	1725	Reserved	
	1726	Reserved	
	1727	Reserved	
	1728	Reserved	
	1729	Reserved	
	1730	Reserved	
B40	1731	Reserved	
	1732	Reserved	
	1733	Reserved	
	1734	Reserved	
	1735	Reserved	
	1736	Reserved	
	1737	Reserved	
	1738	Reserved	
B41	1739	Reserved	
	1740	Reserved	
	1741	Reserved	
	1742	Reserved	
	1743	Reserved	
	1744	Reserved	
	1745	Reserved	
	1746	Reserved	
B42	1747	Reserved	
	1748	Reserved	
	1749	Reserved	
	1750	Reserved	
	1751	Reserved	
	1752	Reserved	
	1753	Reserved	
	1754	Reserved	
B43	1755	Reserved	
	1756	Reserved	
	1757	Reserved	
	1758	Reserved	
	1759	Reserved	
	1760	Reserved	
	1761	Reserved	
	1762	Reserved	
B44	1763	Reserved	
	1764	Reserved	
	1765	Reserved	
	1766	Reserved	
	1767	Reserved	
	1768	Reserved	
	1769	Reserved	
	1770	Reserved	
B45	1771	Reserved	
	1772	Reserved	
	1773	Reserved	
	1774	Reserved	
	1775	Reserved	
	1776	Reserved	
	1777	Reserved	
	1778	Reserved	
B46	1779	Reserved	
	1780	Reserved	
	1781	Reserved	
	1782	Reserved	
	1783	Reserved	
	1784	Reserved	
	1785	Reserved	
	1786	Reserved	
B47	1787	Reserved	
	1788	Reserved	
	1789	Reserved	
	1790	Reserved	
	1791	Reserved	
	1792	Reserved	
	1793	Reserved	
	1794	Reserved	
B48	1795	Reserved	
	1796	Reserved	
	1797	Reserved	
	1798	Reserved	
	1799	Reserved	
	1800	Reserved	
	1801	Reserved	
	1802	Reserved	
B49	1803	Reserved	
	1804	Reserved	
	1805	Reserved	
	1806	Reserved	
	1807	Reserved	
	1808	Reserved	
	1809	Reserved	
	1810	Reserved	
B50	1811	Reserved	
	1812	Reserved	
	1813	Reserved	
	1814	Reserved	
	1815	Reserved	
	1816	Reserved	
	1817	Reserved	
	1818	Reserved	
B51	1819	Reserved	
	1820	Reserved	
	1821	Reserved	
	1822	Reserved	
	1823	Reserved	
	1824	Reserved	
	1825	Reserved	
	1826	Reserved	
B52	1827	Reserved	
	1828	Reserved	
	1829	Reserved	
	1830	Reserved	
	1831	Reserved	
	1832	Reserved	
	1833	Reserved	
	1834	Reserved	
B53	1835	Reserved	
	1836	Reserved	
	1837	Reserved	
	1838	Reserved	
	1839	Reserved	
	1840	Reserved	
	1841	Reserved	
	1842	Reserved	
B54	1843	Reserved	
	1844	Reserved	
	1845	Reserved	
	1846	Reserved	
	1847	Reserved	
	1848	Reserved	
	1849	Reserved	
	1850	Reserved	
B55	1851	Reserved	
	1852	Reserved	
	1853	Reserved	
	1854	Reserved	
	1855	Reserved	
	1856	Reserved	
	1857	Reserved	
	1858	Reserved	
B56	1859	Reserved	
	1860	Reserved	
	1861	Reserved	
	1862	Reserved	
	1863	Reserved	
	1864	Reserved	
	1865	Reserved	
	1866	Reserved	
B57	1867	Reserved	
	1868	Reserved	
	1869	Reserved	
	1870	Reserved	
	1871	Reserved	
	1872	Reserved	
	1873	Reserved	
	1874	Reserved	
B58	1875	Reserved	
	1876	Reserved	
	1877	Reserved	
	1878	Reserved	
	1879	Reserved	
	1880	Reserved	
	1881	Reserved	
	1882	Reserved	
B59	1883	Reserved	
	1884	Reserved	
	1885	Reserved	
	1886	Reserved	
	1887	Reserved	
	1888	Reserved	
	1889	Reserved	
	1890	Reserved	
B60	1891	Reserved	
	1892	Reserved	
	1893	Reserved	
	1894	Reserved	
	1895	Reserved	
	1896	Reserved	
	1897	Reserved	
	1898	Reserved	
B61	1899	Reserved	
	1900	Reserved	
	1901	Reserved	
	1902	Reserved	
	1903	Reserved	
	1904	Reserved	
	1905	Reserved	
	1906	Reserved	
B62	1907	Reserved	
	1908	Reserved	
	1909	Reserved	
	1910	Reserved	
	1911	Reserved	
	1912	Reserved	
	1913	Reserved	
	1914	Reserved	
B63	1915	Reserved	
	1916	Reserved	
	1917	Reserved	
	1918	Reserved	
	1919	Reserved	
	1920	Reserved	
	1921	Reserved	
	1922	Reserved	
B64	1923	Reserved	
	1924	Reserved	
	1925	Reserved	
	1926	Reserved	
	1927	Reserved	
	1928	Reserved	
	1929	Reserved	
	1930	Reserved	
B65	1931	Reserved	
	1932	Reserved	
	1933	Reserved	
	1934	Reserved	
	1935	Reserved	
	1936	Reserved	
	1937	Reserved	
	1938	Reserved	
B66	1939	Reserved	
	1940	Reserved	
	1941	Reserved	
	1942	Reserved	
	1943	Reserved	
	1944	Reserved	
	1945	Reserved	
	1946	Reserved	
B67	1947	Reserved	
	1948	Reserved	
	1949	Reserved	
	1950	Reserved	
	1951	Reserved	
	1952	Reserved	
	1953	Reserved	
	1954	Reserved	
B68	1955	Reserved	
	1956	Reserved	
	1957	Reserved	
	1958	Reserved	
	1959	Reserved	
	1960	Reserved	

**Low Voltage GreenPAK Programmable
Mixed-Signal Matrix**
Table 38: Register Map (Continued)

Address		Signal Function	Register Bit Definition
Byte	Register Bit		
BA	1488	ACMP0 Vref Selection	000000: 25 mV
	1489		000001: 50 mV
	1490		011110: 775 mV
	1491		011111: 800 mV
	1492		100000: 825 mV
	1493		100001: 850 mV
	1494	ACMP0 Hysteresis selection	100010~111110: Reserved
	1495		111111: external Vref (Default 25 mV)
BB	1496	Reserved	
	1497	Reserved	
	1498	ACMPH0 Input Divider	00: 1x
	1499		01: 0.5x
	1500	ACMP0 Input tie to V _{DD} Enable	10: Reserved
	1501	Reserved	11: Reserved
	1502	Reserved	
BC	1503	Reserved	
	1504	ACMPH1 Vref Selection	000000: 25 mV
	1505		000001: 50 mV
	1506		011110: 775 mV
	1507		011111: 800 mV
	1508		100000: 825 mV
	1509		100001: 850 mV
	1510	ACMP1 Hysteresis selection	100010~111110: Reserved
	1511		111111: external Vref (Default: 25 mV)
BD	1512	Reserved	
	1513	Reserved	
	1514	ACMPH1 Input Divider	00: 1x
	1515		01: 0.5x
	1516	ACMPH1 Input tie to ACMPH0 Enable	10: Reserved
	1517	ACMP1 External Vref Select	11: Reserved
	1518	Reserved	0: Do not pull
	1519	Reserved	1: Pull to input of ACMPH0 (Pull positive input of ACMPH1 as the input of ACMPH0)
			0: Vinn of ACMPH1 from Pin
			1: Vinn of ACMPH1 from Vinn of ACMPH0

**Low Voltage GreenPAK Programmable
Mixed-Signal Matrix**
Table 38: Register Map (Continued)

Address		Signal Function	Register Bit Definition
Byte	Register Bit		
BE	1520	ACMP reference voltage generator enable	0: Disable 1: Enable
	1521	ACMP Buffer Enable	0: Disable 1: Enable
	1522	ACMP Buffer Enable Selection	0: Enable by reg_buf_en 1: Enable by tempsense_en
	1523	ACMP Unit-gain-buffer enable	0: Disable and pass input voltage directly to output 1: Enable and apply UGB
	1524	ACMP Buffer Discharge	0: Disable discharge PIN9, GPIO5 1: Enable discharge PIN9, GPIO5
	1525	ACMP Buffer Select	00: Reserved (GND) 01: avref_acmph0 10: avref_acmph1 11: Tempsense Output
	1526		
	1527	Reserved	
BF	1528	ACMP Temp Sensor Enable	0: Do not select tempsense output as buffer out 1: Select tempsense output as buffer out
	1529	ACMP Temp Sensor Enable Select	0: Enable by tempsense_en 1: Enable by tempsense_en_matrix
	1530	Pass buffer output to ACMPH1 input	0: Do not pass 1: Pass
	1531	Bandgap control	0: BG always wake, non sleep 1: Sleep when w/s sleep
	1532	Option of Ibias enable	0: No change in ibias_en 1: Force ibias_en equal to bg_en
	1533	Reserved	
	1534	Reserved	
	1535	Reserved	
C0	1536	V _{DD} detector hysteresis selection	0: With hysteresis 0.1V 1: without hysteresis
	1537	BG, Vref gen and ACMP wake up sequence selection	0: Enable BG Vref gen and ACMP at same time 1: Enable BG first. After BG_ok, enable Vrefgen; After BG_ok and Vref_ok, enable ACMP
	1538	Reserved	
	1539	Reserved	
	1540	Reserved	
	1541	Reserved	
	1542	Reserved	
	1543	Reserved	
C1	1544	Reserved	
	1545	Reserved	
	1546	Reserved	
	1547	Reserved	
	1548	Reserved	
	1549	Reserved	
	1550	Reserved	
	1551	Reserved	

Table 38: Register Map (Continued)

Address		Signal Function	Register Bit Definition
Byte	Register Bit		
C2	1552	Reserved	
	1553		
	1554		
	1555		
	1556		
	1557		
	1558		
	1559		
C3	1560	Reserved	
	1561		
	1562	Reserved	
	1563		
	1564	Reserved	
	1565		
	1566	Reserved	
	1567	Reserved	
C4	1568	Reserved	
	1569		
	1570		
	1571		
	1572		
	1573		
	1574		
	1575	Reserved	
C5	1576	Reserved	
	1577		
	1578	Reserved	
	1579	Reserved	
	1580	Reserved	
	1581		
	1582		
	1583		
C6	1584	Reserved	
	1585		
	1586		
	1587		
	1588	Reserved	
	1589	Reserved	
	1590	Reserved	
	1591	Reserved	
C7	1592	Reserved	
	1593		
	1594		
	1595		
	1596	Reserved	
	1597	Reserved	
	1598	Reserved	
	1599	Reserved	

SLG47512/13

Low Voltage GreenPAK Programmable Mixed-Signal Matrix

Table 38: Register Map (Continued)

Address		Signal Function	Register Bit Definition
Byte	Register Bit		
C8	1600	Reserved	
	1601	Reserved	
	1602	Reserved	
	1603	Reserved	
	1604	Reserved	
	1605	Reserved	
	1606	Reserved	
	1607	Reserved	
C9	1608	Reserved	
	1609	Reserved	
	1610	Reserved	
	1611	Reserved	
	1612	Reserved	
	1613	Reserved	
	1614	Reserved	
	1615	Reserved	
CA	1616	Reserved	
	1617	Reserved	
	1618		
	1619	Reserved	
	1620		
	1621	Reserved	
	1622	Reserved	
	1623	Reserved	
CB	1624	Reserved	
	1625	Reserved	
	1626		
	1627	Reserved	
	1628	Reserved	
	1629	Reserved	
	1630	Reserved	
	1631	Reserved	
CC	1632	Reserved	
	1633	Reserved	
	1634		
	1635	Reserved	
	1636	Reserved	
	1637	Reserved	
	1638		
	1639	Reserved	
CD	1640	Reserved	
	1641	Reserved	
	1642		
	1643	Reserved	
	1644	Reserved	
	1645	Reserved	
	1646		
	1647	Reserved	

SLG47512/13

Low Voltage GreenPAK Programmable Mixed-Signal Matrix

Table 38: Register Map (Continued)

Address		Signal Function	Register Bit Definition
Byte	Register Bit		
CE	1648	Reserved	
	1649		
	1650		
	1651		
	1652	Reserved	
	1653		
	1654		
	1655	Reserved	
CF	1656	Reserved	
	1657		
	1658		
	1659		
	1660	Reserved	
	1661		
	1662		
	1663	Reserved	
D0	1664	Reserved	
	1665		
	1666		
	1667		
	1668	Reserved	
	1669		
	1670		
	1671	Reserved	
D1	1672	Reserved	
	1673		
	1674		
	1675		
	1676	Reserved	
	1677		
	1678		
	1679	Reserved	
D2	1680	Reserved	
	1681		
	1682		
	1683		
	1684	Reserved	
	1685		
	1686		
	1687	Reserved	
D3	1688	Reserved	
	1689		
	1690		
	1691		
	1692	Reserved	
	1693	Reserved	
	1694	Reserved	
	1695	Reserved	

Table 38: Register Map (Continued)

Address		Signal Function	Register Bit Definition
Byte	Register Bit		
D4	1696	Reserved	
	1697		
	1698		
	1699		
	1700	Reserved	
	1701		
	1702		
	1703		
D5	1704	Reserved	
	1705		
	1706		
	1707		
	1708		
	1709		
	1710		
	1711		
D6	1712	Reserved	
	1713		
	1714		
	1715		
	1716		
	1717		
	1718		
	1719		
D7	1720	RPR	Registers Read Protection Register. Valid only when PROTECT_EN is 1 00: 1K register data is unprotected for read 01: 1K register data is partly protected for read 10: 1K register data is fully protected for read 11: 1K register data is fully protected for read
	1721		
	1722	WPR	Registers Write Protection Register. Valid only when PROTECT_EN is 1 00: 1K register data is unprotected for write 01: 1K register data is partly protected for write 10: 1K register data is fully protected for write 11: 1K register data is fully protected for write
	1723		
	1724	Reserved	
	1725	Reserved	
	1726	Reserved	
	1727	Reserved	
D8	1728	Reserved	
	1729		
	1730		
	1731		
	1732		
	1733		
	1734		
	1735		

SLG47512/13

Low Voltage GreenPAK Programmable Mixed-Signal Matrix

Table 38: Register Map (Continued)

Address		Signal Function	Register Bit Definition
Byte	Register Bit		
D9	1736	Reserved	
	1737		
	1738		
	1739		
	1740		
	1741		
	1742		
	1743		
DA	1744	Reserved	
	1745		
	1746		
	1747		
	1748		
	1749		
	1750		
	1751		
DB	1752	8-bit Pattern ID Byte 0 (from NVM)	
	1753		
	1754		
	1755		
	1756		
	1757		
	1758		
	1759		
DC	1760	Reserved	
	1761		
	1762		
	1763		
	1764		
	1765		
	1766		
	1767		
DD	1768	Reserved	
	1769	Reserved	
	1770	Reserved	
	1771	Reserved	
	1772	Reserved	
	1773	Reserved	
	1774	Reserved	
	1775	Reserved	
DE	1776	Reserved	
	1777	Reserved	
	1778	Reserved	
	1779	Reserved	
	1780	Reserved	
	1781	Reserved	
	1782	Reserved	
	1783	Reserved	

Table 38: Register Map (Continued)

Address		Signal Function	Register Bit Definition
Byte	Register Bit		
DF	1784	Reserved	
	1785	Reserved	
	1786	Reserved	
	1787	Reserved	
	1788	Reserved	
	1789	Reserved	
	1790	Reserved	
	1791	Reserved	
E0	1792	Reserved	
	1793	Reserved	
	1794	Reserved	
	1795	Reserved	
	1796	Reserved	
	1797	Reserved	
	1798	Reserved	
	1799	Reserved	
E1	1800	Reserved	
	1801	Reserved	
	1802	Reserved	
	1803	Reserved	
	1804	Reserved	
	1805	Reserved	
	1806	Reserved	
	1807	Reserved	
E2	1808	Reserved	
	1809	Reserved	
	1810	Reserved	
	1811	Reserved	
	1812	Reserved	
	1813	Reserved	
	1814	Reserved	
	1815	Reserved	
E3	1816	Reserved	
	1817	Reserved	
	1818	Reserved	
	1819	Reserved	
	1820	Reserved	
	1821	Reserved	
	1822	Reserved	
	1823	Reserved	
E4	1824	Reserved	
	1825	Reserved	
	1826	Reserved	
	1827	Reserved	
	1828	Reserved	
	1829	Reserved	
	1830	Reserved	
	1831	Reserved	

Table 38: Register Map (Continued)

Address		Signal Function	Register Bit Definition
Byte	Register Bit		
E5	1832	Reserved	
	1833	Reserved	
	1834	Reserved	
	1835	Reserved	
	1836	Reserved	
	1837	Reserved	
	1838	Reserved	
	1839	Reserved	
E6	1840	Reserved	
	1841	Reserved	
	1842	Reserved	
	1843	Reserved	
	1844	Reserved	
	1845	Reserved	
	1846	Reserved	
	1847	Reserved	
E7	1848	Reserved	
	1849	Reserved	
	1850	Reserved	
	1851	Reserved	
	1852	Reserved	
	1853	Reserved	
	1854	Reserved	
	1855	Reserved	
E8	1856	Reserved	
	1857	Reserved	
	1858	Reserved	
	1859	Reserved	
	1860	Reserved	
	1861	Reserved	
	1862	Reserved	
	1863	Reserved	
E9	1864	Reserved	
	1865	Reserved	
	1866	Reserved	
	1867	Reserved	
	1868	Reserved	
	1869	Reserved	
	1870	Reserved	
	1871	Reserved	
EA	1872	Reserved	
	1873	Reserved	
	1874	Reserved	
	1875	Reserved	
	1876	Reserved	
	1877	Reserved	
	1878	Reserved	
	1879	Reserved	

Table 38: Register Map (Continued)

Address		Signal Function	Register Bit Definition
Byte	Register Bit		
EB	1880	Reserved	
	1881	Reserved	
	1882	Reserved	
	1883	Reserved	
	1884	Reserved	
	1885	Reserved	
	1886	Reserved	
EC	1887	Reserved	
	1888	Reserved	
	1889	Reserved	
	1890	Reserved	
	1891	Reserved	
	1892	Reserved	
	1893	Reserved	
ED	1894	Reserved	
	1895	Reserved	
	1896	Reserved	
	1897	Reserved	
	1898	Reserved	
	1899	Reserved	
	1900	Reserved	
EE	1901	Reserved	
	1902	Reserved	
	1903	Reserved	
	1904	Reserved	
	1905	Reserved	
	1906	Reserved	
	1907	Reserved	
EF	1908	Reserved	
	1909	Reserved	
	1910	Reserved	
	1911	Reserved	
	1912	Reserved	
	1913	Reserved	
	1914	Reserved	
F0	1915	Reserved	
	1916	Reserved	
	1917	Reserved	
	1918	Reserved	
	1919	Reserved	
	1920	Reserved	
	1921	Reserved	
	1922	Reserved	
	1923	Reserved	
	1924	Reserved	
	1925	Reserved	
	1926	Reserved	
	1927	Reserved	

Table 38: Register Map (Continued)

Address		Signal Function	Register Bit Definition
Byte	Register Bit		
F1	1928	Reserved	
	1929	Reserved	
	1930	Reserved	
	1931	Reserved	
	1932	Reserved	
	1933	Reserved	
	1934	Reserved	
	1935	Reserved	
F2	1936	Reserved	
	1937	Reserved	
	1938	Reserved	
	1939	Reserved	
	1940	Reserved	
	1941	Reserved	
	1942	Reserved	
	1943	Reserved	
F3	1944	Reserved	
	1945	Reserved	
	1946	Reserved	
	1947	Reserved	
	1948	Reserved	
	1949	Reserved	
	1950	Reserved	
	1951	Reserved	
F4	1952	Reserved	
	1953	Reserved	
	1954	Reserved	
	1955	Reserved	
	1956	Reserved	
	1957	Reserved	
	1958	Reserved	
	1959	Reserved	
F5	1960	Reserved	
	1961	Reserved	
	1962	Reserved	
	1963	Reserved	
	1964	Reserved	
	1965	Reserved	
	1966	Reserved	
	1967	Reserved	
F6	1968	Reserved	
	1969	Reserved	
	1970	Reserved	
	1971	Reserved	
	1972	Reserved	
	1973	Reserved	
	1974	Reserved	
	1975	Reserved	

Table 38: Register Map (Continued)

Address		Signal Function	Register Bit Definition
Byte	Register Bit		
F7	1976	Reserved	
	1977	Reserved	
	1978	Reserved	
	1979	Reserved	
	1980	Reserved	
	1981	Reserved	
	1982	Reserved	
F8	1983	Reserved	
	1984	Reserved	
	1985	Reserved	
	1986	Reserved	
	1987	Reserved	
	1988	Reserved	
	1989	Reserved	
F9	1990	Reserved	
	1991	Reserved	
	1992	Reserved	
	1993	Reserved	
	1994	Reserved	
	1995	Reserved	
	1996	Reserved	
FA	1997	Reserved	
	1998	Reserved	
	1999	Reserved	
	2000	Reserved	
	2001	Reserved	
	2002	Reserved	
	2003	Reserved	
FB	2004	Reserved	
	2005	Reserved	
	2006	Reserved	
	2007	Reserved	
	2008	Reserved	
	2009	Reserved	
	2010	Reserved	
FC	2011	Reserved	
	2012	Reserved	
	2013	Reserved	
	2014	Reserved	
	2015	Reserved	
	2016	Reserved	
	2017	Reserved	
FC	2018	Reserved	
	2019	Reserved	
	2020	Reserved	
	2021	Reserved	
	2022	Reserved	
	2023	Reserved	

Table 38: Register Map (Continued)


Address		Signal Function	Register Bit Definition
Byte	Register Bit		
FD	2024	Reserved	
	2025	Reserved	
	2026	Reserved	
	2027	Reserved	
	2028	Reserved	
	2029	Reserved	
	2030	Reserved	
	2031	Reserved	
FE	2032	Reserved	
	2033	Reserved	
	2034	Reserved	
	2035	Reserved	
	2036	Reserved	
	2037	Reserved	
	2038	Reserved	
	2039	Reserved	
FF	2040	Reserved	
	2041	Reserved	
	2042	Reserved	
	2043	Reserved	
	2044	Reserved	
	2045	Reserved	
	2046	Reserved	
	2047	Reserved	

SLG47512/13


Low Voltage GreenPAK Programmable Mixed-Signal Matrix

18 Package Top Marking Definitions

18.1 STQFN 12L 1.6 MM X 1.6 MM X 0.55 MM 0.4P FC

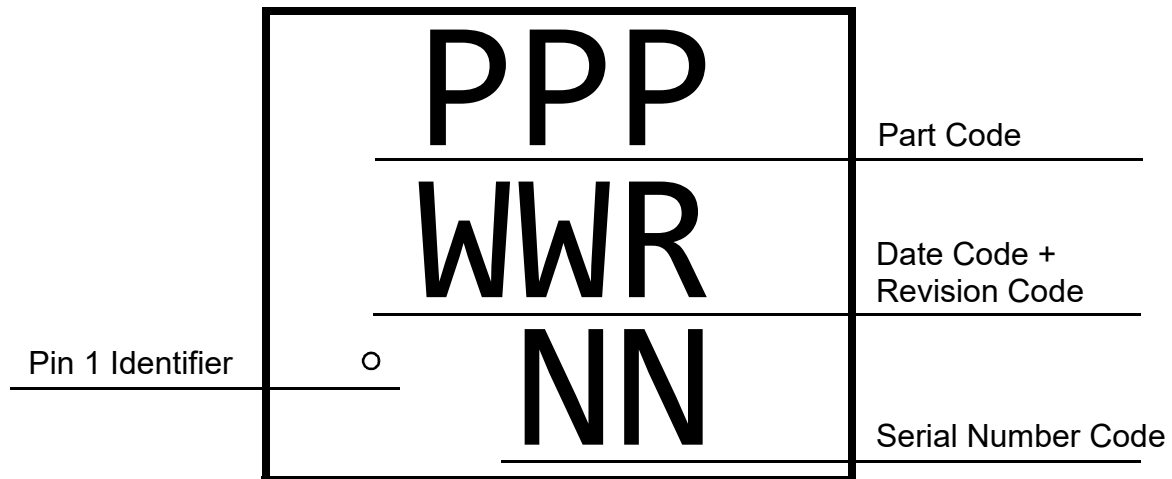

18.2 MSTQFN 16L 1.6 MM X 1.6 MM X 0.55 MM 0.4P

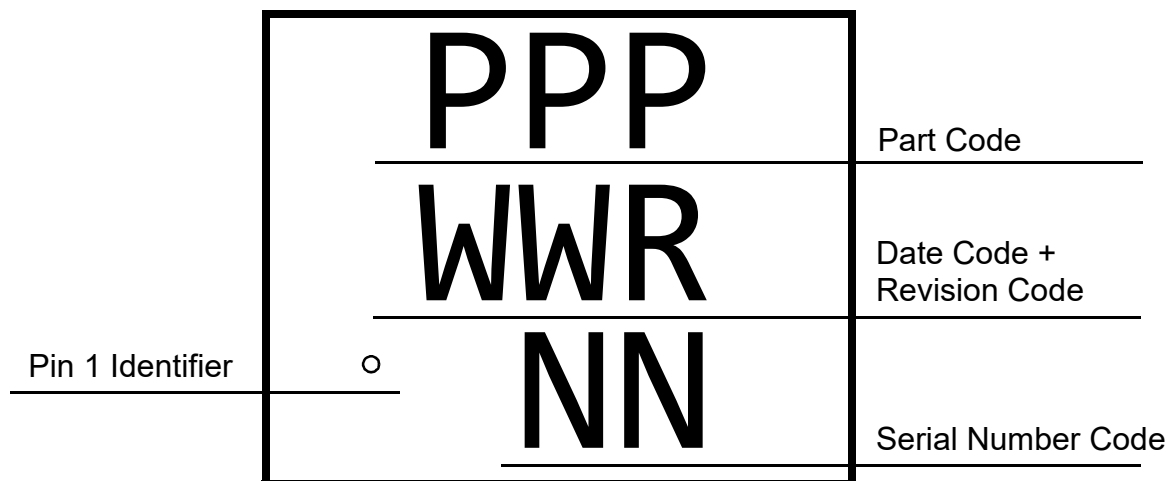


SLG47512/13

Low Voltage GreenPAK Programmable Mixed-Signal Matrix

19 Package Information

19.1 PACKAGE OUTLINES FOR STQFN 12L 1.6 MM X 1.6 MM X 0.55 MM 0.4P FC PACKAGE

JEDEC MO-220
IC Net Weight: 0.0035 g

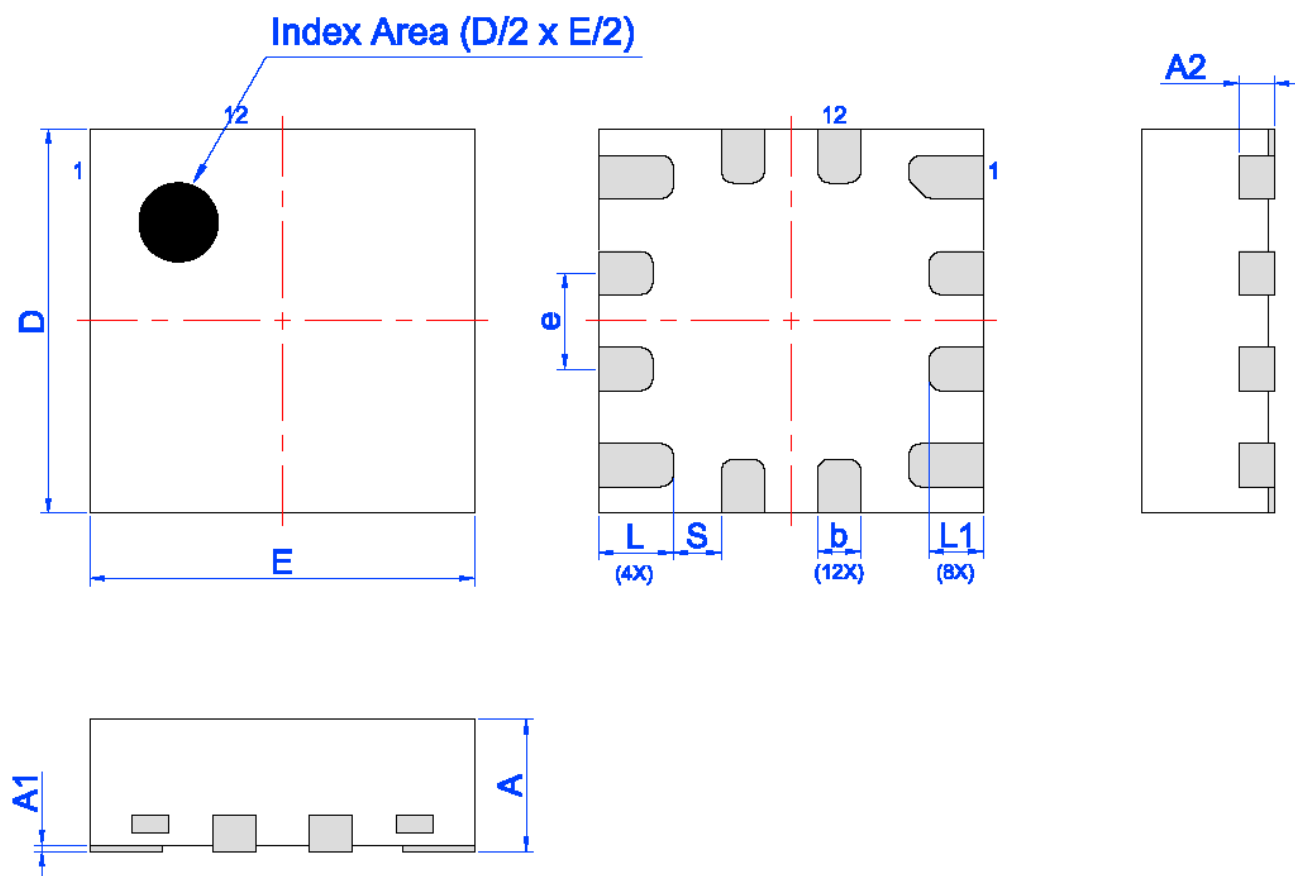

Unit: mm


Symbol	Min	Nom.	Max	Symbol	Min	Nom.	Max
A	0.50	0.55	0.60	D	1.55	1.60	1.65
A1	0.005	-	0.060	E	1.55	1.60	1.65
A2	0.10	0.15	0.20	L	0.26	0.31	0.36
b	0.13	0.18	0.23	L1	0.175	0.225	0.275
e	0.40 BSC			S	0.2 REF		

SLG47512/13

Low Voltage GreenPAK Programmable Mixed-Signal Matrix

19.2 PACKAGE OUTLINES FOR MSTQFN 16L 1.6 MM X 1.6 MM X 0.55 MM 0.4P PACKAGE

JEDEC MO-220
IC Net Weight: 0.0043 g

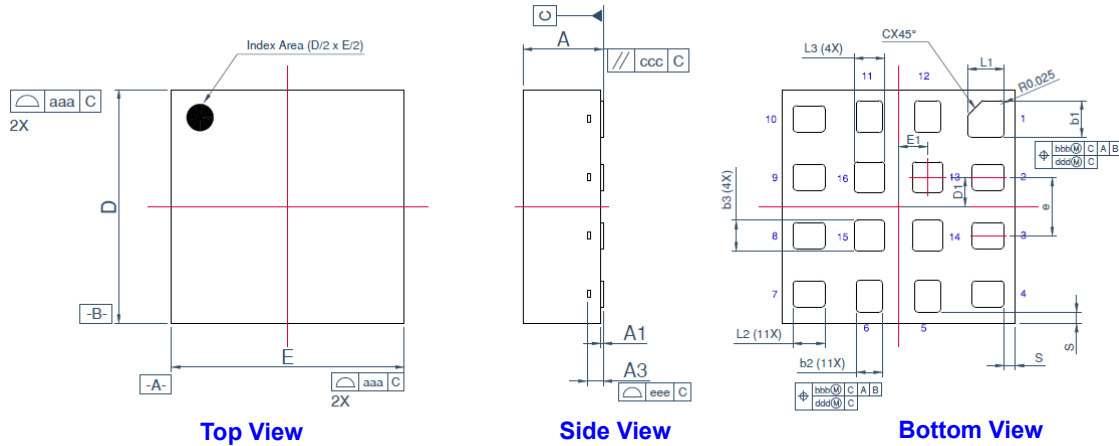

Controlling Dimensions: mm

SYMBOL	MILLIMETER			INCH		
	MIN	NOR	MAX	MIN	NOR	MAX
A	0.500	0.550	0.600	0.020	0.022	0.024
A1	0.00	0.005	0.010	0.0000	0.0002	0.0004
A3	0.11 REF			0.004 REF		
D	1.550	1.600	1.650	0.061	0.063	0.065
E	1.550	1.600	1.650	0.061	0.063	0.065
b1	0.200	0.250	0.300	0.008	0.010	0.012
b2	0.130	0.180	0.230	0.005	0.007	0.009
b3	0.160	0.210	0.260	0.006	0.008	0.010
L1	0.200	0.250	0.300	0.008	0.010	0.012
L2	0.170	0.220	0.270	0.007	0.009	0.011
L3	0.160	0.210	0.260	0.006	0.008	0.010
e	0.400 BSC			0.016 BSC		
C	0.100 REF			0.004 REF		
D1	0.200 BSC			0.008 BSC		
E1	0.200 BSC			0.008 BSC		
S	0.075 REF			0.003 REF		
aaa	0.1			0.004		
bbb	0.07			0.003		
ddd	0.05			0.002		
eee	0.05			0.002		
fff	0.05			0.002		

SLG47512/13

Low Voltage GreenPAK Programmable Mixed-Signal Matrix

19.3 MOISTURE SENSITIVITY LEVEL

The Moisture Sensitivity Level (MSL) is an indicator for the maximum allowable time period (floor lifetime) in which a moisture sensitive plastic device, once removed from the dry bag, can be exposed to an environment with a specified maximum temperature and a maximum relative humidity before the solder reflow process. The MSL classification is defined in Table 39.

For detailed information on MSL levels refer to the IPC/JEDEC standard J-STD-020, which can be downloaded from <http://www.jedec.org>.

The <PACKAGE_NAME> package is qualified for MSL <n>.

Table 39: MSL Classification

MSL Level	Floor Lifetime	Conditions
MSL 4	72 hours	30 °C/60 % RH
MSL 3	168 hours	30 °C/60 % RH
MSL 2A	4 weeks	30 °C/60 % RH
MSL 2	1 year	30 °C/60 % RH
MSL 1	Unlimited	30 °C/60 % RH

19.4 STQFN HANDLING

Be sure to handle STQFN package only in a clean, ESD-safe environment. Tweezers or vacuum pick-up tools are suitable for handling. Do not handle STQFN package with fingers as this can contaminate the package pins and interface with solder reflow.

19.5 SOLDERING INFORMATION

Refer to the IPC/JEDEC standard J-STD-020 for relevant soldering information. This document can be downloaded from <http://www.jedec.org>.

20 Ordering Information

The ordering number consists of the part number followed by a suffix indicating the packing method. For details and availability, please consult Renesas Electronics Corporation's or your local sales representative.

Part Number	Type
SLG47512V	12-pin STQFN
SLG47512VTR	12-pin STQFN - Tape and Reel (3k units)
SLG47513M	16-pin MSTQFN
SLG47513MTR	16-pin MSTQFN - Tape and Reel (3k units)

Note 1 Use SLG47512V or SLG47513M to order. Shipments are automatically in Tape and Reel.

Note 2 "TR" suffix is no longer used. It is a legacy naming convention shown here only for informational purposes.

20.1 TAPE AND REEL SPECIFICATIONS


Package Type	# of Pins	Nominal Package Size (mm)	Max Units		Reel & Hub Size (mm)	Leader (min)		Trailer (min)		Tape Width (mm)	Part Pitch (mm)
			per Reel	per Box		Pockets	Length (mm)	Pockets	Length (mm)		
STQFN 12L 1.6 mm x 1.6 mm x 0.55 mm, 0.4P FCA Green	12	1.6x1.6x0.55	3000	3000	178/60	100	400	100	400	8	4
MSTQFN 16L 1.6 mm x 1.6 mm x 0.55 mm, 0.4P FCA Green	16	1.6x1.6x0.55	3000	3000	178/60	100	400	100	400	8	4

SLG47512/13

Low Voltage GreenPAK Programmable Mixed-Signal Matrix

20.2 CARRIER TAPE DRAWING AND DIMENSIONS

Package Type	Pocket BTM Length (mm)	Pocket BTM Width (mm)	Pocket Depth (mm)	Index Hole Pitch (mm)	Pocket Pitch (mm)	Index Hole Diameter (mm)	Index Hole to Tape Edge (mm)	Index Hole to Pocket Center (mm)	Tape Width (mm)
	A0	B0	K0	P0	P1	D0	E	F	W
STQFN 12L 1.6 mm x 1.6 mm x 0.55 mm, 0.4P FCA Green	1.80 ±0.05 mm	1.80 ±0.05 mm	0.70 ±0.05 mm	4	4	1.5	1.75	3.5	8
MSTQFN 16L 1.6 mm x 1.6 mm x 0.55 mm, 0.4P FCA Green	1.80 ±0.05 mm	1.80 ±0.05 mm	0.70 ±0.05 mm	4	4	1.5	1.75	3.5	8

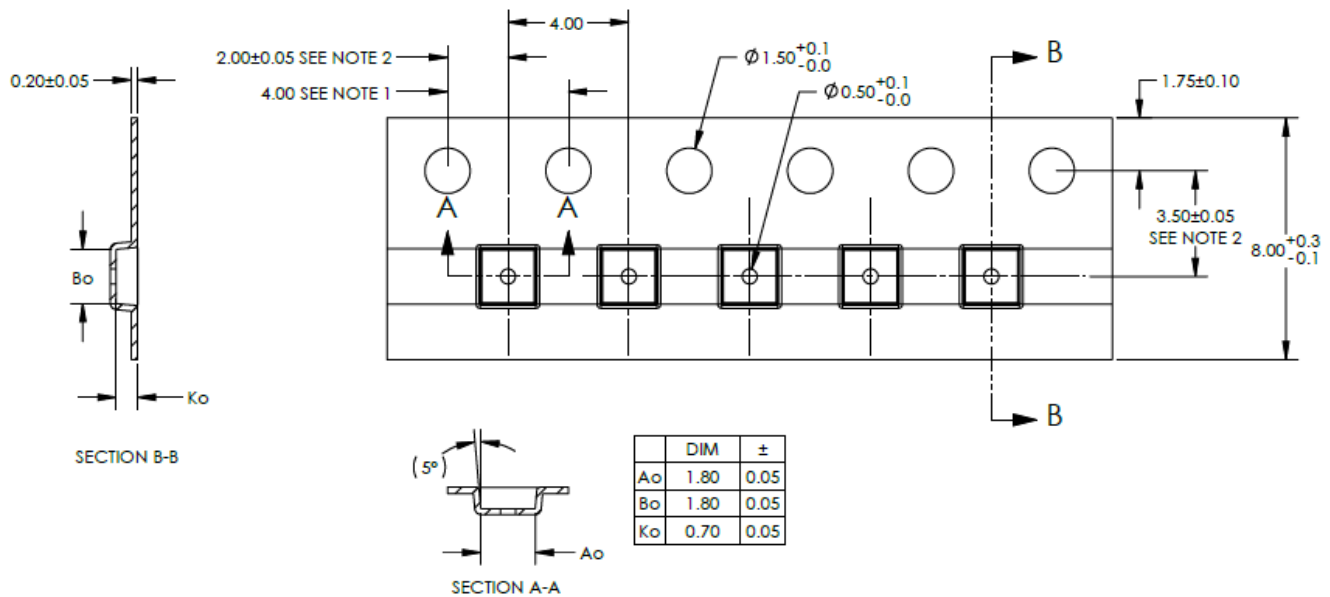

SLG47512/13

Low Voltage GreenPAK Programmable Mixed-Signal Matrix


21 Layout Guidelines

21.1 STQFN 12L 1.6 MM X 1.6 MM X 0.55 MM 0.4P FC PACKAGE

 Exposed Pad
(PKG face down)


 Recommended Land Pattern
(PKG face down)

Units: μm

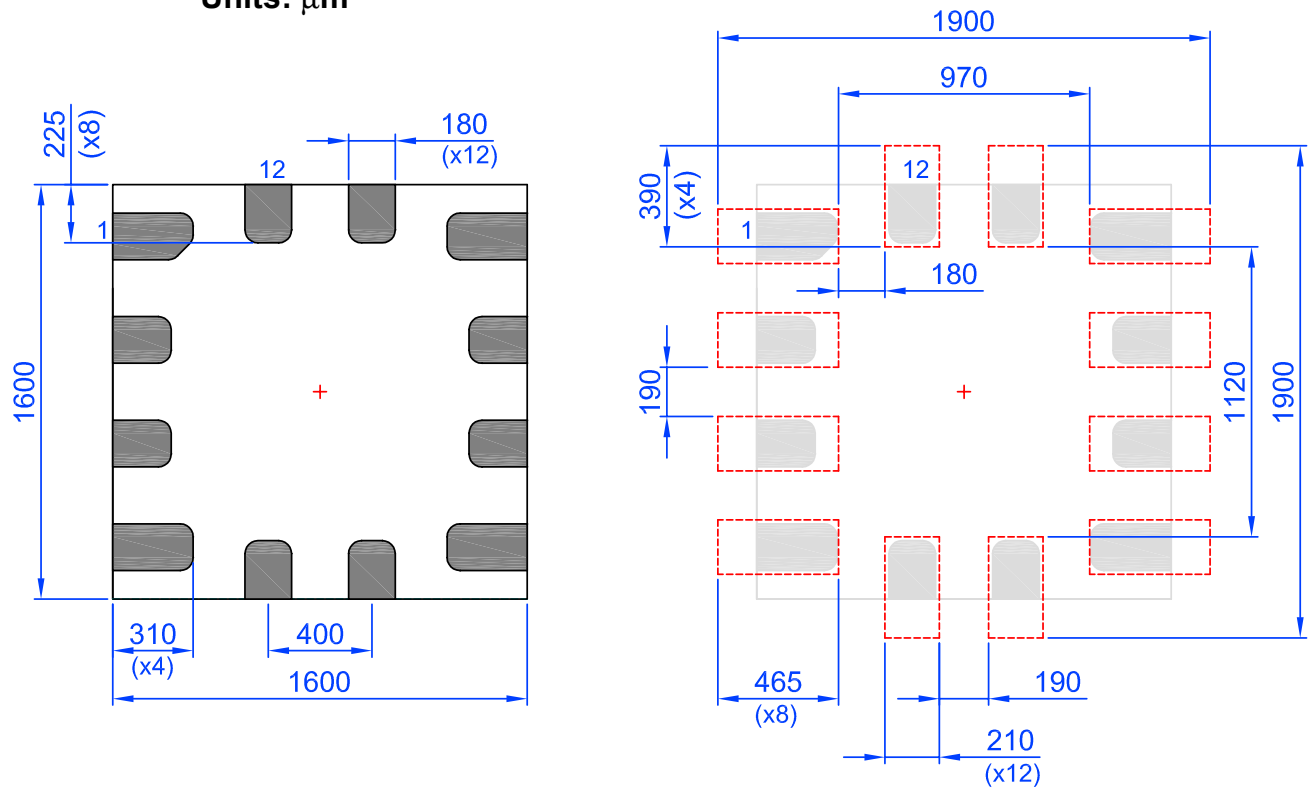

Low Voltage GreenPAK Programmable Mixed-Signal Matrix

21.2 MSTQFN 16L 1.6 MM X 1.6 MM X 0.55 MM 0.4P PACKAGE

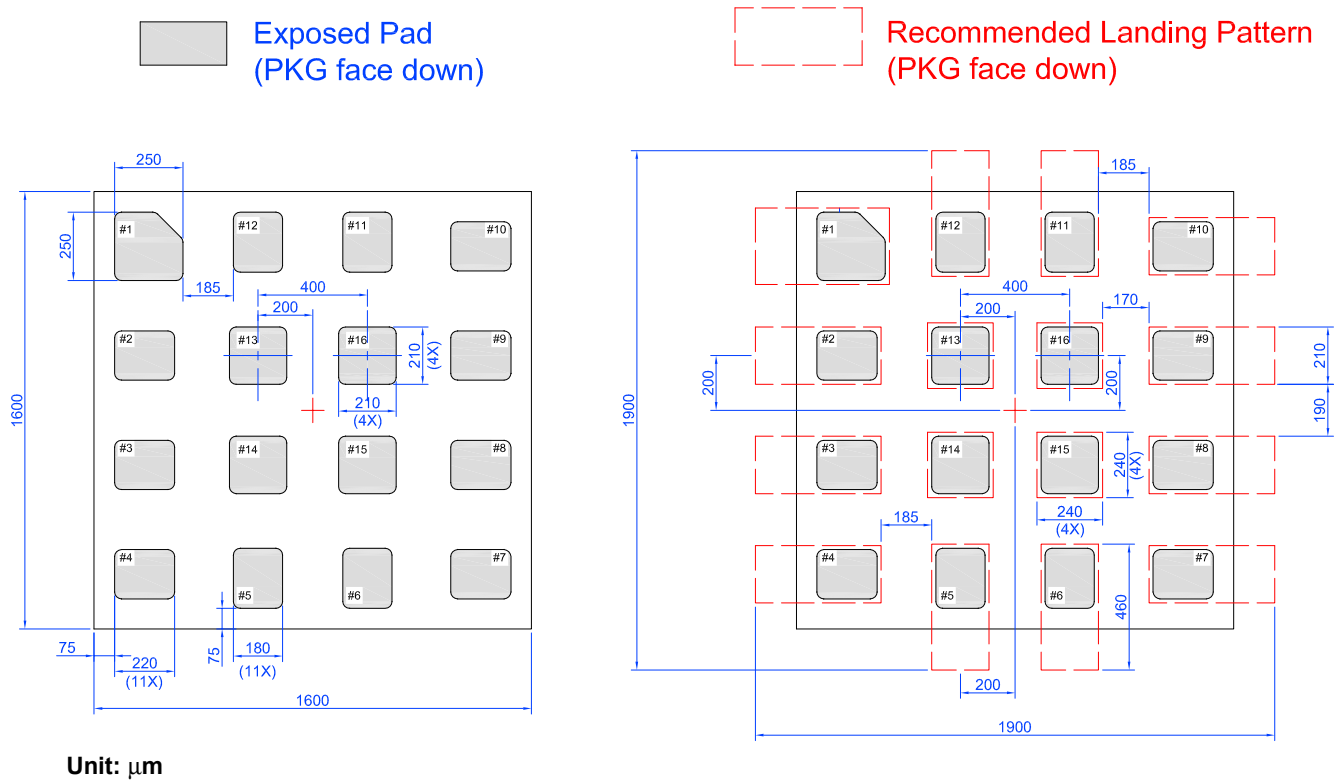

SLG47512/13

Low Voltage GreenPAK Programmable Mixed-Signal Matrix

Glossary

A

ACK	Acknowledge bit
ACMP	Analog Comparator
ACMPH	Analog Comparator High Speed
ACMPL	Analog Comparator Low Power

B

BG	Bandgap
----	---------

C

CLK	Clock
CMO	Connection matrix output
CNT	Counter

D

DFF	D Flip-Flop
DLY	Delay

E

ESD	Electrostatic discharge
EV	End Value

F

FSM	Finite State Machine
-----	----------------------

G

GPI	General Purpose Input
GPIO	General Purpose Input/Output
GPO	General Purpose Output

I

IN	Input
IO	Input/Output

L

LPF	Low Pass Filter
LSB	Least Significant Bit
LUT	Look Up Table

SLG47512/13

Low Voltage GreenPAK Programmable Mixed-Signal Matrix

LV Low Voltage

M

MSB Most Significant Bit

MUX Multiplexer

N

NPR Non-Volatile Memory Read/Write/Erase Protection

nRST Reset

NVM Non-Volatile Memory

O

OD Open-Drain

OE Output Enable

OSC Oscillator

OTP One Time Programmable

OUT Output

P

PD Power-down

PGen Pattern Generator

POR Power-On Reset

PP Push-Pull

PWR Power

P DLY Programmable Delay

R

R/W Read/Write

S

SCL I²C Clock Input

SDA I²C Data Input/Output

SLA Target Address

SMT With Schmitt Trigger

SV nSET Value

T

TS Temperature Sensor

SLG47512/13

Low Voltage GreenPAK Programmable Mixed-Signal Matrix

V

Vref Voltage Reference

W

WOSMT Without Schmitt Trigger

WS Wake and Sleep Controller

SLG47512/13

Low Voltage GreenPAK Programmable Mixed-Signal Matrix

Revision History

Revision	Date	Description
3.2	7-Feb-2025	Updated the terminology for the I ² C macrocell Corrected registers [30:24]
3.1	4-Feb-2025	Fixed typos Parameter T _{SP} min and max values corrected in tables I ² C Pins Timing Characteristics for DI Mode/DILV Mode Parameter name T _I and description Input Filter Spike Suppression (SCL, SDA) changed to T _{SP} - Pulse Width of Spikes that must be suppressed by the Input Filter in tables I ² C Pins Timing Characteristics for DI Mode/DILV Mode to comply with the I ² C standard specification Corrected Register Bit Definition for Register Bits [33], [34], [35] in table Register Map Updated figure I ² C General Timing Characteristics Updated the terms Master/Slave to Controller/Target to comply with the latest I ² C standard specification Updated LUT block names to match with Go Configure™ Software Hub
3.0	8-Feb-2024	Final version Updated registers [1759:1752]

SLG47512/13

Low Voltage GreenPAK Programmable Mixed-Signal Matrix

Status Definitions

Revision	Datasheet Status	Product Status	Definition
1.<n>	Target	Development	This datasheet contains the design specifications for product development. Specifications may change in any manner without notice.
2.<n>	Preliminary	Qualification	This datasheet contains the specifications and preliminary characterization data for products in pre-production. Specifications may be changed at any time without notice in order to improve the design.
3.<n>	Final	Production	This datasheet contains the final specifications for products in volume production. The specifications may be changed at any time in order to improve the design, manufacturing and supply. Major specification changes are communicated via Customer Product Notifications. Datasheet changes are communicated via www.renesas.com .
4.<n>	Obsolete	Archived	This datasheet contains the specifications for discontinued products. The information is provided for reference only.

RoHS Compliance

Renesas Electronics Corporation's suppliers certify that its products are in compliance with the requirements of Directive 2011/65/EU of the European Parliament on the restriction of the use of certain hazardous substances in electrical and electronic equipment. RoHS certificates from our suppliers are available on request.

IMPORTANT NOTICE AND DISCLAIMER

RENESAS ELECTRONICS CORPORATION AND ITS SUBSIDIARIES ("RENESAS") PROVIDES TECHNICAL SPECIFICATIONS AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT OF THIRD-PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for developers who are designing with Renesas products. You are solely responsible for (1) selecting the appropriate products for your application, (2) designing, validating, and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements. These resources are subject to change without notice. Renesas grants you permission to use these resources only to develop an application that uses Renesas products. Other reproduction or use of these resources is strictly prohibited. No license is granted to any other Renesas intellectual property or to any third-party intellectual property. Renesas disclaims responsibility for, and you will fully indemnify Renesas and its representatives against, any claims, damages, costs, losses, or liabilities arising from your use of these resources. Renesas' products are provided only subject to Renesas' Terms and Conditions of Sale or other applicable terms agreed to in writing. No use of any Renesas resources expands or otherwise alters any applicable warranties or warranty disclaimers for these products.

(Disclaimer Rev.1.01)

Corporate Headquarters

TOYOSU FORESIA, 3-2-24 Toyosu,
Koto-ku, Tokyo 135-0061, Japan
www.renesas.com

Contact Information

For further information on a product, technology, the most up-to-date version of a document, or your nearest sales office, please visit www.renesas.com/contact-us/.

Trademarks

Renesas and the Renesas logo are trademarks of Renesas Electronics Corporation. All trademarks and registered trademarks are the property of their respective owners.