
R8C/M12A Group

Timer RB2 in Programmable One-Shot Generation Mode

R01AN0103EJ0101

Rev.1.01

Mar. 10, 2011

1. Abstract

This document describes a setting method and an application example of timer RB2 programmable one-shot generation mode in the R8C/M12A Group.

2. Introduction

The application example described in this document applies to the following microcomputer (MCU) and parameter:

- MCU: R8C/M12A Group
- XIN clock frequency: 20 MHz

This application note can be used with other R8C Family MCUs which have the same special function registers (SFRs) as the above group. Check the manual for any modifications to functions. Careful evaluation is recommended before using the program described in this application note.

3. Application Example

3.1 Program Outline

A one-shot pulse of 3 ms high width is output from the TRBO pin using timer RB2 programmable one-shot generation mode.

Settings

- Set the output level to one-shot pulse high output, and low-level output at a timer stop.
- Set timer RB output to waveform output.
- Disable a one-shot trigger by $\overline{\text{INT0}}$ pin input (start one-shot pulse output by a program).
- Set programmable one-shot generation mode as the operating mode.
- Select an 8-bit timer with an 8-bit prescaler or a 16-bit timer as a counter (refer to 3.1.1 Usage Note).
- Write to the reload register only.
- Set f2 (10 MHz) as the count source.
- Set to count source provided.
- Use the timer RB2 interrupt.

Calculating the setting time

- 8-bit timer with 8-bit prescaler

$$\begin{aligned}\text{One-shot pulse: } 3 \text{ ms} &= 1/10 \text{ MHz} \times (\text{TRBPRES} + 1) \times (\text{TRBPR} + 1) \\ &= 100 \text{ ns} \times (\text{C7h} + 1) \times (95\text{h} + 1) \\ &= 100 \text{ ns} \times 200 \times 150\end{aligned}$$

- 16-bit timer

$$\begin{aligned}\text{One-shot pulse: } 3 \text{ ms} &= 1/10 \text{ MHz} \times ((\text{TRBPRES} + 1) + (\text{TRBPR} \times 100\text{h})) \\ &= 100 \text{ ns} \times ((2\text{Fh} + 1) + (75\text{h} \times 100\text{h})) \\ &= 100 \text{ ns} \times 30000\end{aligned}$$

Figure 3.1 shows a Block Diagram and Figure 3.2 shows a Timing Diagram. Table 3.1 lists the pin used and its function.

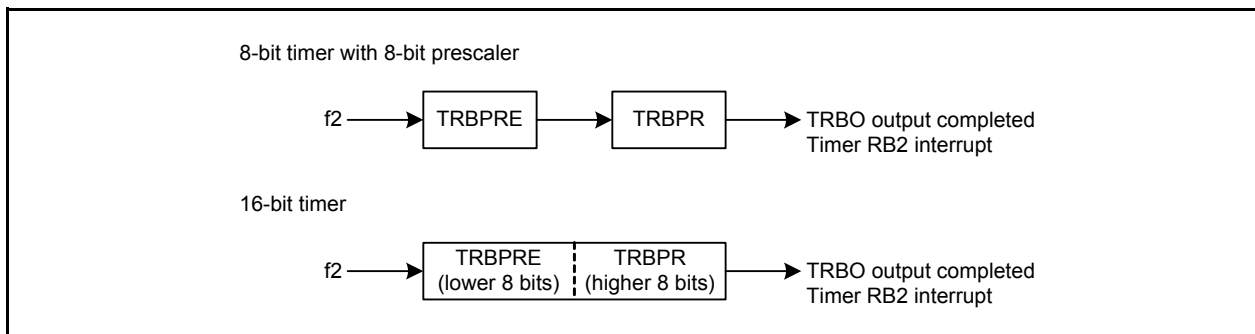


Figure 3.1 Block Diagram

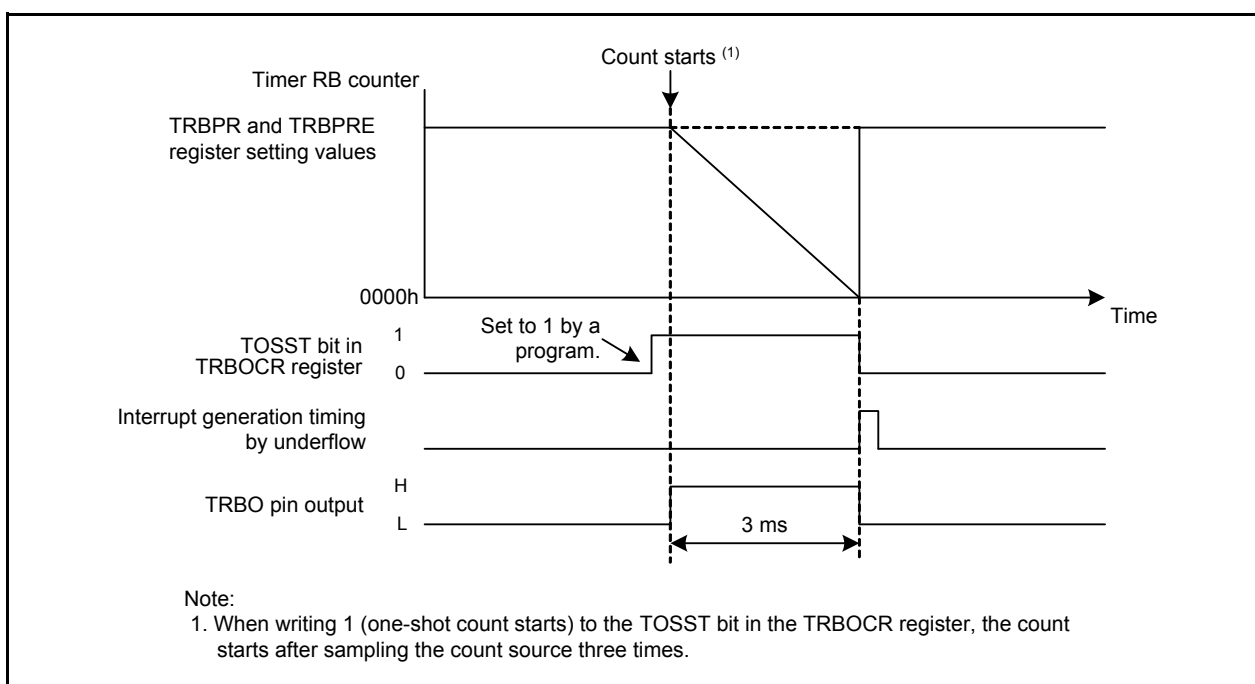


Figure 3.2 Timing Diagram

Table 3.1 Pin Used and Its Function

Pin Name	I/O	Function
P1_3/TRBO	Output	Timer RB2 output

3.1.1 Usage Note

The following is a note regarding using this application note:

- (1) Select the timer RB counter.

An 8-bit timer with an 8-bit prescaler is used for the initial setting. When switching to a 16-bit timer, comment out the following in a program:

```
#define TIMER_RB_8_BIT /* 8-bit timer with 8-bit prescaler selected */
```

3.2 Memory

Table 3.2 Memory

Memory	Size	Remarks
ROM	189 bytes	In the r01an0103_src.c module
RAM	0 bytes	In the r01an0103_src.c module
Maximum user stack	10 bytes	
Maximum interrupt stack	18 bytes	

Memory size varies depending on the C compiler version and compile options.

The above applies to the following conditions:

C compiler: M16C Series, R8C Family C Compiler V.5.45 Release 01

Compile options: -c -finfo -dir "\$(CONFIGDIR)" -R8C

4. Software

This section shows the initial setting procedures and values to set the example described in section 3. **Application Example.** Refer to the latest **R8C/M12A Group** hardware user's manual for details on individual registers.

The × in the register's Setting Value represents bits not used in this application, blank spaces represent bits that do not change, and the dash represents reserved bits or bits that have nothing assigned.

4.1 Function Tables

Declaration	void main (void)		
Outline	Main function		
Argument	Argument name		Meaning
	None		—
Variable (global)	Variable name		Contents
	None		—
Returned value	Type	Value	Meaning
	None	—	—
Function	Initialize the system clock and timer RB2.		


Declaration	void mcu_init (void)		
Outline	System clock setting		
Argument	Argument name		Meaning
	None		—
Variable (global)	Variable name		Contents
	None		—
Returned value	Type	Value	Meaning
	None	—	—
Function	Set the system clock (XIN clock).		

Declaration	void timer_rb2_init (void)		
Outline	Initial setting of timer RB2		
Argument	Argument name		Meaning
	None		—
Variable (global)	Variable name		Contents
	None		—
Returned value	Type	Value	Meaning
	None	—	—
Function	Initialize SFRs to use timer RB2 in programmable one-shot generation mode.		

Declaration	void _timer_rb2 (void)		
Outline	Timer RB2 interrupt handling		
Argument	Argument name		Meaning
	None		—
Variable (global)	Variable name		Contents
	None		—
Returned value	Type	Value	Meaning
	None	—	—
Function	Perform timer RB2 interrupt handling generated by the timer RB underflow.		


4.2 Main Function

- Flowchart

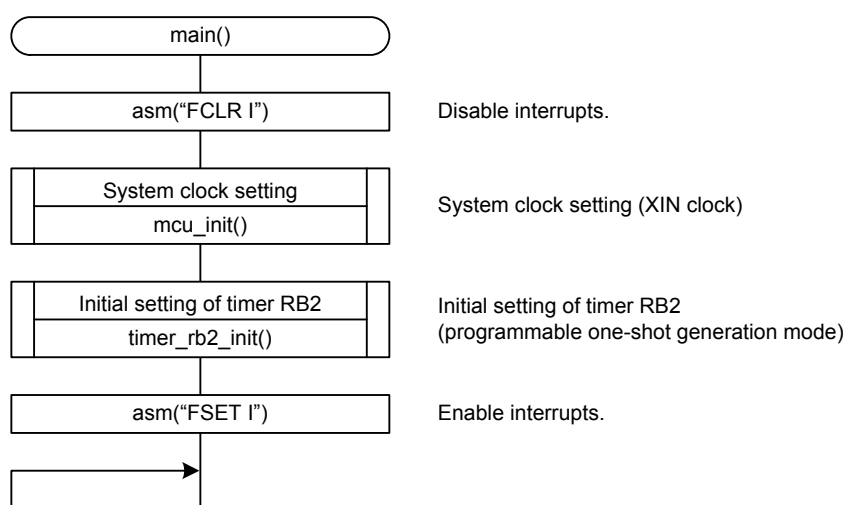

4.3 System Clock Setting

• Flowchart

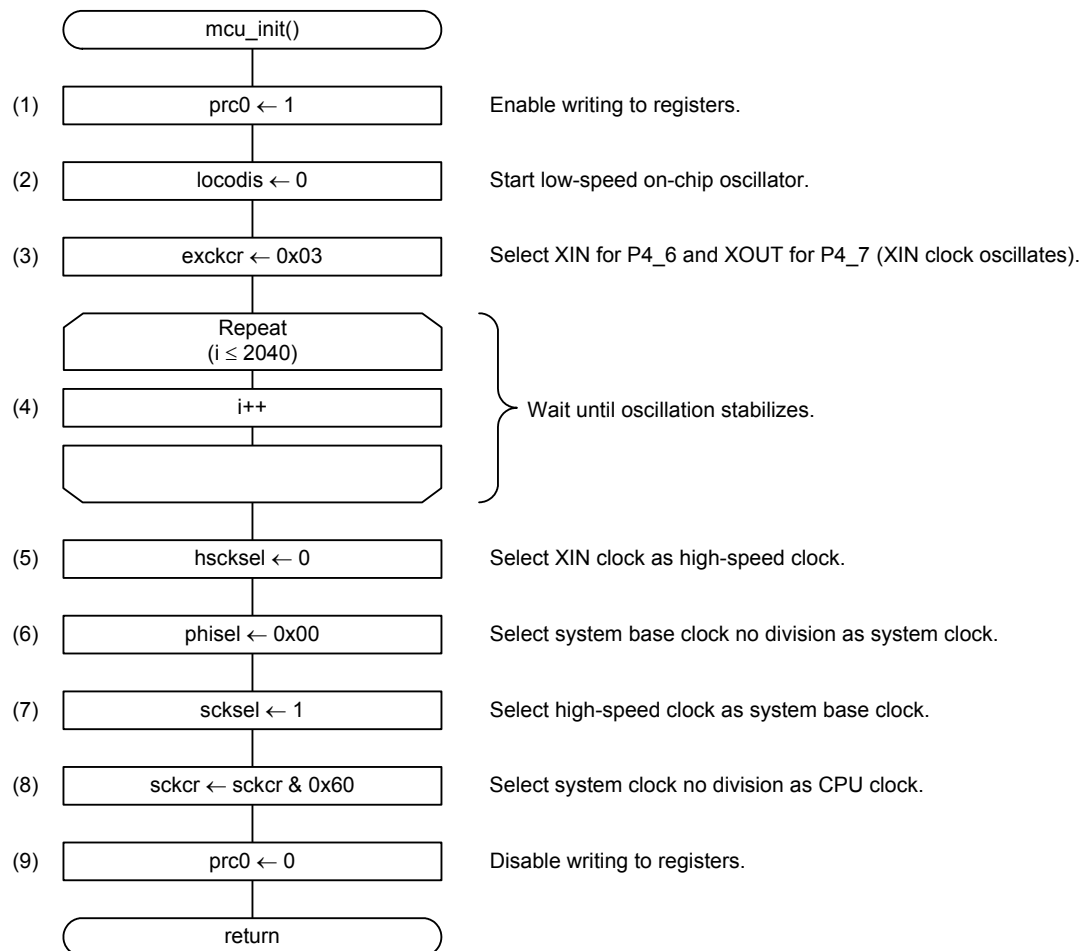

- Register settings

- (1) Enable writing to registers EXCKCR, OCOCR, SCKCR, PHISEL, CKSTPR, CKRSCR, BAKCR, FRV1, and FRV2.

Protect Register (PRCR)

Bit	b7	b6	b5	b4	b3	b2	b1	b0
Setting Value	—	—	—	x	x	—	x	1

Bit	Symbol	Bit Name	Function	R/W
b0	PRC0	Protect bit 0	Enables writing to registers EXCKCR, OCOCR, SCKCR, PHISEL, CKSTPR, CKRSCR, BAKCR, FRV1, and FRV2 1: Enabled	R/W

- (2) Start the low-speed on-chip oscillator.

High-Speed/Low-Speed On-Chip Oscillator Control Register (OCOCR)

Bit	b7	b6	b5	b4	b3	b2	b1	b0
Setting Value	—	—	—	—	—	—	0	x

Bit	Symbol	Bit Name	Function	R/W
b1	LOCODIS	Low-speed on-chip oscillator oscillation stop bit	0: Low-speed on-chip oscillator on	R/W

- (3) Oscillate the XIN clock.

External Clock Control Register (EXCKCR)

Bit	b7	b6	b5	b4	b3	b2	b1	b0
Setting Value	—	x	—	—	—	—	1	1

Bit	Symbol	Bit Name	Function	R/W
b0	CKPT0	Port P4_6 and P4_7 pin function select bits	P4_6 pin b1 b0	R/W
b1	CKPT1		1 1: XIN P4_7 pin b1 b0 1 1: XOUT	R/W

- (4) Wait until the XIN clock oscillation stabilizes.

- (5) Set the XIN clock for the high-speed clock.

System Clock f Control Register (SCKCR)

Bit	b7	b6	b5	b4	b3	b2	b1	b0
Setting Value	—	0	x	—	—	—	—	—

Bit	Symbol	Bit Name	Function	R/W
b6	HSCKSEL	High-speed on-chip oscillator/XIN clock select bit	0: XIN clock	R/W

- (6) Set the system base clock with no division for the system clock.

System Clock f Select Register (PHISEL)

Bit	b7	b6	b5	b4	b3	b2	b1	b0
Setting Value	0	0	0	0	0	0	0	0

Bit	Symbol	Bit Name	Function	R/W
b0	PHISEL0	System clock division select bits	bits used to set the division ratio of the system base clock (fBASE) to generate the system clock (f) System clock (f) $f = fBASE/(n + 1)$ n: Binary value set by the PHISEL register	R/W
b1	PHISEL1			R/W
b2	PHISEL2			R/W
b3	PHISEL3			R/W
b4	PHISEL4			R/W
b5	PHISEL5			R/W
b6	PHISEL6			R/W
b7	PHISEL7			R/W

- (7) Set the high-speed clock for the system base clock.

Clock Stop Control Register (CKSTPR)

Bit	b7	b6	b5	b4	b3	b2	b1	b0
Setting Value	1	—	—	—	—	x	x	x

Bit	Symbol	Bit Name	Function	R/W
b7	SCKSEL	System base clock select bit	1: fHSCK	R/W

- (8) Set the system clock with no division for the CPU clock.

System Clock f Control Register (SCKCR)

Bit	b7	b6	b5	b4	b3	b2	b1	b0
Setting Value	—	—	x	—	—	0	0	0

Bit	Symbol	Bit Name	Function	R/W
b0	PHISSEL0	CPU clock division select bits	b2 b1 b0 0 0 0: fs = System clock with no division	R/W
b1	PHISSEL1			R/W
b2	PHISSEL2			R/W

- (9) Disable writing to registers EXCKCR, OCOCR, SCKCR, PHISEL, CKSTPR, CKRSCR, BAKCR, FRV1, and FRV2.


Protect Register (PRCR)


Bit	b7	b6	b5	b4	b3	b2	b1	b0
Setting Value	—	—	—	x	x	—	x	0

Bit	Symbol	Bit Name	Function	R/W
b0	PRC0	Protect bit 0	Enables writing to registers EXCKCR, OCOCR, SCKCR, PHISEL, CKSTPR, CKRSCR, BAKCR, FRV1, and FRV2 0: Disabled	R/W

4.4 Initial Setting of Timer RB2

• Flowchart

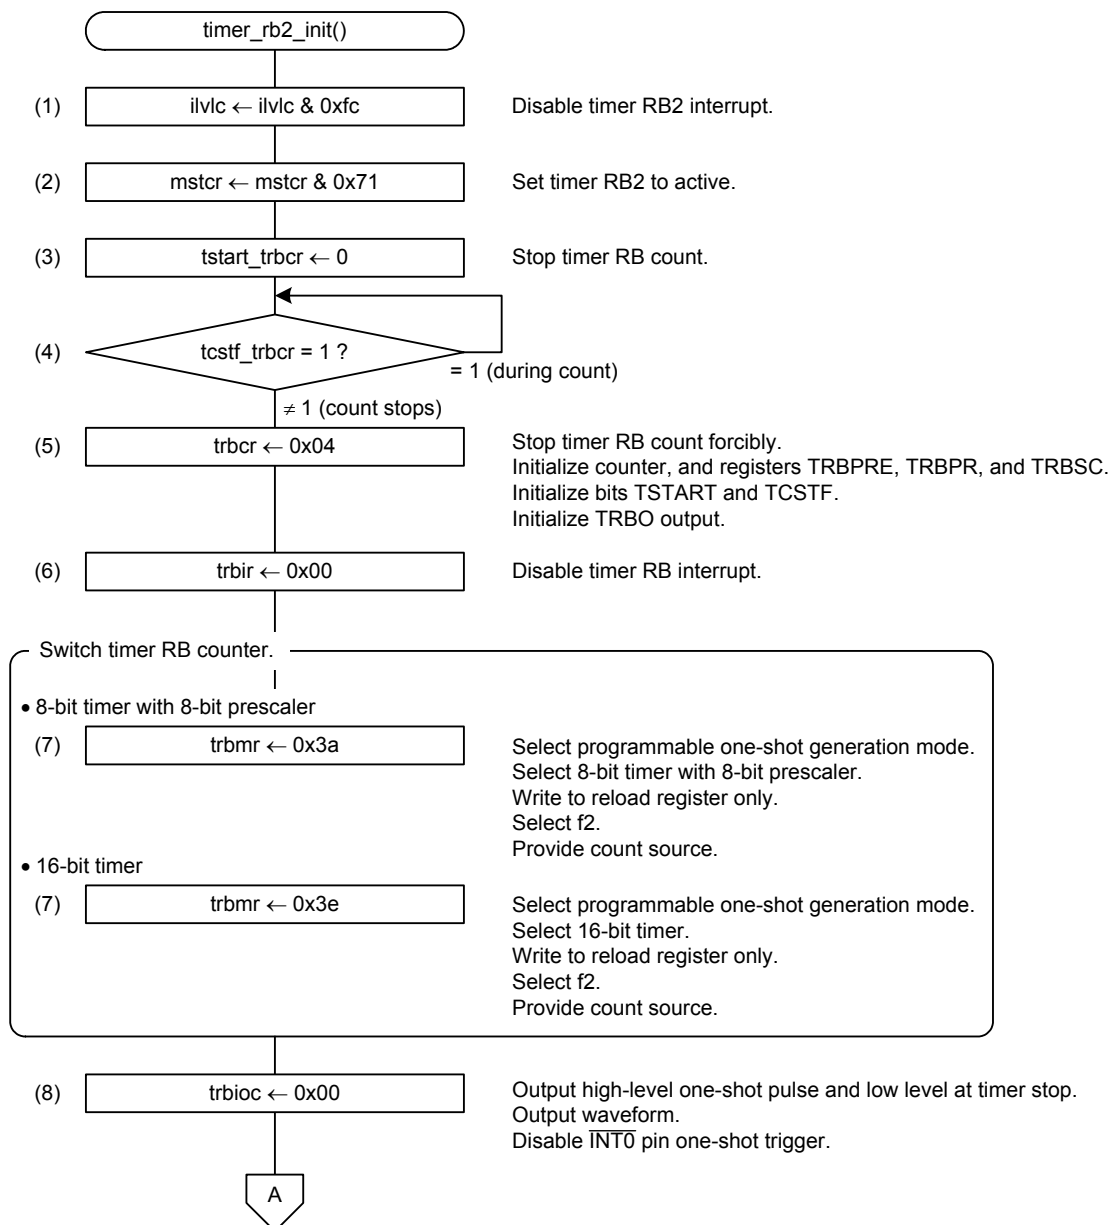

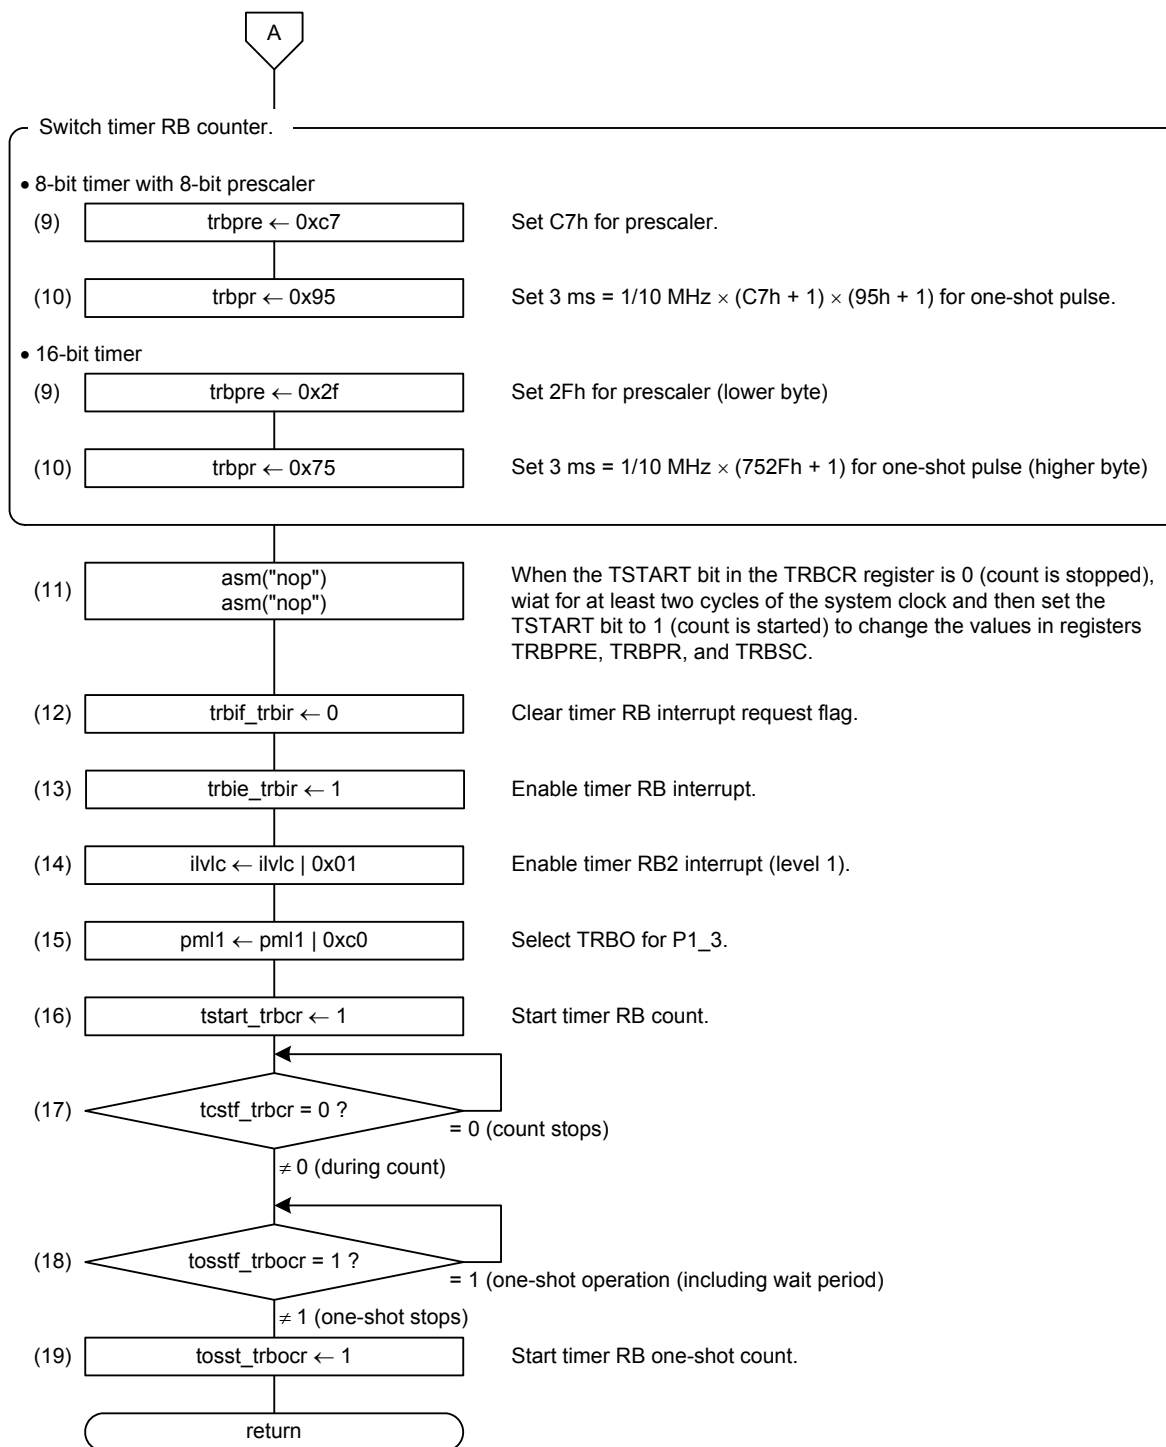

- Register settings

(1) Disable the timer RB2 interrupt.

Interrupt Priority Level Register C (ILVLC)

Bit	b7	b6	b5	b4	b3	b2	b1	b0
Setting Value	—	—	x	x	—	—	0	0

Bit	Symbol	Bit Name	Function	R/W
b0	ILVLC0	Interrupt priority level setting bits	b1 b0 0 0: Level 0 (interrupt disabled)	R/W
b1	ILVLC1			R/W

(2) Set timer RB2 to active.

Module Standby Control Register (MSTCR)

Bit	b7	b6	b5	b4	b3	b2	b1	b0
Setting Value	—	x	x	x	—	—	0	x

Bit	Symbol	Bit Name	Function	R/W
b1	MSTTRB	Timer RB2 standby bit	0: Active	R/W

(3) Stop the timer RB count.

Timer RB Control Register (TRBCR)

Bit	b7	b6	b5	b4	b3	b2	b1	b0
Setting Value	—	—	—	—	—	—	—	0

Bit	Symbol	Bit Name	Function	R/W
b0	TSTART	Timer RB count start bit	0: Count is stopped	R/W

(4) Wait until the timer RB count stops.

Timer RB Control Register (TRBCR)

Bit	Symbol	Bit Name	Function	R/W
b1	TCSTF	Timer RB count status flag	0: Count is stopped 1: Count is in progress	R

- (5) Initialize the counter, registers TRBPRES, TRBPR, and TRBSC, bits TSTART and TCSTF, and TRBO output.

Timer RB Control Register (TRBCR)

Bit	b7	b6	b5	b4	b3	b2	b1	b0
Setting Value	—	—	—	—	—	1		

Bit	Symbol	Bit Name	Function	R/W
b2	TSTOP	Timer RB count forced stop bit	When 1 is written to this bit, the count is forcibly stopped. The read value is 0.	R/W

- (6) Disable the timer RB interrupt.

Timer RB Interrupt Control Register (TRBIR)

Bit	b7	b6	b5	b4	b3	b2	b1	b0
Setting Value	0		—	—	—	—	—	—

Bit	Symbol	Bit Name	Function	R/W
b7	TRBIE	Timer RB interrupt enable bit	0: Interrupt disabled	R/W

- (7) Set the timer RB mode register.

Timer RB Mode Register (TRBMR)

- 8-bit timer with 8-bit prescaler

Bit	b7	b6	b5	b4	b3	b2	b1	b0
Setting Value	0	0	1	1	1	0	1	0

- 16-bit timer

Bit	b7	b6	b5	b4	b3	b2	b1	b0
Setting Value	0	0	1	1	1	1	1	0

Bit	Symbol	Bit Name	Function	R/W
b0	TMOD0	Timer RB operating mode select bits	b1 b0 1 0: Programmable one-shot generation mode	R/W
b1	TMOD1			R/W
b2	TCNT16	Timer RB counter select bit	0: 8-bit timer with 8-bit prescaler 1: 16-bit timer	R/W
b3	TWRC	Timer RB write control bit	1: Write to reload register only	R/W
b4	TCK0	Timer RB count source select bits	b6 b5 b4 0 1 1: f2	R/W
b5	TCK1			R/W
b6	TCK2			R/W
b7	TCKCUT	Timer RB count source cutoff bit	0: Count source is supplied	R/W

(8) Set the timer RB I/O control register.

Timer RB I/O Control Register (TRBIOC)

Bit	b7	b6	b5	b4	b3	b2	b1	b0
Setting Value	—	—	—	—	x	0	0	0

Bit	Symbol	Bit Name	Function	R/W
b0	TOPL	Timer RB output level select bit	0: High-level one-shot pulse output Low-level output at timer stop	R/W
b1	TOCNT	Timer RB output switch bit	0: Waveform output	R/W
b2	INOSTG	One-shot trigger control bit	0: One-shot trigger to $\overline{\text{INT0}}$ pin disabled	R/W

(9) Set the timer RB prescaler register.

Timer RB Prescaler Register (TRBPRES)

- Set C7h in 8-bit timer with 8-bit prescaler

Bit	b7	b6	b5	b4	b3	b2	b1	b0
Setting Value	1	1	0	0	0	1	1	1

- Set lower byte (2Fh) of 752Fh in 16-bit timer

Bit	b7	b6	b5	b4	b3	b2	b1	b0
Setting Value	0	0	1	0	1	1	1	1

Bit	Function	Setting Range	R/W
b7-b0	An internal count source is counted.	00h to FFh	R/W

(10) Set the timer RB primary register.

Timer RB Primary Register (TRBPR)

- Set 95h in 8-bit timer with 8-bit prescaler

Bit	b7	b6	b5	b4	b3	b2	b1	b0
Setting Value	1	0	0	1	0	1	0	1

- Set higher byte (75h) of 752Fh in 16-bit timer

Bit	b7	b6	b5	b4	b3	b2	b1	b0
Setting Value	0	1	1	1	0	1	0	1

Bit	Function	Setting Range	R/W
b7-b0	Timer RB prescaler underflow is counted.	00h to FFh	R/W

(11) Wait for at least two cycles of the system clock.

(12) Initialize the timer RB interrupt request flag.

Timer RB Interrupt Control Register (TRBIR)

Bit	b7	b6	b5	b4	b3	b2	b1	b0
Setting Value		0	—	—	—	—	—	—

Bit	Symbol	Bit Name	Function	R/W
b6	TRBIF	Timer RB interrupt request flag	0: No interrupt requested	R/W

(13) Enable the timer RB interrupt.

Timer RB Interrupt Control Register (TRBIR)

Bit	b7	b6	b5	b4	b3	b2	b1	b0
Setting Value	1		—	—	—	—	—	—

Bit	Symbol	Bit Name	Function	R/W
b7	TRBIE	Timer RB interrupt enable bit	1: Interrupt enabled	R/W

(14) Enable (level 1) the timer RB2 interrupt.

Interrupt Priority Level Register C (ILVLC)

Bit	b7	b6	b5	b4	b3	b2	b1	b0
Setting Value	—	—	x	x	—	—	0	1

Bit	Symbol	Bit Name	Function	R/W
b0	ILVLC0	Interrupt priority level setting bits	b1 b0 0 1: Level 1	R/W
b1	ILVLC1			R/W

(15) Set port P1_3 to timer RB2 output.

Port 1 Function Mapping Register 0 (PML1)

Bit	b7	b6	b5	b4	b3	b2	b1	b0
Setting Value	1	1	x	x	x	x	x	x

Bit	Symbol	Bit Name	Function	R/W
b6	P13SEL0	Port P1_3 function select bits	b7 b6 1 1: TRBO	R/W
b7	P13SEL1			R/W

(16) Start the timer RB count.

Timer RB Control Register (TRBCR)

Bit	b7	b6	b5	b4	b3	b2	b1	b0
Setting Value	—	—	—	—	—			1

Bit	Symbol	Bit Name	Function	R/W
b0	TSTART	Timer RB count start bit	1: Count is started	R/W

(17) Wait until the timer RB count starts.

Timer RB Control Register (TRBCR)

Bit	Symbol	Bit Name	Function	R/W
b1	TCSTF	Timer RB count status flag	0: Count is stopped 1: Count is in progress	R

(18) Confirm timer RB one-shot operation stops.

Timer RB One-Shot Control Register (TRBOCR)

Bit	Symbol	Bit Name	Function	R/W
b2	TOSSTF	Timer RB one-shot status flag	0: One-shot is stopped 1: One-shot is operating (including wait period)	R

(19) Start timer RB one-shot count.


Timer RB One-Shot Control Register (TRBOCR)

Bit	b7	b6	b5	b4	b3	b2	b1	b0
Setting Value	—	—	—	—	—		x	1

Bit	Symbol	Bit Name	Function	R/W
b0	TOSST	Timer RB one-shot start bit	When 1 is written to this bit, the one-shot count is started. The read value is 0.	R/W

4.5 Timer RB2 Interrupt Handling

- Flowchart

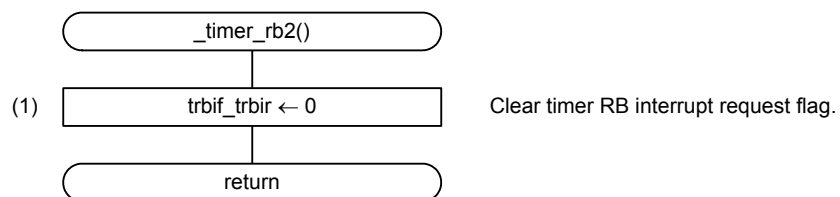

- Register setting

(1) Initialize the timer RB interrupt request flag.

Timer RB Interrupt Control Register (TRBIR)

Bit	b7	b6	b5	b4	b3	b2	b1	b0
Setting Value		0	—	—	—	—	—	—

Bit	Symbol	Bit Name	Function	R/W
b6	TRBIF	Timer RB interrupt request flag	0: No interrupt requested	R/W

5. Sample Program

A sample program can be downloaded from the Renesas Electronics website.

To download, click “Application Notes” in the left-hand side menu of the R8C Family page.

6. Reference Documents

R8C/M12A Group User's Manual: Hardware Rev.1.00

The latest version can be downloaded from the Renesas Electronics website.

Technical Update/Technical News

The latest information can be downloaded from the Renesas Electronics website.

Website and Support

Renesas Electronics website

<http://www.renesas.com/>

Inquiries

<http://www.renesas.com/inquiry>

Revision History	R8C/M12A Group Timer RB2 in Programmable One-Shot Generation Mode
------------------	--

Rev.	Date	Description	
		Page	Summary
1.00	Jan. 9, 2011	—	First edition issued
1.01	Mar. 10, 2011	—	R8C/M12A Group hardware user's manual Rev.1.00 reviewed
		7	High-speed/low-speed on-chip oscillator control register (OCOCR) revised External clock control register (EXCKCR) revised
		8	System clock f select register (PHISEL) revised System clock f control register (SCKCR) revised
		12, 14, 16	Timer RB interrupt control register (TRBIR) revised

All trademarks and registered trademarks are the property of their respective owners.

General Precautions in the Handling of MPU/MCU Products

The following usage notes are applicable to all MPU/MCU products from Renesas. For detailed usage notes on the products covered by this manual, refer to the relevant sections of the manual. If the descriptions under General Precautions in the Handling of MPU/MCU Products and in the body of the manual differ from each other, the description in the body of the manual takes precedence.

1. Handling of Unused Pins

Handle unused pins in accord with the directions given under Handling of Unused Pins in the manual.

- The input pins of CMOS products are generally in the high-impedance state. In operation with an unused pin in the open-circuit state, extra electromagnetic noise is induced in the vicinity of LSI, an associated shoot-through current flows internally, and malfunctions occur due to the false recognition of the pin state as an input signal become possible. Unused pins should be handled as described under Handling of Unused Pins in the manual.

2. Processing at Power-on

The state of the product is undefined at the moment when power is supplied.

- The states of internal circuits in the LSI are indeterminate and the states of register settings and pins are undefined at the moment when power is supplied.

In a finished product where the reset signal is applied to the external reset pin, the states of pins are not guaranteed from the moment when power is supplied until the reset process is completed.

In a similar way, the states of pins in a product that is reset by an on-chip power-on reset function are not guaranteed from the moment when power is supplied until the power reaches the level at which resetting has been specified.

3. Prohibition of Access to Reserved Addresses

Access to reserved addresses is prohibited.

- The reserved addresses are provided for the possible future expansion of functions. Do not access these addresses; the correct operation of LSI is not guaranteed if they are accessed.

4. Clock Signals

After applying a reset, only release the reset line after the operating clock signal has become stable. When switching the clock signal during program execution, wait until the target clock signal has stabilized.

- When the clock signal is generated with an external resonator (or from an external oscillator) during a reset, ensure that the reset line is only released after full stabilization of the clock signal. Moreover, when switching to a clock signal produced with an external resonator (or by an external oscillator) while program execution is in progress, wait until the target clock signal is stable.

5. Differences between Products

Before changing from one product to another, i.e. to one with a different part number, confirm that the change will not lead to problems.

- The characteristics of MPU/MCU in the same group but having different part numbers may differ because of the differences in internal memory capacity and layout pattern. When changing to products of different part numbers, implement a system-evaluation test for each of the products.

Notice

1. All information included in this document is current as of the date this document is issued. Such information, however, is subject to change without any prior notice. Before purchasing or using any Renesas Electronics products listed herein, please confirm the latest product information with a Renesas Electronics sales office. Also, please pay regular and careful attention to additional and different information to be disclosed by Renesas Electronics such as that disclosed through our website.
2. Renesas Electronics does not assume any liability for infringement of patents, copyrights, or other intellectual property rights of third parties by or arising from the use of Renesas Electronics products or technical information described in this document. No license, express, implied or otherwise, is granted hereby under any patents, copyrights or other intellectual property rights of Renesas Electronics or others.
3. You should not alter, modify, copy, or otherwise misappropriate any Renesas Electronics product, whether in whole or in part.
4. Descriptions of circuits, software and other related information in this document are provided only to illustrate the operation of semiconductor products and application examples. You are fully responsible for the incorporation of these circuits, software, and information in the design of your equipment. Renesas Electronics assumes no responsibility for any losses incurred by you or third parties arising from the use of these circuits, software, or information.
5. When exporting the products or technology described in this document, you should comply with the applicable export control laws and regulations and follow the procedures required by such laws and regulations. You should not use Renesas Electronics products or the technology described in this document for any purpose relating to military applications or use by the military, including but not limited to the development of weapons of mass destruction. Renesas Electronics products and technology may not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable domestic or foreign laws or regulations.
6. Renesas Electronics has used reasonable care in preparing the information included in this document, but Renesas Electronics does not warrant that such information is error free. Renesas Electronics assumes no liability whatsoever for any damages incurred by you resulting from errors in or omissions from the information included herein.
7. Renesas Electronics products are classified according to the following three quality grades: "Standard", "High Quality", and "Specific". The recommended applications for each Renesas Electronics product depends on the product's quality grade, as indicated below. You must check the quality grade of each Renesas Electronics product before using it in a particular application. You may not use any Renesas Electronics product for any application categorized as "Specific" without the prior written consent of Renesas Electronics. Further, you may not use any Renesas Electronics product for any application for which it is not intended without the prior written consent of Renesas Electronics. Renesas Electronics shall not be in any way liable for any damages or losses incurred by you or third parties arising from the use of any Renesas Electronics product for an application categorized as "Specific" or for which the product is not intended where you have failed to obtain the prior written consent of Renesas Electronics. The quality grade of each Renesas Electronics product is "Standard" unless otherwise expressly specified in a Renesas Electronics data sheets or data books, etc.

"Standard": Computers; office equipment; communications equipment; test and measurement equipment; audio and visual equipment; home electronic appliances; machine tools; personal electronic equipment; and industrial robots.

"High Quality": Transportation equipment (automobiles, trains, ships, etc.); traffic control systems; anti-disaster systems; anti-crime systems; safety equipment; and medical equipment not specifically designed for life support.

"Specific": Aircraft; aerospace equipment; submersible repeaters; nuclear reactor control systems; medical equipment or systems for life support (e.g. artificial life support devices or systems), surgical implantations, or healthcare intervention (e.g. excision, etc.), and any other applications or purposes that pose a direct threat to human life.

8. You should use the Renesas Electronics products described in this document within the range specified by Renesas Electronics, especially with respect to the maximum rating, operating supply voltage range, movement power voltage range, heat radiation characteristics, installation and other product characteristics. Renesas Electronics shall have no liability for malfunctions or damages arising out of the use of Renesas Electronics products beyond such specified ranges.
9. Although Renesas Electronics endeavors to improve the quality and reliability of its products, semiconductor products have specific characteristics such as the occurrence of failure at a certain rate and malfunctions under certain use conditions. Further, Renesas Electronics products are not subject to radiation resistance design. Please be sure to implement safety measures to guard them against the possibility of physical injury, and injury or damage caused by fire in the event of the failure of a Renesas Electronics product, such as safety design for hardware and software including but not limited to redundancy, fire control and malfunction prevention, appropriate treatment for aging degradation or any other appropriate measures. Because the evaluation of microcomputer software alone is very difficult, please evaluate the safety of the final products or system manufactured by you.
10. Please contact a Renesas Electronics sales office for details as to environmental matters such as the environmental compatibility of each Renesas Electronics product. Please use Renesas Electronics products in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive. Renesas Electronics assumes no liability for damages or losses occurring as a result of your noncompliance with applicable laws and regulations.
11. This document may not be reproduced or duplicated, in any form, in whole or in part, without prior written consent of Renesas Electronics.
12. Please contact a Renesas Electronics sales office if you have any questions regarding the information contained in this document or Renesas Electronics products, or if you have any other inquiries.

(Note 1) "Renesas Electronics" as used in this document means Renesas Electronics Corporation and also includes its majority-owned subsidiaries.

(Note 2) "Renesas Electronics product(s)" means any product developed or manufactured by or for Renesas Electronics.



SALES OFFICES

Renesas Electronics Corporation

<http://www.renesas.com>

Refer to "<http://www.renesas.com/>" for the latest and detailed information.

Renesas Electronics America Inc.
2880 Scott Boulevard Santa Clara, CA 95050-2554, U.S.A.
Tel: +1-408-588-6000, Fax: +1-408-588-6130

Renesas Electronics Canada Limited
1101 Nicholson Road, Newmarket, Ontario L3Y 9C3, Canada
Tel: +1-905-898-5441, Fax: +1-905-898-3220

Renesas Electronics Europe Limited
Dukes Meadow, Millboard Road, Bourne End, Buckinghamshire, SL8 5FH, U.K.
Tel: +44-1628-585-100, Fax: +44-1628-585-900

Renesas Electronics Europe GmbH
Arcadiastrasse 10, 40472 Düsseldorf, Germany
Tel: +49-211-65030, Fax: +49-211-6503-1327

Renesas Electronics (China) Co., Ltd.
7th Floor, Quantum Plaza, No.27 ZhiChunLu Haidian District, Beijing 100083, P.R.China
Tel: +86-10-8235-1155, Fax: +86-10-8235-7679

Renesas Electronics (Shanghai) Co., Ltd.
Unit 204, 205, AZIA Center, No.1233 Lujiazui Ring Rd., Pudong District, Shanghai 200120, China
Tel: +86-21-5877-1818, Fax: +86-21-6887-7858 / -7898

Renesas Electronics Hong Kong Limited
Unit 1601-1613, 16/F., Tower 2, Grand Century Place, 193 Prince Edward Road West, Mongkok, Kowloon, Hong Kong
Tel: +852-2886-9318, Fax: +852 2886-9022/9044

Renesas Electronics Taiwan Co., Ltd.
7F, No. 363 Fu Shing North Road Taipei, Taiwan
Tel: +886-2-8175-9600, Fax: +886 2-8175-9670

Renesas Electronics Singapore Pte. Ltd.
1 harbourFront Avenue, #06-10, Keppel Bay Tower, Singapore 098632
Tel: +65-6213-0200, Fax: +65-6278-8001

Renesas Electronics Malaysia Sdn.Bhd.
Unit 906, Block B, Menara Amcorp, Amcorp Trade Centre, No. 18, Jln Persiaran Barat, 46050 Petaling Jaya, Selangor Darul Ehsan, Malaysia
Tel: +60-3-7955-9390, Fax: +60-3-7955-9510

Renesas Electronics Korea Co., Ltd.
11F., Samik Laved' or Bldg., 720-2 Yeoksam-Dong, Kangnam-Ku, Seoul 135-080, Korea
Tel: +82-2-558-3737, Fax: +82-2-558-5141