

RENESAS TECHNICAL UPDATE

TOYOSU FORESIA, 3-2-24, Toyosu, Koto-ku, Tokyo 135-0061, Japan
Renesas Electronics Corporation

Product Category	MPU/MCU		Document No.	TN-RA*-A0136A/E	Rev.	1.00
Title	RA8T1 Group, correction of the description of the table and registers when FSBL is executed		Information Category	Technical Notification		
Applicable Product	RA8T1 Group	Lot No.	Reference Document	RA8T1 Group User's Manual : Hardware Rev.1.20		
		All				

The description of table and registers are corrected when FSBL is executed as follows.:

Contents

1.	2.6 Initial Vector Table Base Address	2
2.	6.2.5 OFS1, OFS1_SEC: Option Function Select Register 1 for Non-secure and Secure	2
3.	6.2.6 OFS1_SEL: Option Function Select Register 1 for Security Attribution	3
4.	6.2.16 SAMR : Start Address of Measurement Report	3
5.	10.2.6 Module Stop Control Register C (MSTPCRC)	4
6.	35.2.4 CRC Data Output Register(CRCDOR/CRCDOR_HA/CRCDOR_BY).....	5
7.	Setting if FSBL is executed in reset.....	6
8.	Workarounds if FSBL is executed in reset.....	6

1. 2.6 Initial Vector Table Base Address

[Page 87]

Table 2.5 is corrected. The secure vector table base address is 0x200_0000 regardless of FSBL execution.

Before correction

Table 2.5 Initial vector table base address

Operating mode	CPU INITSVTOR
Single-chip mode (not execute FSBL)	0x0200_0000
Single-chip mode (execute FSBL)	0x0700_0000

After correction

Table 2.5 Initial vector table base address

Operating mode	CPU INITSVTOR
Single-chip mode	0x0200_0000

2. 6.2.5 OFS1, OFS1_SEC: Option Function Select Register 1 for Non-secure and Secure

[Page 152]

The function of OFS1_SEC. HOCOEN is corrected.

Before correction

Address: OFS1: 0x1300_A180 (Non-secure)
 OFS1_SEC: 0x0300_A200 (Secure)

Bit	Symbol	Function	R/W
8	HOCOEN	HOCO Oscillation Enable 0: Enable HOCO oscillation after a reset 1: Disable HOCO oscillation after a reset	R

After correction

Address: OFS1: 0x1300_A180 (Non-secure)

Bit	Symbol	Function	R/W
8	HOCOEN	HOCO Oscillation Enable 0: Enable HOCO oscillation after a reset 1: Disable HOCO oscillation after a reset When FSBL is executed, OFS1.HOCOEN register value needs to be "1".	R

Address: OFS1_SEC: 0x0300_A200 (Secure)

Bit	Symbol	Function	R/W
8	HOCOEN	HOCO Oscillation Enable 0: Enable HOCO oscillation after a reset 1: Disable HOCO oscillation after a reset	R

3. 6.2.6 OFS1_SEL: Option Function Select Register 1 for Security Attribution

[Page 153]

The function of OFS1_SEL. HOCOEN and OFS1_SEL. HOCOFRQ0[2:0] are corrected.

Before correction

Bit	Symbol	Function	R/W
8	HOCOEN	Security attributes of HOCO Oscillation Enable 0: Select OFS1_SEC.HOCOEN 1: Select OFS1.HOCOEN	R
11:9	HOCOFRQ0[2:0]	Security attributes of HOCO Frequency Setting 0 0 0 0: Select OFS1_SEC.HOCOFRQ0[2:0] 1 1 1: Select OFS1.HOCOFRQ0[2:0] Others: Reserved	R

After correction


Bit	Symbol	Function	R/W
8	HOCOEN	Security attributes of HOCO Oscillation Enable 0: Select OFS1_SEC.HOCOEN 1: Select OFS1.HOCOEN Note: If FSBL is executed in reset, OFS1.HOCOEN is always selected regardless of this bit value.	R
11:9	HOCOFRQ0[2:0]	Security attributes of HOCO Frequency Setting 0 0 0 0: Select OFS1_SEC.HOCOFRQ0[2:0] 1 1 1: Select OFS1.HOCOFRQ0[2:0] Others: Reserved Note: If FSBL is executed in reset, OFS1.HOCOFRQ0 is always selected regardless of this bit-field value.	R

4. 6.2.16 SAMR : Start Address of Measurement Report

[Page 162]


The setting address area of SAMR is corrected. This register is only used when FSBL is executed.

Before correction

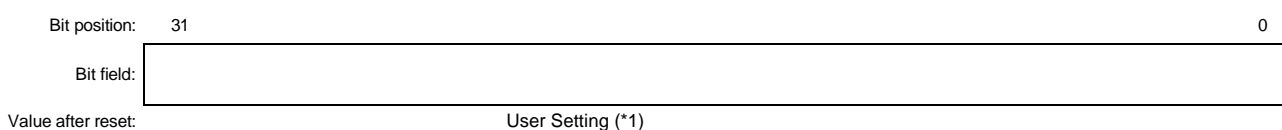

Note 1. The value in a blank product is 0xFFFFFFFF. It is set to the value written by your application.

After correction

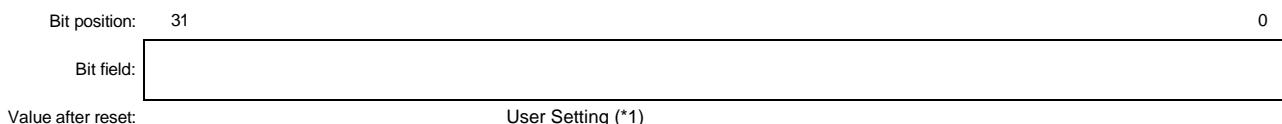

Note 1. The value in a blank product is 0xFFFFFFFF. It is set to the value written by your application.

The SAMR register specifies the starting address of measurement report. The measurement report is stored in the SRAM shown in Figure 37.14 Format and location of the measurement report. Specify Either SRAM0 or SRAM1 or Standby RAM. In case SRAM0 is used for measurement report, do not specify the addresses from 0x22007780 to 0x22007BFF. When reading the measurement report in SRAM0, disable the ECC functionality by setting SRAMCR0.ECCMOD[1:0]=b00.

5. 10.2.6 Module Stop Control Register C (MSTPCRC)

MSTCRC the value after reset in case FBSL is executed is corrected.

[Page 276]

Before correction

Bit position:	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
Bit field:	MSTP C31	—	—	—	MSTP C27	MSTP C26	—	—	—	—	—	—	—	—	—	—
Value after reset:	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Bit position:	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Bit field:	—	MSTP C14	MSTP C13	MSTP C12	MSTP C11	—	—	—	—	—	—	—	—	—	MSTP C1	MSTP C0
Value after reset:	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1

Bit	Symbol	Function	R/W
7	—	This bit is read as 1. The write value should be 1.	R/W
8	—	This bit is read as 1. The write value should be 1.	R/W
16	—	This bit is read as 1. The write value should be 1.	R/W

After correction

Bit position:	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
Bit field:	MSTP C31	—	—	—	MSTP C27	MSTP C26	—	—	—	—	—	—	—	—	—	MSTP C16
Value after reset:	1/0(*1)	1	1	1	1/0(*1)	1/0(*1)	1	1	1	1	1	1	1	1	1	1/0(*1)
Bit position:	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Bit field:	—	MSTP C14	MSTP C13	MSTP C12	MSTP C11	—	—	MSTP C8	MSTP C7	—	—	—	—	—	MSTP C1	MSTP C0
Value after reset:	1	1/0(*1)	1/0(*1)	1/0(*1)	1/0(*1)	1	1	1/0(*1)	1/0(*1)	1	1	1	1	1	1/0(*1)	1/0(*1)

Note *1): If FSBL is executed in reset, then value after reset is 0, if FSBL is skipped in reset, then value after reset is 1.

Bit	Symbol	Function	R/W
7	MSTPC7	Target module: Internal circuit and not usable. If the reset value is not 1, set 1 to reduce the current consumption. 0: Cancel the module-stop state 1: Enter the module-stop state	R/W
8	MSTPC8	Target module: Internal circuit and not usable. If the reset value is not 1, set 1 to reduce the current consumption. 0: Cancel the module-stop state 1: Enter the module-stop state	R/W
16	MSTPC16	Target module: Internal circuit and not usable. If the reset value is not 1, set 1 to reduce the current consumption. 0: Cancel the module-stop state 1: Enter the module-stop state	R/W


Other update from this correction in Hardware Use's Manual

In CAC, CRC, SDHI/MMC1, SDHI/MMC0, DOC, ELC, CEU, CANFD1, CANFD0, RSIP-E51A explanation chapter, there is a note that each module is stopped after reset. This is also corrected as the initial Module-stop state is defined by MSTPCRC.

6. 35.2.4 CRC Data Output Register(CRCDOR/CRCDOR_HA/CRCDOR_BY)

[Page 1868]

Before correction

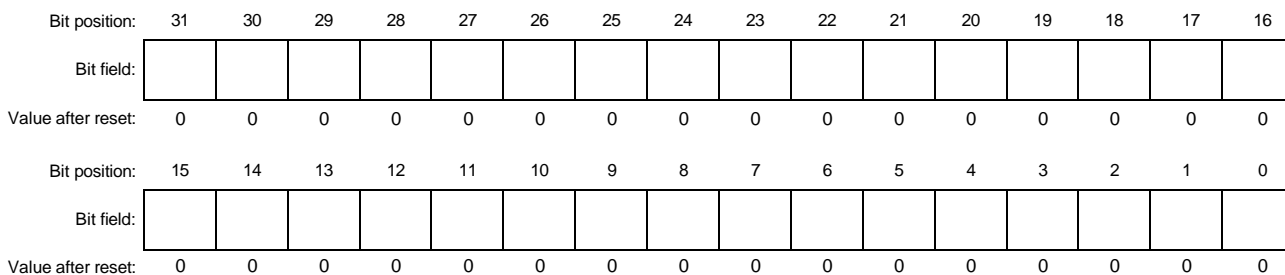

Bit	Symbol	Function	R/W
31:0	n/a	CRC output data The CRCDOR register is a 32-bit read/write register for CRC-32 or CRC-32C calculation. The CRCDOR_HA (CRCDOR[31:16]) register is a 16-bit read/write register for CRC-16 or CRC-CCITT calculation. The CRCDOR_BY (CRCDOR[31:24]) register is an 8-bit read/write register for CRC-8 calculation. Because its initial value is 0x00000000 , rewrite the CRCDOR/CRCDOR_HA/ CRCDOR_BY register to perform the calculations using a value other than the initial value. Data written to the CRCDIR/CRCDIR_BY register is CRC calculated and the result is stored in the CRCDOR/CRCDOR_HA/CRCDOR_BY register. If the CRC code is calculated following the transferred data and the result is 0x00000000, there is no CRC error.	R/W

After correction



Note *1): If FSBL is executed in reset, then value after reset is 1, if FSBL is skipped in reset, then values after reset is 0.

Bit	Symbol	Function	R/W
31:0	n/a	CRC output data The CRCDOR register is a 32-bit read/write register for CRC-32 or CRC-32C calculation. The CRCDOR_HA (CRCDOR[31:16]) register is a 16-bit read/write register for CRC-16 or CRC-CCITT calculation. The CRCDOR_BY (CRCDOR[31:24]) register is an 8-bit read/write register for CRC-8 calculation. Rewrite the CRCDOR/CRCDOR_HA/ CRCDOR_BY register to perform the calculations using a value other than the initial value. Data written to the CRCDIR/CRCDIR_BY register is CRC calculated and the result is stored in the CRCDOR/CRCDOR_HA/CRCDOR_BY register. If the CRC code is calculated following the transferred data and the result is 0x00000000, there is no CRC error.	R/W

7. Setting if FSBL is executed in reset

If FSBL execution is selected in reset, this setting is required.

1. OFS1.HOCOEN needs to be used as oscillation disabled after reset. Therefore, OFS1.HOCOEN register value needs to be "1".

8. Workarounds if FSBL is executed in reset

If FSBL execution is selected in reset, these are workarounds. If FSBL skipped in reset, no workaround is required.

1. The secure vector table base address is 0x0200_0000.
2. OFS1_SEL.HOCOEN and OFS1_SEL.HOCOFREQ0 always select OFS1.HOCOEN and OFS1.HOCOFREQ0 respectively. Therefore, Use HOCOCR and HOCOCR2, or OFS1.HOCOFREQ0 register to operate, stop and set frequency for HOCO.
3. In case SRAM0 is used for measurement report, do not specify the addresses from 0x22007780 to 0x22007BFF. When reading the measurement report in SRAM0, disable the ECC functionality by setting SRAMCR0.ECCMOD[1:0]=b00.
4. MSTPC0, MSTPC1, MSTPC7, MSTPC8, MSTPC11, MSTPC12, MSTPC13, MSTPC14, MSTPC16, MSTPC26, MSTPC27, MSTPC31 value after reset is 0. The corresponding module is not stopped. If the corresponding functionality is not in use, change respective module stop bit to 1 in order to reduce current consumption. Change MSTPC7, MSTPC8, MSTPC16 to 1 in order to reduce current consumption.
5. CRCDOR register's initial value is not 0x00000000. Rewrite the CRCDOR/CRCDOR_HA/CRCDOR_BY register to perform the CRC calculations using a value other than the value after reset.