

## RL78/G13

R01AN0453EJ0100

Rev. 1.00

## Voltage Detector (Reset Mode)

---

Sep. 30, 2011

### Introduction

This application note describes the reset mode of the voltage detector (LVD) on the RL78/G13. When the supply voltage ( $V_{DD}$ ) becomes lower than the LVD detection voltage ( $V_{LVI}$ ), the voltage detector generates an internal reset. Using LEDs, the internal reset can be distinguished from a power-on-reset (POR).

### Target Device

RL78/G13

When applying the sample program covered in this application note to another microcomputer, modify the program according to the specifications for the target microcomputer and conduct an extensive evaluation of the modified program.

**Contents**

1. Specifications .....	3
2. Operation Check Conditions .....	4
3. Related Application Notes .....	4
4. Description of the Hardware .....	5
4.1 Hardware Configuration Example .....	5
4.2 List of Pins to be Used .....	5
5. Description of the Software .....	6
5.1 Operation Outline .....	6
5.2 List of Option Byte Settings .....	8
5.3 List of Variables .....	8
5.4 List of Functions .....	8
5.5 Function Specifications .....	9
5.6 Flowcharts .....	10
5.6.1 Initialization Function .....	11
5.6.2 System Function .....	12
5.6.3 Setting up the I/O Ports .....	13
5.6.4 CPU Clock Setup .....	14
5.6.5 INTPO Initialization .....	15
5.6.6 Main Processing .....	16
5.6.7 INTPO Operation Start .....	17
5.6.8 INTPO Interrupt Processing .....	18
6. Sample Code .....	19
7. Documents for Reference .....	19
Revision Record .....	20
General Precautions in the Handling of MPU/MCU Products .....	21

### 1. Specifications

This application note describes the operation (reset mode) of the voltage detector.

When the supply voltage ( $V_{DD}$ ) becomes lower than the LVD detection voltage ( $V_{LVI}$ ), the voltage detector generates an internal reset. The three LEDs permit a visual distinction between this internal reset and a power-on-reset. The indications provided by these LEDs are changed according to the switch input count.


When  $V_{DD} < V_{LVI}$ , the voltage detector generates an internal reset. Later, when  $V_{DD} \geq V_{LVI}$ , this reset is ended. At this time, the system restarts from the state it was in when the LEDs provided the last indications.

When  $V_{DD} < V_{PDR}$ , an internal reset occurs due to a power-on-reset. Later, when  $V_{DD} \geq V_{LVI}$ , this internal reset is ended and the system restarts while all the LEDs are off.

Table1.1 shows the required peripheral functions and their uses. Figure 1.1 presents an overview of the operation (reset mode) of the voltage detector.

**Table1.1 Required Peripheral Functions and Their Uses**

Peripheral function	Use
LVD	Supply voltage ( $V_{DD}$ ) monitoring
P137/INTP0	Switch input
P10 to P12	LED lighting control (for LED1 to LED3)

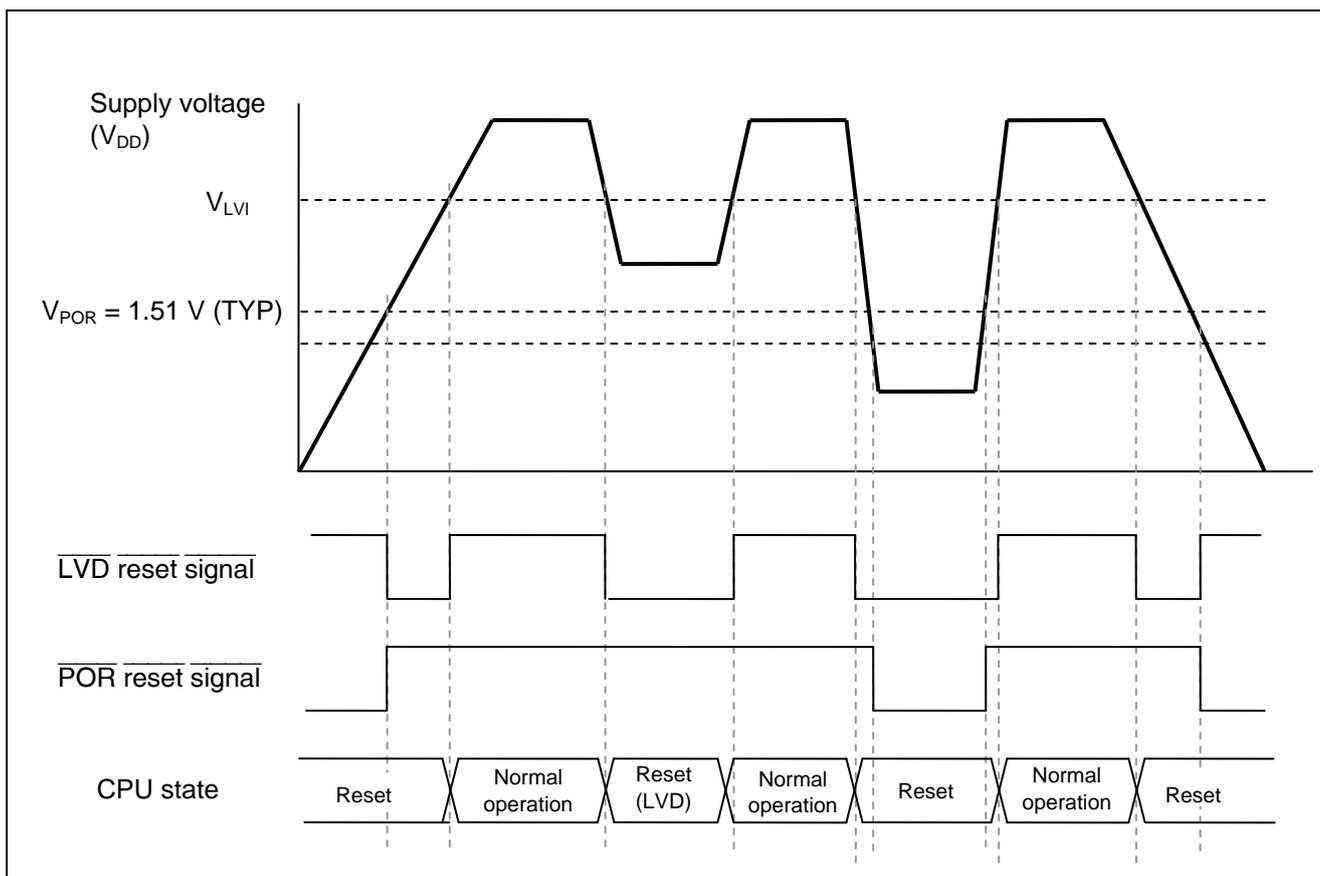

**Figure 1.1 Overview of LVD Operation (Reset Mode)**

## 2. Operation Check Conditions

The sample code contained in this application note has been checked under the conditions listed in the table below.

**Table 2.1 Operation Check Conditions**

Item	Description
Microcontroller used	RL78/G13 (R5F100LEA)
Operating frequency	<ul style="list-style-type: none"> <li>High-speed on-chip oscillator (HOCO) clock: 32 MHz</li> <li>CPU/peripheral hardware clock: 32 MHz</li> </ul>
Operating voltage	5.0 V (can run on a voltage range of 2.9 V to 5.5 V.) LVD operation ( $V_{LVI}$ ): Reset mode <ul style="list-style-type: none"> <li>Rising edge voltage: 2.81 V (2.76 V to 2.87 V)</li> <li>Falling edge voltage: 2.75 V (2.70 V to 2.81V)</li> </ul>
Integrated development environment	CubeSuite+ V1.00.01 from Renesas Electronics Corp.
C compiler	CA78K0R V1.20 from Renesas Electronics Corp.

## 3. Related Application Notes


The application note related to this application note is listed below for reference.

- RL78/G13 Initialization (R01AN0451EJ0100) Application Note

## 4. Description of the Hardware

### 4.1 Hardware Configuration Example

Figure 4.1 shows an example of the hardware configuration used for this application note.

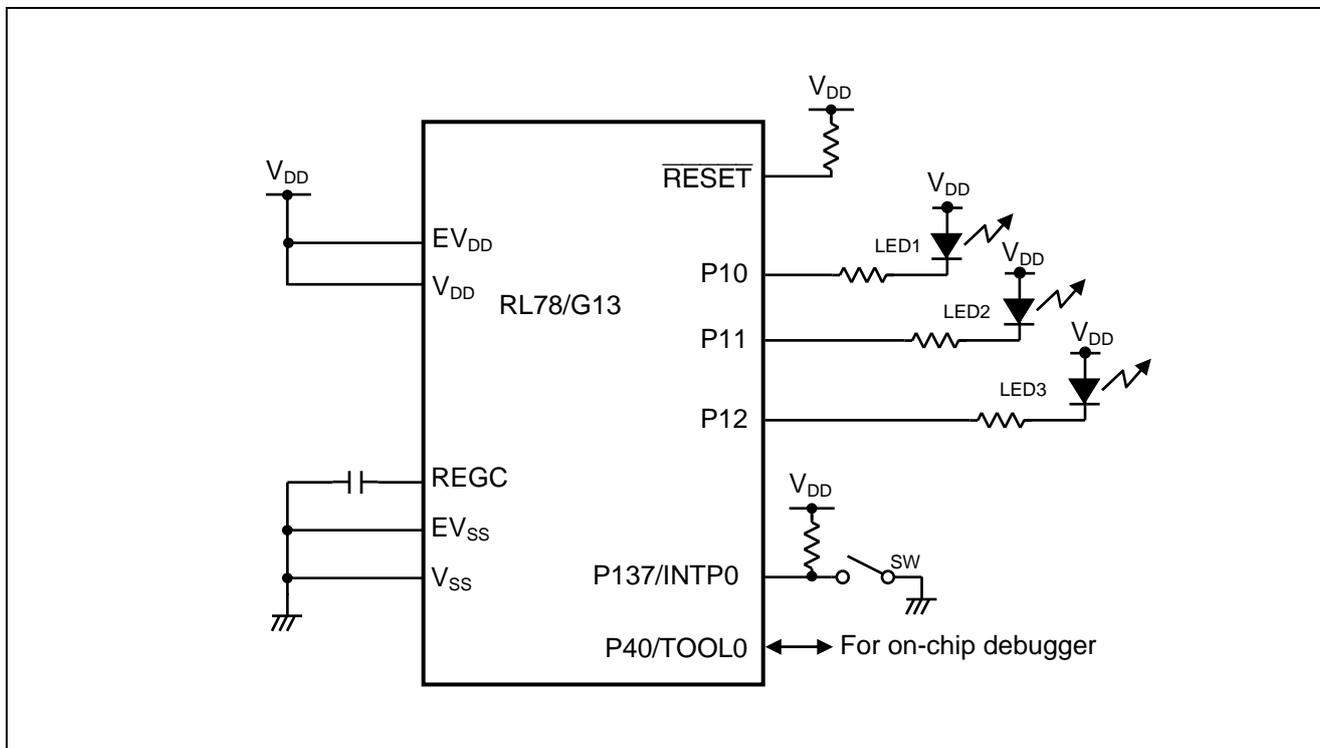

**Figure 4.1 Hardware Configuration**

- Cautions**
1. The purpose of this circuit is only to provide the connection outline and the circuit is simplified accordingly. When designing and implementing an actual circuit, provide proper pin treatment and make sure that the hardware's electrical specifications are met (connect the input-only ports separately to  $V_{DD}$  or  $V_{SS}$  via a resistor).
  2. Connect any pins whose name begins with  $EV_{SS}$  to  $V_{SS}$  and any pins whose name begins with  $EV_{DD}$  to  $V_{DD}$ , respectively.

### 4.2 List of Pins to be Used

Table 4.1 lists the pins to be used and their functions.

**Table 4.1 Pins to be Used and Their Functions**

Pin Name	I/O	Description
P10	Output	LED on (LED1) control port
P11	Output	LED on (LED2) control port
P12	Output	LED on (LED3) control port
P137/INTP0	Input	Switch input port

## 5. Description of the Software

### 5.1 Operation Outline

The sample program described in this application note monitors the supply voltage using the voltage detector (reset mode).

When  $V_{DD} < V_{LVI}$ , the voltage detector generates an internal reset (LVD reset). At this time, various registers are initialized. If, however,  $V_{DD}$  is equal to or greater than the power-on-reset detection voltage ( $V_{PDR} = 1.50 \text{ V} \pm 0.03 \text{ V}$ ), the on-chip RAM's state remains unchanged since before the reset generation. Because the on-chip RAM holds the switch input count which was obtained before the reset generation, the system can restart from the state it was in when the LED indications were provided before the reset generation.

The switch input count is initialized when a reset other than the LVD reset occurs.

#### (1) Initializing the voltage detector

<Conditions for setting>

- When the power is turned on or after the reset is ended, the option byte should be referenced automatically and the voltage detector should be set to reset mode.
- The rising edge detection voltage should be set to 2.81 V. The falling edge detection voltage should be set to 2.75 V.

Caution: When reset mode is selected, the voltage detection level register (LVIS) is write-prohibited. The initial value for the LVIS register is set to 81H (low-voltage detection level:  $V_{LVI}$  for reset mode) automatically.

#### (2) Setting the input and output ports

- LED lighting control (for LED1 to LED3): Configure P10, P11 and P12 as the output ports.
- Switch input: Configure P137/INTP0 for detecting INTP0 falling edges (via an external pull-up resistor)

#### (3) LED indications depending on the switch input count


- Interrupt processing is started upon detection of a P137/INTP0 falling edge. Chattering is detected and, if the on state of the input lasts about 10 ms, it is recognized as a switch input and the LED indications are changed. When  $V_{DD} < V_{LVI}$ , an LVD reset is generated; however the on-chip RAM's state remains unchanged since before the reset generation (see Note).

(4') When  $V_{DD} < V_{PDR}$ , a POR internal reset occurs, deleting the LED indication data.

Caution: If the standard startup routine is used for programs written in C, data in the on-chip RAM is initialized before the main function is executed. To prevent it from being initialized, a startup routine which has its initialization code commented out is adopted.

Caution: Usage Precautions: For information about the precautions in using the device, refer to RL78/G13 User's Manual: Hardware.

Figure 5.1 presents an overview of the sample code operation.

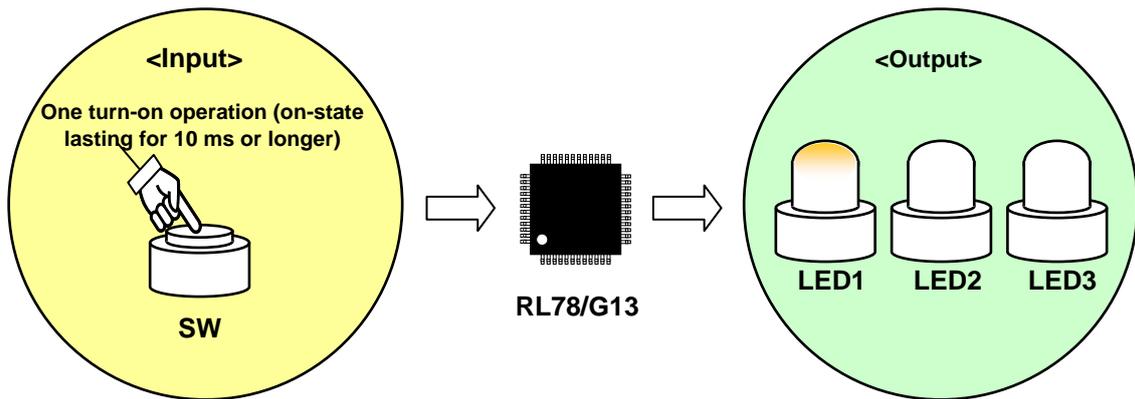

Switch (SW) input count <sup>Note</sup>	LED indications		
	LED1	LED2	LED3
0	OFF	OFF	OFF
1	ON	OFF	OFF
2	OFF	ON	OFF
3	ON	ON	OFF
4	OFF	OFF	ON
5	ON	OFF	ON
6	OFF	ON	ON
7	ON	ON	ON

Note: For the eighth and subsequent operations, the LED indications above are repeated.

Figure 5.1 Overview of Sample Code Operation

## 5.2 List of Option Byte Settings

Table 5.1 summarizes the settings of the option bytes.

**Table 5.1 Option Byte Settings**

Address	Value	Description
000C0H/010C0H	01101110B	Disables the watchdog timer. (Stops counting after the release from the reset state.)
000C1H/010C1H	01111111B	LVD reset mode Rising edge voltage: 2.81 V (2.76 V to 2.87 V) Falling edge voltage: 2.75 V (2.70 V to 2.81 V)
000C2H/010C2H	11101000B	HS mode HOCO: 32 MHz
000C3H/010C3H	10000100B	Enables the on-chip debugger.

## 5.3 List of Variables

Table 5.2 lists the global variables.

**Table 5.2 Global Variables**

Type	Variable Name	Contents	Function Used
uint8_t	g_ResetFactor	RESF register save area	main() R_CGC_Get_ResetSource()
uint8_t	g_SwCount	SW depress count	main() R_INTC0_Interrupt()

## 5.4 List of Functions

Table 5.3 gives a list of functions that are used by this sample program.

**Table 5.3 Functions**

Function Name	Outline
R_PORT_Create	Initializes the input and output ports.
R_INTC_Create	Initializes the external-interrupt settings.
R_INTC0_Start	Enables INTPO interrupts.
R_INTC0_Interrupt	Processes INTPO interrupts.

## 5.5 Function Specifications

This section describes the specifications for the functions that are used in the sample code.

### [Function Name] R\_PORT\_Create

---

<b>Synopsis</b>	Initializes the input and output ports.
<b>Header</b>	r_cg_port.h
<b>Declaration</b>	void R_PORT_Create(void)
<b>Explanation</b>	<ul style="list-style-type: none"> <li>LED lighting control (for LED 1 to LED3): This function configures P10, P11 and P12 as the output ports.</li> </ul>
<b>Arguments</b>	None
<b>Return value</b>	None
<b>Remarks</b>	None

### [Function Name] R\_INTC\_Create

---

<b>Synopsis</b>	Initializes the external-interrupt settings.
<b>Header</b>	r_cg_intc.h
<b>Declaration</b>	void R_INTC_Create(void)
<b>Explanation</b>	<p>This function initializes the external-interrupt settings.</p> <p>This function clears the interrupt request.</p>
<b>Arguments</b>	None
<b>Return value</b>	None
<b>Remarks</b>	None

### [Function Name] R\_INTC0\_Start

---

<b>Synopsis</b>	Enables INTP0 interrupts.
<b>Header</b>	r_cg_intc.h
<b>Declaration</b>	void R_INTC0_Start(void)
<b>Explanation</b>	<p>This function clears the interrupt request flag.</p> <p>This function enables INTP0 interrupts and starts taking in the switch input.</p>
<b>Arguments</b>	None
<b>Return value</b>	None
<b>Remarks</b>	None


### [Function Name] R\_INTC0\_Interrupt

---

<b>Synopsis</b>	Processes INTP0 interrupts.
<b>Header</b>	r_cg_intc.h
<b>Declaration</b>	__interrupt void R_INTC0_Interrupt(void)
<b>Explanation</b>	<p>This function processes the INTP0 interrupt when it occurs.</p> <p>This function waits 10 ms and then scans the P137 (SW input pin).</p> <p>When the switch is depressed, this function causes the LED indication counter to count up.</p>
<b>Arguments</b>	None
<b>Return value</b>	None
<b>Remarks</b>	None

## 5.6 Flowcharts


Figure 5.2 shows the overall flow of the sample program described in this application note.

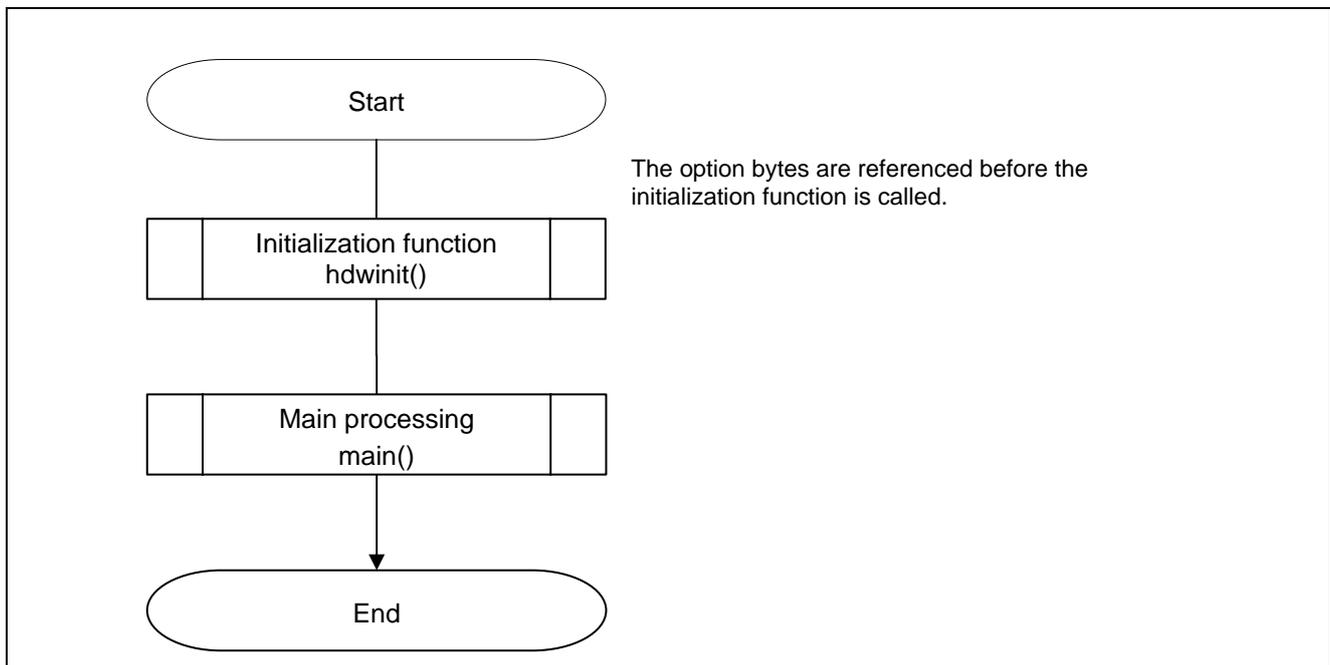

**Figure 5.2 Overall Flow**

### 5.6.1 Initialization Function


Figure 5.3 shows the flowchart for the initialization function.

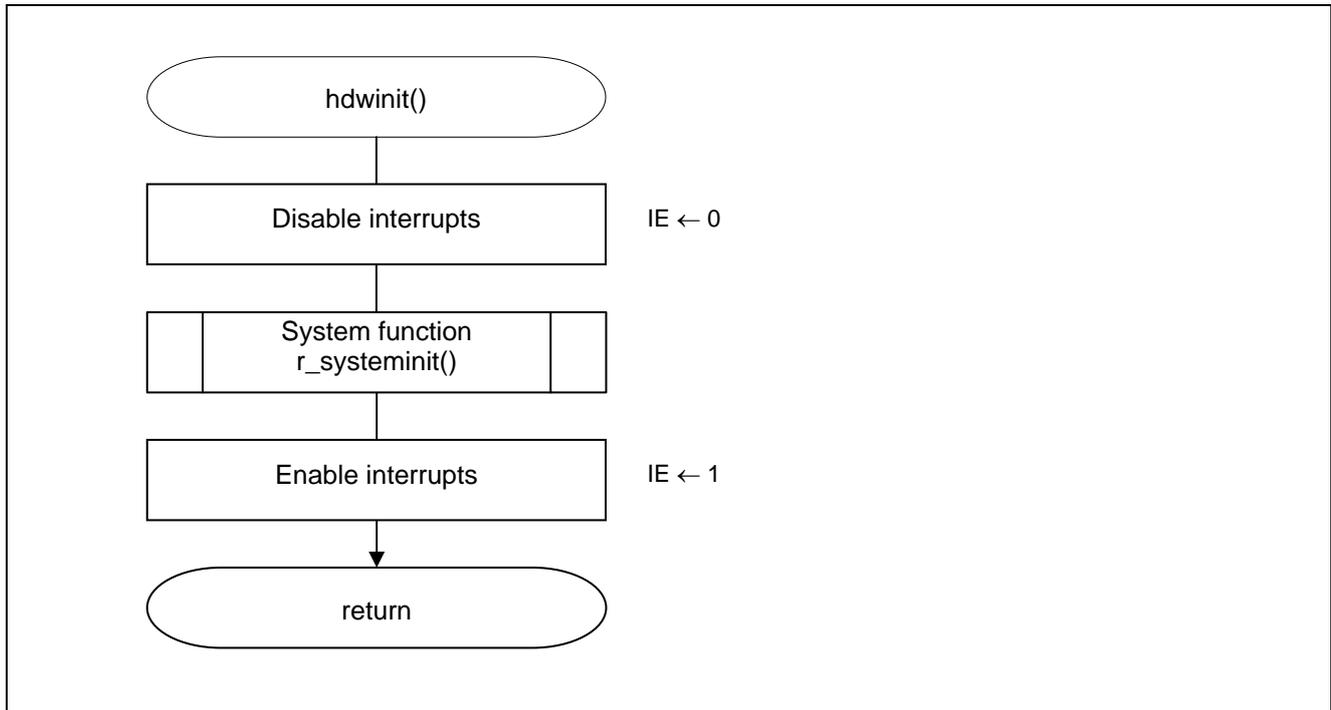

**Figure 5.3 Initialization Function**

**5.6.2 System Function**


Figure 5.4 shows the flowchart for the system function.

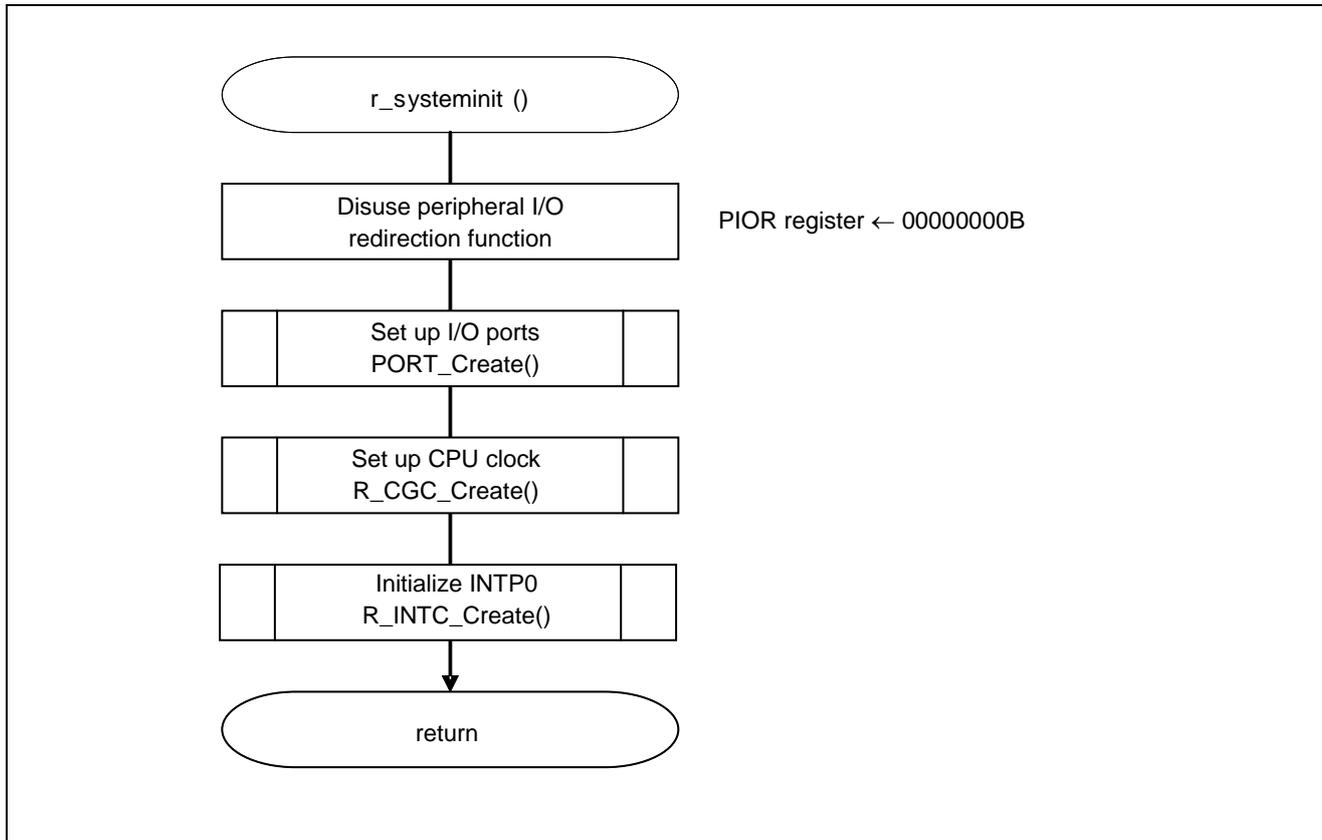

**Figure 5.4 System Function**

### 5.6.3 Setting up the I/O Ports

Figure 5.5 shows the flowchart for setting up the I/O ports.

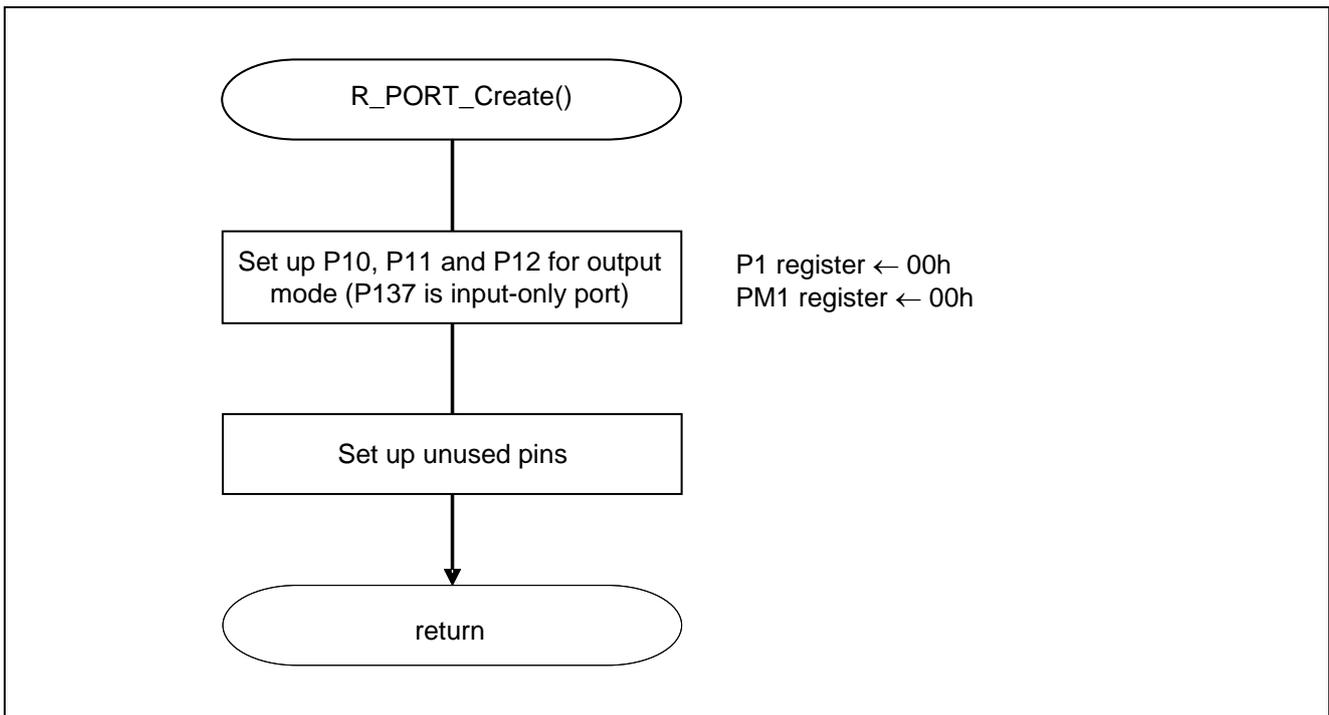


**Figure 5.5 I/O Port Setup**

Caution: Refer to the section entitled "Flowcharts" in RL78/G13 Initialization Application Note (R01AN0451EJ0100) for the configuration of the unused ports.

Caution: Provide proper treatment for unused ports so that their electrical specifications are observed. Connect each of any unused input-only ports to  $V_{DD}$  or  $V_{SS}$  via a resistor.

### 5.6.4 CPU Clock Setup

Figure 5.6 shows the flowchart for setting up the CPU clock.

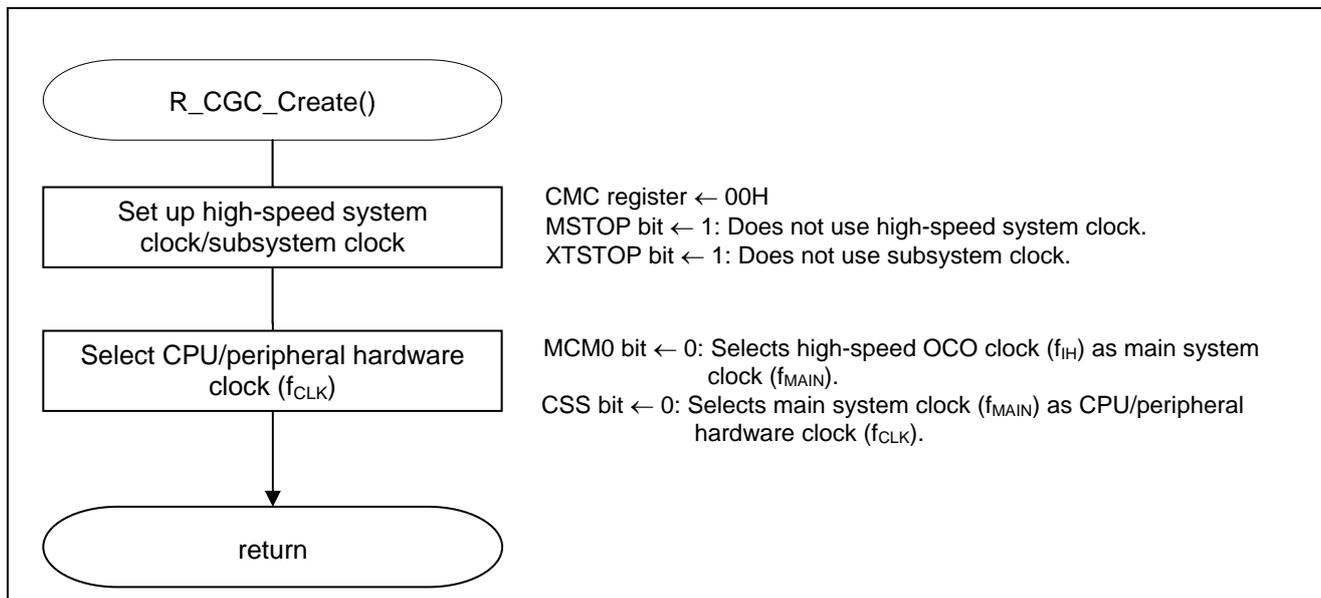


**Figure 5.6 CPU Clock Setup**

Caution: For details on the procedure for setting up the CPU clock (`R_CGC_Create()`), refer to the section entitled "Flowcharts" in RL78/G13 Initialization Application Note (R01AN0451EJ0100).

### 5.6.5 INTP0 Initialization

Figure 5.7 shows the flowchart for INTP0 initialization.

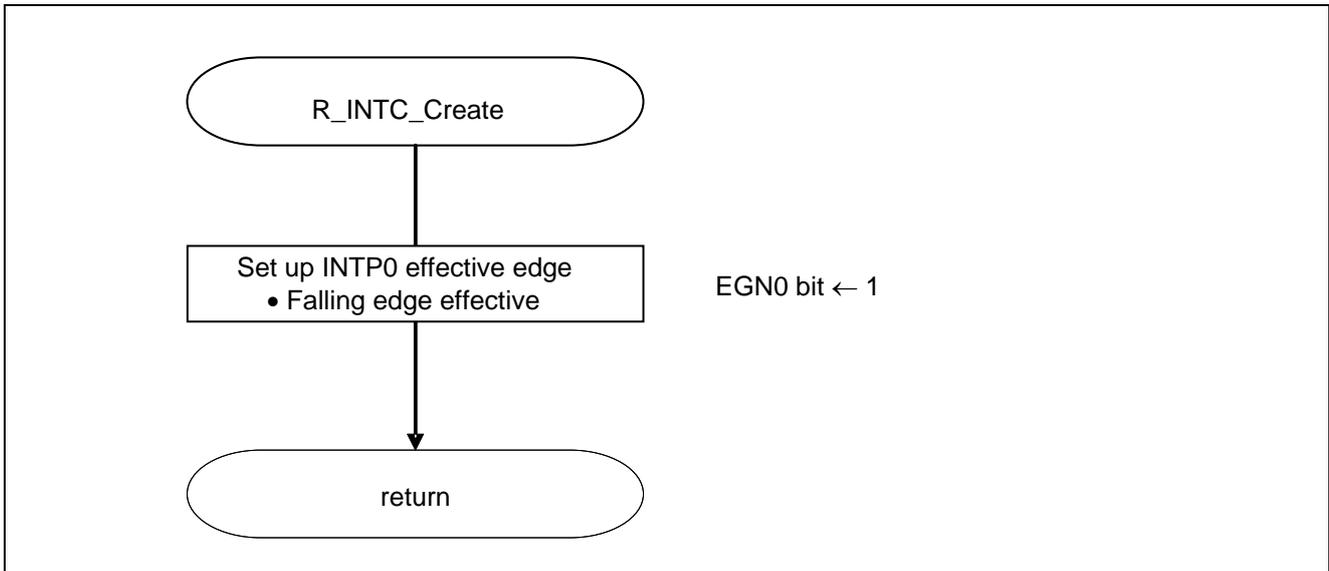

**Figure 5.7 INTP0 Initialization**

Setup for INTP0 pin edge detection

- External interrupt rising edge enable registers (EGP0, EGP1)
- External interrupt falling edge enable registers (EGN0, EGN1)

These registers are used to set up effective edges for INTP0 to INTP11

Symbol: EGP0

7	6	5	4	3	2	1	0
EGP7	EGP6	EGP5	EGP4	EGP3	EGP2	EGP1	EGP0
x	x	x	x	x	x	x	<b>0</b>

Symbol: EGN0

7	6	5	4	3	2	1	0
EGN7	EGN6	EGN5	EGN4	EGN3	EGN2	EGN1	EGN0
x	x	x	x	x	x	x	<b>1</b>

Bit 0

EGP0	EGN0	INTP0 pin valid edge selection
0	0	Edge detection disabled
<b>0</b>	<b>1</b>	<b>Falling edge</b>
1	0	Rising edge
1	1	Both rising and falling edges

Caution: For detailed information about setting the registers, refer to RL78/G13 User’s Manual: Hardware.

5.6.6 Main Processing

Figure 5.8 shows the flowchart for main processing.


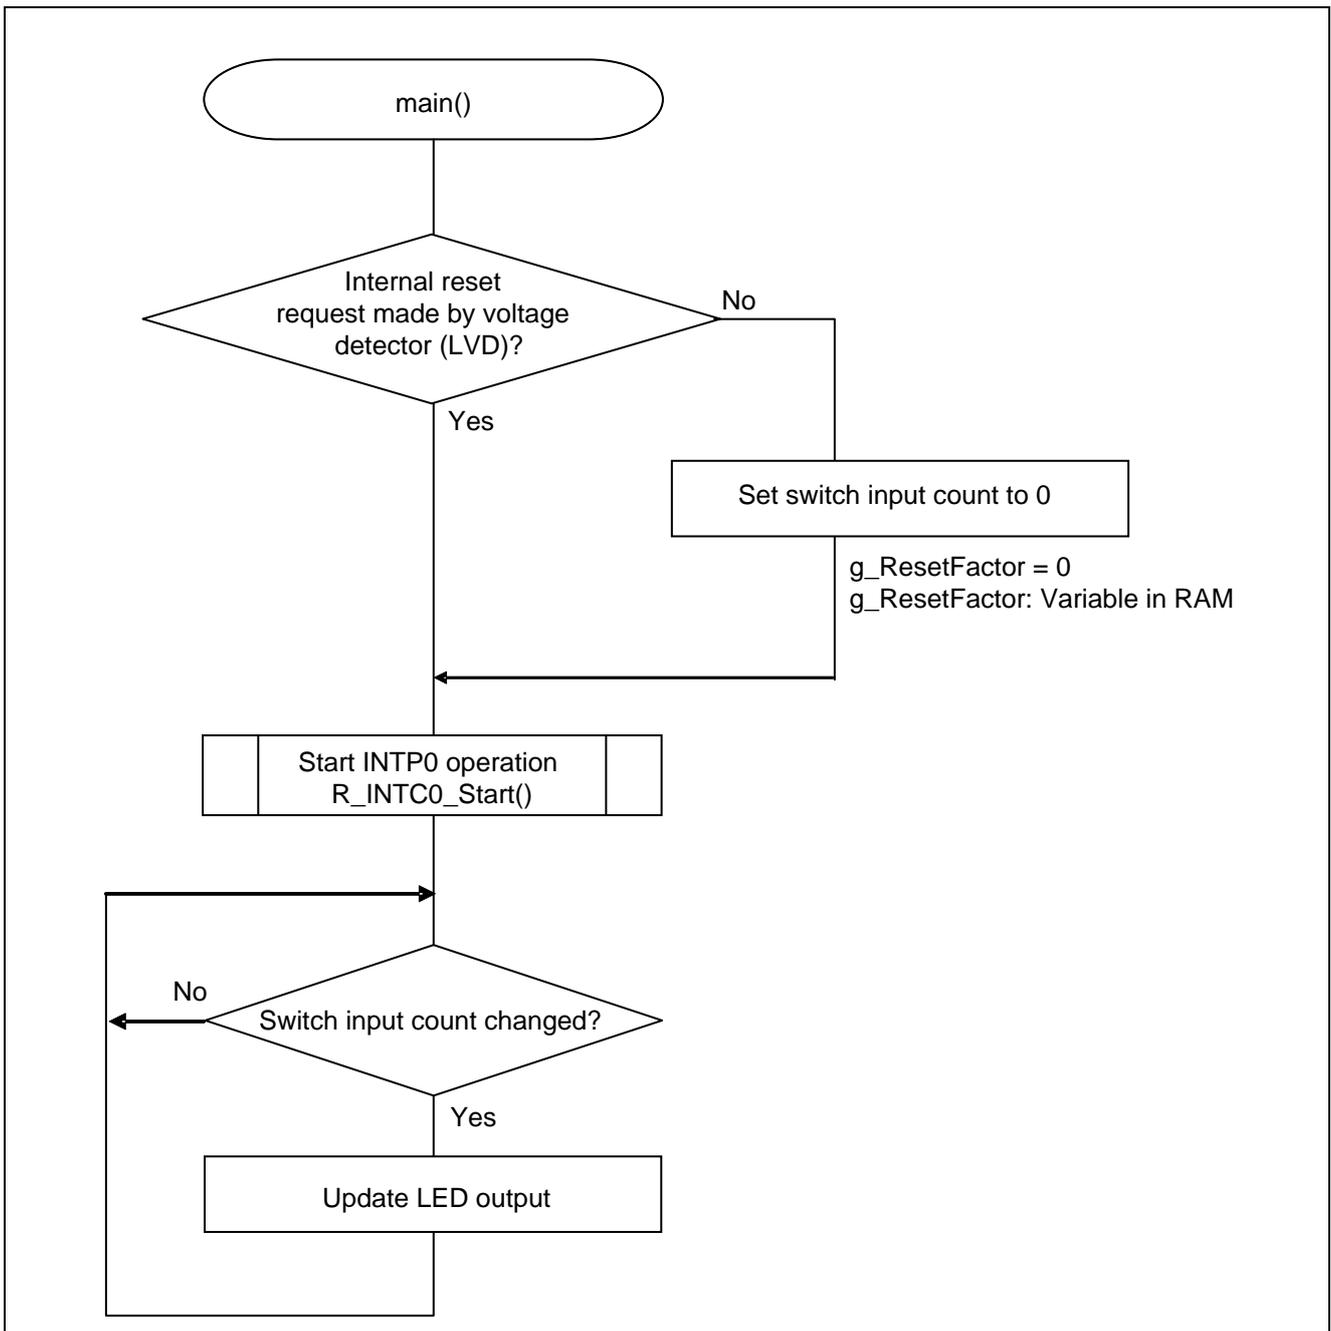


Figure 5.8 Main Processing

### 5.6.7 INTP0 Operation Start

Figure 5.9 shows the flowchart for starting INTP0 operation.

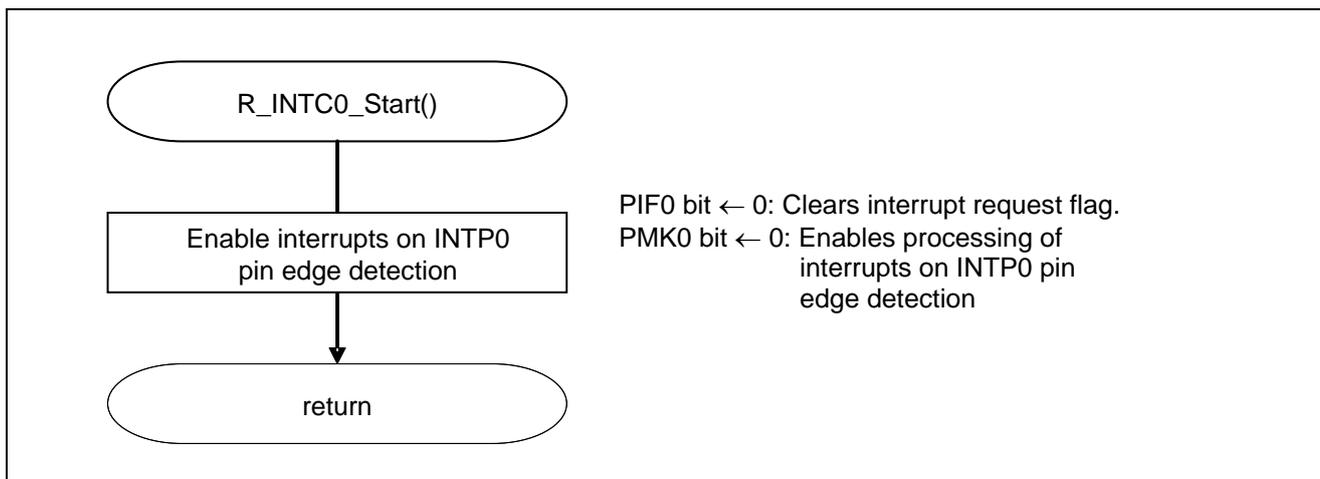

**Figure 5.9 INTP0 Operation Start**

#### Setup for INTP0 Interrupts

- Interrupt request flag register (IF0L)  
Clears interrupt request flag.
- Interrupt mask flag register (MK0L)  
Clears interrupt mask.

Symbol: IF0L

7	6	5	4	3	2	1	0
PIF5	PIF4	PIF3	PIF2	PIF1	PIF0	LVIIIF	WDTIIF
x	x	x	x	x	0	x	x

Bit 2

PIF0	Interrupt request flag
0	<b>No interrupt request signal is generated</b>
1	Interrupt request signal is generated, interrupt request status

Symbol: MK0L

7	6	5	4	3	2	1	0
PMK5	PMK4	PMK3	PMK2	PMK1	PMK0	LVIMK	WDTIMK
x	x	x	x	x	0	x	x


Bit 2

PMK0	Interrupt processing control
0	<b>Interrupt processing enabled</b>
1	Interrupt processing disabled

Caution: For detailed information about setting the registers, see RL78/G13 User’s Manual: Hardware.

**5.6.8 INTP0 Interrupt Processing**

Figure 5.10 shows the flowchart for INTP0 interrupt processing.

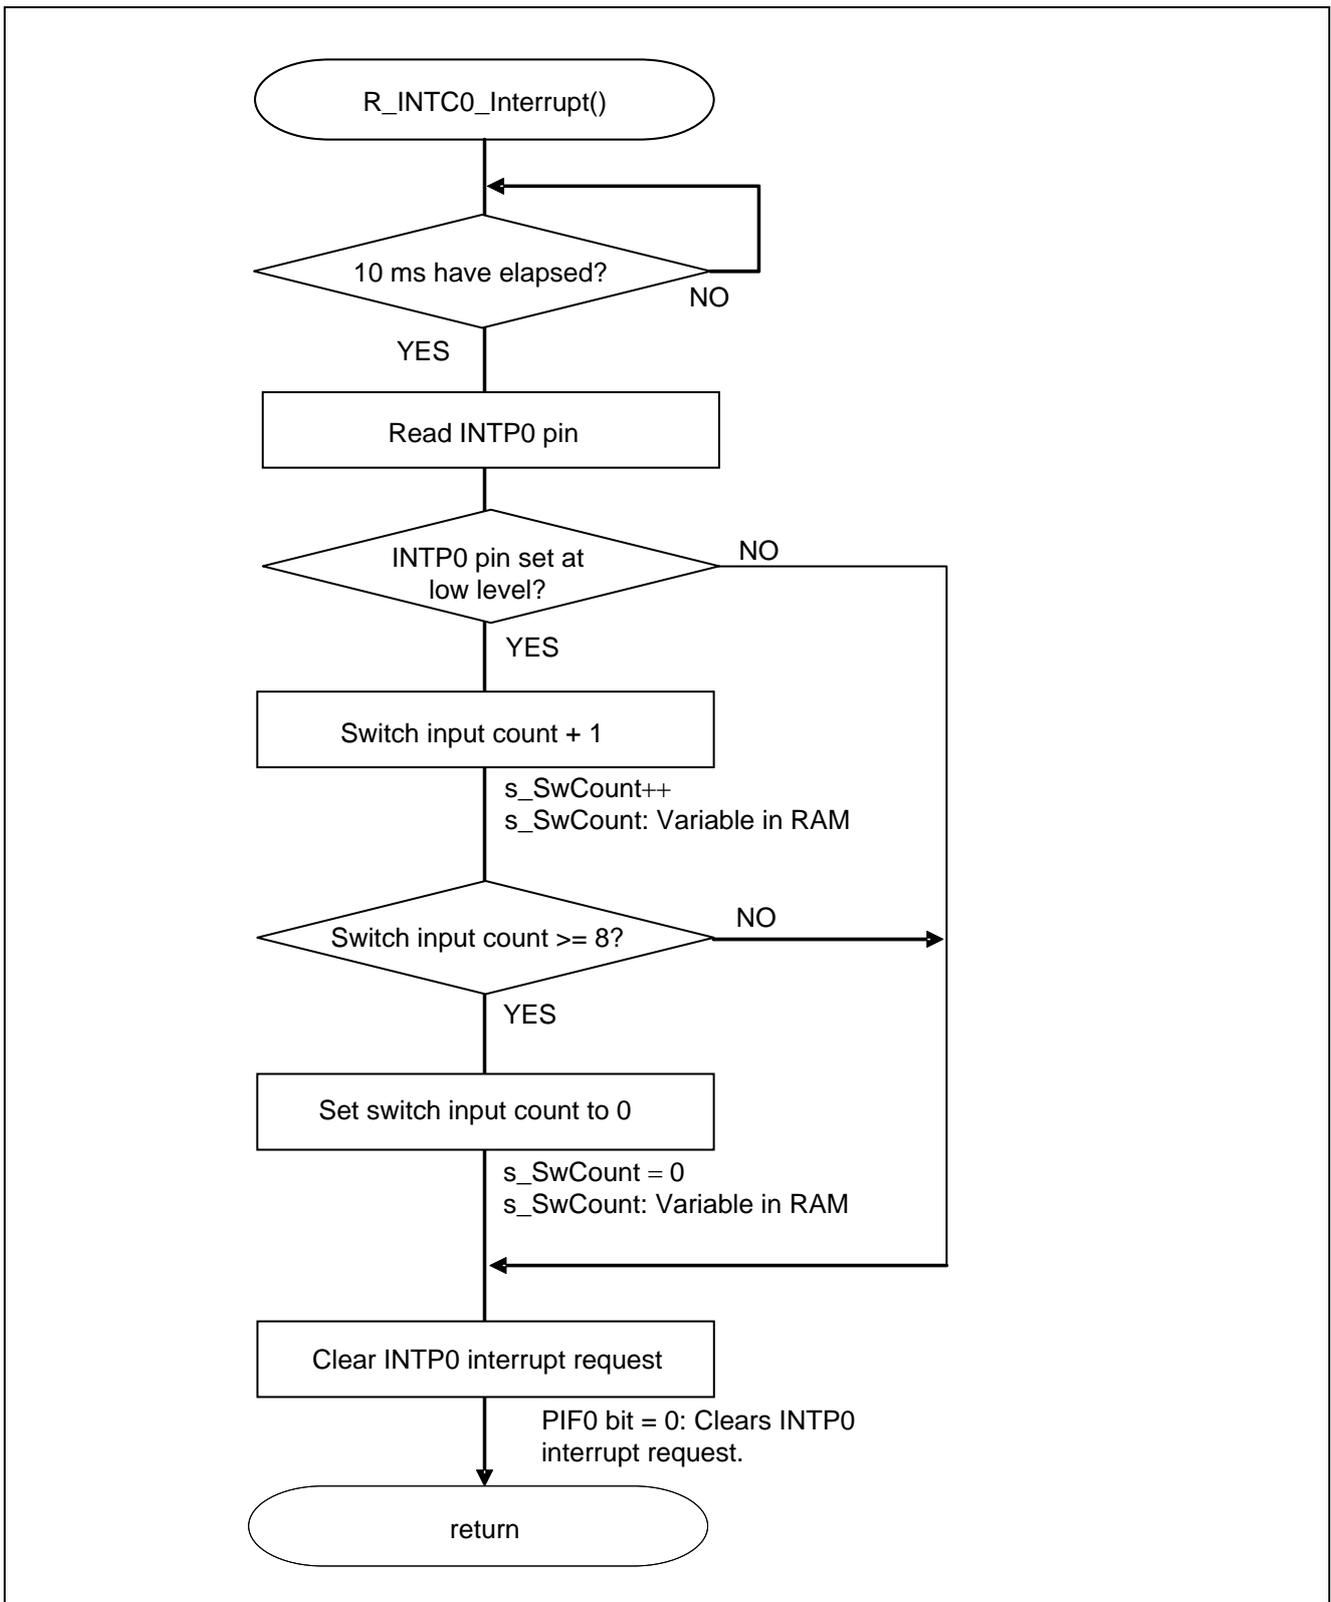

**Figure 5.10 INTP0 Interrupt Processing**

## 6. Sample Code

The sample code is available on the Renesas Electronics Website.

## 7. Documents for Reference

RL78/G13 User's Manual: Hardware Rev.0.07 (R01UH0146EJ0007)

RL78 Family User's Manual: Software Rev.1.00 (R01US0015EJ0100)

(The latest versions of the documents are available on the Renesas Electronics Website.)

Technical Updates/Technical Brochures

(The latest versions of the documents are available on the Renesas Electronics Website.)

## Website and Support

Renesas Electronics Website

- <http://www.renesas.com/index.jsp>

Inquiries

- <http://www.renesas.com/contact/>

Revision Record	RL78/G13 Voltage Detector (Reset Mode)
-----------------	--

Rev.	Date	Description	
		Page	Summary
1.00	Sep. 30, 2011	—	First edition issued

All trademarks and registered trademarks are the property of their respective owners.

## General Precautions in the Handling of MPU/MCU Products

The following usage notes are applicable to all MPU/MCU products from Renesas. For detailed usage notes on the products covered by this manual, refer to the relevant sections of the manual. If the descriptions under General Precautions in the Handling of MPU/MCU Products and in the body of the manual differ from each other, the description in the body of the manual takes precedence.

### 1. Handling of Unused Pins

- Handle unused pins in accord with the directions given under Handling of Unused Pins in the manual.
  - The input pins of CMOS products are generally in the high-impedance state. In operation with unused pin in the open-circuit state, extra electromagnetic noise is induced in the vicinity of LSI, an associated shoot-through current flows internally, and malfunctions occur due to the false recognition of the pin state as an input signal become possible. Unused pins should be handled as described under Handling of Unused Pins in the manual.

### 2. Processing at Power-on

- The state of the product is undefined at the moment when power is supplied.
  - The states of internal circuits in the LSI are indeterminate and the states of register settings and pins are undefined at the moment when power is supplied.  
In a finished product where the reset signal is applied to the external reset pin, the states of pins are not guaranteed from the moment when power is supplied until the reset process is completed. In a similar way, the states of pins in a product that is reset by an on-chip power-on reset function are not guaranteed from the moment when power is supplied until the power reaches the level at which resetting has been specified.

### 3. Prohibition of Access to Reserved Addresses

- Access to reserved addresses is prohibited.
  - The reserved addresses are provided for the possible future expansion of functions. Do not access these addresses; the correct operation of LSI is not guaranteed if they are accessed.

### 4. Clock Signals

- After applying a reset, only release the reset line after the operating clock signal has become stable. When switching the clock signal during program execution, wait until the target clock signal has stabilized.
  - When the clock signal is generated with an external resonator (or from an external oscillator) during a reset, ensure that the reset line is only released after full stabilization of the clock signal. Moreover, when switching to a clock signal produced with an external resonator (or by an external oscillator) while program execution is in progress, wait until the target clock signal is stable.

### 5. Differences between Products

- Before changing from one product to another, i.e. to one with a different part number, confirm that the change will not lead to problems.
  - The characteristics of MPU/MCU in the same group but having different part numbers may differ because of the differences in internal memory capacity and layout pattern. When changing to products of different part numbers, implement a system-evaluation test for each of the products.

## Notice

- All information included in this document is current as of the date this document is issued. Such information, however, is subject to change without any prior notice. Before purchasing or using any Renesas Electronics products listed herein, please confirm the latest product information with a Renesas Electronics sales office. Also, please pay regular and careful attention to additional and different information to be disclosed by Renesas Electronics such as that disclosed through our website.
- Renesas Electronics does not assume any liability for infringement of patents, copyrights, or other intellectual property rights of third parties by or arising from the use of Renesas Electronics products or technical information described in this document. No license, express, implied or otherwise, is granted hereby under any patents, copyrights or other intellectual property rights of Renesas Electronics or others.
- You should not alter, modify, copy, or otherwise misappropriate any Renesas Electronics product, whether in whole or in part.
- Descriptions of circuits, software and other related information in this document are provided only to illustrate the operation of semiconductor products and application examples. You are fully responsible for the incorporation of these circuits, software, and information in the design of your equipment. Renesas Electronics assumes no responsibility for any losses incurred by you or third parties arising from the use of these circuits, software, or information.
- When exporting the products or technology described in this document, you should comply with the applicable export control laws and regulations and follow the procedures required by such laws and regulations. You should not use Renesas Electronics products or the technology described in this document for any purpose relating to military applications or use by the military, including but not limited to the development of weapons of mass destruction. Renesas Electronics products and technology may not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable domestic or foreign laws or regulations.
- Renesas Electronics has used reasonable care in preparing the information included in this document, but Renesas Electronics does not warrant that such information is error free. Renesas Electronics assumes no liability whatsoever for any damages incurred by you resulting from errors in or omissions from the information included herein.
- Renesas Electronics products are classified according to the following three quality grades: "Standard", "High Quality", and "Specific". The recommended applications for each Renesas Electronics product depends on the product's quality grade, as indicated below. You must check the quality grade of each Renesas Electronics product before using it in a particular application. You may not use any Renesas Electronics product for any application categorized as "Specific" without the prior written consent of Renesas Electronics. Further, you may not use any Renesas Electronics product for any application for which it is not intended without the prior written consent of Renesas Electronics. Renesas Electronics shall not be in any way liable for any damages or losses incurred by you or third parties arising from the use of any Renesas Electronics product for an application categorized as "Specific" or for which the product is not intended where you have failed to obtain the prior written consent of Renesas Electronics. The quality grade of each Renesas Electronics product is "Standard" unless otherwise expressly specified in a Renesas Electronics data sheets or data books, etc.  
"Standard": Computers; office equipment; communications equipment; test and measurement equipment; audio and visual equipment; home electronic appliances; machine tools; personal electronic equipment; and industrial robots.  
"High Quality": Transportation equipment (automobiles, trains, ships, etc.); traffic control systems; anti-disaster systems; anti-crime systems; safety equipment; and medical equipment not specifically designed for life support.  
"Specific": Aircraft; aerospace equipment; submersible repeaters; nuclear reactor control systems; medical equipment or systems for life support (e.g. artificial life support devices or systems), surgical implantations, or healthcare intervention (e.g. excision, etc.), and any other applications or purposes that pose a direct threat to human life.
- You should use the Renesas Electronics products described in this document within the range specified by Renesas Electronics, especially with respect to the maximum rating, operating supply voltage range, movement power voltage range, heat radiation characteristics, installation and other product characteristics. Renesas Electronics shall have no liability for malfunctions or damages arising out of the use of Renesas Electronics products beyond such specified ranges.
- Although Renesas Electronics endeavors to improve the quality and reliability of its products, semiconductor products have specific characteristics such as the occurrence of failure at a certain rate and malfunctions under certain use conditions. Further, Renesas Electronics products are not subject to radiation resistance design. Please be sure to implement safety measures to guard them against the possibility of physical injury, and injury or damage caused by fire in the event of the failure of a Renesas Electronics product, such as safety design for hardware and software including but not limited to redundancy, fire control and malfunction prevention, appropriate treatment for aging degradation or any other appropriate measures. Because the evaluation of microcomputer software alone is very difficult, please evaluate the safety of the final products or system manufactured by you.
- Please contact a Renesas Electronics sales office for details as to environmental matters such as the environmental compatibility of each Renesas Electronics product. Please use Renesas Electronics products in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive. Renesas Electronics assumes no liability for damages or losses occurring as a result of your noncompliance with applicable laws and regulations.
- This document may not be reproduced or duplicated, in any form, in whole or in part, without prior written consent of Renesas Electronics.
- Please contact a Renesas Electronics sales office if you have any questions regarding the information contained in this document or Renesas Electronics products, or if you have any other inquiries.  
(Note 1) "Renesas Electronics" as used in this document means Renesas Electronics Corporation and also includes its majority-owned subsidiaries.  
(Note 2) "Renesas Electronics product(s)" means any product developed or manufactured by or for Renesas Electronics.



### SALES OFFICES

Renesas Electronics Corporation

<http://www.renesas.com>

Refer to "<http://www.renesas.com>" for the latest and detailed information.

#### Renesas Electronics America Inc.

2880 Scott Boulevard Santa Clara, CA 95050-2554, U.S.A.  
Tel: +1-408-588-6000, Fax: +1-408-588-6130

#### Renesas Electronics Canada Limited

1101 Nicholson Road, Newmarket, Ontario L3Y 9C3, Canada  
Tel: +1-905-898-5441, Fax: +1-905-898-3220

#### Renesas Electronics Europe Limited

Dukes Meadow, Millboard Road, Bourne End, Buckinghamshire, SL8 5FH, U.K.  
Tel: +44-1628-585-100, Fax: +44-1628-585-900

#### Renesas Electronics Europe GmbH

Arcadiastrasse 10, 40472 Düsseldorf, Germany  
Tel: +49-211-65030, Fax: +49-211-6503-1327

#### Renesas Electronics (China) Co., Ltd.

7th Floor, Quantum Plaza, No.27 ZhiChunLu Haidian District, Beijing 100083, P.R.China  
Tel: +86-10-8235-1155, Fax: +86-10-8235-7679

#### Renesas Electronics (Shanghai) Co., Ltd.

Unit 204, 205, AZIA Center, No.1233 Lujiazui Ring Rd., Pudong District, Shanghai 200120, China  
Tel: +86-21-5877-1818, Fax: +86-21-6887-7858 / -7898

#### Renesas Electronics Hong Kong Limited

Unit 1601-1613, 16/F., Tower 2, Grand Century Place, 193 Prince Edward Road West, Mongkok, Kowloon, Hong Kong  
Tel: +852-2886-9318, Fax: +852-2886-9022/9044

#### Renesas Electronics Taiwan Co., Ltd.

13F, No. 363, Fu Shing North Road, Taipei, Taiwan  
Tel: +886-2-8175-9600, Fax: +886-2-8175-9670

#### Renesas Electronics Singapore Pte. Ltd.

1 HarbourFront Avenue, #06-10, Keppel Bay Tower, Singapore 098632  
Tel: +65-6213-0200, Fax: +65-6278-8001

#### Renesas Electronics Malaysia Sdn.Bhd.

Unit 906, Block B, Menara Amcorp, Amcorp Trade Centre, No. 18, Jln Persiaran Barat, 46050 Petaling Jaya, Selangor Darul Ehsan, Malaysia  
Tel: +60-3-7955-9390, Fax: +60-3-7955-9510

#### Renesas Electronics Korea Co., Ltd.

11F., Samik Lavied' or Bldg., 720-2 Yeoksam-Dong, Kangnam-Ku, Seoul 135-080, Korea  
Tel: +82-2-558-3737, Fax: +82-2-558-5141