

[New Release]

R20TS1100EJ0100

Rev.1.00

Jan. 20, 2025

## RZ/N2H Evaluation Board Kit

Possible evaluation Linux/RTOS application and industrial Ethernet communication.

### Outline

RZ/N2H Evaluation Board Kit has been released. It supports the RZ family RZ/N2H group.

### 1. Product Overview

The RZ/N2H Evaluation Board Kit is an evaluation board kit that is ideal for evaluation Linux/RTOS application and industrial Ethernet communication processing. It has a built-in emulator, so you can start your evaluation by simply connecting the included USB cable to your PC. It is equipped with a wide range of functional ICs such as Gigabit Ethernet PHY, non-volatile memory, and LPDDR4 memory, allowing you to evaluate various functions of the RZ/N2H without an expansion board.

The kit includes the following hardware necessary for development.

#### ➤ Hardware

- CPU board with RZ/N2H group device (quad CPU, internal RAM 2MB, pin count 576-pin), and on-board emulator
- Power supply USB cable (USB Type-C – Type-C) # Need to prepare a separate 45W (15V-3A) USB-PD power supply adapter
- On-board emulator connection USB cable (Type-A – Type Micro-B)
- PC terminal debugging USB cable (Type-A – Type Mini-B)

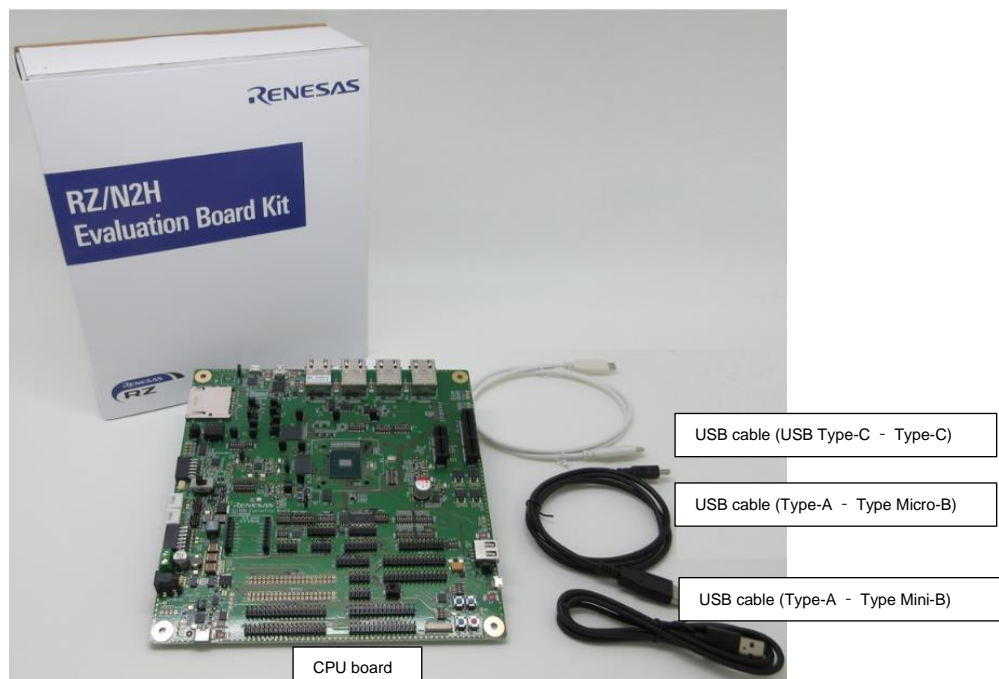


Figure 1 RZ/N2H Evaluation Board Kit

➤ Software

The development environment, sample code, and application notes are available on the website. Please visit the URL below.

- RZ/N2H Evaluation Board Kit product web page  
<https://www.renesas.com/rzn2h-evkit>

2. Product Features

- Implemented RZ/N2H with 4x Cortex®-A55 and 2x Cortex®-R52 CPU cores  
 High application processing performance and high-precision real-time control are achieved on a single chip. It can be used for a variety of software development, from Linux applications to RTOS applications.
- Equipped with an on-board emulator, debugging can be started simply by connecting to a PC and turning on the power
- Equipped with four Gigabit Ethernet PHYs, non-volatile memory (QSPI Flash, Octa Flash, eMMC), DDR, and other high-performance ICs, the functionality of the target MPU can be fully evaluated.
- By connecting an optional inverter board to the pin header (PWM, ΔΣI/F, Encoder I/F), it is possible to evaluate motor control of up to 5 axes.
- Equipped with the microSD card slot, the SD card slot, and the PCIe connector.  
 Versatile expansion interfaces such as Pmod™/Grove®/QWIIC®/mikroBUS™ are also available, allowing various use cases to be evaluated.

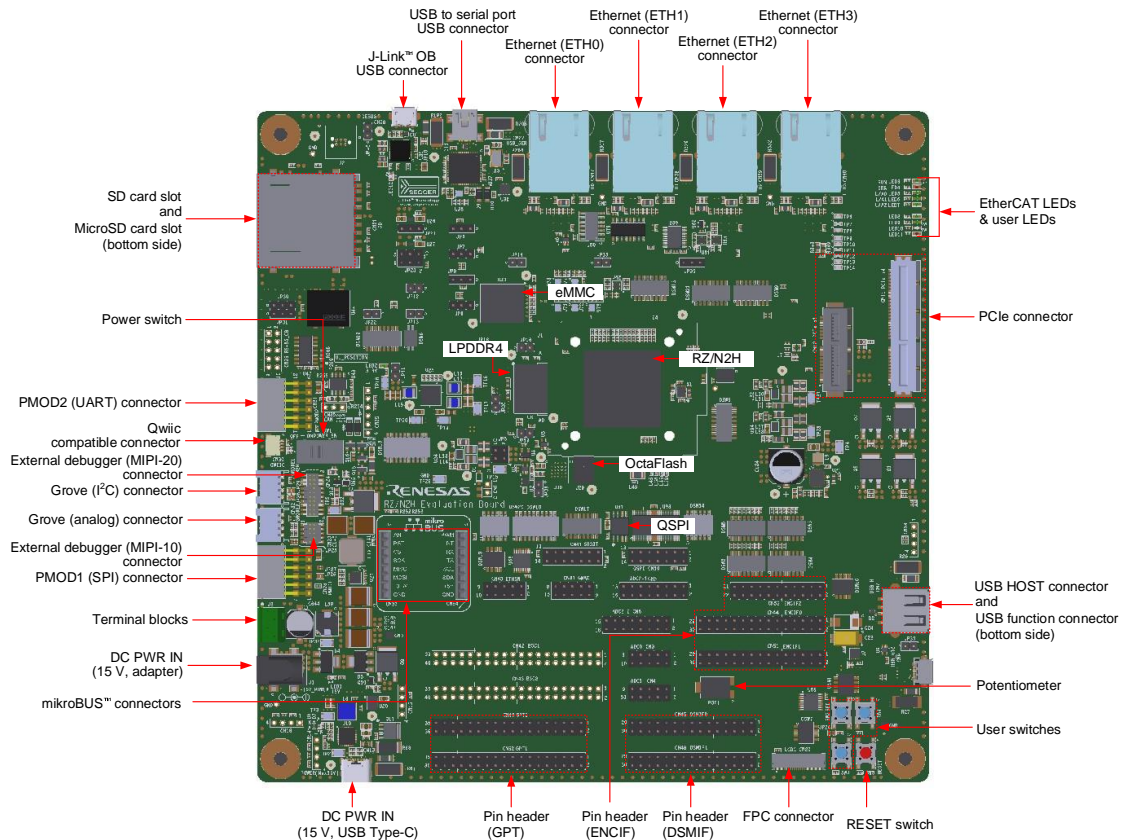


Figure 2 CPU board (component side)

### 3. Purchasing the Product

Contact your local Renesas Electronics sales office or distributor and inform them of the following product information.

Regarding the price of the product, contact the sales office or distributor.

Product name	Orderable Part Number
RZ/N2H Evaluation Board Kit	RTK9RZN2H0S00000BJ

**Revision History**

Rev.	Date	Description	
		Page	Summary
1.00	Jan.20.25	-	First edition issued

Renesas Electronics has used reasonable care in preparing the information included in this document, but Renesas Electronics does not warrant that such information is error free. Renesas Electronics assumes no liability whatsoever for any damages incurred by you resulting from errors in or omissions from the information included herein.

The past news contents have been based on information at the time of publication. Now changed or invalid information may be included.

The URLs in the Tool News also may be subject to change or become invalid without prior notice.

**Corporate Headquarters**

TOYOSU FORESIA, 3-2-24 Toyosu,  
Koto-ku, Tokyo 135-0061, Japan

[www.renesas.com](http://www.renesas.com)

**Trademarks**

Renesas and the Renesas logo are trademarks of Renesas Electronics Corporation. All trademarks and registered trademarks are the property of their respective owners.

**Contact Information**

For further information on a product, technology, the most up-to-date version of a document, or your nearest sales office, please visit:

[www.renesas.com/contact/](http://www.renesas.com/contact/)