

# Application Note

## DVFS and LDO Bypass Operation on i.MX6 Based Platform with DA9063

AN-PM-053

### Abstract

*This application note describes the functionality of the DVFS and LDO bypass features of the i.MX6 Freescale SoC, and explains how it can be used in a system in conjunction with the DA9063 PMIC.*

*Finally, it analyses the implementation on a Dialog Semiconductor PEBIX platform and the performance improvement achieved in terms of power saving.*

---

## DVFS and LDO Bypass Operation on i.MX6 Based Platform with DA9063

### Contents

<b>Abstract</b> .....	<b>1</b>
<b>Contents</b> .....	<b>2</b>
<b>Figures</b> .....	<b>2</b>
<b>Tables</b> .....	<b>2</b>
<b>1 Terms and Definitions</b> .....	<b>3</b>
<b>2 References</b> .....	<b>3</b>
<b>3 Introduction</b> .....	<b>4</b>
<b>4 Bypass Mode Implemented in the PEBIX Platform</b> .....	<b>4</b>
<b>5 Measurement Method and Results</b> .....	<b>5</b>
5.1 Results .....	6
5.2 Approximate Power Saving in Bypass Mode .....	6
<b>6 Conclusions</b> .....	<b>8</b>
<b>Appendix A Scope Screenshots</b> .....	<b>9</b>
<b>Revision History</b> .....	<b>12</b>

### Figures

Figure 1: i.MX6 Internal LDOs .....	4
Figure 2: BYPASS MODE (l <sub>do_active</sub> =OFF) at 800 MHz .....	9
Figure 3: BYPASS MODE (l <sub>do_active</sub> =OFF) at 800 MHz – Details of DVFS Performed on VDDCORE Supply .....	9
Figure 4: NO BYPASS MODE (l <sub>do_active</sub> =ON) at 800 MHz – Voltage Rails and System Current ...	10
Figure 5: BYPASS MODE (l <sub>do_active</sub> =OFF) at 1 GHz .....	10
Figure 6: BYPASS MODE (l <sub>do_active</sub> =OFF) at 1GHz – Voltage Rails and System Current .....	11

### Tables

Table 1: Best Combinations of Clock Frequency and Voltage Rails .....	6
Table 2: Current Measurements Whilst Running Video (1 GHz) .....	6
Table 3: Current Measurements Whilst Running Video (800 MHz) .....	7

---

## DVFS and LDO Bypass Operation on i.MX6 Based Platform with DA9063

### 1 Terms and Definitions

BSP	Board Support Package
CPU	Central Processing Unit
DVFS	Dynamic Voltage Frequency Scaling
FET	Field Effect Transistor
LDO	Low DropOut Voltage Regulator
PCB	Printed Circuit Board
PMIC	Power Management Integrated Circuits
SoC	System on (a) Chip

### 2 References

- [1] DA9063, Datasheet, Dialog Semiconductor.
- [2] AN-PM-024 DA9063 Voltage Monitoring, Application Note, Dialog Semiconductor.

## DVFS and LDO Bypass Operation on i.MX6 Based Platform with DA9063

### 3 Introduction

The Board Support Package (BSP) used in the PEBIX<sup>1</sup> board features the bypass mode and Dynamic Voltage Frequency Scaling (DVFS) software functions which improve power saving efficiency on a system equipped with a PMIC. DVFS is applied on the ARM core voltage domain.

The bypass mode implements a mechanism where the internal LDOs of the i.MX6 are bypassed by fully switching on their respective pass device (FET), with the consequence that no regulation is performed.

The DVFS technique is implemented in the kernel, by using an interrupt generated by the DVFS block (internal to i.MX6) which tracks the CPU load. Within the kernel it is possible to define two CPU load thresholds, above which the DVFS block generates two interrupts to the ARM core, according to the CPU load. In turn the ARM core programs the external PMIC according to a Table (look-up Table) implemented in the kernel, which relates voltage rail levels (VDDSOC, VDDCORE) and ARM cores clock frequencies. A high CPU load would increase both VDDSOC, VDDCORE power rails and also the clock frequency and vice versa. The result is a power saving which is a paramount requirement for mobile applications, where normally a battery is the power source of the system.

### 4 Bypass Mode Implemented in the PEBIX Platform

The bypass mode functionality has been tested on a PEBIX platform with an i.MX6Q processor and a DA9063 PMIC. For other platforms with the same hardware architecture as PEBIX, the results can vary due to the dependency on PCB layout.

Figure 1 shows a simplified block diagram of the i.MX6 SoC with its internal LDOs. Since, in bypass mode, the i.MX6Q LDOs simply pass through the input voltages to the outputs (the LDO MOSFETs are permanently on with no regulation), the host CPU must program the external PMIC to generate the required VDDCORE and VDDSOC according to the look-up Table (Table 1) and applied by Android application in run time.

Without bypass mode, the internal LDOs will regulate the applied voltages at the input. With this configuration the required input voltage level must of course be higher.

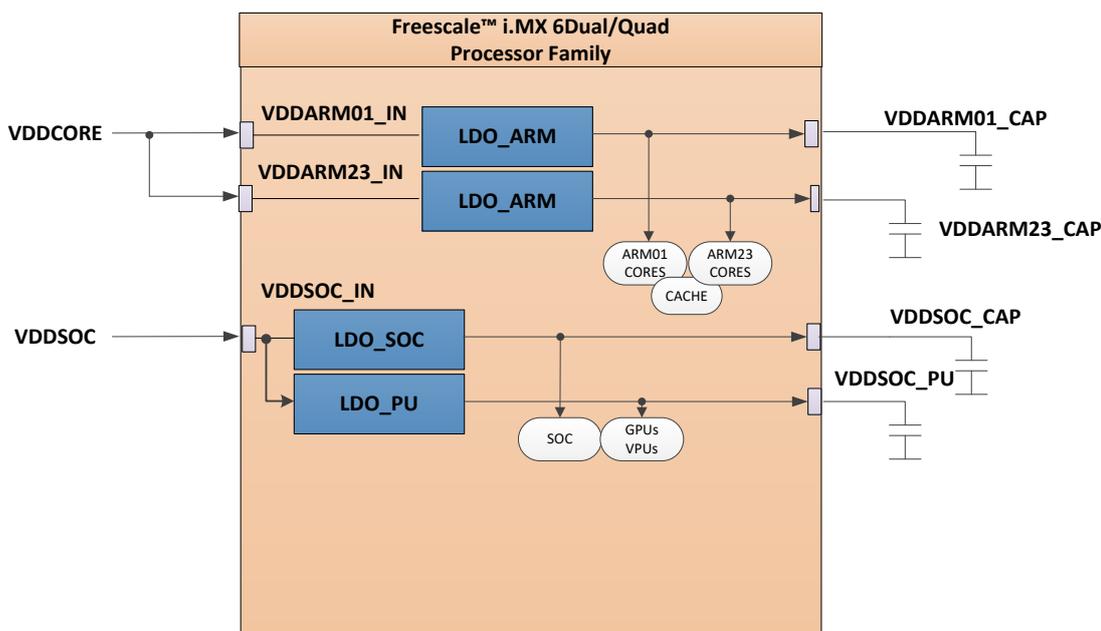


Figure 1: i.MX6 Internal LDOs

<sup>1</sup> PEBIX = PMIC Evaluation Board for i.MX6 Q/D process. It is an i.MX6 Q/D based platform with a DA9063 PMIC.

---

## DVFS and LDO Bypass Operation on i.MX6 Based Platform with DA9063

### 5 Measurement Method and Results

Tests were carried out on a PEBIX board which was designed with specific jumper links on all supply rails to allow current measurements. For the tests, only VDDSOC and VDDCORE rails were monitored. A video clip was running to exercise the SoC power demand on these rails.

Both currents  $I_{ARM}$  and  $I_{SOC}$  have a complex profile due to the continuous load transient, such as whilst streaming a video clip, as shown in [Figure 2](#). The average current (RMS value measured in a long time slot) was measured by using a scope and a current probe on these rails, for both conditions: bypass and no bypass mode.

For the tests, the ARM core clock frequency was set in the software to 1 GHz or 800 MHz.

Clock frequencies higher than 1 GHz cannot be implemented as the i.MX6 device is rated only up to this frequency.

In this report the following definitions will be used:

$P_b$  = Power in bypass mode

$P_r$  = power in no-bypass mode (regulated)

$V_b$  = voltage rail in bypass mode

$V_r$  = voltage rail in no bypass mode (regulated)

## DVFS and LDO Bypass Operation on i.MX6 Based Platform with DA9063

**Table 1: Best Combinations of Clock Frequency and Voltage Rails**

Clock frequency = 1GHz	Rail	Rail input
.pu_voltage	VDDSOC	1250
.soc_voltage		1250
.cpu_voltage	VDDCORE	1300
<b>Clock frequency = 800MHz</b>		
.pu_voltage	VDDSOC	1250
.soc_voltage		1250
.cpu_voltage	VDDCORE	1200
<b>Clock frequency = 400MHz</b>		
.pu_voltage	VDDSOC	1250
.soc_voltage		1250
.cpu_voltage	VDDCORE	1100

Normally, the DVFS mechanism can be applied to both VDDSOC and VDDCORE rails. However, after experimenting with different frequencies and voltage levels, the best combinations of clock frequency and voltage rails were found and gathered in

Note that VDDSOC is kept constant due to a hardware limitation. A large voltage drop on the main rail VDDSOC does not allow further reduction of the voltage levels without causing a software crash.

### 5.1 Results

The Appendix includes scope screenshots which show the complex profile of both I\_ARM and I\_SOC currents. The complexity is due to the continuous load transients while streaming the video clip. Figure 3 shows the VDDCORE (core voltage) dynamically switched mainly between two values, according to Table 1. For example, if the clock frequency is set to 1 GHz, the VDDCORE voltage is mainly switched between the values 1.3 V and 1.25 V. For an 800 MHz clock frequency, these values will be between 1.25 V and 1.1 V.

### 5.2 Approximate Power Saving in Bypass Mode

The DVFS mechanism is also active during bypass mode. When DVFS become active, VDDCORE and VDDSOC voltages are adjusted according to the CPU load as per Table 1.

Table 2 presents a summary of the current measurements while running the video clip. The power input demand can be estimated with the formulae:

$$P_r = VDDCORE \times (I\_ARM + I\_SOC)$$

$$P_b = VDDCORE \times I\_ARM + VDDSOC \times I\_SOC$$

**Table 2: Current Measurements Whilst Running Video (1 GHz)**

Clock Frequency	LDO Mode	VDDCORE (V)	I_ARM (mA)	VDDSOC (V)	I_SOC (mA)	P (mW)
1 GHz	No bypass	1.38	110	1.38	450	773
1 GHz	bypass	1.30	125	1.25	406	670 max
1 GHz	bypass	1.10	125	1.25	406	509 min

From the values shown it is possible to estimate the power saving, assuming the system is always working in one of the following two conditions:

## DVFS and LDO Bypass Operation on i.MX6 Based Platform with DA9063

- Worst case, where it is assumed the voltage rails are always set to the highest level by the DVFS mechanism
  - $\Delta P \text{ min} = 773 - 670 = 103 \text{ mW} \rightarrow 13.3 \%$
- Best case, where it is assumed the voltage rails are always set to the lowest level by the DVFS mechanism
  - $\Delta P \text{ max} = 773 - 509 = 264 \text{ mW} \rightarrow 34.2 \%$

When bypass mode is not active (no-bypass) a portion of the input power is lost in the internal LDOs due to voltage drop across the MOSFET pass devices. This is an unavoidable limitation of an LDO and requires  $V_{in} - V_{out} \geq 1.1 \text{ V}$ . However, when bypass mode is active, it is possible to lower the applied input voltage as there will be no voltage drop across the internal LDOs.

The above results show that the implementation of both bypass mode and DVFS mechanisms can lead to a significant power saving of at least 13.3 % if the input voltage is maintained at 1.3 V. As the input voltage is also toggled to a lower level of 1.1 V, then the actual figure will be between 13.3 % and 34.2 %.

Clock Frequency	LDO Mode	VDDCORE (V)	I_ARM (mA)	VDDSOC (V)	I_SOC (mA)	P (mW)
800MHz	No bypass	1.38	93	1.38	450	749
800MHz	bypass	1.25	86	1.25	418	625 max
800MHz	bypass	1.10	86	1.25	418	617 min

**Table 3: Current Measurements Whilst Running Video (800 MHz)**

Similarly, if the max clock frequency is set to 800 MHz, the power saving is as below:

- Worst case:  $\Delta P \text{ min} = 749 - 670 = 79 \text{ mW} \rightarrow 10.5 \%$
- Best case:  $\Delta P \text{ max} = 749 - 617 = 132 \text{ mW} \rightarrow 17.6 \%$

---

## DVFS and LDO Bypass Operation on i.MX6 Based Platform with DA9063

### 6 Conclusions

Implementing the DVFS and bypass modes has been demonstrated to improve power saving. The power saving can be further improved if the mechanism is also applied to the VDDSOC rail. (This was not possible in the PEBIX platform due to a hardware limitation, as explained above.)

Lastly, as the DVFS modifies the rail voltages only in the range of tens of millivolts, the voltage drops, due to PCB track resistance, can also have an impact on the power saving. Therefore, designers may need to tune the rail voltages for each clock frequency (by modifying the kernel look-up, see [Table 1](#)) to achieve the best power saving whilst also remaining within the maximum rail voltages specified by the i.MX6 datasheet. Consequently, results may differ from those above due to the high dependency upon PCB layout and rail voltage settings in the kernel.

DVFS and LDO Bypass Operation on i.MX6 Based Platform with DA9063

Appendix A Scope Screenshots

The following scope screenshots show the complex profile of both I\_ARM and I\_SOC currents.

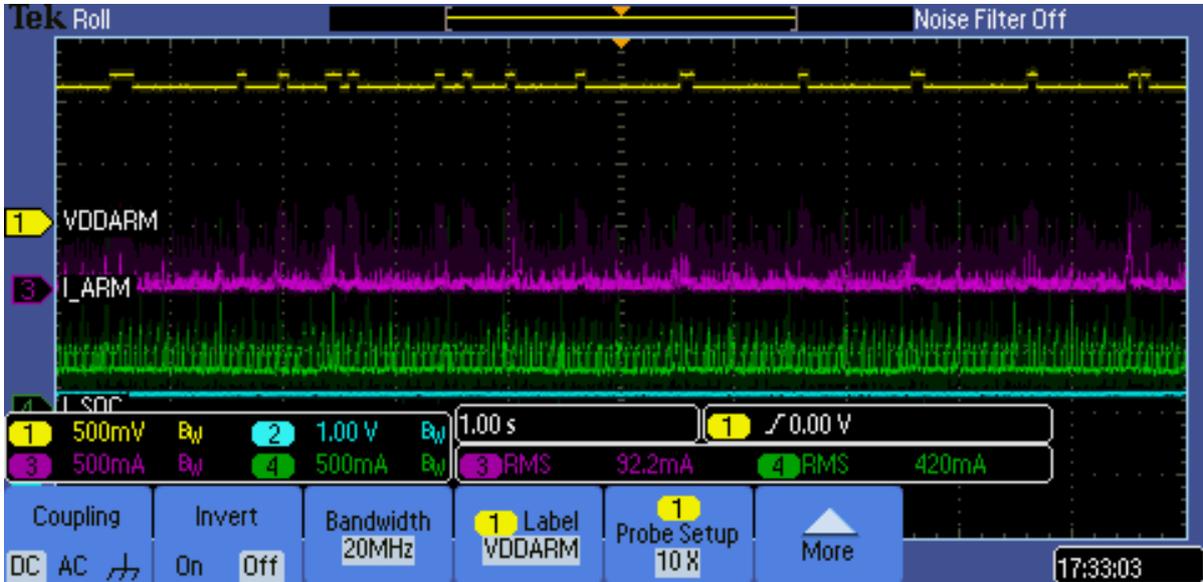


Figure 2: BYPASS MODE (I<sub>do\_active</sub>=OFF) at 800 MHz

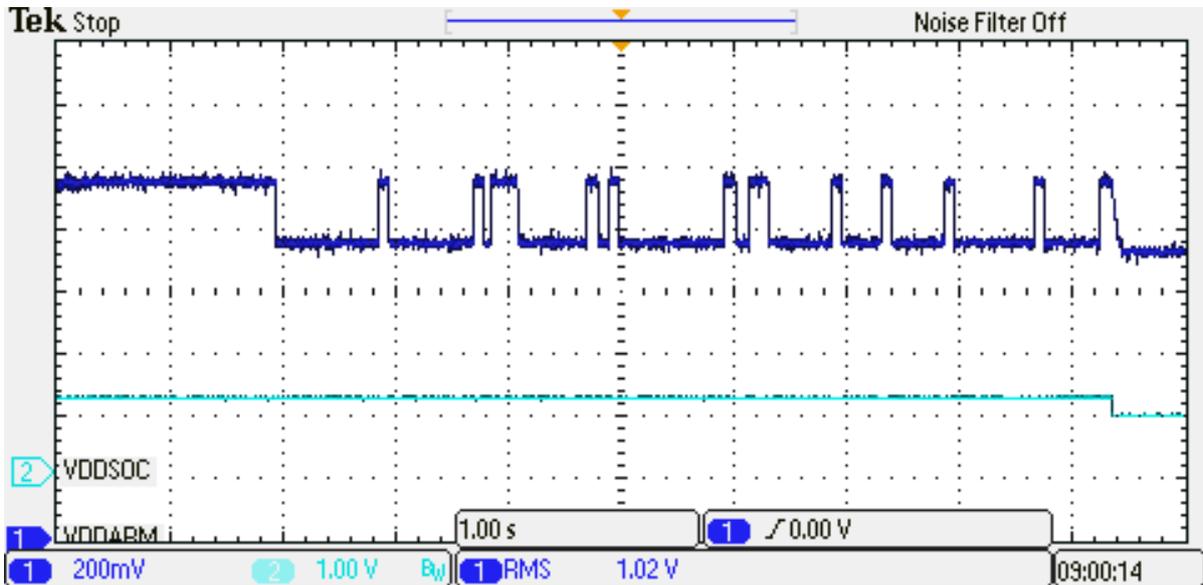


Figure 3: BYPASS MODE (I<sub>do\_active</sub>=OFF) at 800 MHz – Details of DVFS Performed on VDDCORE Supply

DVFS and LDO Bypass Operation on i.MX6 Based Platform with DA9063

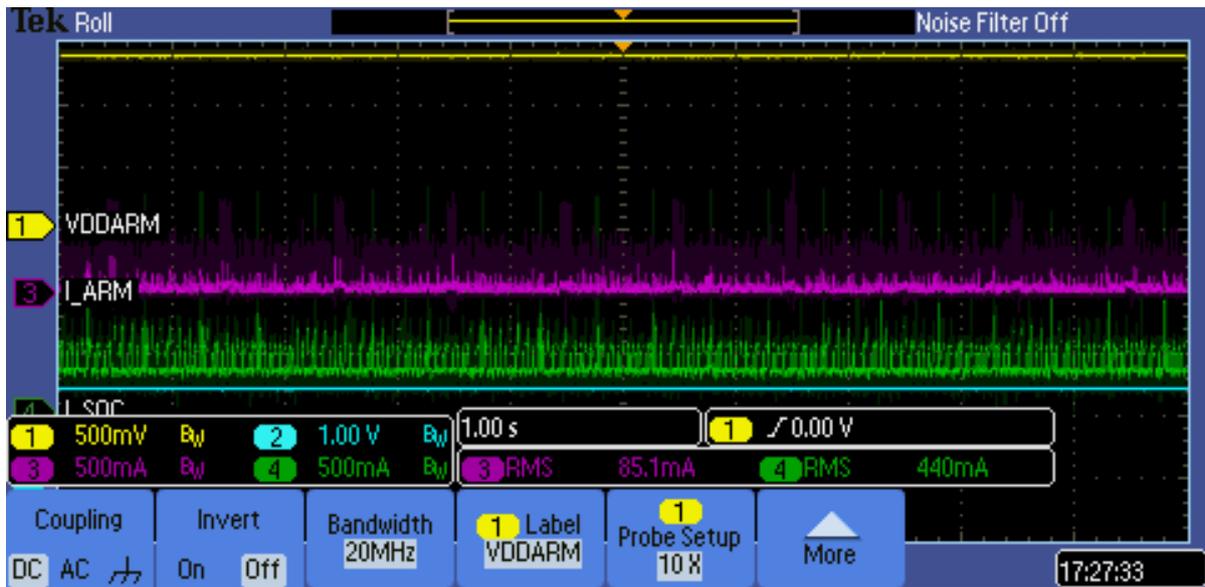


Figure 4: NO BYPASS MODE (I<sub>do\_active</sub>=ON) at 800 MHz – Voltage Rails and System Current



Figure 5: BYPASS MODE (I<sub>do\_active</sub>=OFF) at 1 GHz

DVFS and LDO Bypass Operation on i.MX6 Based Platform with DA9063

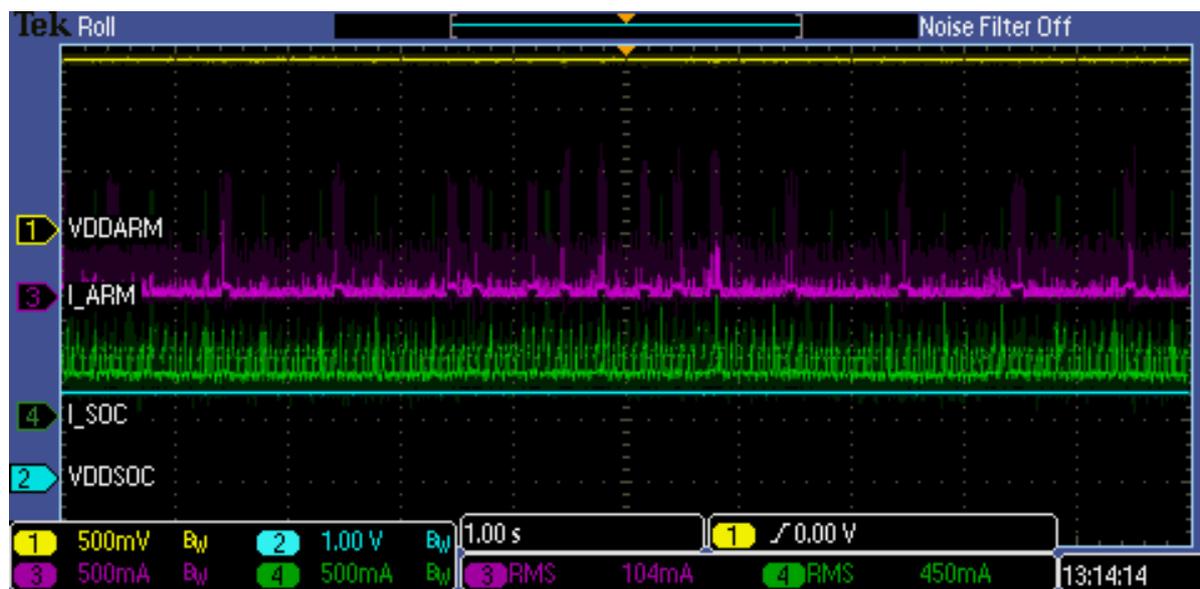


Figure 6: BYPASS MODE (I<sub>do\_active</sub>=OFF) at 1GHz – Voltage Rails and System Current

---

**DVFS and LDO Bypass Operation on i.MX6  
Based Platform with DA9063****Revision History**

<b>Revision</b>	<b>Date</b>	<b>Description</b>
1.0	17-Dec 2016	Initial version.
1.1	23-Sep-2016	Updated to latest publishing standards
1.2	16-Feb-2022	File was rebranded with new logo, copyright and disclaimer

---

## DVFS and LDO Bypass Operation on i.MX6 Based Platform with DA9063

### Status Definitions

Status	Definition
DRAFT	The content of this document is under review and subject to formal approval, which may result in modifications or additions.
APPROVED or unmarked	The content of this document has been approved for publication.

### RoHS Compliance

Dialog Semiconductor's suppliers certify that its products are in compliance with the requirements of Directive 2011/65/EU of the European Parliament on the restriction of the use of certain hazardous substances in electrical and electronic equipment. RoHS certificates from our suppliers are available on request.

## IMPORTANT NOTICE AND DISCLAIMER

RENESAS ELECTRONICS CORPORATION AND ITS SUBSIDIARIES (“RENESAS”) PROVIDES TECHNICAL SPECIFICATIONS AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES “AS IS” AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT OF THIRD-PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for developers who are designing with Renesas products. You are solely responsible for (1) selecting the appropriate products for your application, (2) designing, validating, and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements. These resources are subject to change without notice. Renesas grants you permission to use these resources only to develop an application that uses Renesas products. Other reproduction or use of these resources is strictly prohibited. No license is granted to any other Renesas intellectual property or to any third-party intellectual property. Renesas disclaims responsibility for, and you will fully indemnify Renesas and its representatives against, any claims, damages, costs, losses, or liabilities arising from your use of these resources. Renesas' products are provided only subject to Renesas' Terms and Conditions of Sale or other applicable terms agreed to in writing. No use of any Renesas resources expands or otherwise alters any applicable warranties or warranty disclaimers for these products.

(Disclaimer Rev.1.01 Jan 2024)

### Corporate Headquarters

TOYOSU FORESIA, 3-2-24 Toyosu,  
Koto-ku, Tokyo 135-0061, Japan  
[www.renesas.com](http://www.renesas.com)

### Trademarks

Renesas and the Renesas logo are trademarks of Renesas Electronics Corporation. All trademarks and registered trademarks are the property of their respective owners.

### Contact Information

For further information on a product, technology, the most up-to-date version of a document, or your nearest sales office, please visit [www.renesas.com/contact-us/](http://www.renesas.com/contact-us/).