

To our customers,

---

## Old Company Name in Catalogs and Other Documents

---

On April 1<sup>st</sup>, 2010, NEC Electronics Corporation merged with Renesas Technology Corporation, and Renesas Electronics Corporation took over all the business of both companies. Therefore, although the old company name remains in this document, it is a valid Renesas Electronics document. We appreciate your understanding.

Renesas Electronics website: <http://www.renesas.com>

April 1<sup>st</sup>, 2010  
Renesas Electronics Corporation

Issued by: Renesas Electronics Corporation (<http://www.renesas.com>)

Send any inquiries to <http://www.renesas.com/inquiry>.

## Notice

1. All information included in this document is current as of the date this document is issued. Such information, however, is subject to change without any prior notice. Before purchasing or using any Renesas Electronics products listed herein, please confirm the latest product information with a Renesas Electronics sales office. Also, please pay regular and careful attention to additional and different information to be disclosed by Renesas Electronics such as that disclosed through our website.
2. Renesas Electronics does not assume any liability for infringement of patents, copyrights, or other intellectual property rights of third parties by or arising from the use of Renesas Electronics products or technical information described in this document. No license, express, implied or otherwise, is granted hereby under any patents, copyrights or other intellectual property rights of Renesas Electronics or others.
3. You should not alter, modify, copy, or otherwise misappropriate any Renesas Electronics product, whether in whole or in part.
4. Descriptions of circuits, software and other related information in this document are provided only to illustrate the operation of semiconductor products and application examples. You are fully responsible for the incorporation of these circuits, software, and information in the design of your equipment. Renesas Electronics assumes no responsibility for any losses incurred by you or third parties arising from the use of these circuits, software, or information.
5. When exporting the products or technology described in this document, you should comply with the applicable export control laws and regulations and follow the procedures required by such laws and regulations. You should not use Renesas Electronics products or the technology described in this document for any purpose relating to military applications or use by the military, including but not limited to the development of weapons of mass destruction. Renesas Electronics products and technology may not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable domestic or foreign laws or regulations.
6. Renesas Electronics has used reasonable care in preparing the information included in this document, but Renesas Electronics does not warrant that such information is error free. Renesas Electronics assumes no liability whatsoever for any damages incurred by you resulting from errors in or omissions from the information included herein.
7. Renesas Electronics products are classified according to the following three quality grades: “Standard”, “High Quality”, and “Specific”. The recommended applications for each Renesas Electronics product depends on the product’s quality grade, as indicated below. You must check the quality grade of each Renesas Electronics product before using it in a particular application. You may not use any Renesas Electronics product for any application categorized as “Specific” without the prior written consent of Renesas Electronics. Further, you may not use any Renesas Electronics product for any application for which it is not intended without the prior written consent of Renesas Electronics. Renesas Electronics shall not be in any way liable for any damages or losses incurred by you or third parties arising from the use of any Renesas Electronics product for an application categorized as “Specific” or for which the product is not intended where you have failed to obtain the prior written consent of Renesas Electronics. The quality grade of each Renesas Electronics product is “Standard” unless otherwise expressly specified in a Renesas Electronics data sheets or data books, etc.  

“Standard”: Computers; office equipment; communications equipment; test and measurement equipment; audio and visual equipment; home electronic appliances; machine tools; personal electronic equipment; and industrial robots.

“High Quality”: Transportation equipment (automobiles, trains, ships, etc.); traffic control systems; anti-disaster systems; anti-crime systems; safety equipment; and medical equipment not specifically designed for life support.

“Specific”: Aircraft; aerospace equipment; submersible repeaters; nuclear reactor control systems; medical equipment or systems for life support (e.g. artificial life support devices or systems), surgical implantations, or healthcare intervention (e.g. excision, etc.), and any other applications or purposes that pose a direct threat to human life.
8. You should use the Renesas Electronics products described in this document within the range specified by Renesas Electronics, especially with respect to the maximum rating, operating supply voltage range, movement power voltage range, heat radiation characteristics, installation and other product characteristics. Renesas Electronics shall have no liability for malfunctions or damages arising out of the use of Renesas Electronics products beyond such specified ranges.
9. Although Renesas Electronics endeavors to improve the quality and reliability of its products, semiconductor products have specific characteristics such as the occurrence of failure at a certain rate and malfunctions under certain use conditions. Further, Renesas Electronics products are not subject to radiation resistance design. Please be sure to implement safety measures to guard them against the possibility of physical injury, and injury or damage caused by fire in the event of the failure of a Renesas Electronics product, such as safety design for hardware and software including but not limited to redundancy, fire control and malfunction prevention, appropriate treatment for aging degradation or any other appropriate measures. Because the evaluation of microcomputer software alone is very difficult, please evaluate the safety of the final products or system manufactured by you.
10. Please contact a Renesas Electronics sales office for details as to environmental matters such as the environmental compatibility of each Renesas Electronics product. Please use Renesas Electronics products in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive. Renesas Electronics assumes no liability for damages or losses occurring as a result of your noncompliance with applicable laws and regulations.
11. This document may not be reproduced or duplicated, in any form, in whole or in part, without prior written consent of Renesas Electronics.
12. Please contact a Renesas Electronics sales office if you have any questions regarding the information contained in this document or Renesas Electronics products, or if you have any other inquiries.

(Note 1) “Renesas Electronics” as used in this document means Renesas Electronics Corporation and also includes its majority-owned subsidiaries.

(Note 2) “Renesas Electronics product(s)” means any product developed or manufactured by or for Renesas Electronics.

# M61522FP

## 8ch ELECTRONIC VOLUME WITH 8 INPUT SELECTOR

REJ03F0034-0100Z

Rev.1.0

Sep.19.2003

### Feature

FUNCTION	FEATURE
Electronic Volume	8 channel Dependant Electronic Volume with High Voltage Transistor. (0~-99dB/1dBstep, -∞dB)
Input Selector	(1) Front L/R channel 8 Input Selector.(Main/Sub) (2) 2 channel Selector Output.
Multi Channel Input	All channel 2 Input Selector.
External Input	2 External Input.(C/SBLch)
REC Output	4 Lines REC Output (Both L and R channels)
Input ATT	Input ATT (0/-3/-6/-9/-12dB)
Output Gain Control	Output Gain Control (0/+3/+6/+9/+10/+12dB)
Balance Out	Built-in Balance Output (for ADC)


### Application

Receiver, AV Amp, Mini Stereo etc.


### Recommended Operating Condition

Rated Supply Voltage .....AVCC=7.0V(typ), AVEE=-7.0V(typ), DVDD=3.3V(typ)

System Block Diagram

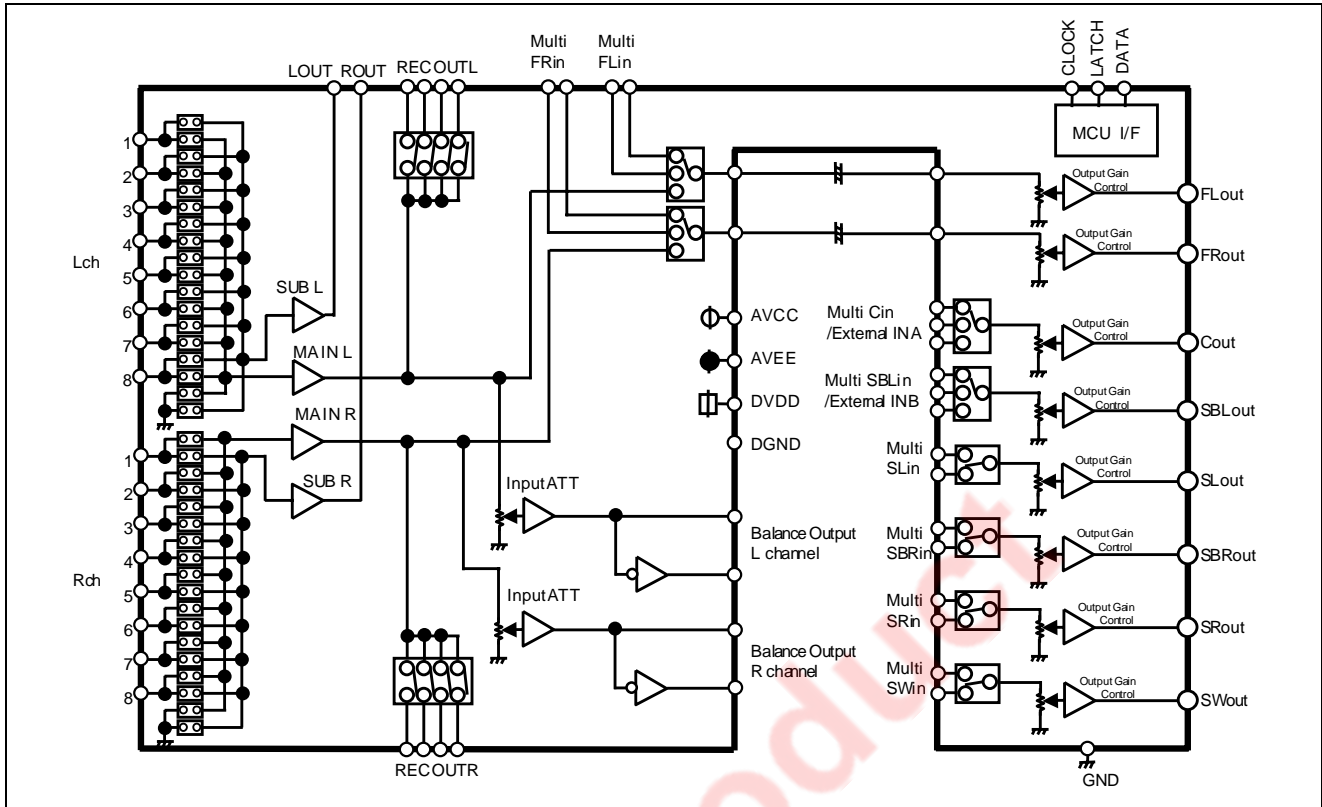

Block Diagram and Pin Configuration (Top View)

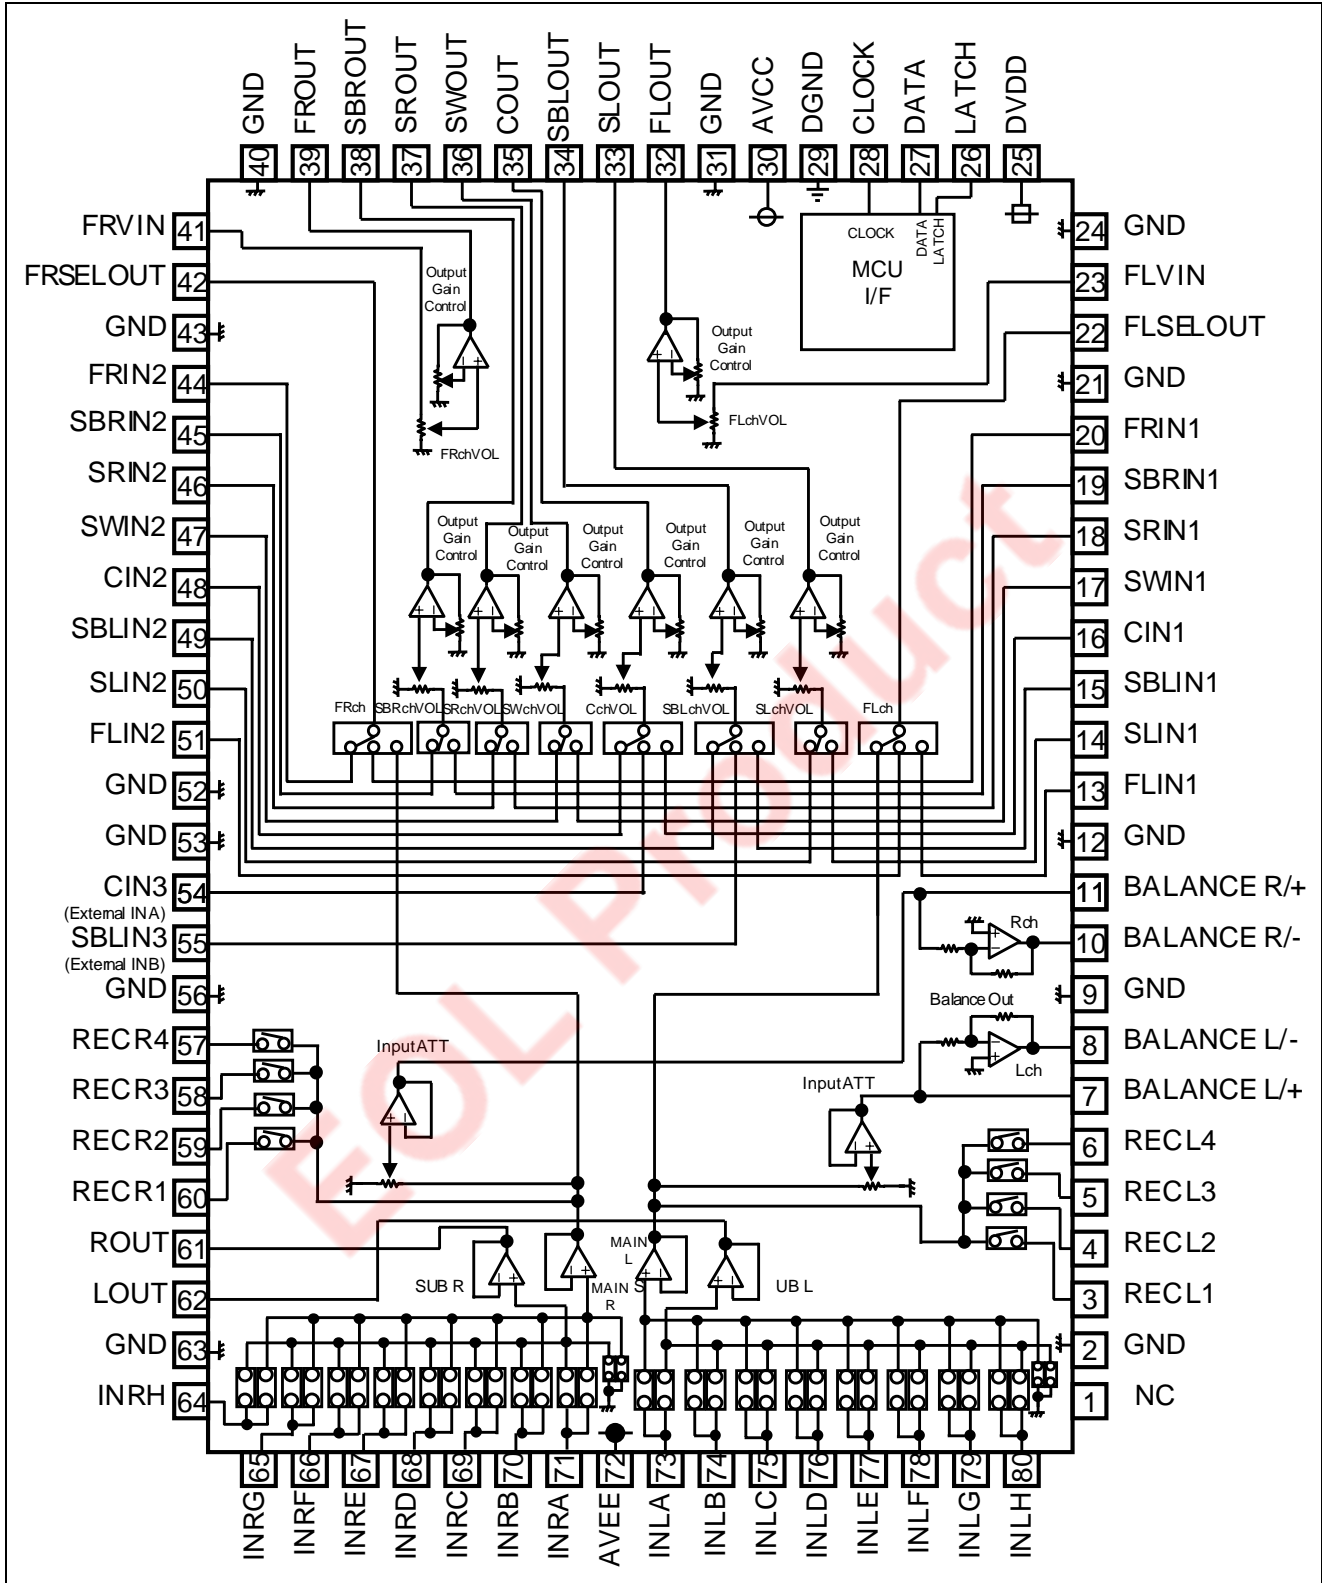


## Pin Description

PIN No.	Name	Function
1	NC	Non-connection terminal
2,9,12,21,24,31, 40,43,52,53,56,63	GND	Analog Ground
3,4,5,6, 57,58,59,60	REC L1,L2,L3,L4 /REC R1,R2,R3,R4	Output pin of REC (Lch and Rch)
7,8	BALANCE L/+,L/-	Output pin of L channel Balance Output(+/-)
10,11	BALANCE R/+,R/-	Output pin of R channel Balance Output(+/-)
13,51	FLIN1/FLIN2	Input pin of FL channel (2 Input Selector)
14,50	SLIN1/SLIN2	Input pin of SL channel (2 Input Selector)
15,49	SBLIN1/SBLIN2	Input pin of SBL channel (2 Input Selector)
16,48	CIN1/CIN2	Input pin of C channel (2 Input Selector)
17,47	SWIN1/SWIN2	Input pin of SW channel (2 Input Selector)
18,46	SRIN1/SRIN2	Input pin of SR channel (2 Input Selector)
19,45	SBRIN1/SBRIN2	Input pin of SBR channel (2 Input Selector)
20,44	FRIN1/FRIN2	Input pin of FR channel (2 Input Selector)
22	FLSEOUT	Output pin of FL channel volume input selector
23	FLVIN	Input pin of FL channel volume
25	DVDD	Power supply to internal logic circuit
29	DGND	Ground of internal logic circuit
26,27,28	LATCH,DATA,CLOCK	Input pin of Control trigger/data/clock
30	AVCC	Positive power supply to internal analog circuit
32	FLOUT	Output pin of FL channel
33	SLOUT	Output pin of SL channel
34	SBLOUT	Output pin of SBL channel
35	COUT	Output pin of C channel
36	SWOUT	Output pin of SW channel
37	SBROUT	Output pin of SBR channel
38	SROUT	Output pin of SR channel
39	FROUT	Output pin of FR channel
41	FRVIN	Input pin of FR channel volume
42	FRSEOUT	Output pin of FR channel volume input selector
54	CIN3	External input pinA(Input pin of C channel)
55	SBLIN3	External input pinB(Input pin of SBL channel)
61,62	ROUT/LOUT	Output pin of Input selector
64,65,66,67,68,69, 70,71	INRA,B,C,D,E,F,G,H	Input pin of R channel (8 Input Selector)
73,74,75,76,77,78, 79,80	INLA,B,C,D,E,F,G,H	Input pin of L channel (8 Input Selector)
72	AVEE	Negative power supply to internal analog circuit

## Absolute Maximum Ratings

(Ta=25°C, unless otherwise noted)

Symbol	Parameter	Condition	Ratings	Unit
Supply voltage	Power supply	AVCC-AVEE	±7.8	V
		DVDD-GND	6.0	
Pd	Power dissipation	Ta≤25°C	1250	mW
Kθ	Thermal derating	Ta>25°C	12.5	mW/°C
Topr	Operating temperature		-20~+55	°C
Tstg	Storage temperature		-40~+125	°C

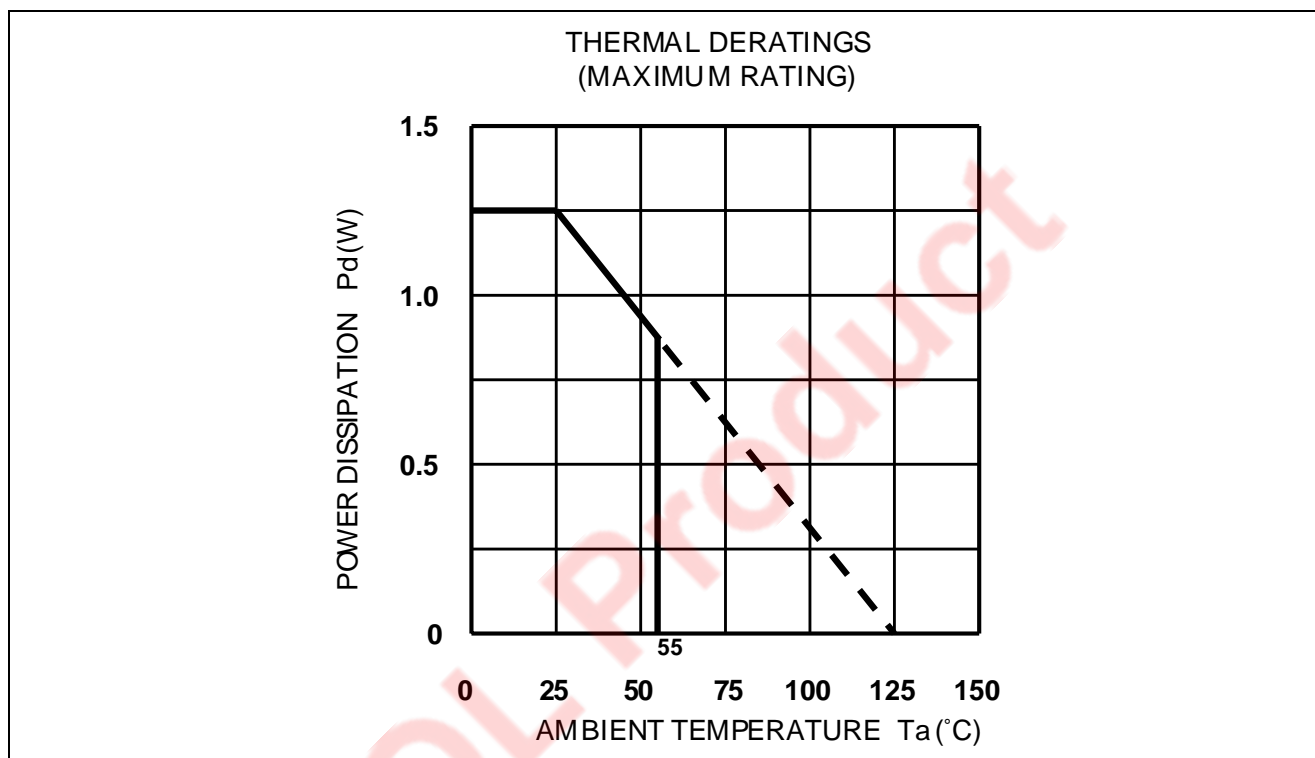

## Recommended Operating Conditions


(Ta=25°C, unless otherwise noted)

Parameter	Symbol	Condition	MIN	TYP	MAX	Unit
Analog supply voltage (Positive)	AVCC		4.5	7.0	7.3	V
Analog supply voltage (Negative)	AVEE		-7.3	-7.0	-4.5	V
Digital supply voltage	DVDD		3.0	3.3	3.6	V
Logic $\bar{H}$ level input voltage	VIH	DGND reference	2.4	—	DVDD	V
Logic $\bar{L}$ level input voltage	VIL	DGND reference	DGND	—	0.5	V


Note1: VEE≤DGND&lt;VDD≤VCC

Note2: After applying AVCC, then apply AVEE and DVDD.

Relationship between Data and Clock

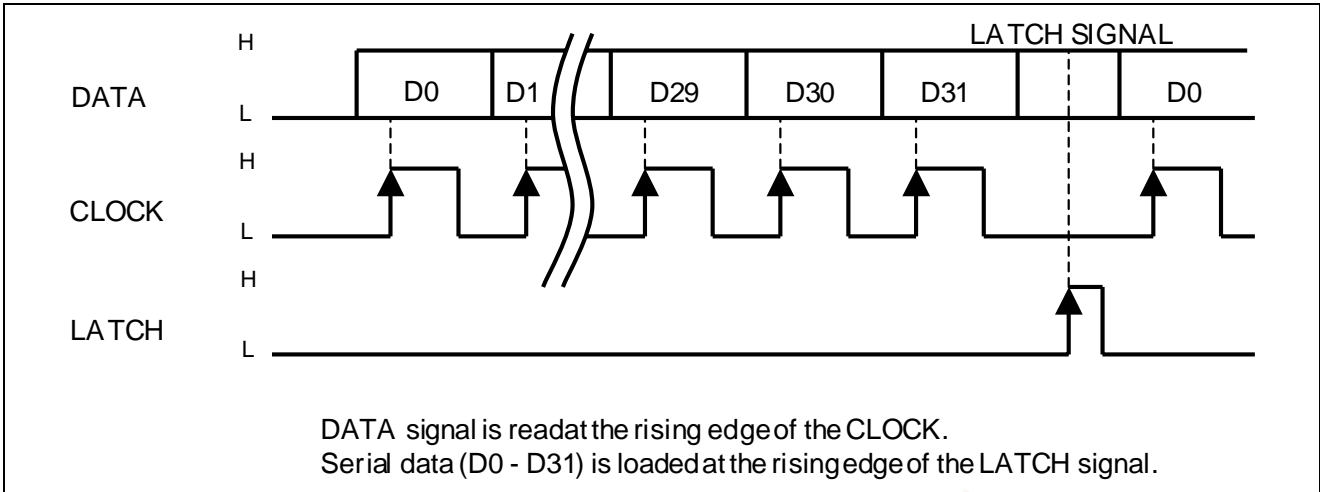

Clock and Data Timings

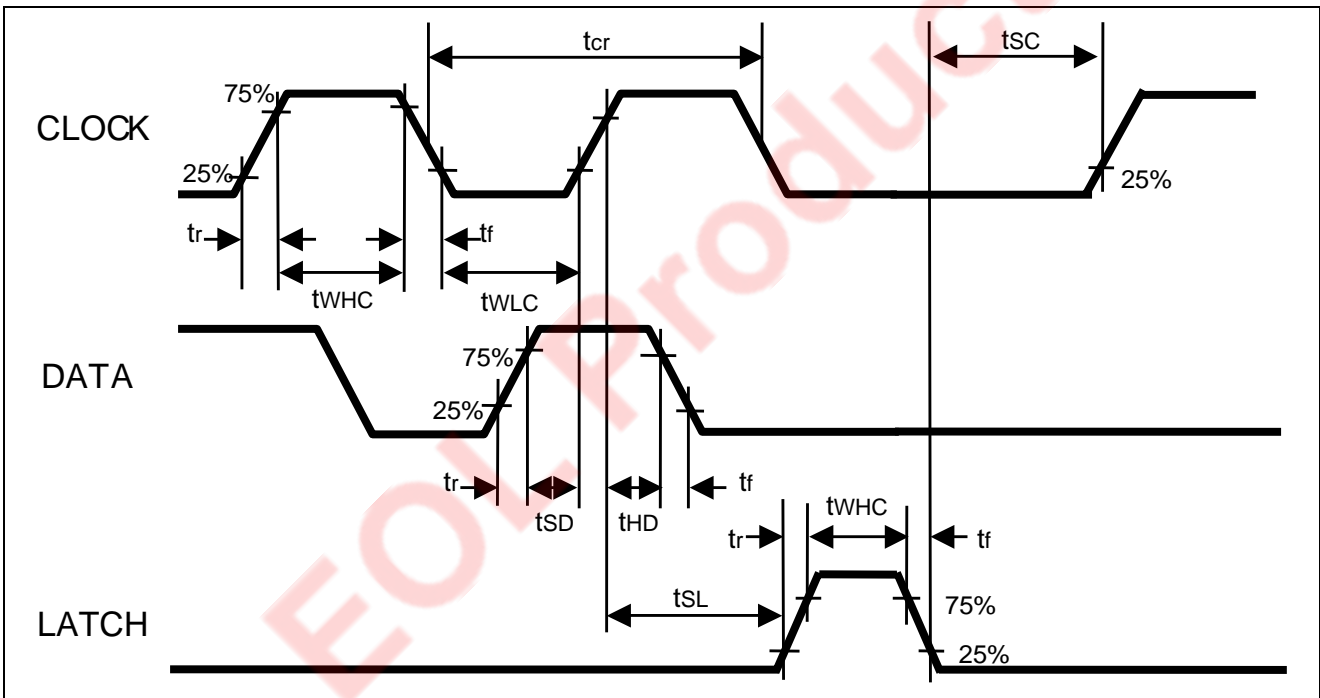



**Timing Definition of Digital Block**

Symbol	Parameter	Limits			Unit
		Min	typ	Max	
tcr	Clock cycle time	4	—	—	μsec
tWHC	Clock pulse width (iHi level)	1.6	—	—	
tWLC	Clock pulse width (iLi level)	1.6	—	—	
tr	Rising time of clock, data and latch	—	—	0.4	
tf	Falling time of clock, data and latch	—	—	0.4	
tSD	Data setup time	0.8	—	—	
tHD	Data hold time	0.8	—	—	
tSL	Latch setup time	1	—	—	
tWHL	Latch pulse width	1.6	—	—	
tSC	Clock setup time	4	—	—	

EOL Product

Data Control Specification

Three types of input format can be selected by changing the D30/D31 slot setting status.  
 (Initialize all data of the 3 formats when Digital Powersupply (DVDD) turn on).

	D0	D1	D2	D3	D4	D5	D6	D7	D8	D9	D10	D11	D12	D13	D14	D15	D16	D17	D18	D19	D20	D21	D22	D23	D24	D25	D26	D27	D28	D29	D30	D31				
Slot0	Input Selector (MAIN)			Input Selector (SUB)			Input ATT			Output Gain Control			FL/FR VOL Input Selector	C/SBL VOL Input Selector	SW SR SL SBR VOL Input Selector	All ch Output Mute	REC Output 1	REC Output 2	REC Output 3	REC Output 4	0	0	0	0	0	0	0	0	0	0	0	0				
Slot 1	FLch Volume			FRch Volume			Cch Volume			SWch Volume			SBLch Volume			SBRch Volume			0			0			0			0			1					
Slot2	SLch Volume			SRch Volume			SBLch Volume			SBRch Volume			0			0			0			0			0			0			1			0		

Setting Code

(1) Input Selector(MAIN/SUB)  
(D30=0,D31=0)

Setting	MAIN	D0	D1	D2	D3
	SUB	D4	D5	D6	D7
ALL OFF		0	0	0	0
A		0	0	0	1
B		0	0	1	0
C		0	0	1	1
D		0	1	0	0
E		0	1	0	1
F		0	1	1	0
G		0	1	1	1
H		1	0	0	0

(2) Input ATT  
(D30=0,D31=0)

Setting	D8	D9	D10
0dB	0	0	0
-3dB	0	0	1
-6dB	0	1	0
-9dB	0	1	1
-12dB	1	0	0

(3) Output Gain Control  
(D30=0,D31=0)

Setting	D11	D12	D13
0dB	0	0	0
+3dB	0	0	1
+6dB	0	1	0
+9dB	0	1	1
+10dB	1	0	0
+12dB	1	0	1

(4) FL/FR channel Volume  
Input Selector (D30=0,D31=0)

Setting	D14	D15
Bypass	0	0
Multi IN1	0	1
Multi IN2	1	0

(5) C/SBL channel Volume  
Input Selector (D30=0,D31=0)

Setting	D16	D17
External IN	0	0
Multi IN1	0	1
Multi IN2	1	0

(6) SW/SR/SL/SBR channel  
Volume Input Selector  
(D30=0,D31=0)

Setting	D18
Multi IN1	0
Multi IN2	1

(7) All channel Output Mute  
(D30=0,D31=0)

Setting	D19
Mute OFF	0
Mute ON	1

(8) REC Output  
(D30=0,D31=0)

REC output	REC1	REC2	REC3	REC4
Setting	D20	D21	D22	D23
OFF	0	0	0	0
ON	1	1	1	1

 It's initial setting when DVDD turn on.

Note : Please don't input except specification data.

**M61522FP**

(9)8 channel Volume (FLch,FRch,Cch,SWch:D30=0,D31=1 / SLch,SRch,SBLch,SBRch:D30=1,D31=0)

ATT	FLch SLch	D0	D1	D2	D3	D4	D5	D6
	FRch SRch	D7	D8	D9	D10	D11	D12	D13
	Cch SBLch	D14	D15	D16	D17	D18	D19	D20
	SWch SBRch	D21	D22	D23	D24	D25	D26	D27
0dB	0	0	0	0	0	0	0	0
-1dB	0	0	0	0	0	0	0	1
-2dB	0	0	0	0	0	0	1	0
-3dB	0	0	0	0	0	0	1	1
-4dB	0	0	0	0	1	0	0	0
-5dB	0	0	0	0	1	0	0	1
-6dB	0	0	0	0	1	1	0	0
-7dB	0	0	0	0	1	1	1	1
-8dB	0	0	0	1	0	0	0	0
-9dB	0	0	0	1	0	0	0	1
-10dB	0	0	0	1	0	1	0	0
-11dB	0	0	0	1	0	1	1	1
-12dB	0	0	0	1	1	0	0	0
-13dB	0	0	0	1	1	0	0	1
-14dB	0	0	0	1	1	1	0	0
-15dB	0	0	0	1	1	1	1	1
-16dB	0	0	1	0	0	0	0	0
-17dB	0	0	1	0	0	0	0	1
-18dB	0	0	1	0	0	1	0	0
-19dB	0	0	1	0	0	1	1	1
-20dB	0	0	1	0	1	0	0	0
-21dB	0	0	1	0	1	0	0	1
-22dB	0	0	1	0	1	1	0	0
-23dB	0	0	1	0	1	1	1	1
-24dB	0	0	1	1	0	0	0	0
-25dB	0	0	1	1	0	0	0	1
-26dB	0	0	1	1	0	1	0	0
-27dB	0	0	1	1	0	1	1	1

ATT	FLch SLch	D0	D1	D2	D3	D4	D5	D6
	FRch SRch	D7	D8	D9	D10	D11	D12	D13
	Cch SBLch	D14	D15	D16	D17	D18	D19	D20
	SWch SBRch	D21	D22	D23	D24	D25	D26	D27
-28dB	0	0	1	1	1	0	0	0
-29dB	0	0	1	1	1	0	1	1
-30dB	0	0	1	1	1	1	0	0
-31dB	0	0	1	1	1	1	1	1
-32dB	0	1	0	0	0	0	0	0
-33dB	0	1	0	0	0	0	0	1
-34dB	0	1	0	0	0	1	0	0
-35dB	0	1	0	0	0	1	1	1
-36dB	0	1	0	0	1	0	0	0
-37dB	0	1	0	0	1	0	0	1
-38dB	0	1	0	0	1	1	0	0
-39dB	0	1	0	0	1	1	1	1
-40dB	0	1	0	1	0	0	0	0
-41dB	0	1	0	1	0	0	0	1
-42dB	0	1	0	1	0	1	0	0
-43dB	0	1	0	1	0	1	1	1
-44dB	0	1	0	1	1	0	0	0
-45dB	0	1	0	1	1	0	0	1
-46dB	0	1	0	1	1	1	0	0
-47dB	0	1	0	1	1	1	1	1
-48dB	0	1	1	0	0	0	0	0
-49dB	0	1	1	0	0	0	0	1
-50dB	0	1	1	0	0	1	0	0
-51dB	0	1	1	0	0	1	1	1
-52dB	0	1	1	0	1	0	0	0
-53dB	0	1	1	0	1	0	0	1
-54dB	0	1	1	0	1	1	0	0
-55dB	0	1	1	0	1	1	1	1

ATT	FLch	D0	D1	D2	D3	D4	D5	D6
	SLch	D7	D8	D9	D10	D11	D12	D13
	FRch	D14	D15	D16	D17	D18	D19	D20
	SRch	D21	D22	D23	D24	D25	D26	D27
-56dB	0	1	1	1	0	0	0	
-57dB	0	1	1	1	0	0	1	
-58dB	0	1	1	1	0	1	0	
-59dB	0	1	1	1	0	1	1	
-60dB	0	1	1	1	1	0	0	
-61dB	0	1	1	1	1	0	1	
-62dB	0	1	1	1	1	1	0	
-63dB	0	1	1	1	1	1	1	
-64dB	1	0	0	0	0	0	0	
-65dB	1	0	0	0	0	0	1	
-66dB	1	0	0	0	0	1	0	
-67dB	1	0	0	0	0	1	1	
-68dB	1	0	0	0	1	0	0	
-69dB	1	0	0	0	1	0	1	
-70dB	1	0	0	0	1	1	0	
-71dB	1	0	0	0	1	1	1	
-72dB	1	0	0	1	0	0	0	
-73dB	1	0	0	1	0	0	1	
-74dB	1	0	0	1	0	1	0	
-75dB	1	0	0	1	0	1	1	
-76dB	1	0	0	1	1	0	0	
-77dB	1	0	0	1	1	0	1	
-78dB	1	0	0	1	1	1	0	
-79dB	1	0	0	1	1	1	1	
-80dB	1	0	1	0	0	0	0	
-81dB	1	0	1	0	0	0	1	
-82dB	1	0	1	0	0	1	0	

ATT	FLch	D0	D1	D2	D3	D4	D5	D6
	SLch	D7	D8	D9	D10	D11	D12	D13
	FRch	D14	D15	D16	D17	D18	D19	D20
	SRch	D21	D22	D23	D24	D25	D26	D27
-83dB	1	0	1	0	0	1	1	
-84dB	1	0	1	0	1	0	0	
-85dB	1	0	1	0	1	0	1	
-86dB	1	0	1	0	1	1	0	
-87dB	1	0	1	0	1	1	1	
-88dB	1	0	1	1	0	0	0	
-89dB	1	0	1	1	0	0	1	
-90dB	1	0	1	1	0	1	0	
-91dB	1	0	1	1	0	1	1	
-92dB	1	0	1	1	1	0	0	
-93dB	1	0	1	1	1	0	1	
-94dB	1	0	1	1	1	1	0	
-95dB	1	0	1	1	1	1	1	
-96dB	1	1	0	0	0	0	0	
-97dB	1	1	0	0	0	0	1	
-98dB	1	1	0	0	0	1	0	
-99dB	1	1	0	0	0	1	1	
-∞ dB	1	1	1	1	0	0	0	

Note : Please don't input except specification data.

**Electrical Characteristics**

Unless otherwise noted,  $T_a=25^{\circ}\text{C}$ ,  $AVCC=7\text{V}$ ,  $AVEE=-7\text{V}$ ,  $DVDD=3.3\text{V}$ ,  $f=1\text{kHz}$ ,  $\text{Volume}=0\text{dB}$ ,  $\text{Input ATT}=0\text{dB}$ ,  
Output Gain Control=0dB setting

(1) Power supply characteristics

Parameter	Symbol	Test condition	Limits			Unit
			min	typ	max	
Analog positive power circuit current	Alcc	With $AVCC=7\text{V}$ and $AVEE=-7\text{V}$ Pin30 pin current, no signal.	—	40	60	mA
Analog negative power Circuit current	Alee	With $AVCC=7\text{V}$ and $AVEE=-7\text{V}$ Pin72 pin current, no signal.	—	40	60	mA
Digital power circuit current	Dldd	With $DVDD=5\text{V}$ , Pin25 pin current, no signal.	—	3	6	mA

EOL Product

## (2) Input/Output characteristics (OVER ALL)

Parameter	Symbol	Test condition	Limits			Unit
			min	typ	max	
Input resistance	Rin	14~19, 45~50pin When each selector chooses a terminal concerned.	25	50	100	k $\Omega$
Maximum output voltage	VOM	THD=1%, RL=10kohm Output Gain Contro=+10dB setting	3.6	4.2	—	Vrms
Pass gain	Gv	Vi=0.3Vrms, FLAT	-2.0	0	2.0	dB
Total harmonic distortion	THD1	BW: 400Hz~30kHz, f=1kHz, Vo=0.3Vrms, RL=10k $\Omega$	—	0.005	0.05	%
	THD2	BW: 400Hz~30kHz, f=1kHz, Vo=2Vrms, RL=10k $\Omega$	—	0.03	0.1	%
Channels balance	CBAL	Input Pin71,73/Output Pin39,32 Vi=0.3Vrms, JIS-A	-0.5	0	0.5	dB
Output noise voltage	Vono (VOL=- $\infty$ dB)	JIS-A, Rg=0ohm Volume=- $\infty$ dB setting	—	2	6	$\mu$ Vrms
	Vono (VOL=0dB)	JIS-A, Rg=0ohm Volume=0dB setting	—	4	12	$\mu$ Vrms
	Vonobal (Balance out)	Output Pin 7, 8, 10, 11 JIS-A, Rg=0 $\Omega$	—	5	10	$\mu$ Vrms
Input selector channel separation	CS1	(Input selector) Pin73~80, Pin71~64 Vo=0.5Vrms, Rg=0 $\Omega$ , RL=10k $\Omega$ , JIS-A	—	-80	-65	dB
	CS2	(Multi channel/external input selector) Pin51~44, Pin13~20, Pin54,55 Vo=0.5Vrms, Rg=0 $\Omega$ , RL=10k $\Omega$ , JIS-A	—	-80	-65	dB
Crosstalk of mutual channels	CT1	(Main line) Input Pin71,73/Output Pin32,39 Vo=0.5Vrms, Rg=0 $\Omega$ , RL=10k $\Omega$ , JIS-A	—	-80	-65	dB
	CT2	(Sub line) Input Pin71,73/Output Pin62,61 Vo=0.5Vrms, Rg=0 $\Omega$ , RL=10k $\Omega$ , JIS-A	—	-80	-65	dB

## M61522FP

---

### (3) 8 channel Volume characteristics


Unless otherwise noted, Output Gain Control=0dB setting

Parameter	Symbol	Test condition	Limits			Unit
			min	typ	max	
Maximum attenuation	ATTmax	$V_i=1V_{rms}$ , JIS-A, $VOL=-\infty$	—	-100	-95	dB
Volume gain gang error of mutual channels	Dvol	Pin32,33,34,35,36,37,38,39 Output, Volume=0dB setting	-0.5	0	+0.5	dB
Cross talk of mutual channels	CTvol	$V_o=0.5V_{rms}$ , $R_L=10k\ \Omega$ , JIS-A, $R_g=0\ \Omega$	—	-80	-65	dB


EOL Product



Internal Block Diagram

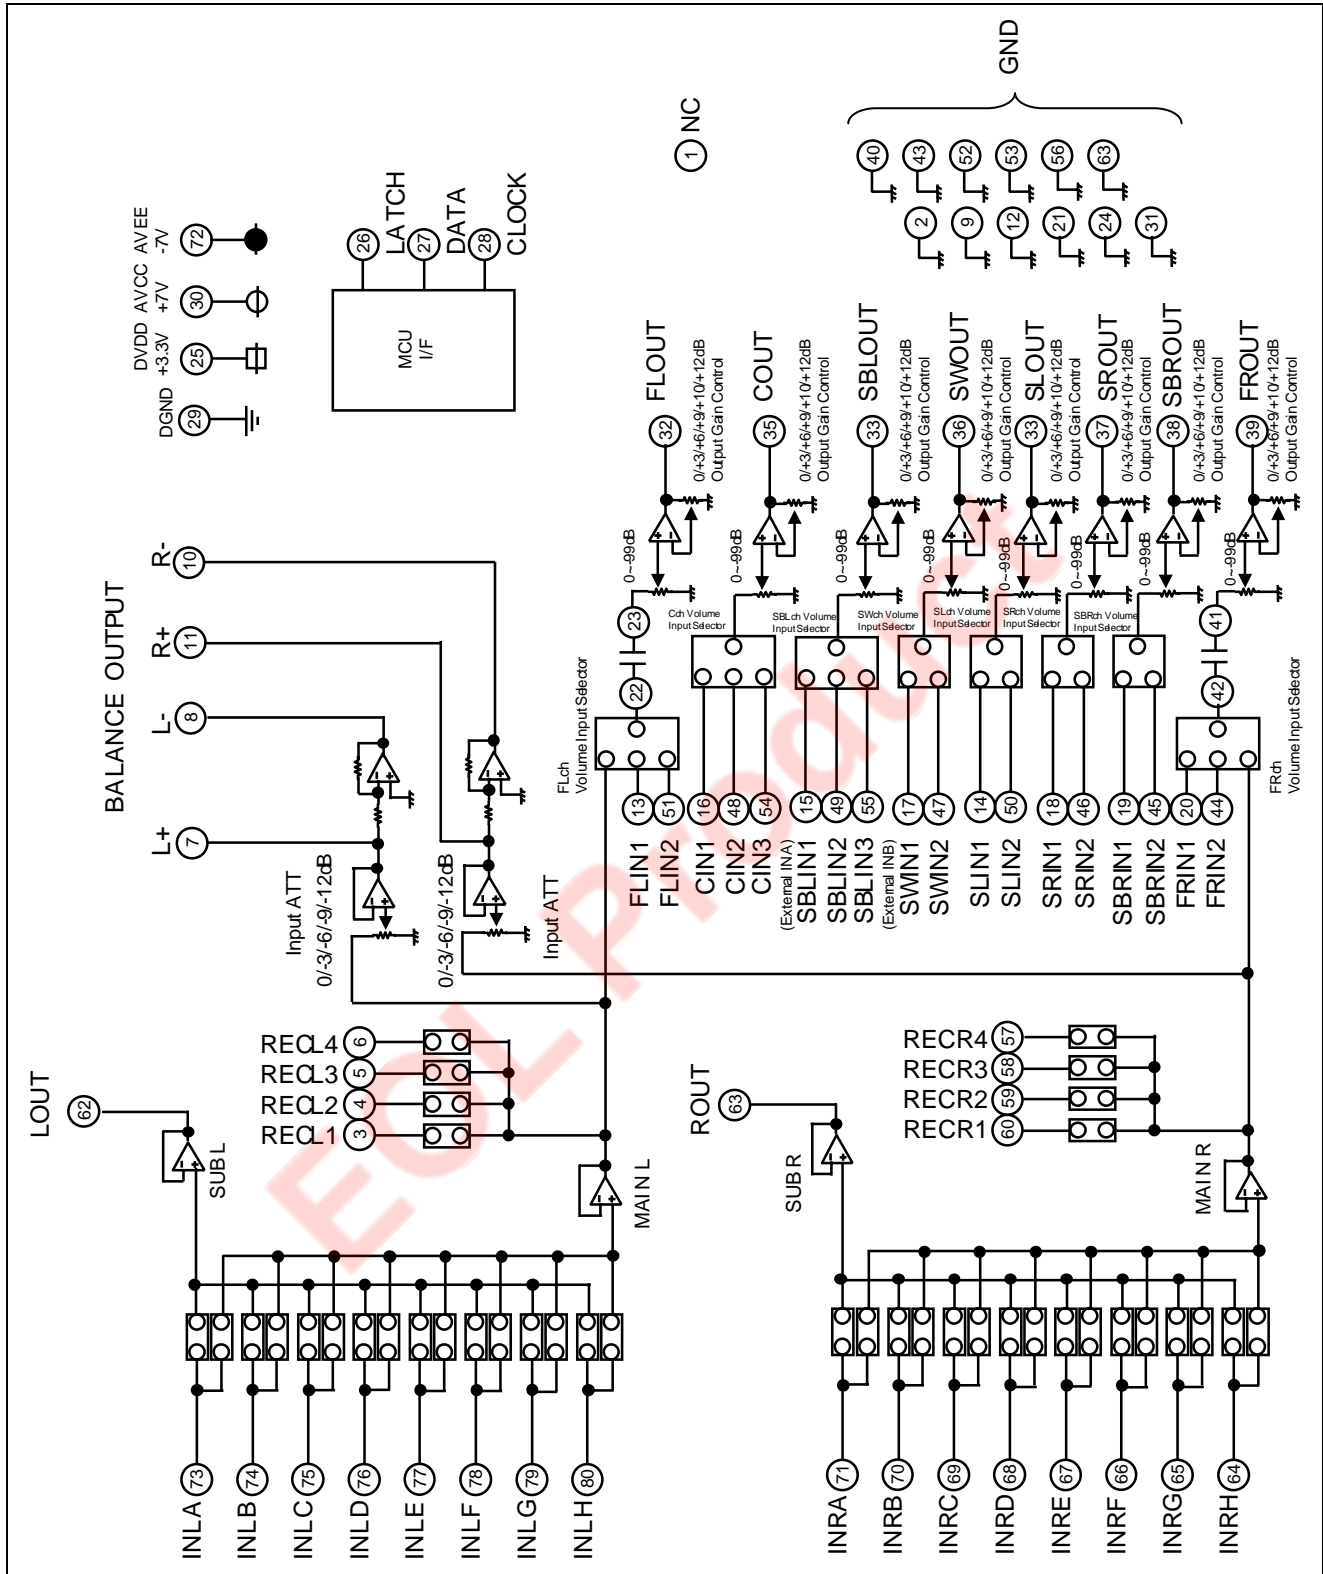

Application Example

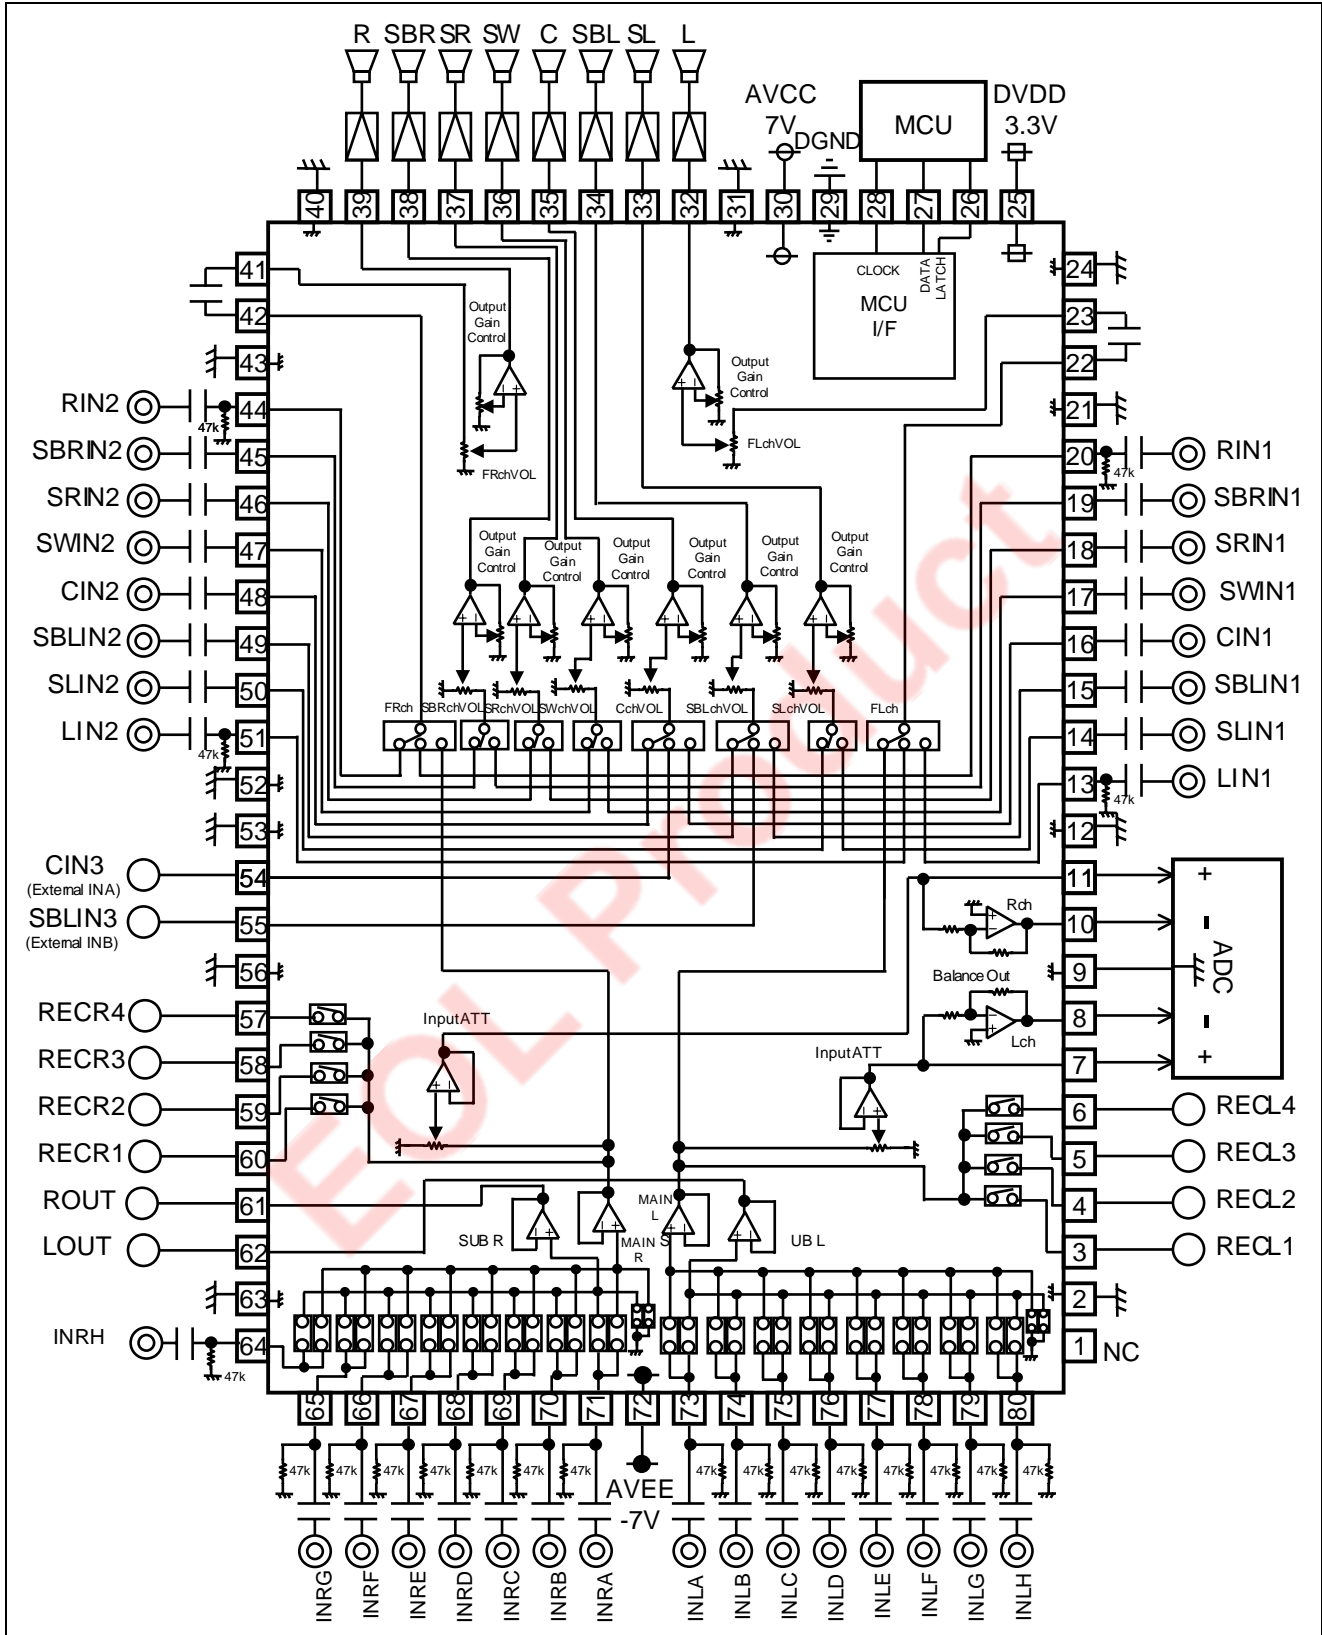






Package Dimensions

Plastic 80pin 14X20mm body QFP

80P6N-A

(MMP)

EIAJ Package Code QFP80-P-1420-0.80	JEDEC Code —	Weight(g) 1.58	Lead Material Alloy 42
--	-----------------	-------------------	---------------------------

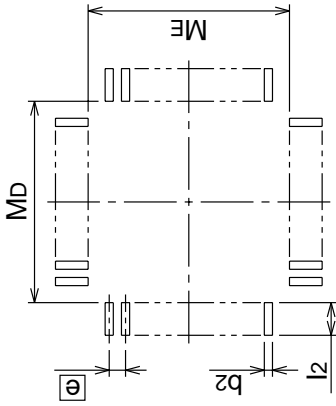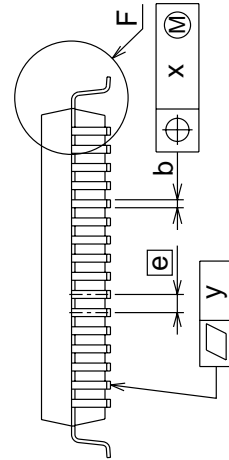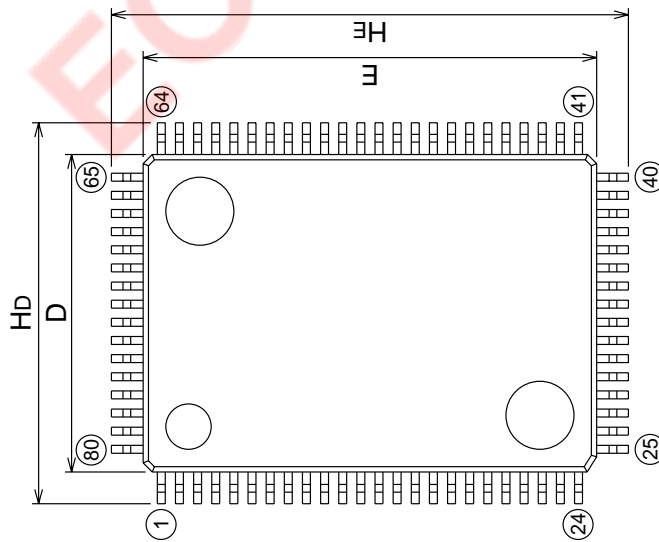

Recommended Mount Pad

Symbol	Dimension in Millimeters		
	Min	Nom	Max
A	—	—	3.05
A1	0	0.1	0.2
A2	—	2.8	—
b	0.3	0.35	0.45
c	0.13	0.15	0.2
D	13.8	14.0	14.2
E	19.8	20.0	20.2
e	—	0.8	—
HD	16.5	16.8	17.1
HE	22.5	22.8	23.1
L	0.4	0.6	0.8
L1	—	1.4	—
x	—	—	0.2
y	—	—	0.1
$\theta$	0°	—	10°
b2	—	0.5	—
l2	1.3	—	—
MD	—	14.6	—
ME	—	20.6	—

## Renesas Technology Corp. Sales Strategic Planning Div. Nippon Bldg., 2-6-2, Ohte-machi, Chiyoda-ku, Tokyo 100-0004, Japan

---

Keep safety first in your circuit designs!

1. Renesas Technology Corp. puts the maximum effort into making semiconductor products better and more reliable, but there is always the possibility that trouble may occur with them. Trouble with semiconductors may lead to personal injury, fire or property damage.  
Remember to give due consideration to safety when making your circuit designs, with appropriate measures such as (i) placement of substitutive, auxiliary circuits, (ii) use of nonflammable material or (iii) prevention against any malfunction or mishap.

Notes regarding these materials

1. These materials are intended as a reference to assist our customers in the selection of the Renesas Technology Corp. product best suited to the customer's application; they do not convey any license under any intellectual property rights, or any other rights, belonging to Renesas Technology Corp. or a third party.
  2. Renesas Technology Corp. assumes no responsibility for any damage, or infringement of any third-party's rights, originating in the use of any product data, diagrams, charts, programs, algorithms, or circuit application examples contained in these materials.
  3. All information contained in these materials, including product data, diagrams, charts, programs and algorithms represents information on products at the time of publication of these materials, and are subject to change by Renesas Technology Corp. without notice due to product improvements or other reasons. It is therefore recommended that customers contact Renesas Technology Corp. or an authorized Renesas Technology Corp. product distributor for the latest product information before purchasing a product listed herein.  
The information described here may contain technical inaccuracies or typographical errors.  
Renesas Technology Corp. assumes no responsibility for any damage, liability, or other loss rising from these inaccuracies or errors.  
Please also pay attention to information published by Renesas Technology Corp. by various means, including the Renesas Technology Corp. Semiconductor home page (<http://www.renesas.com>).
  4. When using any or all of the information contained in these materials, including product data, diagrams, charts, programs, and algorithms, please be sure to evaluate all information as a total system before making a final decision on the applicability of the information and products. Renesas Technology Corp. assumes no responsibility for any damage, liability or other loss resulting from the information contained herein.
  5. Renesas Technology Corp. semiconductors are not designed or manufactured for use in a device or system that is used under circumstances in which human life is potentially at stake. Please contact Renesas Technology Corp. or an authorized Renesas Technology Corp. product distributor when considering the use of a product contained herein for any specific purposes, such as apparatus or systems for transportation, vehicular, medical, aerospace, nuclear, or undersea repeater use.
  6. The prior written approval of Renesas Technology Corp. is necessary to reprint or reproduce in whole or in part these materials.
  7. If these products or technologies are subject to the Japanese export control restrictions, they must be exported under a license from the Japanese government and cannot be imported into a country other than the approved destination.  
Any diversion or reexport contrary to the export control laws and regulations of Japan and/or the country of destination is prohibited.
  8. Please contact Renesas Technology Corp. for further details on these materials or the products contained therein.
- 



### RENESAS SALES OFFICES

<http://www.renesas.com>

**Renesas Technology America, Inc.**  
450 Holger Way, San Jose, CA 95134-1368, U.S.A  
Tel: <1> (408) 382-7500 Fax: <1> (408) 382-7501

**Renesas Technology Europe Limited.**  
Dukes Meadow, Millboard Road, Bourne End, Buckinghamshire, SL8 5FH, United Kingdom  
Tel: <44> (1628) 585 100, Fax: <44> (1628) 585 900

**Renesas Technology Europe GmbH**  
Dornacher Str. 3, D-85622 Feldkirchen, Germany  
Tel: <49> (89) 380 70 0, Fax: <49> (89) 929 30 11

**Renesas Technology Hong Kong Ltd.**  
7/F., North Tower, World Finance Centre, Harbour City, Canton Road, Hong Kong  
Tel: <852> 2265-6688, Fax: <852> 2375-6836

**Renesas Technology Taiwan Co., Ltd.**  
FL 10, #99, Fu-Hsing N. Rd., Taipei, Taiwan  
Tel: <886> (2) 2715-2888, Fax: <886> (2) 2713-2999

**Renesas Technology (Shanghai) Co., Ltd.**  
26/F., Ruijin Building, No.205 Maoming Road (S), Shanghai 200020, China  
Tel: <86> (21) 6472-1001, Fax: <86> (21) 6415-2952

**Renesas Technology Singapore Pte. Ltd.**  
1, Harbour Front Avenue, #06-10, Keppel Bay Tower, Singapore 098632  
Tel: <65> 6213-0200, Fax: <65> 6278-8001