


FEATURES:

- 5Ω switches connect inputs to outputs
- Zero propagation delay
- Direct bus connect
- Live insertion capability
- Low power CMOS proprietary technology
- Bus exchange allows nibble swap
- TTL-compatible control inputs
- Available in 80-pin Millipaq package

DESCRIPTION:

The QS34X383 provides four sets of eight high-speed CMOS TTL-compatible bus switches. The low ON resistance (5Ω) of the QS34X383 allows inputs to be connected to outputs without adding propagation delay and without generating additional ground bounce noise. The Bus Enable (\overline{BE}_x) signals turn the switches on. The Bus Exchange (B_x) signals provide nibble swap of the AB and CD pairs of signals. This exchange configuration allows byte swapping of buses in systems. It can also be used as a 16-bit 2-to-1 multiplexer and to create low delay barrel shifters, etc.

The QS34X383 is characterized for operation at -40°C to $+85^{\circ}\text{C}$.

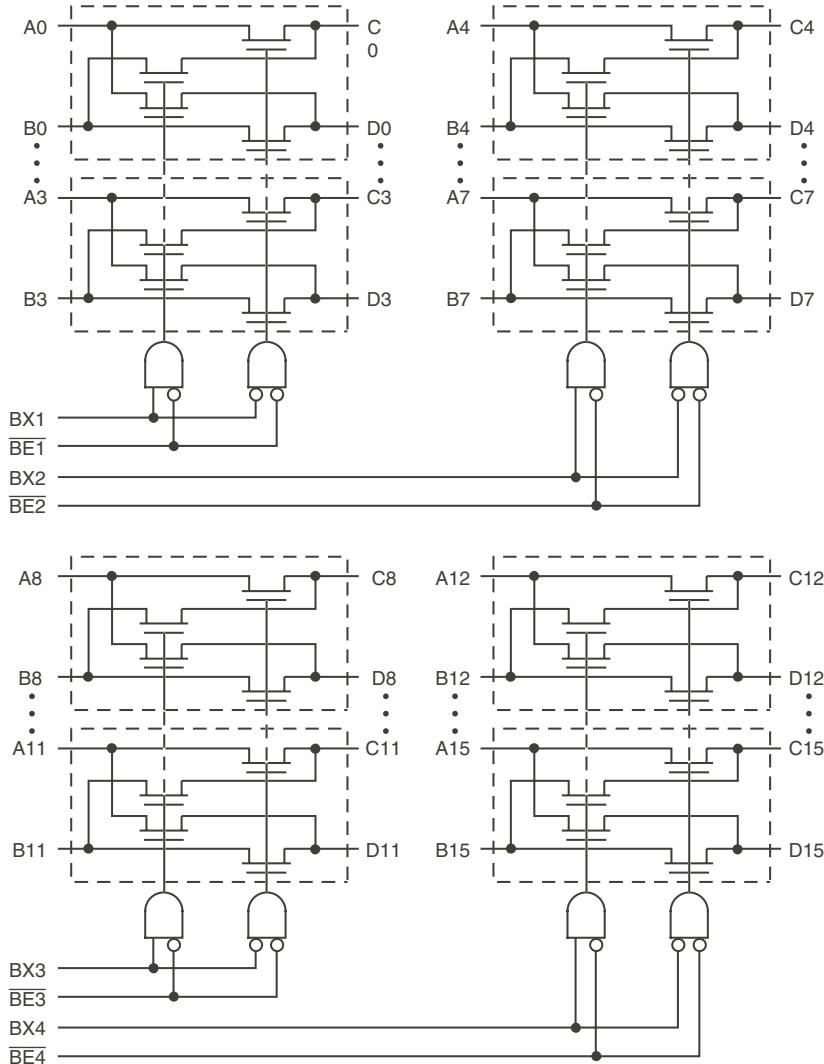FUNCTIONAL BLOCK DIAGRAM

The IDT logo is a registered trademark of Integrated Device Technology, Inc.

INDUSTRIAL TEMPERATURE RANGE

AUGUST 2012

PIN CONFIGURATION

BE1	1	80	Vcc
C0	2	79	D3
A0	3	78	B3
B0	4	77	A3
D0	5	76	C3
C1	6	75	D2
A1	7	74	B2
B1	8	73	A2
D1	9	72	C2
GND	10	71	BX1
BE2	11	70	Vcc
C4	12	69	D7
A4	13	68	B7
B4	14	67	A7
D4	15	66	C7
C5	16	65	D6
A5	17	64	B6
B5	18	63	A6
D5	19	62	C6
GND	20	61	BX2
BE3	21	60	Vcc
C8	22	59	D11
A8	23	58	B11
B8	24	57	A11
D8	25	56	C11
C9	26	55	D10
A9	27	54	B10
B9	28	53	A10
D9	29	52	C10
GND	30	51	BX3
BE4	31	50	Vcc
C12	32	49	D15
A12	33	48	B15
B12	34	47	A15
D12	35	46	C15
C13	36	45	D14
A13	37	44	B14
B13	38	43	A14
D13	39	42	C14
GND	40	41	BX4

MILLIPAQ
TOP VIEW

ABSOLUTE MAXIMUM RATINGS⁽¹⁾

Symbol	Description	Max	Unit
VTERM ⁽²⁾	Supply Voltage to Ground	-0.5 to +7	V
VTERM ⁽³⁾	DC Switch Voltage Vs	-0.5 to +7	V
VTERM ⁽³⁾	DC Input Voltage V _{IN}	-0.5 to +7	V
VAC	AC Input Voltage (pulse width \leq 20ns)	-3	V
I _{OUT}	DC Output Current	120	mA
P _{MAX}	Maximum Power Dissipation (T _A = 85°C)	1.4	W
T _{STG}	Storage Temperature	-65 to +150	°C

NOTE:

1. Stresses greater than those listed under ABSOLUTE MAXIMUM RATINGS may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability.
2. Vcc terminals.
3. All terminals except Vcc.

CAPACITANCE

(T_A = +25°C, f = 1.0MHz, V_{IN} = 0V, V_{OUT} = 0V)

Pins	Max. ⁽¹⁾	Unit
Control Pins	8	pF
Quickswitch Channels (Switch OFF)	8	pF

NOTE:

1. This parameter is measured at characterization but not tested.

PIN DESCRIPTION

Pin Names	I/O	Description
A _x , B _x	I/O	Buses A, B
C _x , D _x	I/O	Buses C, D
BE _x	I	Bus Switch Enable
BX _x	I	Bus Exchange

FUNCTION TABLE⁽¹⁾

BE _x	BX _x	A _x	B _x	Function
H	X	Z	Z	Disconnect
L	L	C _x	D _x	Connect
L	H	D _x	C _x	Exchange

NOTE:

1. H = HIGH Voltage Level
- L = LOW Voltage Level
- X = Don't Care
- Z = High-Impedance

DC ELECTRICAL CHARACTERISTICS OVER OPERATING RANGE

Following Conditions Apply Unless Otherwise Specified:


Industrial: $T_A = -40^\circ\text{C}$ to $+85^\circ\text{C}$, $V_{CC} = 5.0\text{V} \pm 5\%$

Symbol	Parameter	Test Conditions	Min.	Typ. ⁽¹⁾	Max.	Unit
V_{IH}	Input HIGH Level	Guaranteed Logic HIGH for Control Pins	2	—	—	V
V_{IL}	Input LOW Level	Guaranteed Logic LOW for Control Pins	—	—	0.8	V
I_{IN}	Input Leakage Current (Control Inputs)	$0\text{V} \leq V_{IN} \leq V_{CC}$, Control Inputs	—	—	± 5	μA
I_{OZ}	Off-State Output Current (Hi-Z)	$0\text{V} \leq V_{OUT} \leq V_{CC}$, Switches OFF	—	—	± 5	μA
R_{ON}	Switch ON Resistance ^(2,3)	$V_{CC} = \text{Min.}$, $V_{IN} = 0\text{V}$, $I_{ON} = 30\text{mA}$	—	6	8	Ω
		$V_{CC} = \text{Min.}$, $V_{IN} = 2.4\text{V}$, $I_{ON} = 15\text{mA}$	—	12	17	

NOTES:

1. Typical values are at $V_{CC} = 5.0\text{V}$, $T_A = 25^\circ\text{C}$.
2. Max value of R_{ON} is guaranteed but not production tested.
3. Measures by voltage drop between the AB and CD pin at the indicated current through the switch. ON resistance is determined by the lower of the voltages on the two (A or B, C or D) pins.

TYPICAL ON RESISTANCE vs V_{IN} AT $V_{CC} = 5\text{V}$

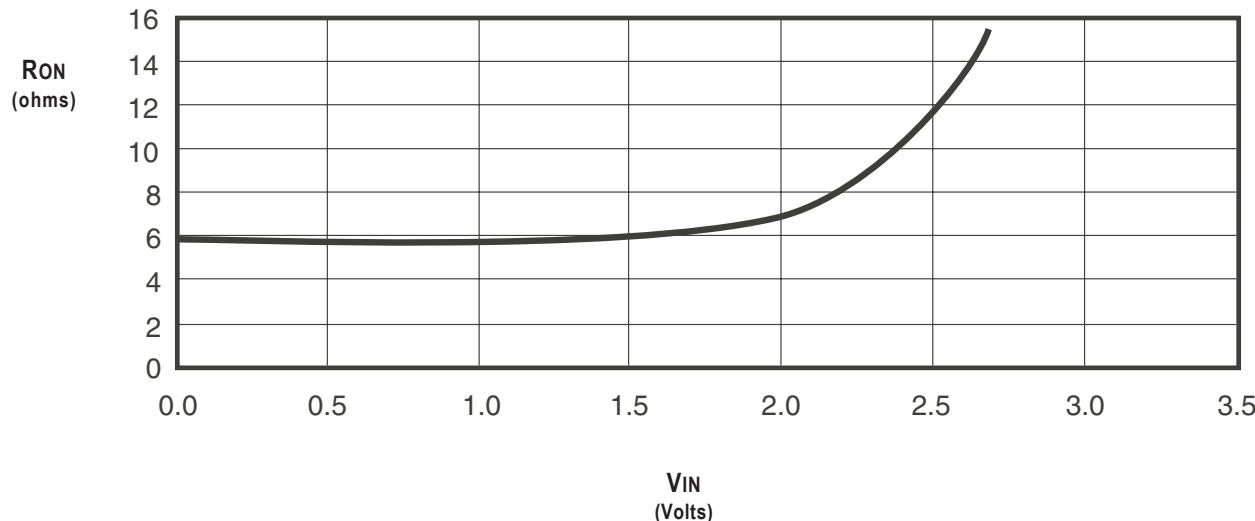

POWER SUPPLY CHARACTERISTICS

Symbol	Parameter	Test Conditions ⁽¹⁾	Max.	Unit
I _{CCQ}	Quiescent Power Supply Current	V _{CC} = Max., \overline{BEx} = GND or V _{CC} , f = 0	6	mA
ΔI_{CC}	Power Supply Current per Control Input HIGH ⁽²⁾	V _{CC} = Max., \overline{BEx} = 3.4V, f = 0	2.5	mA
I _{CCD}	Dynamic Power Supply Current per MHz ⁽³⁾	V _{CC} = Max., A and B pins open Control Inputs Toggling at 50% Duty Cycle	0.25	mA/MHz

NOTES:

1. For conditions shown as Min. or Max., use the appropriate values specified under DC Electrical Characteristics.
2. Per TLL driven input (V_{IN} = 3.4V, control inputs only). A-D pins do not contribute to ΔI_{CC} .
3. This current applies to the control inputs only and represents the current required to switch internal capacitance at the specified frequency. The A and B inputs generate no significant AC or DC currents as they transition. This parameter is guaranteed but not production tested.

SWITCHING CHARACTERISTICS OVER OPERATING RANGE

T_A = -40°C to +85°C, V_{CC} = 5.0V ± 5%;


C_{LOAD} = 50pF, R_{LOAD} = 500Ω unless otherwise noted.

Symbol	Parameter	Min. ⁽¹⁾	Typ.	Max.	Unit
t _{PLH}	Data Propagation Delay ^(2,3)	—	—	0.25	ns
t _{PHL}	AxB _x to CxD _x , CxD _x to AxB _x	—	—	—	—
t _{PZL}	Switch Turn-on Delay	1.5	—	6.5	ns
t _{PZH}	\overline{BEx} to A _x , B _x , C _x , D _x	—	—	—	—
t _{PLZ}	Switch Turn-off Delay ⁽²⁾	1.5	—	5.5	ns
t _{PHZ}	\overline{BEx} to A _x , B _x , C _x , D _x	—	—	—	—
t _{BX}	Switch Multiplex Delay ⁽²⁾	1.5	—	6.5	ns
BX to A _x , B _x , C _x , D _x		—	—	—	—
Q _{CI}	Charge Injection ^(4,5)	—	1.5	—	pC

NOTES:

1. Minimums are guaranteed but not production tested.
2. This parameter is guaranteed but not production tested.
3. The bus switch contributes no propagation delay other than the RC delay of the ON resistance of the switch and the load capacitance. The time constant for the switch alone is of the order of 0.25ns for C_L = 50pF. Since this time constant is much smaller than the rise and fall times of typical driving signals, it adds very little propagation delay to the system. Propagation delay of the bus switch, when used in a system, is determined by the driving circuit on the driving side of the switch and its interaction with the load on the driven side.
4. Measured at switch turn off, A to C, load = 50pF in parallel with 10 meg scope probe, V_{IN} at I = 0V.
5. Measured at switch turn off through bus multiplexer, A to C ≥ A to D, B connected to C, load = 50pF in parallel with 10 meg scope probe, V_{IN} at A = 0V. Charge injection is reduced because the injection from the turn off of the A to C switch is compensated by the turn on of the B to C switch.

ORDERING INFORMATION

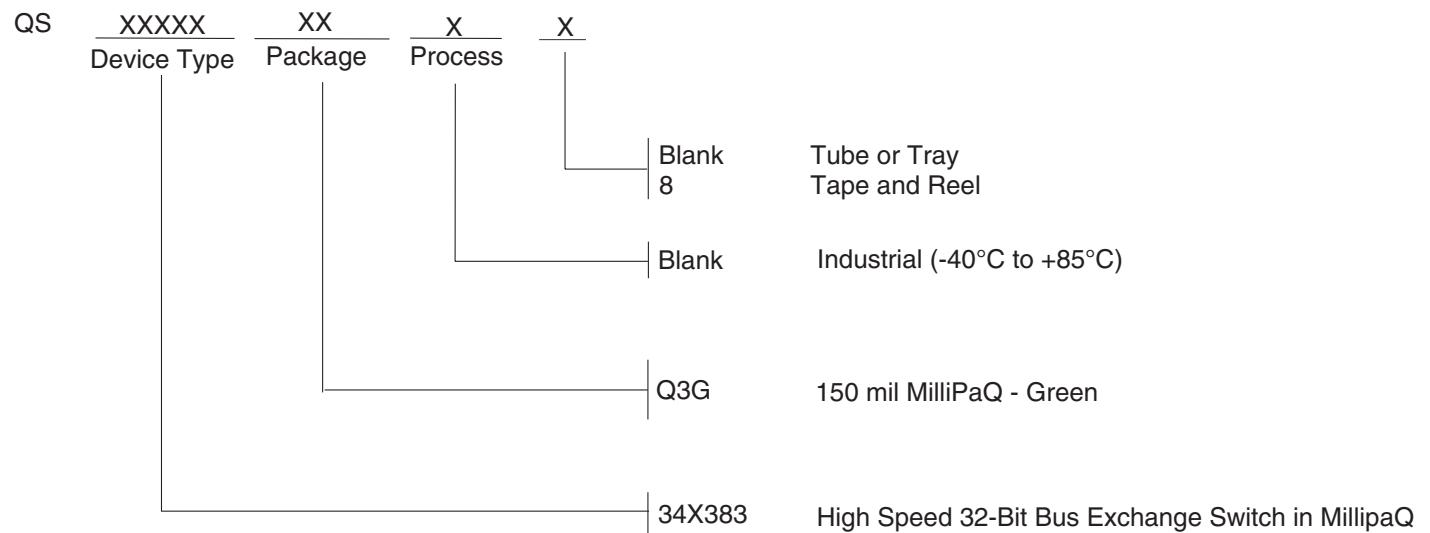

IMPORTANT NOTICE AND DISCLAIMER

RENESAS ELECTRONICS CORPORATION AND ITS SUBSIDIARIES ("RENESAS") PROVIDES TECHNICAL SPECIFICATIONS AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT OF THIRD-PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for developers who are designing with Renesas products. You are solely responsible for (1) selecting the appropriate products for your application, (2) designing, validating, and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements. These resources are subject to change without notice. Renesas grants you permission to use these resources only to develop an application that uses Renesas products. Other reproduction or use of these resources is strictly prohibited. No license is granted to any other Renesas intellectual property or to any third-party intellectual property. Renesas disclaims responsibility for, and you will fully indemnify Renesas and its representatives against, any claims, damages, costs, losses, or liabilities arising from your use of these resources. Renesas' products are provided only subject to Renesas' Terms and Conditions of Sale or other applicable terms agreed to in writing. No use of any Renesas resources expands or otherwise alters any applicable warranties or warranty disclaimers for these products.

(Disclaimer Rev.1.01)

Corporate Headquarters

TOYOSU FORESIA, 3-2-24 Toyosu,
Koto-ku, Tokyo 135-0061, Japan
www.renesas.com

Trademarks

Renesas and the Renesas logo are trademarks of Renesas Electronics Corporation. All trademarks and registered trademarks are the property of their respective owners.

Contact Information

For further information on a product, technology, the most up-to-date version of a document, or your nearest sales office, please visit www.renesas.com/contact-us/.