

SLG47011 Errata Note

Abstract

This document contains the known errata for SLG47011 and the recommended workarounds.

Contents

1. Information	1
2. Errata Summary	1
3. Errata Details.....	2
4. Revision History	5

1. Information

Package(s)	16-pin STQFN: 2.0 mm x 2.0 mm x 0.55 mm, 0.4 mm pitch
------------	---

2. Errata Summary

Issue #	Issue Title
1	Analog Comparator Output Noise with Slow Rise Input Signal
2	Analog Comparator Output Noise with High-Frequency on the Digital Input/Output

3. Errata Details

3.1 Analog Comparator Output Noise with Slow Rise Input Signal

3.1.1. Effect

Noise at the comparator output under certain conditions.

3.1.2. Conditions

Slow rise input signal with $V_{DD} > 3.3\text{ V}$.

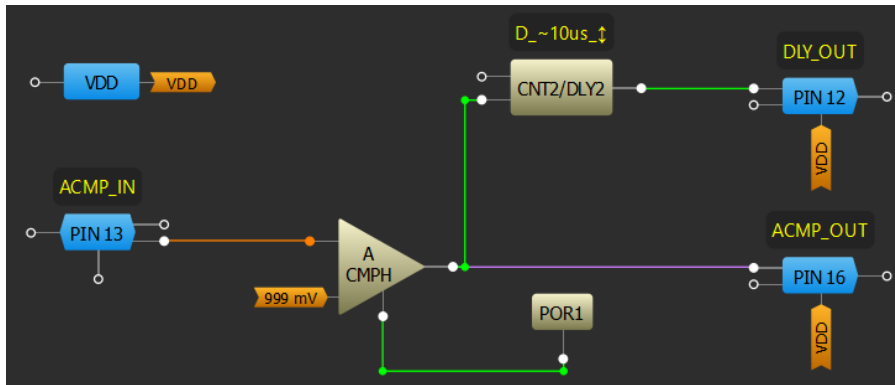


Figure 1. Test Design

3.1.3. Technical Description

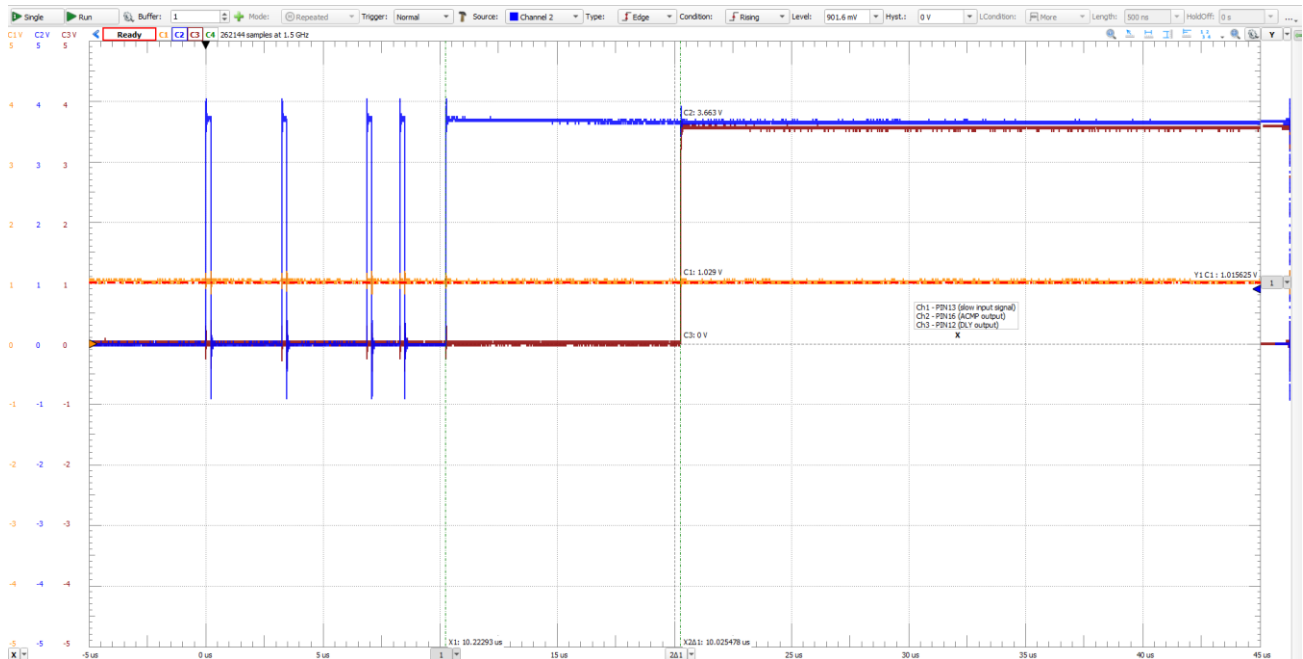


Figure 2. ACMP Output Noise (Ch1 – PIN13, Ch2 – PIN16, Ch3 – PIN12)

When chip V_{DD} level is more than 3.3 V with ACMP hysteresis 27 mV or 54 mV noise can be seen at the output on some reference levels. As shown in [Figure 2](#).

3.1.4. Workaround

Any one of the following prevents the issue:

- Add both edge delay to ACMP output with delay time more than 10 μs .

- Use hysteresis 162 mV.
- Use $V_{DD} < 3.3\text{ V}$.

3.2 Analog Comparator Output Noise with High-Frequency on the Digital Input/Output

3.2.1. Effect

Noise at the comparator output under certain conditions

3.2.2. Conditions

Frequency > 100 kHz on the digital input/output.

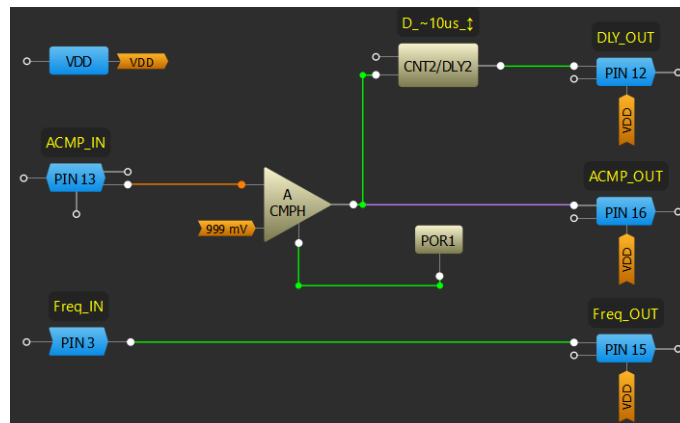


Figure 3. Test Design

3.2.3. Technical Description

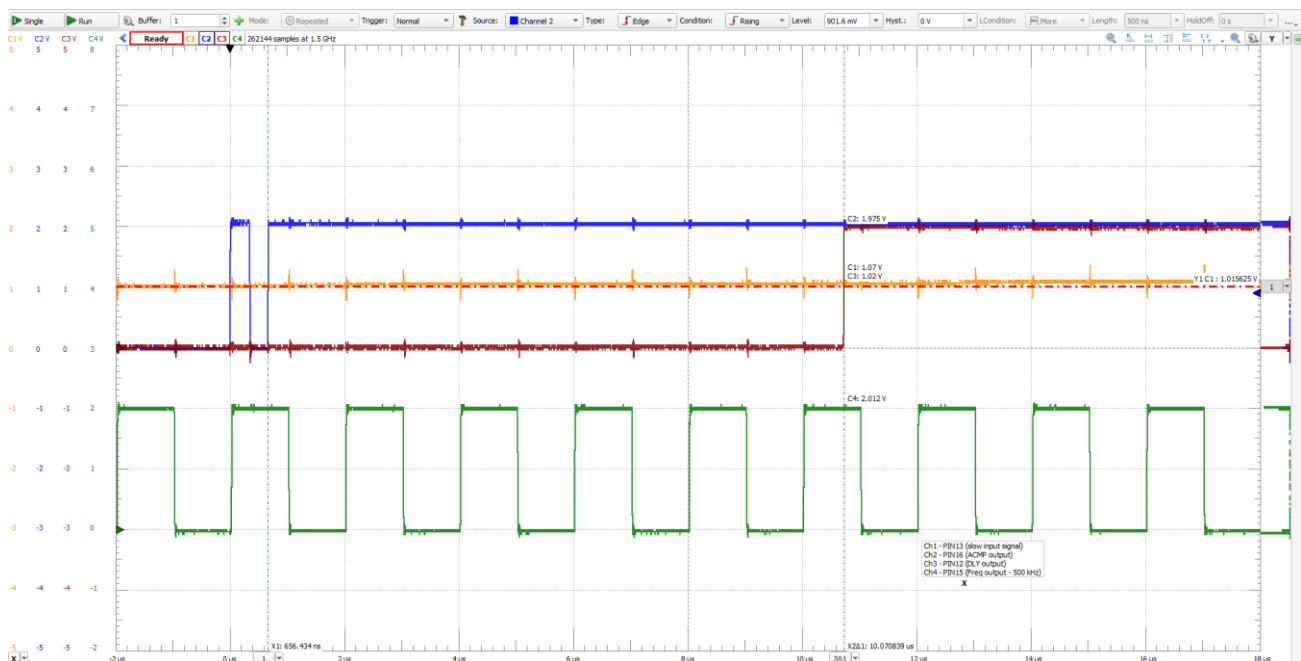


Figure 4. ACMP Output Noise (Ch1 – PIN13, Ch2 – PIN16, Ch3 – PIN12, Ch4 – PIN15)

If there is a frequency on the GPIO above 100 kHz, noise may occur at the output of the comparator as shown in Figure 4. This behavior is observed over the entire VDD range. Also, this behavior is not affected by the hysteresis setting.

3.2.4. Workaround

Any one of the following prevents the issue:

- Add both edge delay cells to ACMP output with delay time more than 10 μ s.

4. Revision History

Revision	Date	Description
1.01	Jul 18, 2024	Removed issue I ² C Incorrect Data when Outputting High-Frequency Signals to Pin
1.00	May 23, 2024	Initial release