






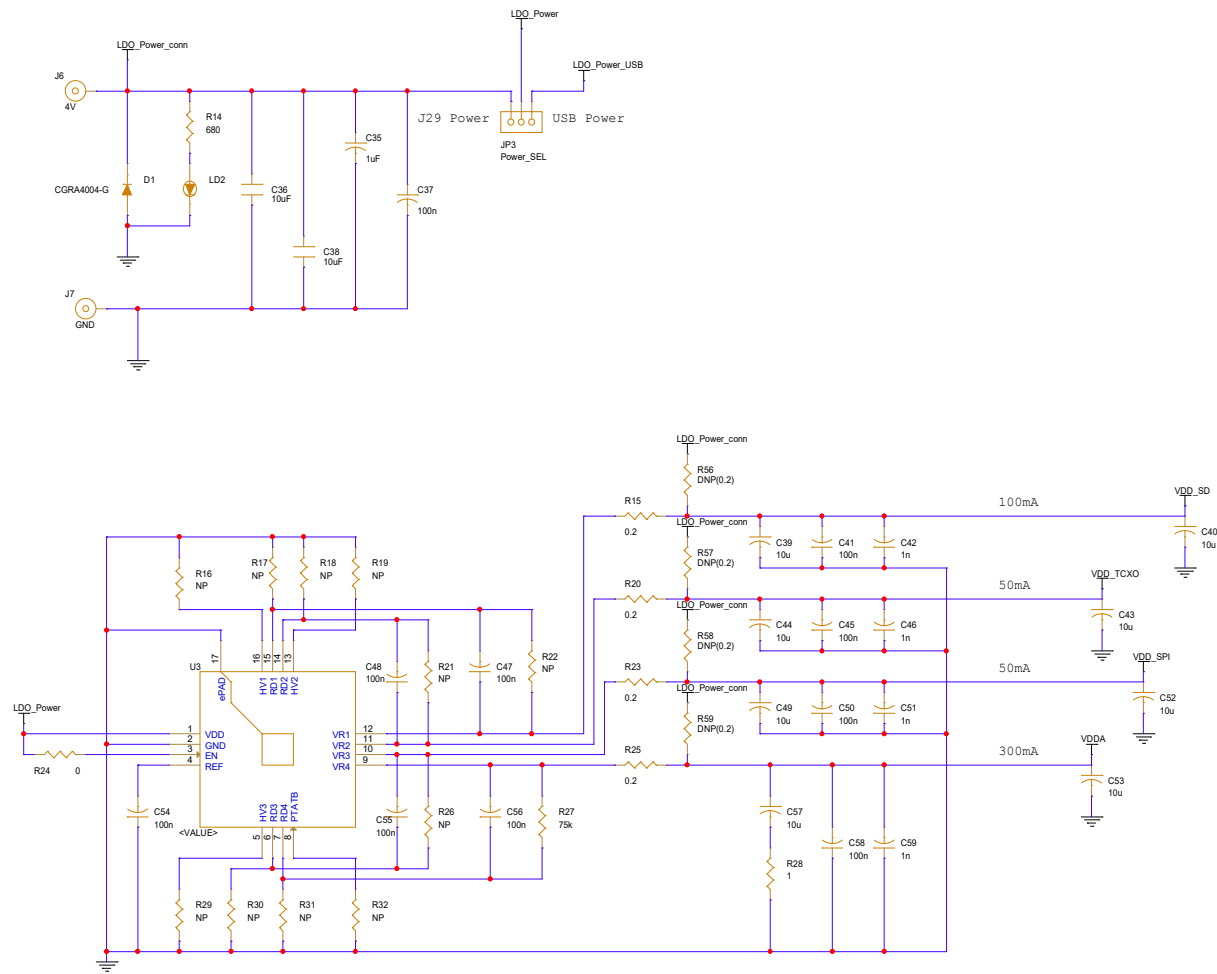

VDDA = V\_CP, VDDA, V\_VCO, VDDD

VDD\_SPI = Translator, I2C PU, SPI PU