

[Released on the Web]

R20TS0616EJ0100

RZ Family RZ/A2M Software Package for GR-MANGO V1.00

Rev.1.00

Oct.01, 2020

Outline

As a derivative package of the RZ/A2M Software Package, a software development kit for the RZ/A2M group, the RZ/A2M Software Package for GR-MANGO V1.00 that supports GR-MANGO boards developed by CORE CORPORATION is now available for download.

This product is available free of charge.

1. Features

The RZ/A2M Software Package for GR-MANGO is a software development kit for the RZ/A2M group that consistently supports camera input, display output, and image adjustment.

The RZ/A2M Software Package for GR-MANGO V1.00 includes the following software components:

- Sample applications for camera input and display output
- Various drivers, middleware, and applications supported by the utilities
 - USB Host HID class mouse
 - Sound input/output
 - DRP basic sample programs
 - File system (FatFS)
 - MicroSD memory card
- Device drivers
- OS (FreeRTOS)

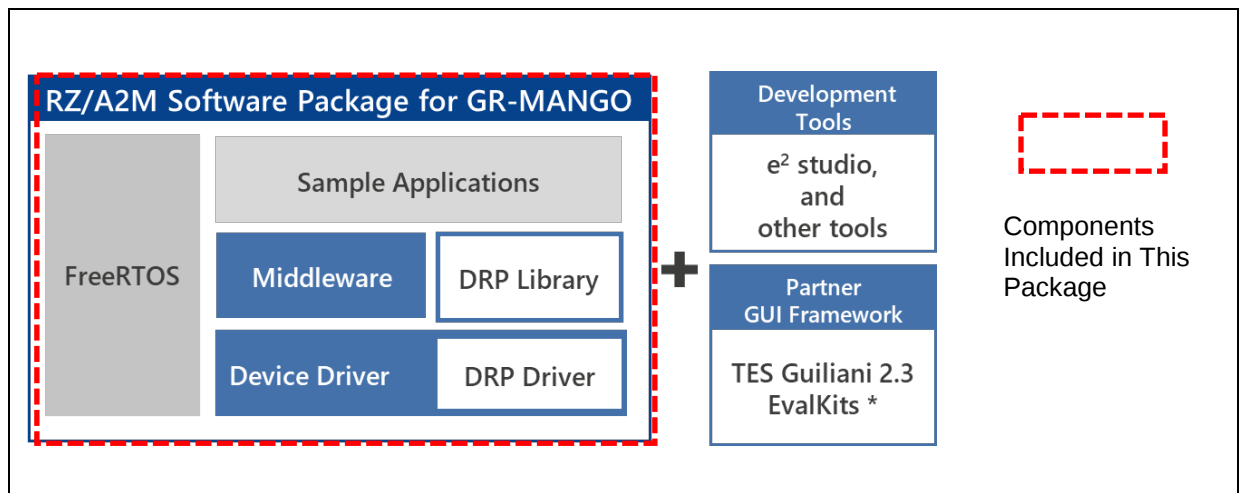


Figure 1. Structure of the RZ/A2M Software Package for GR-MANGO

*: By combining this RZ/A2M Software Package for GR-MANGO with Guiliani EvalKits, a GUI framework kit developed by TES Electronic Solutions, you can easily develop GUIs for HMI applications, leveraging the RZ/A2M group functions.

TES Guiliani 2.3 EvalKits will be available in 4Q 2020 from the following URL:

<https://www.guiliani.de/mediawiki/index.php?title=Downloads:EvalKits>

2. GR-MANGO

A GR-MANGO is a Gadget Renesas (GR) board developed by CORE CORPORATION for the RZ family RZ/A2M group.

Pin-compatible with Raspberry Pi and designed for use in the Mbed™ development environment provided by Arm®, it enables you to develop programs through your Web browser utilizing a rich set of libraries. In addition to the previous development environment for GR-MANGO, this package provides a development environment that utilizes FreeRTOS™.

A GR-MANGO includes a 4 MB on-chip RAM and computing capability of Arm® Cortex®-A9, making it suitable for rapid prototyping of IoT devices utilizing HMI including graphics, a touch panel, camera input, and audio. In addition, by including a dynamically reconfigurable processor (DRP) which processes input images at high speed, the RZ/A2M group can process images more than ten times faster^(Note) than CPU-based software processing and can be applied to image recognition applications for a wide variety of systems from home appliances to industrial equipment.

In this board, since you can just drag and drop to download a program, you can easily try out a RZ/A2M group MCU without an in-circuit emulator.

Note: As an example, in an image edge detection algorithm called Canny Edge Detection, it is observed that a DRP can process 13.5 times faster per frame than a CPU.

- Software processing by a CPU: 110.6 ms/frame
- Hardware processing by a DRP: 8.17 ms/frame

See Gadget Renesas: <https://www.renesas.com/products/gadget-renesas.html>

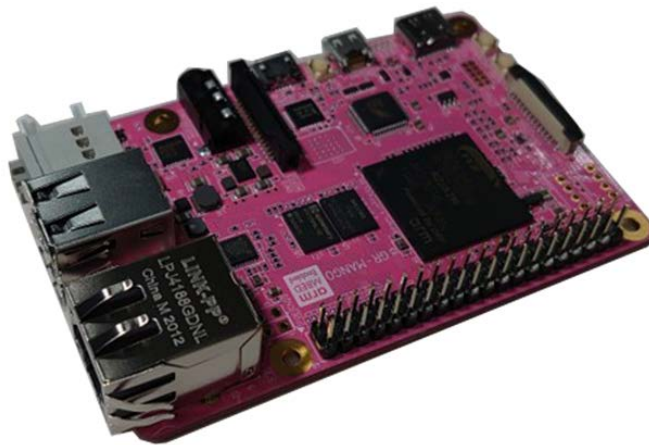


Figure 2. GR-MANGO Image

3. Supported Devices

RZ/A2M group

4. Operating Environment

The following shows the main operating environment.

- Integrated development environment: e² studio 2020-07 and later versions

<https://www.renesas.com/e2studio>

- Compiler: GNU Arm Embedded Toolchain (6-2017-q2)

<https://developer.arm.com/tools-and-software/open-source-software/developer-tools/gnu-toolchain/gnu-rm/downloads>

- Supported board: GR-MANGO

<https://www.renesas.com/products/gadget-renesas/boards/gr-mango.html>

5. Obtaining the Package

Obtain the package from the URL below.

<https://www.renesas.com/rza2-software-development-kit-free-rtos>

6. Using the Package

Download the package from the URL shown in section 5. Decompress the zip file, then start building your project in e² studio.

Revision History

Rev.	Date	Description	
		Page	Summary
1.00	Oct.01.20	-	First edition issued

Renesas Electronics has used reasonable care in preparing the information included in this document, but Renesas Electronics does not warrant that such information is error free. Renesas Electronics assumes no liability whatsoever for any damages incurred by you resulting from errors in or omissions from the information included herein.

The past news contents have been based on information at the time of publication. Now changed or invalid information may be included.

The URL in the Tool News also may be subject to change or become invalid without prior notice.

Corporate Headquarters

TOYOSU FORESIA, 3- 2- 24 Toyosu,
Koto-ku, Tokyo 135- 0061, Japan

www.renesas.com

Trademarks

Renesas and the Renesas logo are trademarks of Renesas Electronics Corporation. All trademarks and registered trademarks are the property of their respective owners.

Contact information

For further information on a product, technology, the most up-to-date version of a document, or your nearest sales office, please visit:

www.renesas.com/contact/