

RV1S9261A

R08DS0273EJ0200 Rev.2.00 Sep. 03, 2025

15 Mbps, HIGH CMTI, IPM DRIVER, 5-PIN SSOP WITH 8.2 mm CREEPAGE DISTANCE (LSSO5) PHOTOCOUPLER

DESCRIPTION

The RV1S9261A is a photocoupler featuring high-speed switching up to 15 Mbps with active high output logic which consists of an AlGaAs LED on the input side and an integrated circuit with a photodiode on the output. The RV1S9261A is designed specifically for high common mode transient immunity (CMTI), wide operating power supply voltage range and high temperature operation up to $T_A = 125$ °C. It is suitable for IPM (Intelligent Power Module) drive.


FEATURES

- Small and long creepage (8.2 mm MIN, LSSO5)
- High speed switching (15 Mbps)
- High common mode transient immunity ($|CM_H|$, $|CM_L| = 100 \text{ kV/}\mu\text{s MIN.}$)
- Pulse width distortion (|tphl tplh| = 20 ns MAX.)
- Wide operating power supply voltage range ($V_{CC} = 4.5 \sim 30 \text{ V}$)
- Operating ambient temperature (125 °C MAX.)
- High isolation voltage (BV = 5 000 Vr.m.s.)
- Embossed tape product: RV1S9261ACCSP-10Yx#KC0: 3 500 pcs/reel
- Pb-free product
- Safety standard

• UL : UL1577, Double protection

• CSA: CAN/CSA-C22.2 No.62368-1, Reinforced insulation


• VDE: DIN EN IEC 60747-5-5 (Option)



APPLICATIONS

- IPM driver
- · General purpose inverter

PACKAGE DIMENSIONS (UNIT: mm)

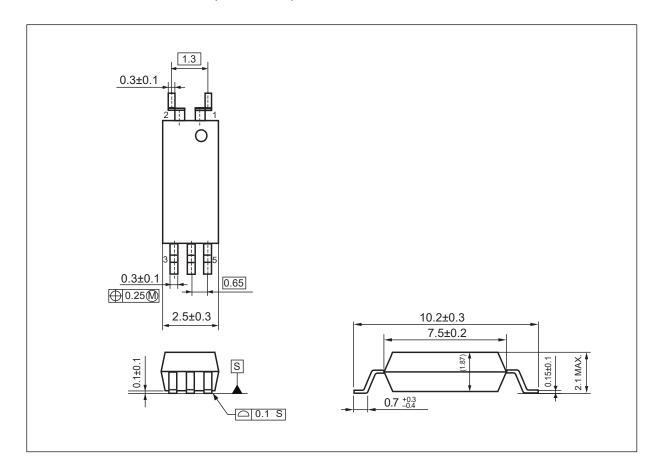


Weight: 0.075 g (TYP.)


PHOTOCOUPLER CONSTRUCTION

Parameter	MIN.
Air Distance	8.2 mm
Creepage Distance	8.2 mm
Isolation Distance	0.15 mm

BLOCK DIAGRAM

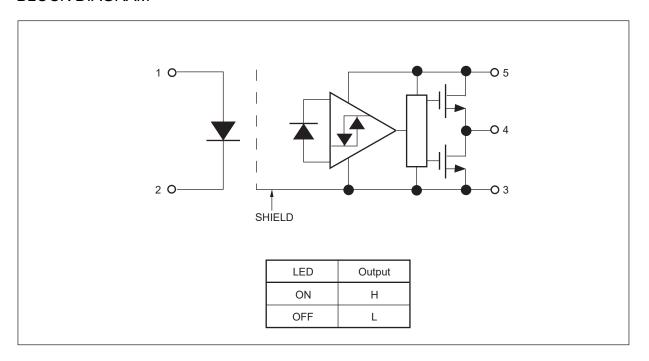

MARKING EXAMPLE



F	?	An initial of "Renesas"		An initial of "Renesas"	
92	61	Product Part Number*			
)	No.1 pin Mark			
N744	N	Rank Code			
	744	Assembly Lot			
		7 Last one-digit of Assembly Year			
		44 Weekly Serial Code			

*) Applicable type numbers listed below

RV1S 9261 ACCSP-10Yx

Marking type number. "RV1S" and "ACCSP-10Yx" are omitted from original type number.

ORDERING INFORMATION

Part Number	Order Number	Solder Plating Specification	Packing Style	Safety Standard Approval	Application Part Number *1
RV1S9261ACCSP -10YC	RV1S9261ACCSP -10YC#SC0	Pb-Free and Halogen Free	Embossed Tape 20 pcs	UL, CSA Approved	RV1S9261A
	RV1S9261ACCSP -10YC#KC0	(Ni/Pd/Au)	Embossed Tape 3 500 pcs/reel		
RV1S9261ACCSP -10YV	RV1S9261ACCSP -10YV#SC0		Embossed Tape 20 pcs	UL, CSA, VDE Approved	
	RV1S9261ACCSP -10YV#KC0		Embossed Tape 3 500 pcs/reel		

Notes: *1. For the application of the safety standard, the following part number should be used.

ABSOLUTE MAXIMUM RATINGS (T_A = 25 °C, unless otherwise specified)

	Parameter	Symbol	Ratings	Unit
Diode	Forward Current	l _F	20	mA
	Reverse Voltage	V _R	5	V
	Power Dissipation *1	P _D	45	mW
Detector	Supply Voltage	Vcc	-0.5 to +30	V
	Output Voltage	Vo	−0.5 to V _{CC}	V
	Output Current	I ₀	25	mA
	Power Dissipation *2	Pc	250	mW
Isolation Vo	Itage *3	BV	5 000	Vr.m.s.
Operating A	mbient Temperature	T _A	−40 to +125	°C
Storage Ter	mperature	T _{stg}	−40 to +150	°C

Notes: *1. Reduced to 1.2 mW/°C at T_A = 110 °C or more.

RECOMMENDED OPERATING CONDITIONS

Parameter	Symbol	MIN.	TYP.	MAX.	Unit
Supply Voltage	Vcc	4.5		30	V
Forward Current (ON)	I _{F (ON)}	6		12	mA
Forward Voltage (OFF)	V _F (OFF)	0		8.0	V
Supply Voltage Ramp Slew Rate	SR			0.5	V/µs
Operating Ambient Temperature	TA	-40		125	°C

^{*2.} Reduced to 4.15 mW/°C at T_A = 85 °C or more.

^{*3.} AC voltage for 1 minute at T_A = 25 °C, RH = 60 % between input and output. Pins 1-2 shorted together, 3-5 shorted together.


ELECTRICAL CHARACTERISTICS ($T_A = -40 \text{ to } +125 \text{ °C}$, $V_{CC} = 4.5 \text{ to } 30 \text{ V}$)

	Parameter	Symbol	Conditions	MIN.	TYP.*1	MAX.	Unit
Diode	Forward Voltage	V _F	I _F = 6 mA, T _A = 25 °C	1.4	1.54	1.7	V
	Reverse Current	I_R	V _R = 3 V, T _A = 25 °C			10	μА
	Input Capacitance	Ct	V _F = 0 V, f = 1 MHz		30		рF
Detector	High Level Output Voltage	Vон	$I_F = 6 \text{ mA}, I_O = -3.5 \text{ mA}$	V _{CC} - 1.5			V
			$I_F = 6 \text{ mA}, I_O = -6.5 \text{ mA}$	V _{CC} - 2.0			
	Low Level Output Voltage	V_{OL}	I _F = 0 mA, I _O = 3.5 mA I _F = 0 mA, I _O = 6.5 mA			0.3 0.5	V
	High Level Supply Current *2	Іссн	I _F = 6 mA, V _{CC} = 30 V		1.7	3	mA
	Low Level Supply Current *2	Iccl	I _F = 0 mA, V _{CC} = 30 V		1.7	3	mA
	UVLO Threshold	Vuvlo	V _O < 1 V, I _F = 6 ~ 12 mA		3		V
Coupled	Threshold Input Current $(L \rightarrow H)$ *2	I _{FLH}	$V_{CC} = 15 \text{ V}, V_O > 13.5 \text{ V},$ $I_O = -3.5 \text{ mA}$			4	mA
	Isolation Resistance	R _{I-O}	$V_{I-O} = 1 \text{ kV}_{DC}, \text{ RH } \le 60 \text{ %},$ $T_A = 25 \text{ °C}$	10 ¹¹			Ω
	Isolation Capacitance	C _{I-O}	V = 0 V, f = 1 MHz		0.6		рF
	Propagation Delay Time $(L \rightarrow H)^{*3}$	t _{PLH}	$V_{IN} = 0 \rightarrow 5 \text{ V}, C_{IN} = 60 \text{ pF},$ $R_{IN} = 560 \Omega, C_L = 15 \text{ pF},$ $V_{THLH} = 1.3 \text{ V}$			60	ns
	Propagation Delay Time $(H \rightarrow L)^{*3}$	t _{PHL}	$V_{IN} = 5 \rightarrow 0 \text{ V, } C_{IN} = 60 \text{ pF,}$ $R_{IN} = 560 \Omega, C_L = 15 \text{ pF,}$ $V_{THHL} = 1.3 \text{ V}$			60	ns
	Pulse Width Distortion	PWD = t _{PHL} - t _{PLH}	$V_{IN} = 0 \Leftrightarrow 5 \text{ V, } C_{IN} = 60 \text{ pF,}$ $R_{IN} = 560 \Omega, C_L = 15 \text{ pF,}$ $V_{THLH} = V_{THHL} = 1.3 \text{ V}$			20	ns
	Propagation Delay Difference Between Any Two Parts	PDD = t _{PHL} - t _{PLH}		-25		25	
	Common Mode Transient Immunity at High Level Output *4	[СМн]	V _{CC} = 30 V, T _A = 25 °C, Vo > 17 V, I _F = 6 mA, V _{CM} = 1.5 kV	100			kV/μs
	Common Mode Transient Immunity at Low Level Output *4	CM _L	V _{CC} = 30 V, T _A = 25 °C, Vo < 1 V, I _F = 0 mA, V _{CM} = 1.5 kV	100			kV/μs

Notes: *1. Typical values at $T_A = 25$ °C.


^{*2.} The polarity of the current flowing from the external circuit to the RV1S9261A is positive..


*3. Test circuit for propagation delay time

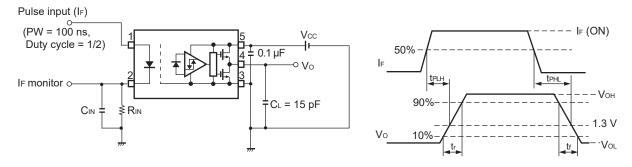


Remark C_L includes probe and stray wiring capacitance.


*4. Test circuit for common mode transient immunity








TYPICAL CHARACTERISTICS (T_A = 25 °C, unless otherwise specified)


















Remark The graphs indicate nominal characteristics.


TYPICAL CHARACTERISTICS (T_A = 25 °C, unless otherwise specified)















Remark The graphs indicate nominal characteristics.


TYPICAL CHARACTERISTICS (T_A = 25 °C, unless otherwise specified)



Remark The graphs indicate nominal characteristics.

TAPING SPECIFICATIONS (UNIT: mm)


Tape Direction



Direction of feed


Outline and Dimensions (Tape)

(Unit: mm)

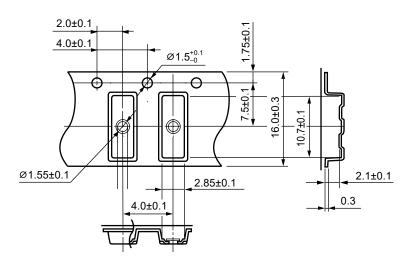

Outline and Dimensions (Reel)


(Unit: mm)



Ø330±2.0 Ø100±1.0 17.4±1.0 21.4±1.0

Packing: 3 500 pcs/reel

RECOMMENDED MOUNT PAD DIMENSIONS (UNIT: mm)

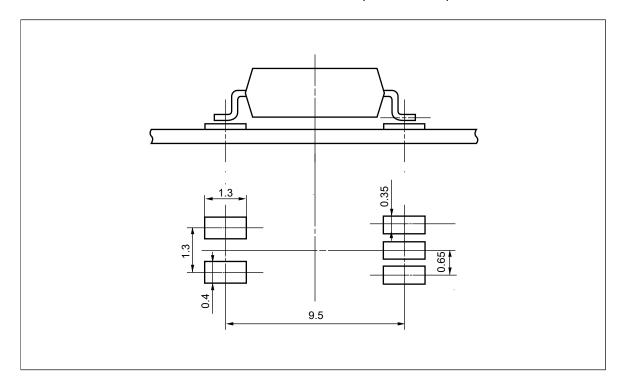

Remark All dimensions in this figure must be evaluated before use.

NOTES ON HANDLING

- 1. Recommended soldering conditions
 - (1) Infrared reflow soldering
 - Peak reflow temperature
 - Time of peak reflow temperature -5 °C (255 °C)
 - Time of temperature higher than 217 °C
 - Time to preheat temperature from 150 to 200 °C
 - Number of reflows
 - Flux

260 °C or below (package surface temperature)

30 s or less


60 to 150 seconds

60 to 120 seconds

Three

Rosin flux containing small amount of chlorine (The flux with a maximum chlorine content of

0.2 Wt% is recommended.)

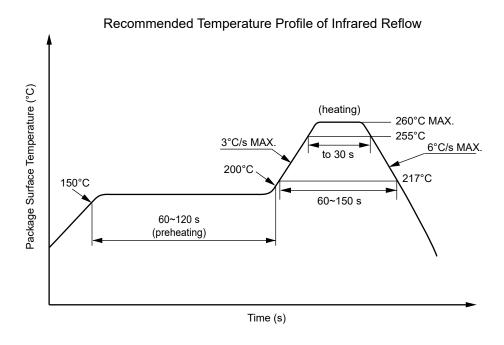

JEDEC J-STD-020F compliant soldering conditions

(2) Wave soldering

 Temperature 260 °C or below (molten solder temperature)

Time 10 s or less

Preheating conditions 120 °C or below (package surface temperature)

Number of times One (Allowed to be dipped in solder including plastic mold portion.) Rosin flux containing small amount of chlorine (The flux with a maximum Flux

chlorine content of 0.2 Wt% is recommended.)

(3) Soldering by Soldering Iron

Peak temperature (lead part temperature) 350 °C or below Time (per one side) 3 s or less Flux Rosin flux containing small amount of chlorine

(The flux with a maximum chlorine content of 0.2 Wt % is recommended.)

Place 1.5 to 2.0 mm or more away from the root of the lead

(4) Cautions

Flux cleaning Avoid cleaning with Freon- or halogen-based (chlorinated etc.) solvents. Fixing/Coating Do not use fixing agents or coatings containing halogen-based substances.

RV1S9261A Data Sheet

2. Cautions regarding noise

Be aware that when voltage is applied suddenly between the photocoupler's input and output at startup, the output transistor may enter the on state, even if the voltage is within the absolute maximum ratings.


USAGE CAUTIONS

- 1. This product is weak for static electricity by designed with high-speed integrated circuit so protect against static electricity when handling.
- 2. By-pass capacitor of more than 0.1 μ F is used between V_{CC} and GND near device. Also, ensure that the distance between the leads of the photocoupler and capacitor is no more than 10 mm.
- 3. Avoid storage at a high temperature and high humidity.


SPECIFICATION OF VDE MARKS LICENSE DOCUMENT

Parameter	Symbol	Rating	Unit
Climatic test class (IEC 60068-1/DIN EN 60068-1)		40/125/21	
Dielectric strength			
maximum operating isolation voltage	Viorm	1 075	V_{peak}
Test voltage (partial discharge test, procedure a for type test and random	V _m	1 720	V_{peak}
test)			
$V_m = 1.6 \times V_{IORM.}, q_{pd} < 5 pC$			
Test voltage (partial discharge test, procedure b for all devices)	V_{m}	2 016	V_{peak}
$V_m = 1.875 \times V_{IORM.}$, $q_{pd} < 5 \text{ pC}$	v m	2 0 10	v peak
Highest permissible overvoltage	VIOTM	8 000	V_{peak}
Degree of pollution (IEC 60664-1/DIN EN 60664-1 (VDE 0110-1))		2	
Comparative tracking index (IEC 60112/DIN EN 60112 (VDE 0303-11))	CTI	400	
Material group (IEC 60664-1/DIN EN 60664-1 (VDE 0110-1))		II	
Storage temperature range	T _{stg}	-40 to +150	°C
Operating temperature range	TA	-40 to +125	°C
Isolation resistance, minimum value			
V _{I-O} = 500 V dc, T _A = 25 °C	R _{I-O} MIN.	10 ¹²	Ω
V_{I-O} = 500 V dc, T_A = maximum temperature of rating, at least 100 °C	R _{I-O} MIN.	10 ¹¹	Ω
Safety maximum ratings (maximum permissible in case of fault, see thermal			
derating curve)			
Maximum ambient temperature	Ts	175	°C
Maximum input current	Isı	400	mA
Maximum output power dissipation	Pso	700	mW
Isolation resistance, minimum value at V⊦o = 500 V dc, T _A = T _S	R _{I-O} MIN.	10 ⁹	Ω

Dependence of maximum safety ratings on ambient temperature

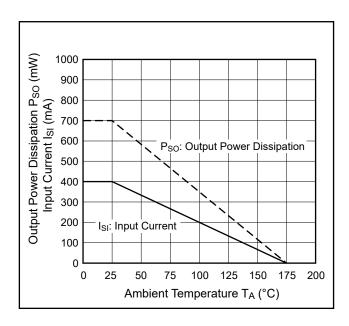

Method a) Destructive Test, Type and Sample Test

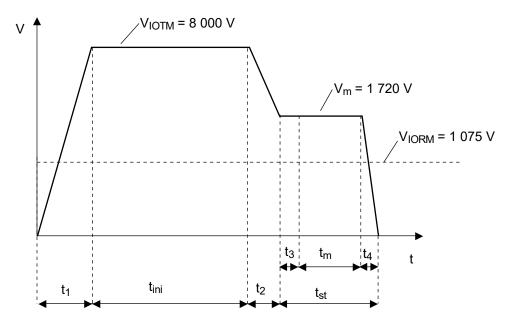

 t_1 , t_2 = 1 to 10 sec


 t_3 , $t_4 = 1 \sec$

 $t_m = 10 sec$

 t_{st} = 12 sec

 $t_{ini} = 60 \text{ sec}$

Method b) Non-destructive Test, 100% Production Test

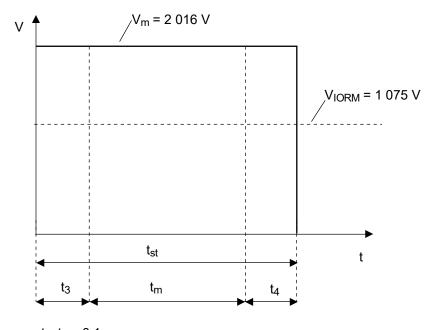

 t_3 , $t_4 = 0.1 \text{ sec}$

 $t_m = 1.0 sec$

 $t_{st} = 1.2 sec$

Caution

GaAs Products

This product uses gallium arsenide (GaAs).

GaAs vapor and powder are hazardous to human health if inhaled or ingested, so please observe the following points.

- Follow related laws and ordinances when disposing of the product. If there are no applicable laws and/or ordinances, dispose of the product as recommended below.
 - Commission a disposal company able to (with a license to) collect, transport and dispose of materials that contain arsenic and other such industrial waste materials.
- 2. Exclude the product from general industrial waste and household garbage, and ensure that the product is controlled (as industrial waste subject to special control) up until final disposal.
- Do not burn, destroy, cut, crush, or chemically dissolve the product.
- Do not lick the product or in any way allow it to enter the mouth.

All trademarks and registered trademarks are the property of their respective owners.

Notice

- 1. Descriptions of circuits, software and other related information in this document are provided only to illustrate the operation of semiconductor products and application examples. You are fully responsible for the incorporation or any other use of the circuits, software, and information in the design of your product or system. Renesas Electronics disclaims any and all liability for any losses and damages incurred by you or third parties arising from the use of these circuits, software, or information.
- 2. Renesas Electronics hereby expressly disclaims any warranties against and liability for infringement or any other claims involving patents, copyrights, or other intellectual property rights of third parties, by or arising from the use of Renesas Electronics products or technical information described in this document, including but not limited to, the product data, drawings, charts, programs, algorithms, and application examples.
- 3. No license, express, implied or otherwise, is granted hereby under any patents, copyrights or other intellectual property rights of Renesas Electronics or others
- 4. You shall be responsible for determining what licenses are required from any third parties, and obtaining such licenses for the lawful import, export, manufacture, sales, utilization, distribution or other disposal of any products incorporating Renesas Electronics products, if required.
- 5. You shall not alter, modify, copy, or reverse engineer any Renesas Electronics product, whether in whole or in part. Renesas Electronics disclaims any and all liability for any losses or damages incurred by you or third parties arising from such alteration, modification, copying or reverse engineering.
- 6. Renesas Electronics products are classified according to the following two quality grades: "Standard" and "High Quality". The intended applications for each Renesas Electronics product depends on the product's quality grade, as indicated below.
 - "Standard": Computers; office equipment; communications equipment; test and measurement equipment; audio and visual equipment; home electronic appliances; machine tools; personal electronic equipment; industrial robots; etc.
 - "High Quality": Transportation equipment (automobiles, trains, ships, etc.); traffic control (traffic lights); large-scale communication equipment; key financial terminal systems; safety control equipment; etc.

Unless expressly designated as a high reliability product or a product for harsh environments in a Renesas Electronics data sheet or other Renesas Electronics document, Renesas Electronics products are not intended or authorized for use in products or systems that may pose a direct threat to human life or bodily injury (artificial life support devices or systems; surgical implantations; etc.), or may cause serious property damage (space system; undersea repeaters; nuclear power control systems; aircraft control systems; key plant systems; military equipment; etc.). Renesas Electronics disclaims any and all liability for any damages or losses incurred by you or any third parties arising from the use of any Renesas Electronics product that is inconsistent with any Renesas Electronics data sheet, user's manual or other Renesas Electronics document.

- 7. No semiconductor product is absolutely secure. Notwithstanding any security measures or features that may be implemented in Renesas Electronics hardware or software products, Renesas Electronics shall have absolutely no liability arising out of any vulnerability or security breach, including but not limited to any unauthorized access to or use of a Renesas Electronics product or a system that uses a Renesas Electronics product. RENESAS ELECTRONICS DOES NOT WARRANT OR GUARANTEE THAT RENESAS ELECTRONICS PRODUCTS, OR ANY SYSTEMS CREATED USING RENESAS ELECTRONICS PRODUCTS WILL BE INVULNERABLE OR FREE FROM CORRUPTION, ATTACK, VIRUSES, INTERFERENCE, HACKING, DATA LOSS OR THEFT, OR OTHER SECURITY INTRUSION ("Vulnerability Issues"). RENESAS ELECTRONICS DISCLAIMS ANY AND ALL RESPONSIBILITY OR LIABILITY ARISING FROM OR RELATED TO ANY VULNERABILITY ISSUES. FURTHERMORE, TO THE EXTENT PERMITTED BY APPLICABLE LAW, RENESAS ELECTRONICS DISCLAIMS ANY AND ALL WARRANTIES, EXPRESS OR IMPLIED, WITH RESPECT TO THIS DOCUMENT AND ANY RELATED OR ACCOMPANYING SOFTWARE OR HARDWARE, INCLUDING BUT NOT LIMITED TO THE IMPLIED WARRANTIES OF MERCHANTABILITY, OR FITNESS FOR A PARTICULAR PURPOSE.
- 8. When using Renesas Electronics products, refer to the latest product information (data sheets, user's manuals, application notes, "General Notes for Handling and Using Semiconductor Devices" in the reliability handbook, etc.), and ensure that usage conditions are within the ranges specified by Renesas Electronics with respect to maximum ratings, operating power supply voltage range, heat dissipation characteristics, installation, etc. Renesas Electronics disclaims any and all liability for any malfunctions, failure or accident arising out of the use of Renesas Electronics products outside of such specified ranges.
- 9. Although Renesas Electronics endeavors to improve the quality and reliability of Renesas Electronics products, semiconductor products have specific characteristics, such as the occurrence of failure at a certain rate and malfunctions under certain use conditions. Unless designated as a high reliability product or a product for harsh environments in a Renesas Electronics data sheet or other Renesas Electronics document, Renesas Electronics products are not subject to radiation resistance design. You are responsible for implementing safety measures to guard against the possibility of bodily injury, injury or damage caused by fire, and/or danger to the public in the event of a failure or malfunction of Renesas Electronics products, such as safety design for hardware and software, including but not limited to redundancy, fire control and malfunction prevention, appropriate treatment for aging degradation or any other appropriate measures. Because the evaluation of microcomputer software alone is very difficult and impractical, you are responsible for evaluating the safety of the final products or systems manufactured by you.
- 10. Please contact a Renesas Electronics sales office for details as to environmental matters such as the environmental compatibility of each Renesas Electronics product. You are responsible for carefully and sufficiently investigating applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive, and using Renesas Electronics products in compliance with all these applicable laws and regulations. Renesas Electronics disclaims any and all liability for damages or losses occurring as a result of your noncompliance with applicable laws and regulations.
- 11. Renesas Electronics products and technologies shall not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable domestic or foreign laws or regulations. You shall comply with any applicable export control laws and regulations promulgated and administered by the governments of any countries asserting jurisdiction over the parties or transactions.
- 12. It is the responsibility of the buyer or distributor of Renesas Electronics products, or any other party who distributes, disposes of, or otherwise sells or transfers the product to a third party, to notify such third party in advance of the contents and conditions set forth in this document.
- 13. This document shall not be reprinted, reproduced or duplicated in any form, in whole or in part, without prior written consent of Renesas Electronics.
- 14. Please contact a Renesas Electronics sales office if you have any questions regarding the information contained in this document or Renesas Electronics products.
- (Note1) "Renesas Electronics" as used in this document means Renesas Electronics Corporation and also includes its directly or indirectly controlled subsidiaries.
- (Note2) "Renesas Electronics product(s)" means any product developed or manufactured by or for Renesas Electronics.

(Rev.5.0-1 October 2020)

Corporate Headquarters

TOYOSU FORESIA, 3-2-24 Toyosu, Koto-ku, Tokyo 135-0061, Japan

www.renesas.com

Trademarks

Renesas and the Renesas logo are trademarks of Renesas Electronics Corporation. All trademarks and registered trademarks are the property of their respective owners.

Contact information

For further information on a product, technology, the most up-to-date version of a document, or your nearest sales office, please visit: www.renesas.com/contact/.