TP65H030G4PWS

650V SuperGaN® GaN FET in TO-247-3 (source tab)

Description

The TP65H030G4PWS 650V, 30mΩ Gallium Nitride (GaN) FET is a normally-off device using Renesas' Gen IV plus platform. It combines a state-of-the-art high voltage GaN HEMT with a low voltage silicon MOSFET to offer superior performance, standard drive, ease of adoption and reliability.

The Gen IV plus SuperGaN® platform uses advanced epi and patented design technologies to simplify manufacturability while improving efficiency over silicon via lower gate charge, output capacitance, crossover loss, and reverse recovery charge.

Benefits

- Superior normally off architecture with D-mode GaN HEMT
- Compatible with standard silicon drivers
- Enhanced noise immunity with a 4V threshold voltage with no negative gate drive required
- Enables high-efficiency, high power density, and reliable power conversion
- Facilitates cost-effective GaN adoption reducing system size, weight, and costs

Product/Schematic Diagrams



TP65H030G4PWS TO-247-3



Cascode Schematic Symbol



Cascode Device Structure

Features

- Ultra-fast switching Gen IV plus GaN
- JEDEC-qualified GaN technology
- Dynamic $R_{DS(on)eff}$ production tested
- Reduced crossover loss
- Negligible Qrr
- RoHS compliant and Halogen-free packaging

Applications

- AI datacenter and telecom power supplies
- E-mobility charging
- PV inverter
- UPS
- BESS

Specifications

V_{DS} (V)	650
$V_{DSS(TR)}$(V) maximum	800
$R_{DS(on)}$ (mΩ) maximum [1]	41
Q_{OSS} (nC) typical	135
Q_G (nC) typical	24.5

1. Dynamic $R_{DS(on)}$ (see Figure 17 and Figure 18)

© 2025 Renesas Electronics

Contents

1. Pin Information 3
1.1 Pin Assignments 3
1.2 Pin Descriptions 3
2. Specifications 4
2.1 Absolute Maximum Ratings 4
2.2 Thermal Specifications 4
2.3 Electrical Specifications – Forward Device 5
2.4 Electrical Specifications – Reverse Device 6
3. Typical Performance Graphs 7
4. Test Circuits and Waveforms 9
5. Package Outline Drawings 10
6. Related Information 11
7. Ordering Information 11
8. Revision History 11

Figures

Figure 1. Pin Assignments – Bottom View 3
Figure 2. Typical Output Characteristics, T_J = 25°C Parameter: V_{GS} 7
Figure 3. Typical Output Characteristics, T_J = 150°C Parameter: V_{GS} 7
Figure 4. Typical Transfer Characteristics V_{DS} = 10V, Parameter: T_J 7
Figure 5. Normalized On-resistance I_D = 30A, V_{GS} = 12V 7
Figure 6. Typical Capacitance V_{GS} = 0V, f = 1MHz 7
Figure 7. Typical C_{OSS} Stored Energy 7
Figure 8. Typical Q_{OSS} 8
Figure 9. Typical Gate Charge 8
Figure 10. Power Dissipation 8
Figure 11. Current Derating 8
Figure 12. Forward Characteristics of Rev. Diode 8
Figure 13. Transient Thermal Resistance 8
Figure 14. Safe Operating Area T_C = 25°C 9
Figure 15. Switching Time Test Circuit 9
Figure 16. Switching Time Waveform 9
Figure 17. Dynamic $R_{DS(on)eff}$ Test Circuit 9
Figure 18. Dynamic $R_{DS(on)eff}$ Waveform 9
Figure 19. TO-247 3L Package Outline Drawing 10

1. Pin Information

1.1 Pin Assignments



Figure 1. Pin Assignments – Bottom View

1.2 Pin Descriptions

Pin Number	Pin Name	Description
1	G	Gate.
2	S	Source.
3	D	Drain.

2. Specifications

2.1 Absolute Maximum Ratings

T_c = 25°C unless otherwise stated.

Caution: Do not operate at or near the maximum ratings listed for extended periods of time. Exposure to such conditions can adversely impact product reliability and result in failures not covered by warranty.

Symbol	Parameter	Minimum	Maximum	Unit
V_{DSS}	Drain to source voltage (T_J = -55°C to 150°C)	-	650	V
$V_{DSS(TR)\ ,\ non\text{-}repetitive}$	Transient drain to source voltage, non-repetitive [1]	-	800	
$V_{DSS(TR)\ ,\ repetitive}$	Transient drain to source voltage, repetitive [2]	-	750	
V_{GSS}	Gate to source voltage	-20	+20	
P_D	Maximum power dissipation at T_C = 25°C	-	192	W
I_D	Continuous drain current at T_C = 25°C	-	55.7	A
	Continuous drain current at T_C = 100°C	-	35	A
I_{DM}	Pulsed drain current (pulse width: 10µs)	-	230	A
T_J	Operating temperature junction	-55	+150	°C
T_S	Storage temperature	-55	+150	°C
T_{SOLD}	Soldering peak temperature [3]	-	260	°C

1. In off-state, spike duration < 30µs, non-repetitive.
2. Off-state, spike duration < 5µs.
3. For 10 sec., 1.6mm from the case.

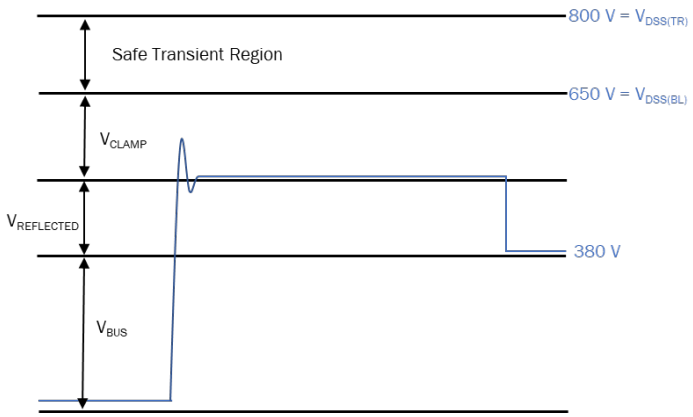

Primary Switch Voltage Stress (264 V AC)

2.2 Thermal Specifications

Symbol	Condition	Typical Value	Unit
$R_{\Theta JC}$	Junction-to-case	0.65	°C/W
$R_{\Theta JA}$	Junction-to-ambient	40	

2.3 Electrical Specifications – Forward Device

T_J = 25°C unless otherwise stated.

Symbol	Parameter	Test Conditions	Minimum	Typical	Maximum	Unit
$V_{DSS(BL)}$	Maximum drain-source voltage	V_{GS} = 0V	650	-	-	V
$V_{GS(th)}$	Gate threshold voltage	V_{DS} = V_{GS}, I_D = 1mA	3.3	4	4.8	V
$\Delta V_{GS(th)}/T_J$	Gate threshold voltage temperature coefficient		-	-6.5	-	mV/°C
$R_{DS(on)eff}$	Drain-source on-resistance [1]	V_{GS} = 12V, I_D = 30A, T_J = 25°C	-	30	41	mΩ
		V_{GS} = 12V, I_D = 30A, T_J = 150°C	-	62	-	
I_{DSS}	Drain-to-source leakage current	V_{DS} = 650V, V_{GS} = 0V, T_J = 25°C	-	3	30	µA
		V_{DS} = 650V, V_{GS} = 0V, T_J = 150°C	-	20	-	
I_{GSS}	Gate-to-source forward leakage current	V_{GS} = 20V	-	-	400	nA
	Gate-to-source reverse leakage current	V_{GS} = -20V	-	-	-400	
C_{ISS}	Input capacitance	V_{GS} = 0V, V_{DS} = 400V, *f* = 1MHz	-	1500	-	pF
C_{OSS}	Output capacitance		-	127	-	
C_{RSS}	Reverse transfer capacitance		-	4.6	-	
$C_{O(er)}$	Output capacitance, energy related [2]	V_{GS} = 0V, V_{DS} = 0V to 400V	-	183	-	pF
$C_{O(tr)}$	Output capacitance, time related [3]		-	339	-	
Q_G	Total gate charge	V_{DS} = 400V, V_{GS} = 0V to 12V, I_D = 30A	-	24.5	-	nC
Q_{GS}	Gate-source charge		-	8.4	-	
Q_{GD}	Gate-drain charge		-	6.6	-	
Q_{OSS}	Output charge	V_{GS} = 0V, V_{DS} = 0V to 400V	-	135	-	nC
$t_{D(on)}$	Turn-on delay	V_{DS} = 400V, V_{GS} = 0V to 12V, $R_{G(on)}$ = 10Ω, $R_{G(off)}$ = 30Ω, ID = 30A, Z_{FB} = 180Ω at 100MHz (see Figure 15)	-	40.8	-	ns
t_R	Rise time		-	6.8	-	
$t_{D(off)}$	Turn-off delay		-	89.2	-	
t_F	Fall time		-	8	-	

1. Dynamic $R_{DS(on)}$ 100% tested; see Figure 17 and Figure 18 for conditions.
2. Equivalent capacitance to give same stored energy from 0V to 400V.
3. Equivalent capacitance to give same charging time from 0V to 400V.

2.4 Electrical Specifications – Reverse Device

T_J = 25°C unless otherwise stated.

Symbol	Parameter	Test Conditions	Minimum	Typical	Maximum	Unit
I_S	Reverse current	V_{GS} = 0V, T_C = 100°C, ≤ 25% duty cycle	-	-	32	A
V_{SD}	Reverse voltage [1]	V_{GS} = 0V, I_S = 32A	-	1.8	-	V
		V_{GS} = 0V, I_S = 16A	-	1.3	-	

1. Includes dynamic $R_{DS(on)}$ effect.

Note: Reverse recovery charge is negligible, enabled by the LV Si FET technology

3. Typical Performance Graphs

T_C = 25°C unless otherwise stated.

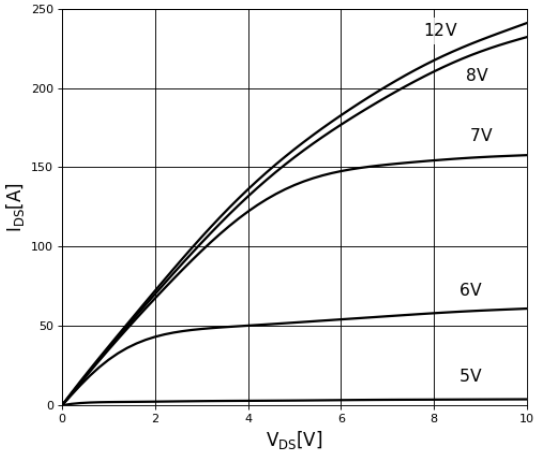

Figure 2. Typical Output Characteristics, T_J = 25°C

Parameter: V_{GS}

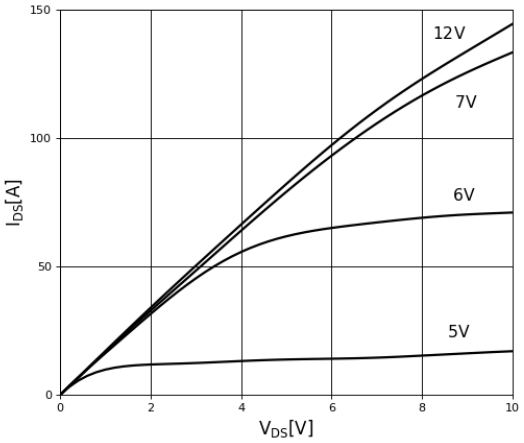

Figure 3. Typical Output Characteristics, T_J = 150°C

Parameter: V_{GS}

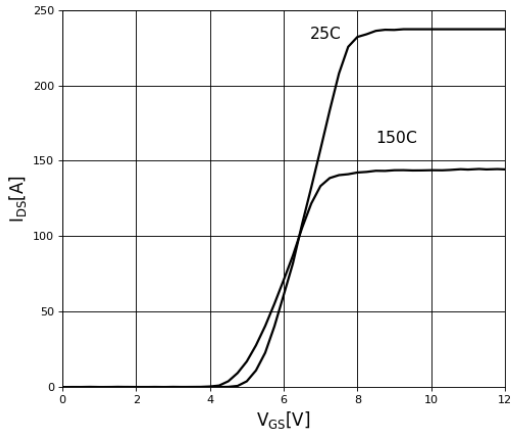

Figure 4. Typical Transfer Characteristics

V_{DS} = 10V, Parameter: T_J

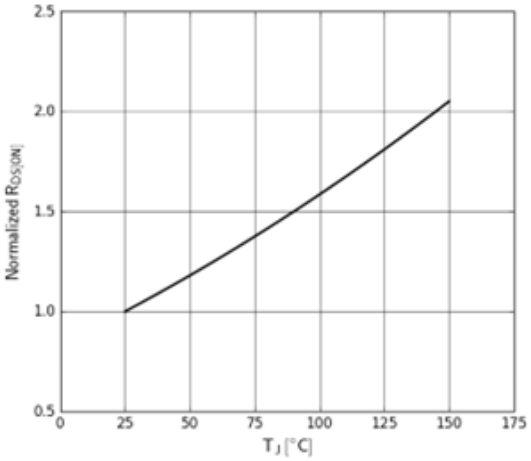

Figure 5. Normalized On-resistance

I_D = 30A, V_{GS} = 12V

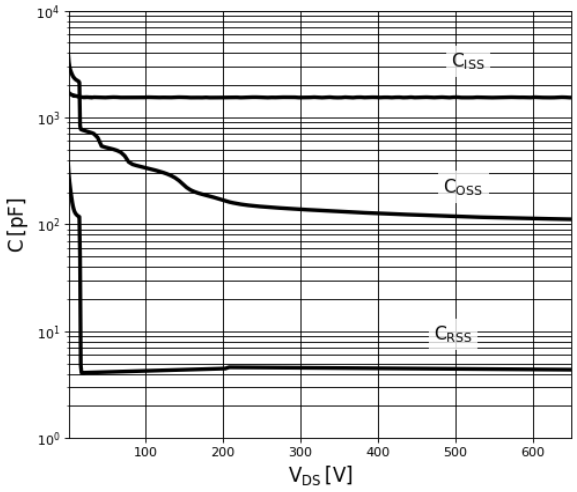

Figure 6. Typical Capacitance

V_{GS} = 0V, f = 1MHz

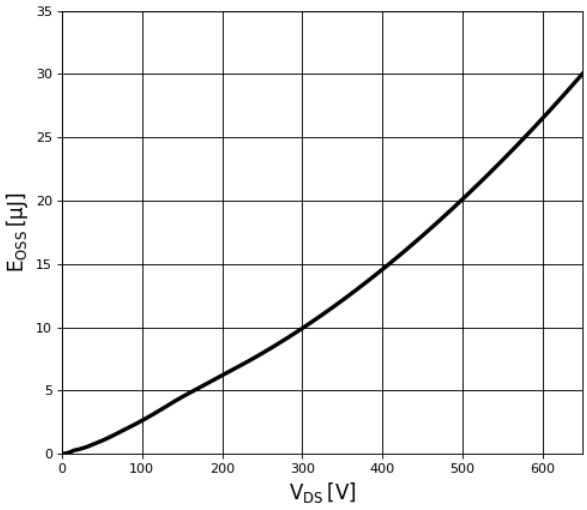

Figure 7. Typical C_{OSS} Stored Energy

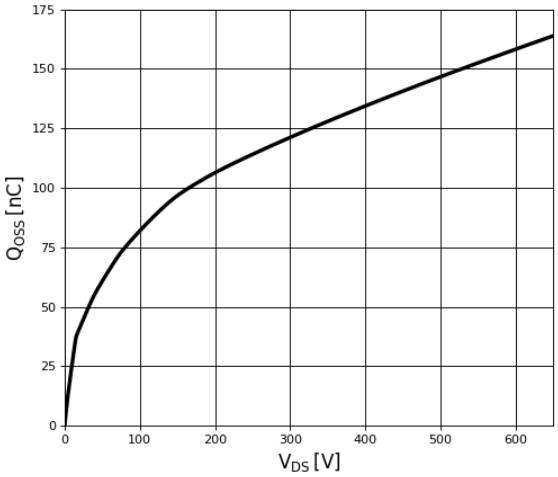

Figure 8. Typical Q_{OSS}

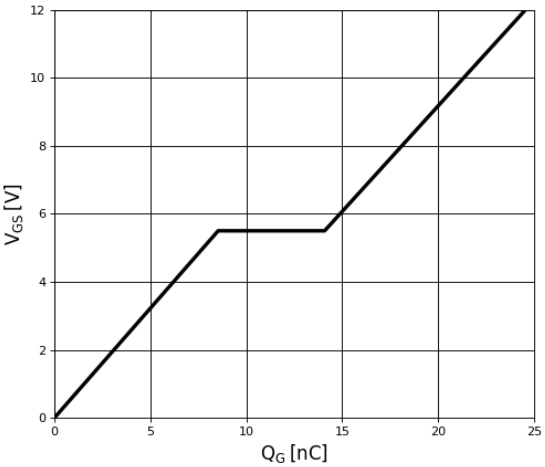

Figure 9. Typical Gate Charge

I_{DS} = 30A, V_{DS} = 400V

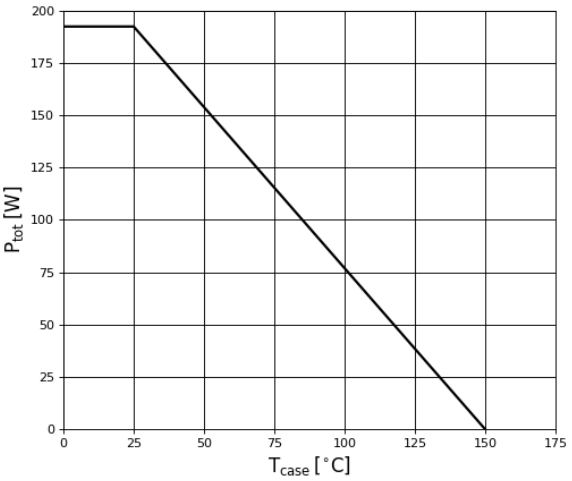

Figure 10. Power Dissipation

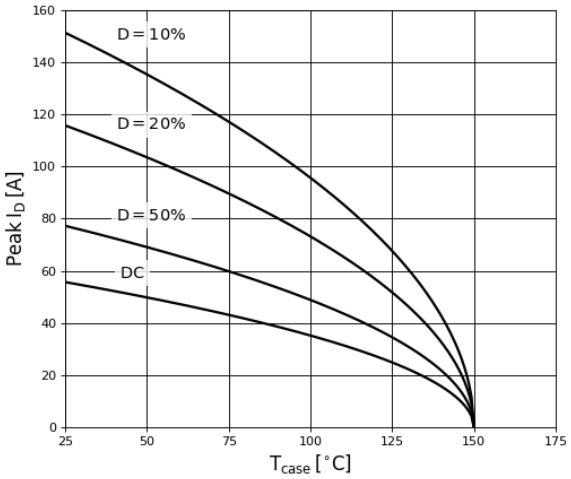

Figure 11. Current Derating

Pulse width ⩽ 10µs, V_{GS} ⩾ 12V

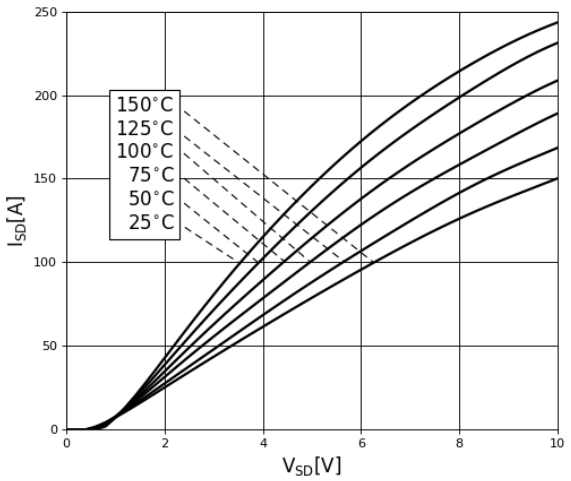

Figure 12. Forward Characteristics of Rev. Diode

$I_S = f(V_{SD})$, Parameter: T_J

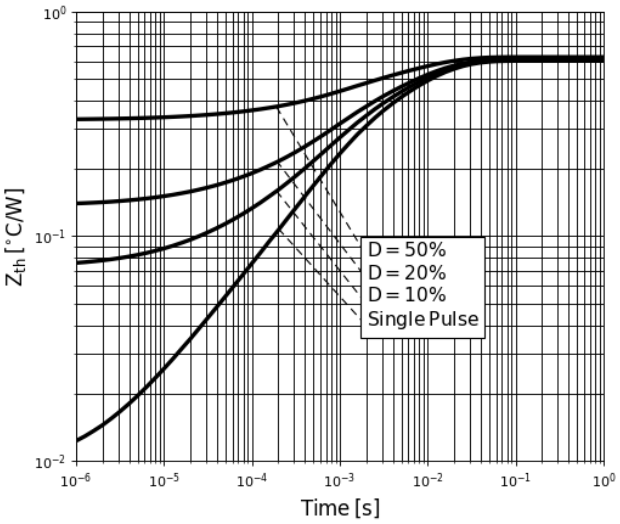

Figure 13. Transient Thermal Resistance

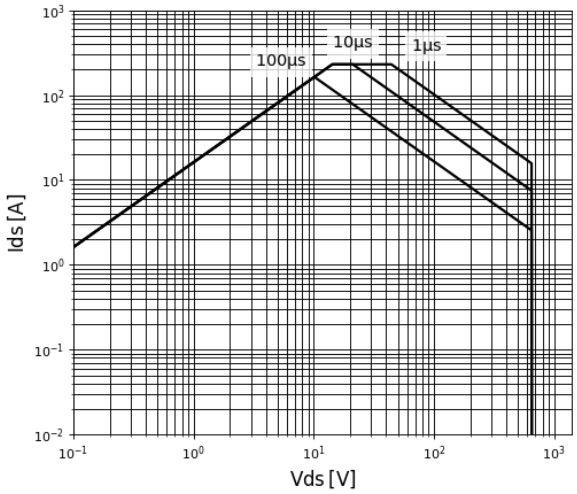

Figure 14. Safe Operating Area T_C = 25°C

4. Test Circuits and Waveforms

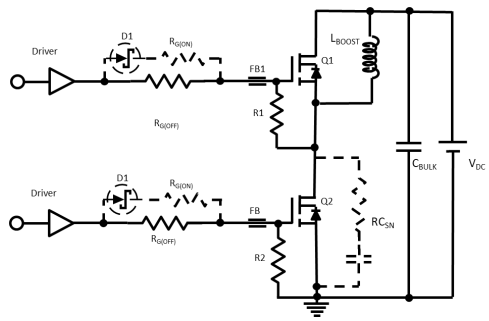

Figure 15. Switching Time Test Circuit

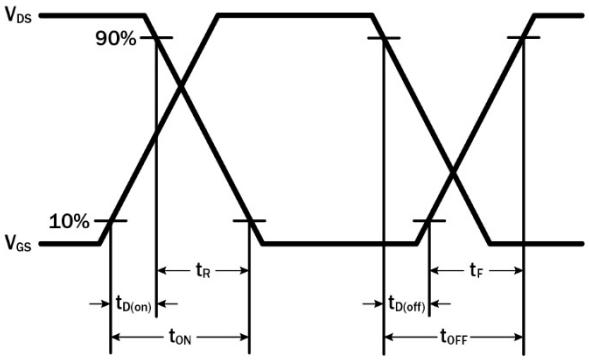

Figure 16. Switching Time Waveform

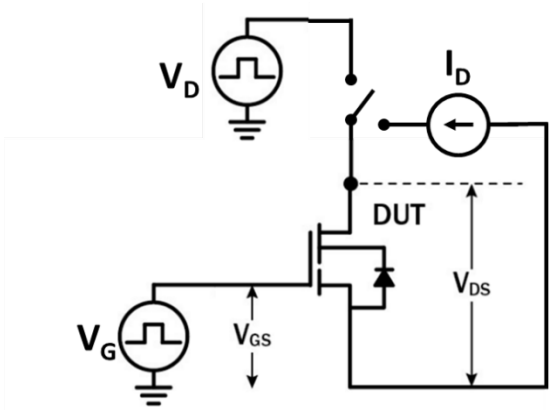

Figure 17. Dynamic $R_{DS(on)eff}$ Test Circuit

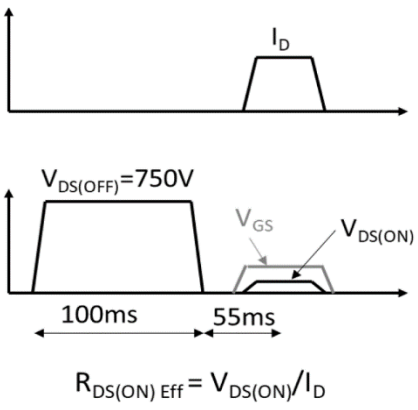

Figure 18. Dynamic $R_{DS(on)eff}$ Waveform

5. Package Outline Drawings

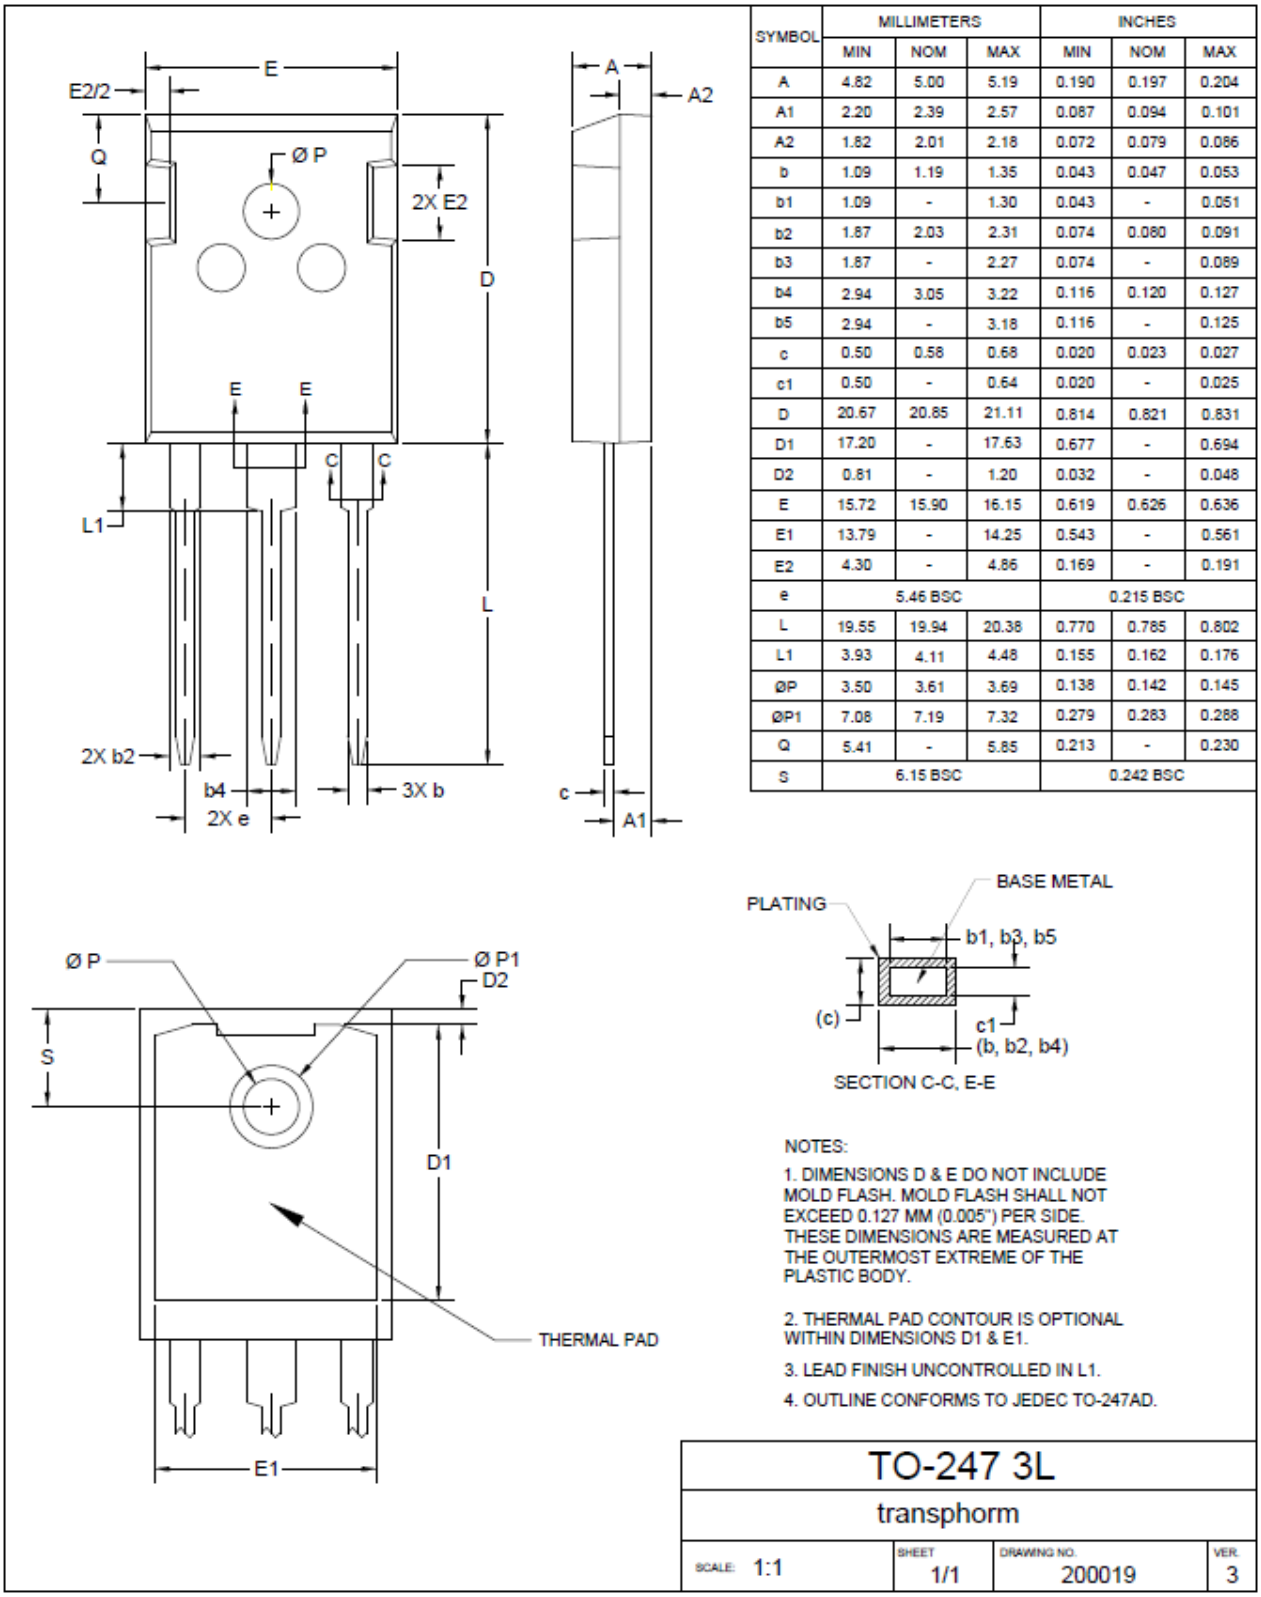

SYMBOL	MILLIMETERS			INCHES		
	MIN	NOM	MAX	MIN	NOM	MAX
A	4.82	5.00	5.19	0.190	0.197	0.204
A1	2.20	2.39	2.57	0.087	0.094	0.101
A2	1.82	2.01	2.18	0.072	0.079	0.086
b	1.09	1.19	1.35	0.043	0.047	0.053
b1	1.09	-	1.30	0.043	-	0.051
b2	1.87	2.03	2.31	0.074	0.080	0.091
b3	1.87	-	2.27	0.074	-	0.089
b4	2.94	3.05	3.22	0.116	0.120	0.127
b5	2.94	-	3.18	0.116	-	0.125
c	0.50	0.58	0.68	0.020	0.023	0.027
c1	0.50	-	0.64	0.020	-	0.025
D	20.67	20.85	21.11	0.814	0.821	0.831
D1	17.20	-	17.63	0.677	-	0.694
D2	0.81	-	1.20	0.032	-	0.048
E	15.72	15.90	16.15	0.619	0.626	0.636
E1	13.79	-	14.25	0.543	-	0.561
E2	4.30	-	4.86	0.169	-	0.191
e	5.46 BSC			0.215 BSC		
L	19.55	19.94	20.38	0.770	0.785	0.802
L1	3.93	4.11	4.48	0.155	0.162	0.176
ØP	3.50	3.61	3.69	0.138	0.142	0.145
ØP1	7.08	7.19	7.32	0.279	0.283	0.288
Q	5.41	-	5.85	0.213	-	0.230
S	6.15 BSC			0.242 BSC		

NOTES:

1. DIMENSIONS D & E DO NOT INCLUDE MOLD FLASH. MOLD FLASH SHALL NOT EXCEED 0.127 MM (0.005") PER SIDE. THESE DIMENSIONS ARE MEASURED AT THE OUTERMOST EXTREME OF THE PLASTIC BODY.
2. THERMAL PAD CONTOUR IS OPTIONAL WITHIN DIMENSIONS D1 & E1.
3. LEAD FINISH UNCONTROLLED IN L1.
4. OUTLINE CONFORMS TO JEDEC TO-247AD.

TO-247 3L			
transphorm			
SCALE: 1:1	SHEET 1/1	DRAWING NO. 200019	VER. 3

Figure 19. TO-247 3L Package Outline Drawing

6. Related Information

All technical documents for Renesas GaN Power devices are accessible from the GaN Power Solutions page.

7. Ordering Information

Part Number	Package Description	Package Configuration
TP65H030G4PWS	TO-247 3L	Source

8. Revision History

Revision	Date	Description
2.00	Nov 25, 2025	Updated the document's formatting; no technical changes were completed.
1.00	May 13, 2025	Initial release.

IMPORTANT NOTICE AND DISCLAIMER

RENESAS ELECTRONICS CORPORATION AND ITS SUBSIDIARIES (“RENESAS”) PROVIDES TECHNICAL SPECIFICATIONS AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES “AS IS” AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT OF THIRD-PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for developers who are designing with Renesas products. You are solely responsible for (1) selecting the appropriate products for your application, (2) designing, validating, and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements. These resources are subject to change without notice. Renesas grants you permission to use these resources only to develop an application that uses Renesas products. Other reproduction or use of these resources is strictly prohibited. No license is granted to any other Renesas intellectual property or to any third-party intellectual property. Renesas disclaims responsibility for, and you will fully indemnify Renesas and its representatives against, any claims, damages, costs, losses, or liabilities arising from your use of these resources. Renesas' products are provided only subject to Renesas' Terms and Conditions of Sale or other applicable terms agreed to in writing. No use of any Renesas resources expands or otherwise alters any applicable warranties or warranty disclaimers for these products.

(Disclaimer Rev.1.01)

Corporate Headquarters

TOYOSU FORESIA, 3-2-24 Toyosu,
Koto-ku, Tokyo 135-0061, Japan
www.renesas.com

Contact Information

For further information on a product, technology, the most up-to-date version of a document, or your nearest sales office, please visit www.renesas.com/contact-us/.

Trademarks

Renesas and the Renesas logo are trademarks of Renesas Electronics Corporation. All trademarks and registered trademarks are the property of their respective owners.

© 2025 Renesas Electronics Corporation. All rights reserved.

IMPORTANT NOTICE AND DISCLAIMER

RENESAS ELECTRONICS CORPORATION AND ITS SUBSIDIARIES (“RENESAS”) PROVIDES TECHNICAL SPECIFICATIONS AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES “AS IS” AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT OF THIRD-PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for developers who are designing with Renesas products. You are solely responsible for (1) selecting the appropriate products for your application, (2) designing, validating, and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements. These resources are subject to change without notice. Renesas grants you permission to use these resources only to develop an application that uses Renesas products. Other reproduction or use of these resources is strictly prohibited. No license is granted to any other Renesas intellectual property or to any third-party intellectual property. Renesas disclaims responsibility for, and you will fully indemnify Renesas and its representatives against, any claims, damages, costs, losses, or liabilities arising from your use of these resources. Renesas' products are provided only subject to Renesas' Terms and Conditions of Sale or other applicable terms agreed to in writing. No use of any Renesas resources expands or otherwise alters any applicable warranties or warranty disclaimers for these products.

(Disclaimer Rev.1.01)

Corporate Headquarters

TOYOSU FORESIA, 3-2-24 Toyosu,
Koto-ku, Tokyo 135-0061, Japan
www.renesas.com

Contact Information

For further information on a product, technology, the most up-to-date version of a document, or your nearest sales office, please visit www.renesas.com/contact-us/.

Trademarks

Renesas and the Renesas logo are trademarks of Renesas Electronics Corporation. All trademarks and registered trademarks are the property of their respective owners.

© 2026 Renesas Electronics Corporation. All rights reserved.