

To our customers,

---

## Old Company Name in Catalogs and Other Documents

---

On April 1<sup>st</sup>, 2010, NEC Electronics Corporation merged with Renesas Technology Corporation, and Renesas Electronics Corporation took over all the business of both companies. Therefore, although the old company name remains in this document, it is a valid Renesas Electronics document. We appreciate your understanding.

Renesas Electronics website: <http://www.renesas.com>

April 1<sup>st</sup>, 2010  
Renesas Electronics Corporation

Issued by: Renesas Electronics Corporation (<http://www.renesas.com>)

Send any inquiries to <http://www.renesas.com/inquiry>.

Not recommended  
for new design

## Notice

1. All information included in this document is current as of the date this document is issued. Such information, however, is subject to change without any prior notice. Before purchasing or using any Renesas Electronics products listed herein, please confirm the latest product information with a Renesas Electronics sales office. Also, please pay regular and careful attention to additional and different information to be disclosed by Renesas Electronics such as that disclosed through our website.
2. Renesas Electronics does not assume any liability for infringement of patents, copyrights, or other intellectual property rights of third parties by or arising from the use of Renesas Electronics products or technical information described in this document. No license, express, implied or otherwise, is granted hereby under any patents, copyrights or other intellectual property rights of Renesas Electronics or others.
3. You should not alter, modify, copy, or otherwise misappropriate any Renesas Electronics product, whether in whole or in part.
4. Descriptions of circuits, software and other related information in this document are provided only to illustrate the operation of semiconductor products and application examples. You are fully responsible for the incorporation of these circuits, software, and information in the design of your equipment. Renesas Electronics assumes no responsibility for any losses incurred by you or third parties arising from the use of these circuits, software, or information.
5. When exporting the products or technology described in this document, you should comply with the applicable export control laws and regulations and follow the procedures required by such laws and regulations. You should not use Renesas Electronics products or the technology described in this document for any purpose relating to military applications or use by the military, including but not limited to the development of weapons of mass destruction. Renesas Electronics products and technology may not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable domestic or foreign laws or regulations.
6. Renesas Electronics has used reasonable care in preparing the information included in this document, but Renesas Electronics does not warrant that such information is error free. Renesas Electronics assumes no liability whatsoever for any damages incurred by you resulting from errors in or omissions from the information included herein.
7. Renesas Electronics products are classified according to the following three quality grades: “Standard”, “High Quality”, and “Specific”. The recommended applications for each Renesas Electronics product depends on the product’s quality grade, as indicated below. You must check the quality grade of each Renesas Electronics product before using it in a particular application. You may not use any Renesas Electronics product for any application categorized as “Specific” without the prior written consent of Renesas Electronics. Further, you may not use any Renesas Electronics product for any application for which it is not intended without the prior written consent of Renesas Electronics. Renesas Electronics shall not be in any way liable for any damages or losses incurred by you or third parties arising from the use of any Renesas Electronics product for an application categorized as “Specific” or for which the product is not intended where you have failed to obtain the prior written consent of Renesas Electronics. The quality grade of each Renesas Electronics product is “Standard” unless otherwise expressly specified in a Renesas Electronics data sheets or data books, etc.
  - “Standard”: Computers; office equipment; communications equipment; test and measurement equipment; audio and visual equipment; home electronic appliances; machine tools; personal electronic equipment; and industrial robots.
  - “High Quality”: Transportation equipment (automobiles, trains, ships, etc.); traffic control systems; anti-disaster systems; anti-crime systems; safety equipment; and medical equipment not specifically designed for life support.
  - “Specific”: Aircraft; aerospace equipment; submersible repeaters; nuclear reactor control systems; medical equipment or systems for life support (e.g. artificial life support devices or systems), surgical implantations, or healthcare intervention (e.g. excision, etc.), and any other applications or purposes that pose a direct threat to human life.
8. You should use the Renesas Electronics products described in this document within the range specified by Renesas Electronics, especially with respect to the maximum rating, operating supply voltage range, movement power voltage range, heat radiation characteristics, installation and other product characteristics. Renesas Electronics shall have no liability for malfunctions or damages arising out of the use of Renesas Electronics products beyond such specified ranges.
9. Although Renesas Electronics endeavors to improve the quality and reliability of its products, semiconductor products have specific characteristics such as the occurrence of failure at a certain rate and malfunctions under certain use conditions. Further, Renesas Electronics products are not subject to radiation resistance design. Please be sure to implement safety measures to guard them against the possibility of physical injury, and injury or damage caused by fire in the event of the failure of a Renesas Electronics product, such as safety design for hardware and software including but not limited to redundancy, fire control and malfunction prevention, appropriate treatment for aging degradation or any other appropriate measures. Because the evaluation of microcomputer software alone is very difficult, please evaluate the safety of the final products or system manufactured by you.
10. Please contact a Renesas Electronics sales office for details as to environmental matters such as the environmental compatibility of each Renesas Electronics product. Please use Renesas Electronics products in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive. Renesas Electronics assumes no liability for damages or losses occurring as a result of your noncompliance with applicable laws and regulations.
11. This document may not be reproduced or duplicated, in any form, in whole or in part, without prior written consent of Renesas Electronics.
12. Please contact a Renesas Electronics sales office if you have any questions regarding the information contained in this document or Renesas Electronics products, or if you have any other inquiries.

(Note 1) “Renesas Electronics” as used in this document means Renesas Electronics Corporation and also includes its majority-owned subsidiaries.

(Note 2) “Renesas Electronics product(s)” means any product developed or manufactured by or for Renesas Electronics.

MICROWAVE LOW NOISE AMPLIFIER  
NPN SILICON EPITAXIAL TRANSISTOR  
(WITH BUILT-IN 2 ELEMENTS) SUPER MINI MOLD

FEATURES

- Low Current, High Gain  
 $|S_{21e}|^2 = 9 \text{ dB TYP. @ } V_{CE} = 2 \text{ V, } I_c = 7 \text{ mA, } f = 2 \text{ GHz}$   
 $|S_{21e}|^2 = 8.5 \text{ dB TYP. @ } V_{CE} = 1 \text{ V, } I_c = 5 \text{ mA, } f = 2 \text{ GHz}$
- A Super Mini Mold Package Adopted
- Built-in 2 Transistors (2 × 2SC5179)

ORDERING INFORMATION

PART NUMBER	QUANTITY	PACKING STYLE
μPA807T	Loose products (50 PCS)	Embossed tape 8 mm wide. Pin 6 (Q1 Base), Pin 5 (Q2 Base), Pin 4 (Q2 Emitter) face to perforation side of the tape.
μPA807T-T1	Taping products (3 KPCS/Reel)	


**Remark** If you require an evaluation sample, please contact an NEC Sales Representative. (Unit sample quantity is 50 pcs.)

ABSOLUTE MAXIMUM RATINGS (T<sub>A</sub> = 25 °C)


PARAMETER	SYMBOL	RATING	UNIT
Collector to Base Voltage	V <sub>CBO</sub>	5	V
Collector to Emitter Voltage	V <sub>CEO</sub>	3	V
Emitter to Base Voltage	V <sub>EBO</sub>	2	V
Collector Current	I <sub>c</sub>	10	mA
Total Power Dissipation	P <sub>T</sub>	30 in 1 element 60 in 2 elements	mW
Junction Temperature	T <sub>j</sub>	150	°C
Storage Temperature	T <sub>stg</sub>	-65 to +150	°C

PACKAGE DRAWINGS

(Unit: mm)

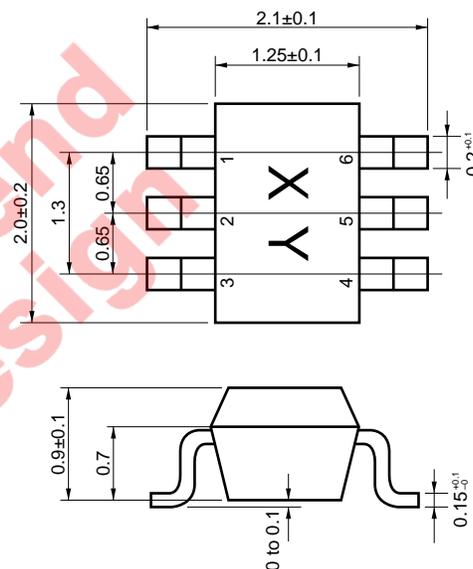

PIN CONFIGURATION (Top View)



PIN CONNECTIONS

1. Collector (Q1)
2. Emitter (Q1)
3. Collector (Q2)
4. Emitter (Q2)
5. Base (Q2)
6. Base (Q1)

This device uses radio frequency technology. Take due precautions to protect it from excessive input levels such as static electricity.

**ELECTRICAL CHARACTERISTICS (T<sub>A</sub> = 25 °C)**

PARAMETER	SYMBOL	CONDITION	MIN.	TYP.	MAX.	UNIT
Collector Cutoff Current	I <sub>CB0</sub>	V <sub>CB</sub> = 5 V, I <sub>E</sub> = 0			0.1	μA
Emitter Cutoff Current	I <sub>EB0</sub>	V <sub>EB</sub> = 1 V, I <sub>C</sub> = 0			0.1	μA
DC Current Gain	h <sub>FE</sub>	V <sub>CE</sub> = 2 V, I <sub>C</sub> = 7 mA <b>Note 1</b>	70		140	
Gain Bandwidth Product (1)	f <sub>T</sub>	V <sub>CE</sub> = 2 V, I <sub>C</sub> = 7 mA, f = 2 GHz	10	13		GHz
Gain Bandwidth Product (2)	f <sub>T</sub>	V <sub>CE</sub> = 1 V, I <sub>C</sub> = 5 mA, f = 2 GHz	8.5	12		GHz
Feed-back Capacitance	C <sub>re</sub>	V <sub>CB</sub> = 2 V, I <sub>E</sub> = 0, f = 1 MHz <b>Note 2</b>		0.4	0.6	pF
Insertion Power Gain (1)	S <sub>21e</sub>   <sup>2</sup>	V <sub>CE</sub> = 2 V, I <sub>C</sub> = 7 mA, f = 2 GHz	7.5	9		dB
Insertion Power Gain (2)	S <sub>21e</sub>   <sup>2</sup>	V <sub>CE</sub> = 1 V, I <sub>C</sub> = 5 mA, f = 2 GHz	7	8.5		dB
Noise Figure (1)	NF	V <sub>CE</sub> = 2 V, I <sub>C</sub> = 3 mA, f = 2 GHz		1.5	2	dB
Noise Figure (2)	NF	V <sub>CE</sub> = 1 V, I <sub>C</sub> = 3 mA, f = 2 GHz		1.5	2	dB
h <sub>FE</sub> Ratio	h <sub>FE1</sub> /h <sub>FE2</sub>	V <sub>CE</sub> = 2 V, I <sub>C</sub> = 7 mA A smaller value among h <sub>FE</sub> of h <sub>FE1</sub> = Q1, Q2 A larger value among h <sub>FE</sub> of h <sub>FE2</sub> = Q1, Q2	0.85			





**Notes 1.** Pulse Measurement: P<sub>w</sub> ≤ 350 μs, Duty cycle ≤ 2 %





**2.** Measured with 3-pin bridge, emitter and case should be connected to guard pin of bridge.

**h<sub>FE</sub> CLASSIFICATION**

Rank	KB
Marking	T84
h <sub>FE</sub> Value	70 to 140

**TYPICAL CHARACTERISTICS (T<sub>A</sub> = 25 °C)**

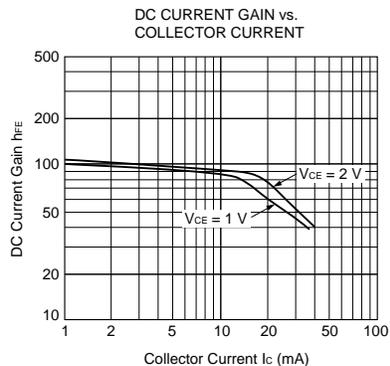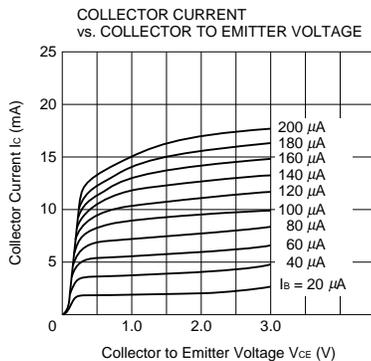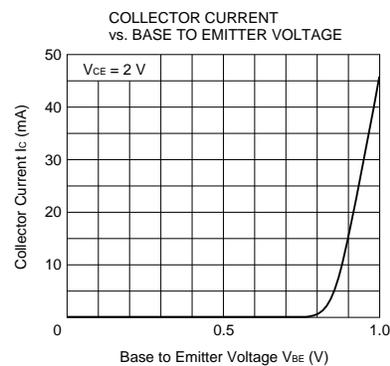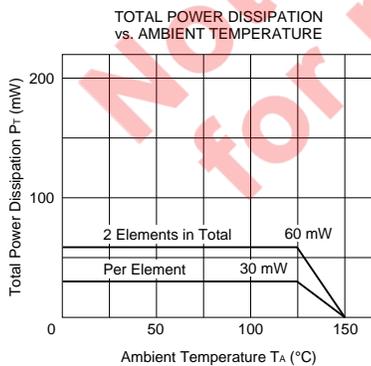

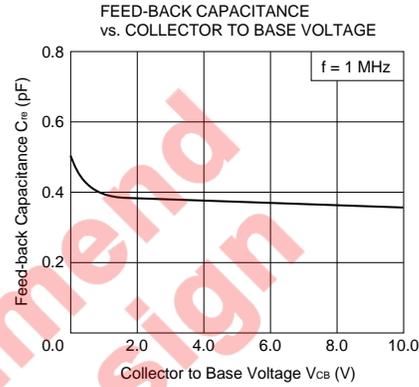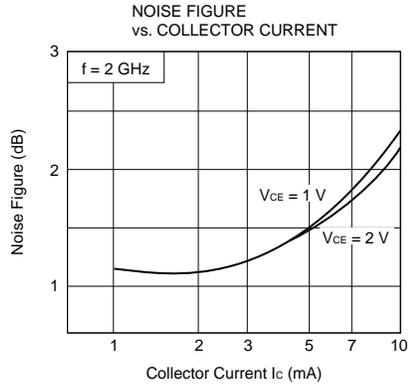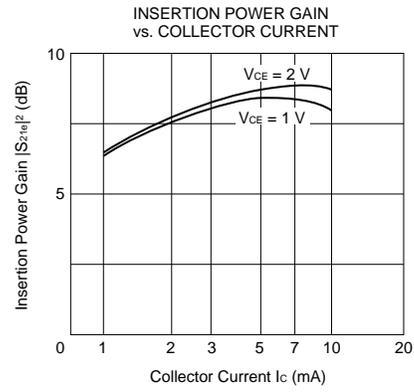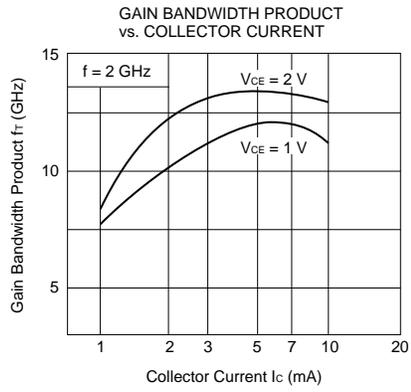

Not recommended for new design

S-PARAMETERS

V<sub>CE</sub> = 1 V, I<sub>c</sub> = 1 mA, Z<sub>o</sub> = 50 Ω

FREQUENCY		S11		S21		S12		S22	
MHz	MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG	
100.0000	0.982	-3.7	1.968	174.3	0.020	83.4	0.994	-4.0	
200.0000	0.983	-7.5	1.939	167.5	0.038	82.6	0.992	-8.1	
300.0000	0.973	-10.6	1.930	161.8	0.058	79.2	0.980	-11.5	
400.0000	0.955	-14.9	2.014	156.4	0.075	75.4	0.959	-15.5	
500.0000	0.946	-17.9	1.934	150.9	0.091	72.8	0.949	-18.8	
600.0000	0.918	-22.1	1.988	146.3	0.107	69.9	0.923	-22.1	
700.0000	0.900	-25.8	1.951	141.7	0.122	66.8	0.901	-25.6	
800.0000	0.873	-29.1	1.931	137.1	0.136	64.2	0.875	-28.4	
900.0000	0.845	-33.3	1.996	133.2	0.148	61.7	0.851	-31.2	
1000.0000	0.827	-35.8	1.900	129.5	0.158	59.8	0.832	-34.1	
1100.0000	0.799	-40.3	1.963	125.6	0.170	57.6	0.806	-36.4	
1200.0000	0.776	-43.4	1.944	121.7	0.179	55.7	0.781	-38.8	
1300.0000	0.753	-46.8	1.909	118.0	0.189	54.3	0.761	-41.1	
1400.0000	0.718	-50.7	1.936	114.1	0.196	52.7	0.736	-43.1	
1500.0000	0.695	-53.4	1.870	110.7	0.205	50.9	0.719	-45.4	
1600.0000	0.663	-57.1	1.878	107.2	0.211	49.7	0.698	-47.0	
1700.0000	0.634	-60.0	1.849	104.0	0.215	48.5	0.677	-48.9	
1800.0000	0.609	-62.8	1.810	100.6	0.222	47.3	0.658	-50.3	
1900.0000	0.581	-65.7	1.786	97.9	0.227	46.4	0.642	-51.9	
2000.0000	0.554	-69.0	1.773	94.7	0.231	45.8	0.622	-53.4	

V<sub>CE</sub> = 1 V, I<sub>c</sub> = 3 mA, Z<sub>o</sub> = 50 Ω

FREQUENCY		S11		S21		S12		S22	
MHz	MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG	
100.0000	0.932	-6.3	5.517	168.9	0.019	83.2	0.975	-7.0	
200.0000	0.914	-12.8	5.308	160.7	0.037	79.3	0.951	-13.6	
300.0000	0.881	-18.1	5.147	152.7	0.054	74.7	0.913	-19.1	
400.0000	0.833	-25.4	5.209	145.3	0.067	70.9	0.857	-24.5	
500.0000	0.797	-29.6	4.893	139.4	0.080	67.7	0.819	-28.7	
600.0000	0.737	-35.8	4.844	133.4	0.092	65.8	0.765	-32.1	
700.0000	0.687	-41.6	4.709	127.6	0.101	63.4	0.720	-35.6	
800.0000	0.636	-46.0	4.495	122.5	0.111	62.2	0.680	-37.8	
900.0000	0.583	-51.0	4.406	117.5	0.118	61.4	0.645	-40.0	
1000.0000	0.541	-54.6	4.184	113.4	0.127	60.5	0.616	-41.8	
1100.0000	0.495	-59.2	4.048	108.6	0.135	59.5	0.587	-43.4	
1200.0000	0.452	-61.8	3.894	104.4	0.143	59.0	0.561	-44.6	
1300.0000	0.420	-65.0	3.693	101.0	0.150	58.2	0.538	-46.0	
1400.0000	0.381	-67.5	3.545	97.1	0.158	58.2	0.517	-47.1	
1500.0000	0.354	-70.0	3.369	94.2	0.165	57.4	0.502	-48.3	
1600.0000	0.325	-71.8	3.227	91.2	0.173	57.5	0.483	-48.9	
1700.0000	0.299	-73.7	3.089	88.6	0.180	57.2	0.469	-49.9	
1800.0000	0.276	-75.3	2.965	85.9	0.187	56.9	0.457	-50.5	
1900.0000	0.254	-77.3	2.842	83.7	0.194	56.8	0.446	-51.3	
2000.0000	0.234	-79.0	2.744	81.2	0.201	56.7	0.434	-52.2	

S-PARAMETERS

V<sub>CE</sub> = 1 V, I<sub>c</sub> = 5 mA, Z<sub>o</sub> = 50 Ω

FREQUENCY		S11		S21		S12		S22	
MHz	MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG	
100.0000	0.867	-9.9	8.234	165.2	0.018	83.2	0.957	-9.0	
200.0000	0.834	-19.0	7.897	155.1	0.035	77.1	0.911	-17.3	
300.0000	0.782	-25.7	7.518	145.9	0.050	72.5	0.847	-23.7	
400.0000	0.713	-34.0	7.443	137.5	0.062	69.7	0.776	-28.9	
500.0000	0.655	-39.7	6.901	130.7	0.073	66.9	0.723	-32.6	
600.0000	0.576	-46.5	6.572	123.6	0.083	66.2	0.664	-35.4	
700.0000	0.514	-52.3	6.182	117.3	0.092	64.6	0.618	-37.9	
800.0000	0.458	-56.2	5.737	112.1	0.100	64.0	0.579	-39.3	
900.0000	0.410	-59.9	5.382	107.5	0.109	63.2	0.547	-40.8	
1000.0000	0.369	-62.7	5.014	103.5	0.116	63.5	0.522	-41.8	
1100.0000	0.335	-65.8	4.692	99.8	0.125	62.8	0.499	-42.8	
1200.0000	0.303	-67.2	4.411	96.3	0.134	63.2	0.479	-43.5	
1300.0000	0.276	-69.6	4.134	93.3	0.141	62.4	0.459	-44.4	
1400.0000	0.251	-71.0	3.902	90.4	0.149	62.7	0.444	-45.1	
1500.0000	0.229	-72.5	3.681	87.9	0.159	62.1	0.431	-45.9	
1600.0000	0.210	-73.7	3.493	85.3	0.167	62.0	0.420	-46.2	
1700.0000	0.191	-74.4	3.326	83.0	0.174	61.6	0.409	-46.8	
1800.0000	0.174	-75.1	3.175	80.8	0.182	61.3	0.399	-47.5	
1900.0000	0.159	-76.8	3.035	78.7	0.190	61.0	0.392	-48.0	
2000.0000	0.144	-78.3	2.915	76.7	0.198	60.7	0.384	-48.7	

V<sub>CE</sub> = 1 V, I<sub>c</sub> = 7 mA, Z<sub>o</sub> = 50 Ω

FREQUENCY		S11		S21		S12		S22	
MHz	MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG	
100.0000	0.793	-15.0	10.022	161.8	0.018	80.9	0.938	-10.4	
200.0000	0.737	-27.5	9.509	149.4	0.034	76.0	0.875	-19.6	
300.0000	0.661	-36.5	8.774	139.2	0.047	71.5	0.796	-26.1	
400.0000	0.574	-44.7	8.493	130.0	0.058	68.7	0.716	-31.0	
500.0000	0.517	-50.7	7.755	122.7	0.069	67.4	0.660	-33.9	
600.0000	0.446	-56.1	7.177	116.0	0.077	66.5	0.601	-36.0	
700.0000	0.395	-60.3	6.636	110.4	0.086	65.8	0.559	-37.8	
800.0000	0.348	-63.2	6.072	105.9	0.095	65.9	0.524	-38.7	
900.0000	0.311	-66.1	5.617	102.0	0.104	65.7	0.497	-39.7	
1000.0000	0.278	-68.0	5.189	98.4	0.112	66.0	0.476	-40.1	
1100.0000	0.251	-70.3	4.824	95.1	0.121	65.3	0.457	-40.9	
1200.0000	0.227	-71.3	4.499	92.0	0.129	65.4	0.442	-41.1	
1300.0000	0.204	-73.4	4.203	89.4	0.138	65.3	0.426	-42.0	
1400.0000	0.185	-74.0	3.963	86.7	0.146	64.8	0.413	-42.7	
1500.0000	0.167	-75.7	3.722	84.3	0.155	64.6	0.404	-43.1	
1600.0000	0.151	-76.3	3.525	82.1	0.163	64.5	0.395	-43.7	
1700.0000	0.135	-77.1	3.345	80.1	0.172	64.0	0.385	-44.0	
1800.0000	0.122	-77.5	3.191	77.8	0.180	63.6	0.377	-44.6	
1900.0000	0.108	-78.9	3.042	76.0	0.190	63.2	0.371	-45.2	
2000.0000	0.097	-81.0	2.913	74.1	0.197	62.9	0.365	-46.1	

S-PARAMETERS

V<sub>CE</sub> = 2 V, I<sub>c</sub> = 1 mA, Z<sub>o</sub> = 50 Ω

FREQUENCY	S11		S21		S12		S22	
	MHz	MAG	ANG	MAG	ANG	MAG	ANG	MAG
100.0000	0.982	-3.3	2.003	173.6	0.018	84.7	0.996	-3.6
200.0000	0.985	-6.8	1.935	168.2	0.036	83.0	0.993	-7.4
300.0000	0.977	-9.8	1.940	162.7	0.052	80.2	0.983	-10.5
400.0000	0.960	-13.9	2.017	157.1	0.069	76.3	0.964	-14.4
500.0000	0.952	-16.7	1.946	152.1	0.085	73.9	0.955	-17.4
600.0000	0.925	-20.7	1.993	147.7	0.099	71.0	0.932	-20.4
700.0000	0.908	-24.1	1.957	143.2	0.113	68.0	0.913	-23.8
800.0000	0.884	-27.3	1.942	138.8	0.126	65.9	0.888	-26.5
900.0000	0.859	-31.1	2.004	135.0	0.137	63.8	0.865	-29.2
1000.0000	0.840	-33.5	1.911	131.4	0.147	61.6	0.847	-32.0
1100.0000	0.815	-37.8	1.973	127.7	0.159	59.3	0.822	-34.1
1200.0000	0.795	-40.5	1.951	124.0	0.168	57.8	0.803	-36.4
1300.0000	0.772	-44.0	1.928	120.4	0.177	56.1	0.782	-38.4
1400.0000	0.741	-47.4	1.956	116.7	0.184	54.6	0.758	-40.4
1500.0000	0.716	-50.2	1.889	113.2	0.193	53.0	0.743	-42.6
1600.0000	0.689	-53.5	1.896	109.8	0.198	51.6	0.719	-44.1
1700.0000	0.659	-56.4	1.873	106.7	0.204	50.5	0.699	-45.9
1800.0000	0.635	-59.0	1.835	103.4	0.210	49.6	0.681	-47.4
1900.0000	0.606	-61.6	1.815	100.7	0.215	48.8	0.666	-48.8
2000.0000	0.581	-64.7	1.801	97.6	0.220	48.0	0.647	-50.4

V<sub>CE</sub> = 2 V, I<sub>c</sub> = 3 mA, Z<sub>o</sub> = 50 Ω

FREQUENCY	S11		S21		S12		S22	
	MHz	MAG	ANG	MAG	ANG	MAG	ANG	MAG
100.0000	0.933	-5.7	5.575	170.0	0.017	84.9	0.979	-6.3
200.0000	0.922	-11.6	5.330	161.5	0.033	79.6	0.959	-12.5
300.0000	0.893	-16.6	5.178	154.0	0.049	75.2	0.924	-17.5
400.0000	0.851	-23.1	5.267	146.8	0.062	72.2	0.874	-22.6
500.0000	0.815	-27.0	4.943	141.1	0.074	69.1	0.838	-26.4
600.0000	0.759	-32.9	4.915	135.2	0.086	67.6	0.787	-29.6
700.0000	0.713	-38.0	4.769	129.6	0.095	65.0	0.745	-33.0
800.0000	0.664	-42.0	4.578	124.5	0.104	63.8	0.706	-35.0
900.0000	0.612	-46.6	4.507	119.7	0.112	63.0	0.673	-37.0
1000.0000	0.572	-49.9	4.285	115.6	0.120	61.9	0.645	-38.9
1100.0000	0.525	-54.0	4.163	111.0	0.128	61.1	0.617	-40.3
1200.0000	0.485	-56.5	4.009	106.8	0.136	60.8	0.593	-41.4
1300.0000	0.452	-59.2	3.814	103.4	0.143	60.2	0.569	-43.0
1400.0000	0.413	-61.5	3.672	99.6	0.150	59.9	0.548	-43.9
1500.0000	0.385	-63.5	3.499	96.7	0.157	59.5	0.532	-44.9
1600.0000	0.356	-64.9	3.349	93.6	0.164	59.1	0.517	-45.6
1700.0000	0.330	-66.4	3.213	90.9	0.172	58.7	0.501	-46.4
1800.0000	0.307	-67.7	3.079	88.2	0.178	58.6	0.488	-47.2
1900.0000	0.286	-69.2	2.959	85.9	0.185	58.4	0.478	-47.8
2000.0000	0.265	-70.4	2.863	83.5	0.193	58.2	0.464	-48.6

S-PARAMETERS

V<sub>CE</sub> = 2 V, I<sub>c</sub> = 5 mA, Z<sub>o</sub> = 50 Ω

FREQUENCY		S11		S21		S12		S22	
MHz	MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG	
100.0000	0.885	-8.3	8.518	167.7	0.017	82.5	0.964	-8.1	
200.0000	0.859	-15.7	8.125	157.0	0.032	78.3	0.926	-15.6	
300.0000	0.811	-22.2	7.721	148.0	0.046	73.6	0.868	-21.4	
400.0000	0.742	-30.3	7.619	139.7	0.057	71.7	0.801	-26.5	
500.0000	0.689	-35.3	7.082	132.9	0.068	68.6	0.752	-30.0	
600.0000	0.612	-41.5	6.779	125.8	0.077	67.5	0.696	-32.3	
700.0000	0.550	-46.7	6.401	119.7	0.086	66.1	0.650	-34.9	
800.0000	0.495	-50.2	5.962	114.6	0.094	65.7	0.612	-36.2	
900.0000	0.446	-53.7	5.613	109.9	0.102	65.0	0.581	-37.6	
1000.0000	0.406	-55.9	5.244	105.8	0.111	64.6	0.557	-38.5	
1100.0000	0.369	-58.4	4.918	101.9	0.118	64.6	0.534	39.7	
1200.0000	0.337	-59.5	4.631	98.5	0.127	64.6	0.515	-40.2	
1300.0000	0.310	-61.3	4.346	95.5	0.134	64.1	0.495	-41.0	
1400.0000	0.285	-61.9	4.103	92.6	0.142	64.0	0.481	-41.6	
1500.0000	0.263	-63.2	3.875	90.0	0.150	63.7	0.467	-42.3	
1600.0000	0.244	-63.4	3.680	87.4	0.157	63.4	0.456	-42.6	
1700.0000	0.225	-63.7	3.502	85.1	0.165	63.3	0.446	-43.3	
1800.0000	0.210	-63.8	3.338	83.0	0.172	62.7	0.435	-43.7	
1900.0000	0.193	-64.7	3.193	80.9	0.181	62.5	0.427	-44.2	
2000.0000	0.178	-64.8	3.064	78.9	0.188	62.3	0.419	-45.0	

V<sub>CE</sub> = 2 V, I<sub>c</sub> = 7 mA, Z<sub>o</sub> = 50 Ω

FREQUENCY		S11		S21		S12		S22	
MHz	MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG	
100.0000	0.836	-10.5	11.040	165.5	0.016	82.0	0.952	-9.4	
200.0000	0.794	-19.7	10.358	153.3	0.031	77.4	0.897	-17.6	
300.0000	0.731	-27.4	9.657	143.3	0.043	73.3	0.825	-23.4	
400.0000	0.645	-36.2	9.225	133.7	0.053	71.2	0.751	-28.2	
500.0000	0.579	-41.6	8.418	126.3	0.063	69.1	0.696	-31.0	
600.0000	0.500	-47.0	7.759	119.3	0.073	68.1	0.640	-32.9	
700.0000	0.440	-51.4	7.124	113.3	0.081	67.5	0.598	-34.6	
800.0000	0.393	-54.0	6.499	108.6	0.089	67.2	0.564	-35.3	
900.0000	0.352	-56.3	6.003	104.4	0.097	67.0	0.537	-36.4	
1000.0000	0.319	-57.7	5.536	100.8	0.105	67.1	0.517	-36.8	
1100.0000	0.290	-59.5	5.135	97.3	0.114	67.0	0.496	-37.7	
1200.0000	0.265	-59.6	4.801	94.4	0.122	67.0	0.482	-37.8	
1300.0000	0.242	-61.1	4.484	91.6	0.130	66.5	0.465	-38.6	
1400.0000	0.223	-61.2	4.221	89.0	0.138	66.8	0.456	-39.0	
1500.0000	0.204	-62.1	3.974	86.5	0.147	66.1	0.443	-39.7	
1600.0000	0.189	-61.7	3.760	84.3	0.154	65.7	0.435	-40.1	
1700.0000	0.175	-61.5	3.565	82.3	0.163	65.4	0.426	-40.5	
1800.0000	0.162	-60.6	3.393	80.2	0.171	65.1	0.418	-41.0	
1900.0000	0.148	-60.8	3.248	78.3	0.179	64.7	0.411	-41.4	
2000.0000	0.137	-60.9	3.106	76.6	0.187	64.5	0.406	-42.1	

No part of this document may be copied or reproduced in any form or by any means without the prior written consent of NEC Corporation. NEC Corporation assumes no responsibility for any errors which may appear in this document.

NEC Corporation does not assume any liability for infringement of patents, copyrights or other intellectual property rights of third parties by or arising from use of a device described herein or any other liability arising from use of such device. No license, either express, implied or otherwise, is granted under any patents, copyrights or other intellectual property rights of NEC Corporation or others.

While NEC Corporation has been making continuous effort to enhance the reliability of its semiconductor devices, the possibility of defects cannot be eliminated entirely. To minimize risks of damage or injury to persons or property arising from a defect in an NEC semiconductor device, customers must incorporate sufficient safety measures in its design, such as redundancy, fire-containment, and anti-failure features.

NEC devices are classified into the following three quality grades:

"Standard", "Special", and "Specific". The Specific quality grade applies only to devices developed based on a customer designated "quality assurance program" for a specific application. The recommended applications of a device depend on its quality grade, as indicated below. Customers must check the quality grade of each device before using it in a particular application.

Standard: Computers, office equipment, communications equipment, test and measurement equipment, audio and visual equipment, home electronic appliances, machine tools, personal electronic equipment and industrial robots

Special: Transportation equipment (automobiles, trains, ships, etc.), traffic control systems, anti-disaster systems, anti-crime systems, safety equipment and medical equipment (not specifically designed for life support)

Specific: Aircrafts, aerospace equipment, submersible repeaters, nuclear reactor control systems, life support systems or medical equipment for life support, etc.

The quality grade of NEC devices is "Standard" unless otherwise specified in NEC's Data Sheets or Data Books. If customers intend to use NEC devices for applications other than those specified for Standard quality grade, they should contact an NEC sales representative in advance.

Anti-radioactive design is not implemented in this product.