

# IOH vs VOH - VDD (-40°C, PIN TYPE: 7-1-x)

Target port: P00 and P40 of 10-pin products, and P00, P40, and P41 of 16-pin products

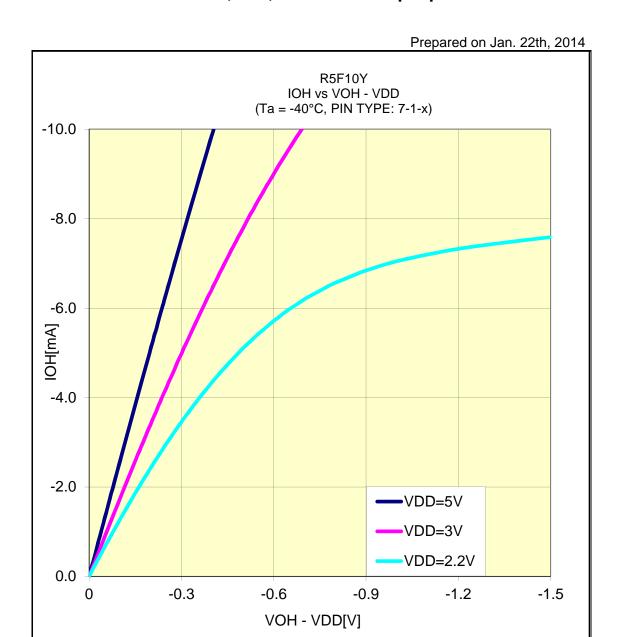


## IOH vs VOH - VDD (-40°C, PIN TYPE: 7-3-x)

Target port: P01 to P04 of 10-pin products, and P01, P02, P05 to P07 of 16-pin products

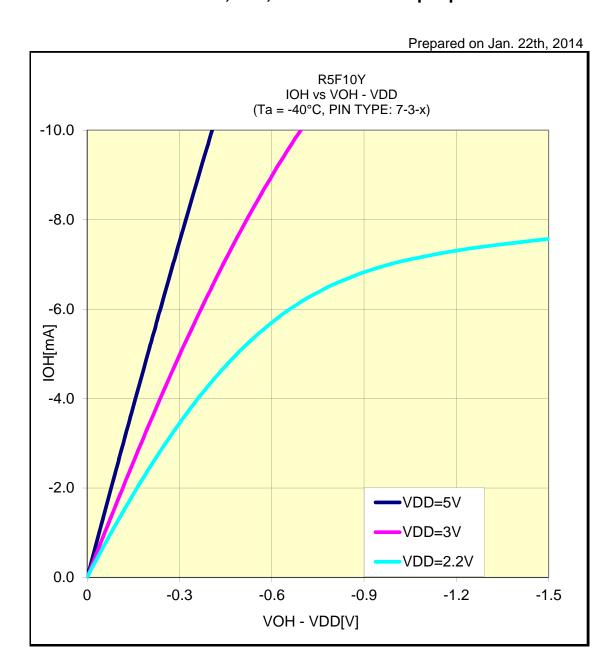


# IOH vs VOH - VDD (-40°C, PIN TYPE: 7-9-x)

Target port: P03 and P04 of 16-pin products

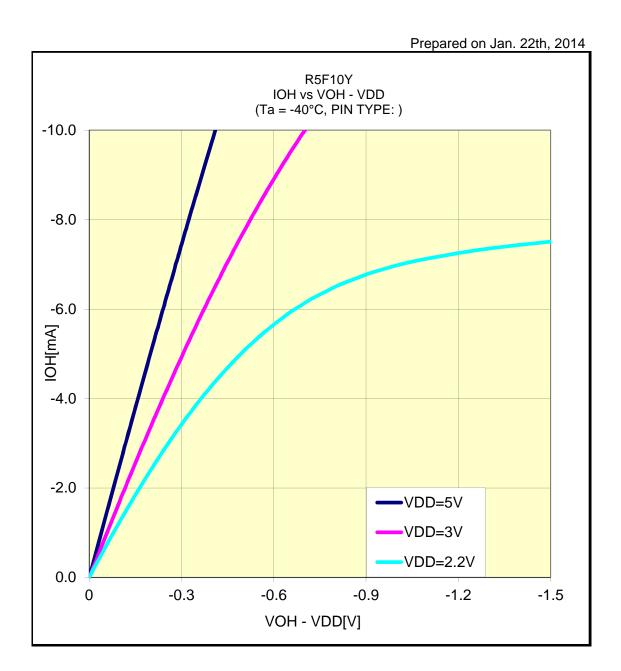


## IOH vs VOH - VDD (+25°C, PIN TYPE: 7-1-x

Target port: P00 and P40 of 10-pin products, and P00, P40, and P41 of 16-pin products

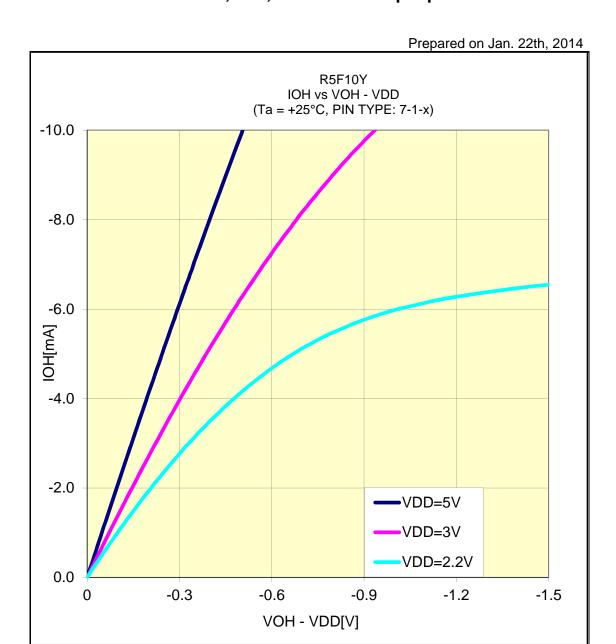


## IOH vs VOH - VDD (+25°C, PIN TYPE: 7-3-x

Target port: P01 to P04 of 10-pin products, and P01, P02, P05 to P07 of 16-pin products

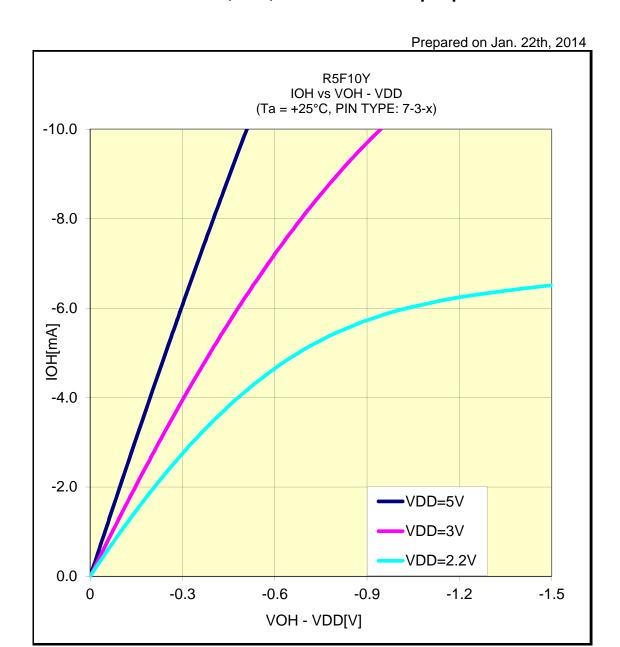


# IOH vs VOH - VDD (+25°C, PIN TYPE: 7-9-x

Target port: P03 and P04 of 16-pin products

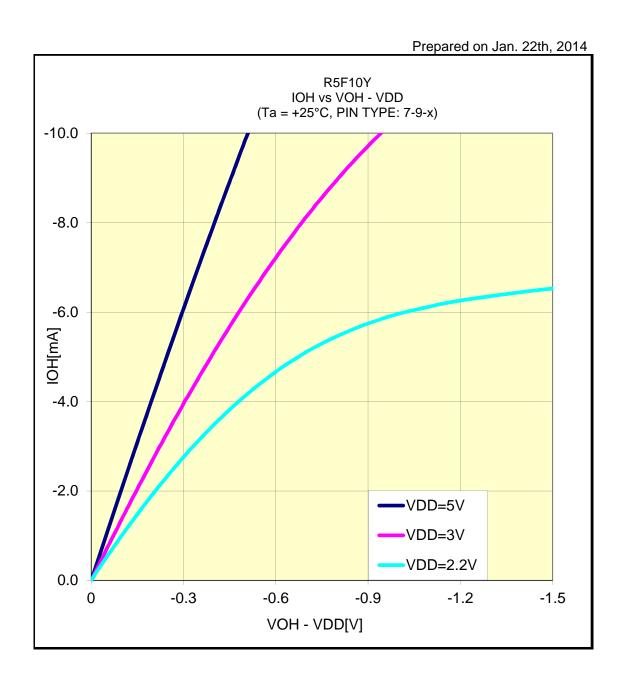


## IOH vs VOH - VDD (+85°C, PIN TYPE: 7-1-x

Target port: P00 and P40 of 10-pin products, and P00, P40, and P41 of 16-pin products

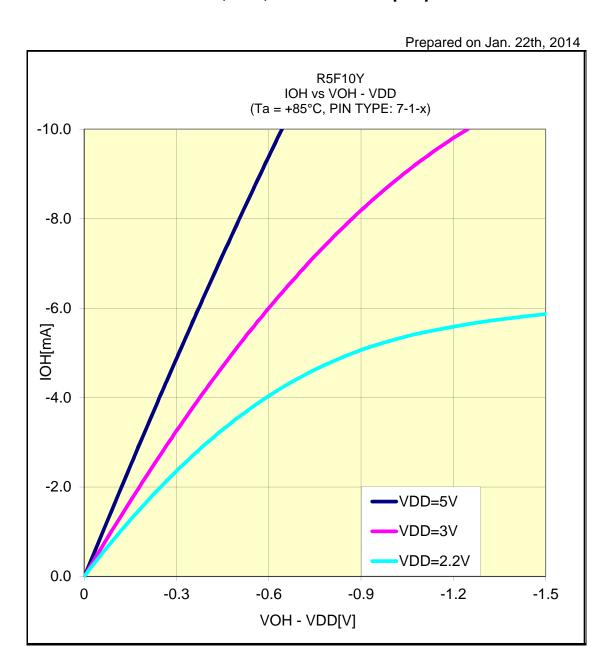

# IOH vs VOH - VDD (+85°C, PIN TYPE: 7-3-x

Target port: P01 to P04 of 10-pin products, and P01, P02, P05 to P07 of 16-pin products

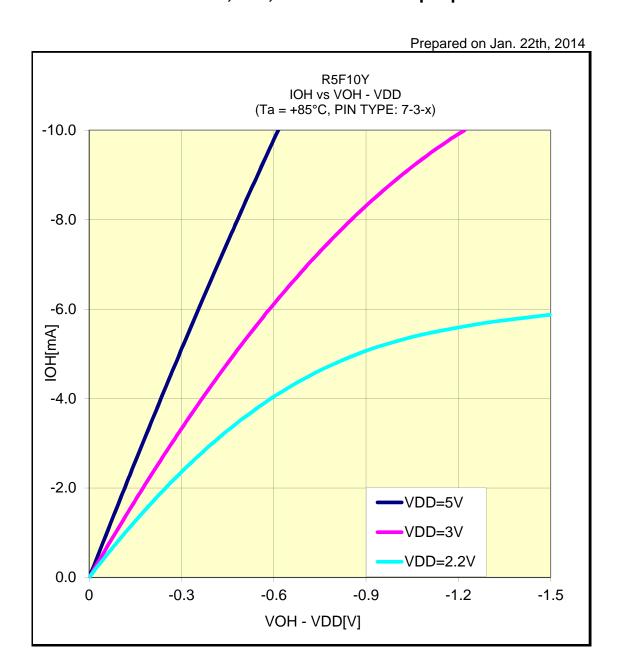

# IOH vs VOH - VDD (+85°C, PIN TYPE: 7-9-x

Target port: P03 and P04 of 16-pin products

