

To our customers,

---

## Old Company Name in Catalogs and Other Documents

---

On April 1<sup>st</sup>, 2010, NEC Electronics Corporation merged with Renesas Technology Corporation, and Renesas Electronics Corporation took over all the business of both companies. Therefore, although the old company name remains in this document, it is a valid Renesas Electronics document. We appreciate your understanding.

Renesas Electronics website: <http://www.renesas.com>

April 1<sup>st</sup>, 2010  
Renesas Electronics Corporation

Issued by: Renesas Electronics Corporation (<http://www.renesas.com>)

Send any inquiries to <http://www.renesas.com/inquiry>.

## Notice

1. All information included in this document is current as of the date this document is issued. Such information, however, is subject to change without any prior notice. Before purchasing or using any Renesas Electronics products listed herein, please confirm the latest product information with a Renesas Electronics sales office. Also, please pay regular and careful attention to additional and different information to be disclosed by Renesas Electronics such as that disclosed through our website.
2. Renesas Electronics does not assume any liability for infringement of patents, copyrights, or other intellectual property rights of third parties by or arising from the use of Renesas Electronics products or technical information described in this document. No license, express, implied or otherwise, is granted hereby under any patents, copyrights or other intellectual property rights of Renesas Electronics or others.
3. You should not alter, modify, copy, or otherwise misappropriate any Renesas Electronics product, whether in whole or in part.
4. Descriptions of circuits, software and other related information in this document are provided only to illustrate the operation of semiconductor products and application examples. You are fully responsible for the incorporation of these circuits, software, and information in the design of your equipment. Renesas Electronics assumes no responsibility for any losses incurred by you or third parties arising from the use of these circuits, software, or information.
5. When exporting the products or technology described in this document, you should comply with the applicable export control laws and regulations and follow the procedures required by such laws and regulations. You should not use Renesas Electronics products or the technology described in this document for any purpose relating to military applications or use by the military, including but not limited to the development of weapons of mass destruction. Renesas Electronics products and technology may not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable domestic or foreign laws or regulations.
6. Renesas Electronics has used reasonable care in preparing the information included in this document, but Renesas Electronics does not warrant that such information is error free. Renesas Electronics assumes no liability whatsoever for any damages incurred by you resulting from errors in or omissions from the information included herein.
7. Renesas Electronics products are classified according to the following three quality grades: “Standard”, “High Quality”, and “Specific”. The recommended applications for each Renesas Electronics product depends on the product’s quality grade, as indicated below. You must check the quality grade of each Renesas Electronics product before using it in a particular application. You may not use any Renesas Electronics product for any application categorized as “Specific” without the prior written consent of Renesas Electronics. Further, you may not use any Renesas Electronics product for any application for which it is not intended without the prior written consent of Renesas Electronics. Renesas Electronics shall not be in any way liable for any damages or losses incurred by you or third parties arising from the use of any Renesas Electronics product for an application categorized as “Specific” or for which the product is not intended where you have failed to obtain the prior written consent of Renesas Electronics. The quality grade of each Renesas Electronics product is “Standard” unless otherwise expressly specified in a Renesas Electronics data sheets or data books, etc.
  - “Standard”: Computers; office equipment; communications equipment; test and measurement equipment; audio and visual equipment; home electronic appliances; machine tools; personal electronic equipment; and industrial robots.
  - “High Quality”: Transportation equipment (automobiles, trains, ships, etc.); traffic control systems; anti-disaster systems; anti-crime systems; safety equipment; and medical equipment not specifically designed for life support.
  - “Specific”: Aircraft; aerospace equipment; submersible repeaters; nuclear reactor control systems; medical equipment or systems for life support (e.g. artificial life support devices or systems), surgical implantations, or healthcare intervention (e.g. excision, etc.), and any other applications or purposes that pose a direct threat to human life.
8. You should use the Renesas Electronics products described in this document within the range specified by Renesas Electronics, especially with respect to the maximum rating, operating supply voltage range, movement power voltage range, heat radiation characteristics, installation and other product characteristics. Renesas Electronics shall have no liability for malfunctions or damages arising out of the use of Renesas Electronics products beyond such specified ranges.
9. Although Renesas Electronics endeavors to improve the quality and reliability of its products, semiconductor products have specific characteristics such as the occurrence of failure at a certain rate and malfunctions under certain use conditions. Further, Renesas Electronics products are not subject to radiation resistance design. Please be sure to implement safety measures to guard them against the possibility of physical injury, and injury or damage caused by fire in the event of the failure of a Renesas Electronics product, such as safety design for hardware and software including but not limited to redundancy, fire control and malfunction prevention, appropriate treatment for aging degradation or any other appropriate measures. Because the evaluation of microcomputer software alone is very difficult, please evaluate the safety of the final products or system manufactured by you.
10. Please contact a Renesas Electronics sales office for details as to environmental matters such as the environmental compatibility of each Renesas Electronics product. Please use Renesas Electronics products in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive. Renesas Electronics assumes no liability for damages or losses occurring as a result of your noncompliance with applicable laws and regulations.
11. This document may not be reproduced or duplicated, in any form, in whole or in part, without prior written consent of Renesas Electronics.
12. Please contact a Renesas Electronics sales office if you have any questions regarding the information contained in this document or Renesas Electronics products, or if you have any other inquiries.

(Note 1) “Renesas Electronics” as used in this document means Renesas Electronics Corporation and also includes its majority-owned subsidiaries.

(Note 2) “Renesas Electronics product(s)” means any product developed or manufactured by or for Renesas Electronics.

**HIGH-FREQUENCY LOW NOISE AMPLIFIER  
NPN SILICON EPITAXIAL TRANSISTOR  
(WITH BUILT-IN 6-PIN 2 × 2SC4226) SMALL MINI MOLD**

The μPA810T has built-in 2 low-voltage transistors which are designed to amplify low noise in the VHF band to the UHF band.

**FEATURES**

- Low Noise  
NF = 1.2 dB TYP. @ f = 1 GHz, V<sub>CE</sub> = 3 V, I<sub>c</sub> = 7 mA
- High Gain  
|S<sub>21e</sub>|<sup>2</sup> = 9.0 dB TYP. @ f = 1 GHz, V<sub>CE</sub> = 3 V, I<sub>c</sub> = 7 mA
- A Small Mini Mold Package Adopted
- Built-in 2 Transistors (2 × 2SC4226)

**ORDERING INFORMATION**

PART NUMBER	QUANTITY	PACKING STYLE
μPA810T	Loose products (50 PCS)	Embossed tape 8 mm wide. Pin 6 (Q1 Base), Pin 5 (Q1 Emitter), Pin 4 (Q2 Emitter) face to perforation side of the tape.
μPA810T-T1	Taping products (3 KPCS/Reel)	

**Remark** If you require an evaluation sample, please contact an NEC Sales Representative. (Unit sample quantity is 50 pcs.)



**ABSOLUTE MAXIMUM RATINGS (T<sub>A</sub> = 25 °C)**

PARAMETER	SYMBOL	RATING	UNIT
Collector to Base Voltage	V <sub>CB0</sub>	20	V
Collector to Emitter Voltage	V <sub>CE0</sub>	12	V
Emitter to Base Voltage	V <sub>EB0</sub>	3	V
Collector Current	I <sub>c</sub>	100	mA
Total Power Dissipation	P <sub>T</sub>	150 in 1 element 200 in 2 elements <sup>Note</sup>	mW
Junction Temperature	T <sub>j</sub>	150	°C
Storage Temperature	T <sub>stg</sub>	-65 to +150	°C


**Note** 110 mW must not be exceeded in 1 element.

**PACKAGE DRAWINGS**

(Unit: mm)

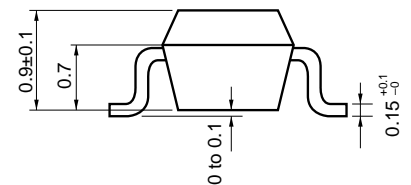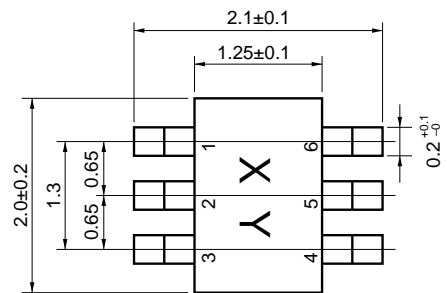

**PIN CONFIGURATION (Top View)**



**PIN CONNECTIONS**

- |                   |                 |
|-------------------|-----------------|
| 1. Collector (Q1) | 4. Emitter (Q2) |
| 2. Base (Q2)      | 5. Emitter (Q1) |
| 3. Collector (Q2) | 6. Base (Q1)    |

**ELECTRICAL CHARACTERISTICS (T<sub>A</sub> = 25 °C)**


PARAMETER	SYMBOL	CONDITION	MIN.	TYP.	MAX.	UNIT
Collector Cutoff Current	I <sub>CBO</sub>	V <sub>CB</sub> = 10 V, I <sub>E</sub> = 0			1	μA
Emitter Cutoff Current	I <sub>EBO</sub>	V <sub>EB</sub> = 1 V, I <sub>C</sub> = 0			1	μA
DC Current Gain	h <sub>FE</sub>	V <sub>CE</sub> = 3 V, I <sub>C</sub> = 7 mA <sup>Note 1</sup>	70		250	
Gain Bandwidth Product	f <sub>T</sub>	V <sub>CE</sub> = 3 V, I <sub>C</sub> = 7 mA	3.0	4.5		GHz
Feed-back Capacitance	C <sub>re</sub>	V <sub>CB</sub> = 3 V, I <sub>E</sub> = 0, f = 1 MHz <sup>Note 2</sup>		0.7	1.5	pF
Insertion Power Gain	S <sub>21e</sub>   <sup>2</sup>	V <sub>CE</sub> = 3 V, I <sub>C</sub> = 7 mA, f = 1 GHz	7	9		dB
Noise Figure	NF	V <sub>CE</sub> = 3 V, I <sub>C</sub> = 7 mA, f = 1 GHz		1.2	2.5	dB
h <sub>FE</sub> Ratio	h <sub>FE1</sub> /h <sub>FE2</sub>	V <sub>CE</sub> = 3 V, I <sub>C</sub> = 7 mA A smaller value among h <sub>FE</sub> of h <sub>FE1</sub> = Q1, Q2 A larger value among h <sub>FE</sub> of h <sub>FE2</sub> = Q1, Q2	0.85			






- Notes**
1. Pulse Measurement: P<sub>w</sub> ≤ 350 μs, Duty cycle ≤ 2 %
  2. Measured with 3-pin bridge, emitter and case should be connected to guard pin of bridge.

**h<sub>FE</sub> CLASSIFICATION**

Rank	FB	GB
Marking	24R	25R
h <sub>FE</sub> Value	70 to 140	125 to 250

**TYPICAL CHARACTERISTICS (T<sub>A</sub> = 25 °C)**

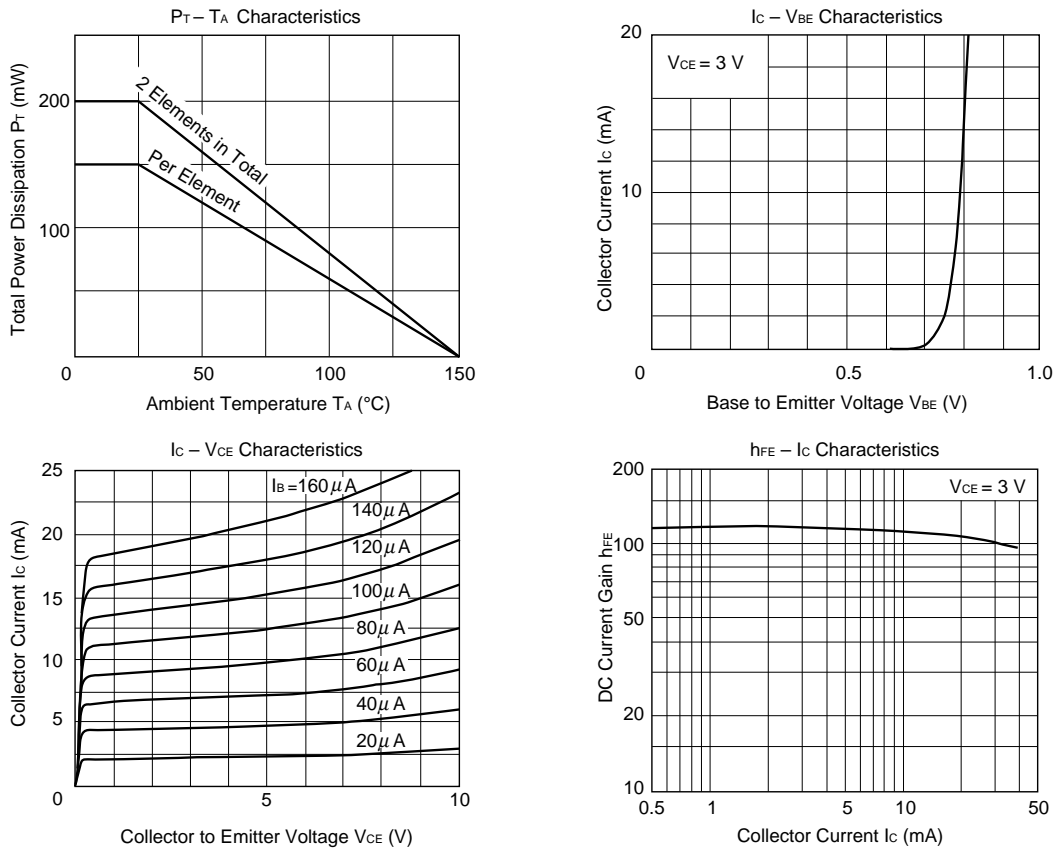

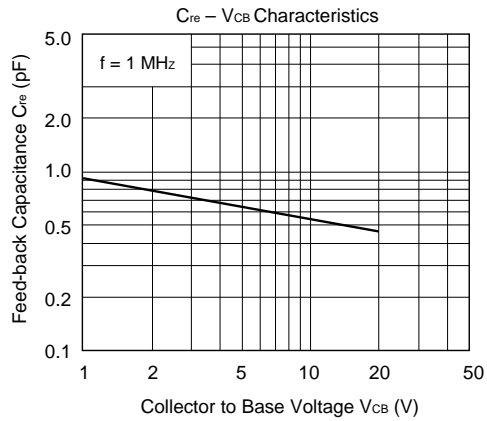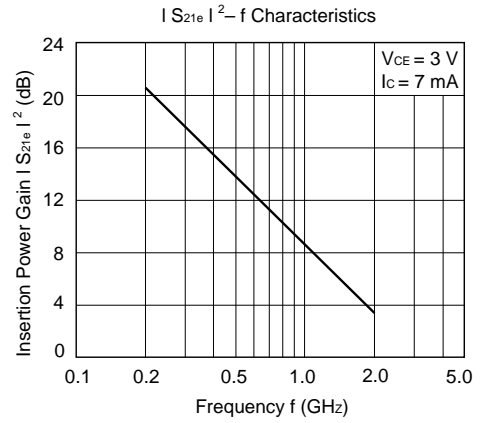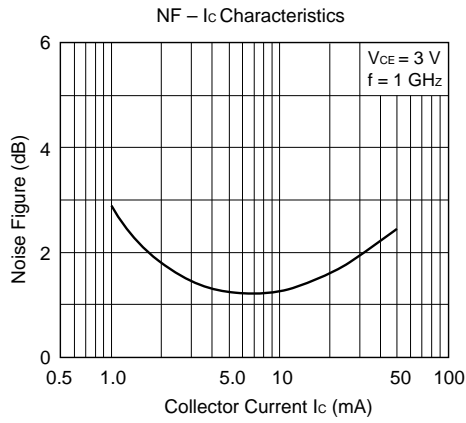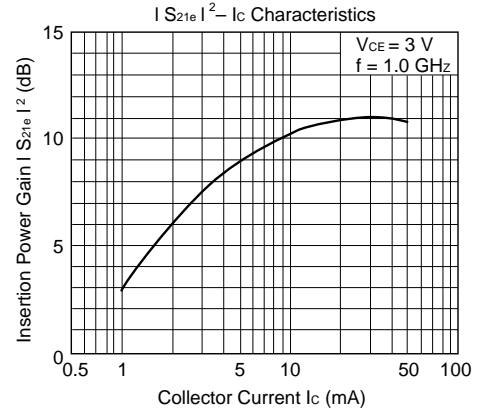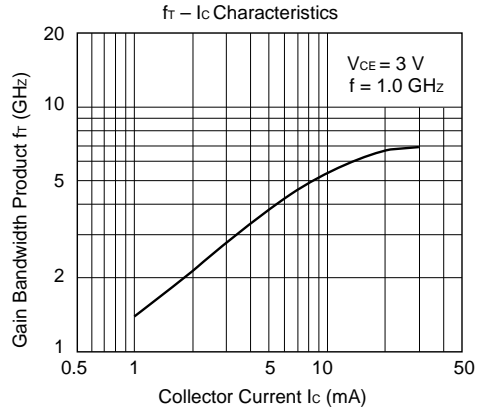

S-PARAMETERS

V<sub>CE</sub> = 3 V, I<sub>c</sub> = 1 mA

FREQUENCY MHz	S <sub>11</sub>		S <sub>21</sub>		S <sub>12</sub>		S <sub>22</sub>	
	MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG
100.00	0.959	-26.1	3.680	162.0	0.045	77.2	0.983	-9.0
200.00	0.920	-48.3	3.305	146.4	0.080	63.8	0.937	-15.8
300.00	0.838	-69.2	2.972	131.3	0.111	50.1	0.863	-23.0
400.00	0.810	-85.6	2.612	121.4	0.128	43.5	0.815	-26.3
500.00	0.775	-100.0	2.367	110.9	0.137	34.7	0.745	-29.1
600.00	0.767	-115.0	2.149	104.1	0.147	30.8	0.724	-31.7
700.00	0.745	-127.0	1.986	93.8	0.147	25.1	0.693	-33.2
800.00	0.722	-137.7	1.854	87.9	0.150	21.5	0.682	-36.5
900.00	0.711	-146.4	1.655	80.0	0.143	20.5	0.668	-39.2
1000.00	0.715	-155.0	1.541	74.0	0.140	17.1	0.644	-43.7
1100.00	0.708	-163.2	1.414	69.2	0.136	19.0	0.623	-46.8
1200.00	0.697	-171.9	1.340	63.3	0.134	18.0	0.594	-50.1
1300.00	0.688	-177.1	1.271	59.5	0.132	18.5	0.577	-52.7
1400.00	0.675	178.8	1.174	54.4	0.122	20.1	0.559	-55.3
1500.00	0.706	173.6	1.119	49.8	0.118	21.9	0.559	-58.3
1600.00	0.725	168.7	1.058	47.5	0.111	29.5	0.549	-61.9
1700.00	0.723	161.1	1.007	43.9	0.114	33.2	0.547	-66.8
1800.00	0.718	156.4	0.998	40.8	0.119	40.8	0.537	-71.6
1900.00	0.702	152.5	0.957	36.2	0.126	44.1	0.526	-76.8
2000.00	0.716	149.8	0.943	31.1	0.137	47.1	0.514	-81.8

V<sub>CE</sub> = 3 V, I<sub>c</sub> = 3 mA

FREQUENCY MHz	S <sub>11</sub>		S <sub>21</sub>		S <sub>12</sub>		S <sub>22</sub>	
	MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG
100.00	0.878	-39.3	9.289	153.2	0.041	71.5	0.941	-17.3
200.00	0.788	-69.5	7.675	133.1	0.068	55.9	0.807	-28.4
300.00	0.685	-93.9	6.222	117.5	0.087	44.8	0.674	-36.5
400.00	0.634	-111.2	5.151	108.1	0.094	41.7	0.588	-39.0
500.00	0.603	-125.2	4.360	99.6	0.100	37.3	0.511	-40.5
600.00	0.591	-137.9	3.838	94.6	0.105	37.7	0.475	-41.3
700.00	0.573	-148.5	3.378	86.0	0.107	36.4	0.443	-41.5
800.00	0.566	-156.8	3.215	82.1	0.113	36.7	0.425	-43.2
900.00	0.563	-163.4	2.821	75.6	0.114	38.8	0.408	-45.0
1000.00	0.573	-170.3	2.594	70.7	0.118	38.3	0.385	-48.2
1100.00	0.577	-177.2	2.359	67.2	0.122	41.5	0.365	-50.7
1200.00	0.572	175.4	2.200	62.2	0.128	41.7	0.343	-53.3
1300.00	0.563	171.4	2.084	58.8	0.136	42.9	0.326	-55.1
1400.00	0.555	168.5	1.904	54.8	0.138	43.8	0.309	-57.1
1500.00	0.584	164.9	1.803	50.5	0.146	44.3	0.301	-59.6
1600.00	0.603	161.2	1.700	48.7	0.150	48.4	0.290	-62.8
1700.00	0.608	154.7	1.616	45.4	0.161	47.8	0.281	-67.3
1800.00	0.607	150.8	1.591	42.4	0.173	50.0	0.268	-72.3
1900.00	0.598	147.7	1.523	38.1	0.183	48.8	0.255	-77.4
2000.00	0.612	145.8	1.488	32.8	0.197	47.7	0.244	-82.6

S-PARAMETERS

V<sub>CE</sub> = 3 V, I<sub>c</sub> = 5 mA

FREQUENCY MHz	S <sub>11</sub>		S <sub>21</sub>		S <sub>12</sub>		S <sub>22</sub>	
	MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG
100.00	0.803	-48.9	13.450	147.0	0.040	65.9	0.892	-23.3
200.00	0.693	-83.5	10.285	124.9	0.059	54.1	0.705	-36.2
300.00	0.594	-108.3	7.895	110.2	0.073	45.6	0.557	-43.4
400.00	0.548	-125.1	6.305	101.7	0.080	44.7	0.468	-45.0
500.00	0.528	-138.0	5.237	94.4	0.086	42.6	0.398	-45.4
600.00	0.520	-149.3	4.554	90.4	0.092	45.2	0.363	-45.2
700.00	0.508	-158.7	3.961	82.8	0.097	45.4	0.334	-44.8
800.00	0.505	-165.6	3.624	79.1	0.106	46.4	0.317	-46.0
900.00	0.505	-171.1	3.283	73.6	0.112	48.6	0.301	-47.1
1000.00	0.519	-176.9	3.009	69.1	0.120	48.0	0.279	-49.9
1100.00	0.527	177.0	2.729	66.0	0.127	50.1	0.262	-52.2
1200.00	0.525	170.1	2.536	61.5	0.135	49.4	0.243	-54.7
1300.00	0.518	166.6	2.399	58.3	0.147	49.9	0.227	-56.2
1400.00	0.513	164.1	2.188	54.6	0.151	50.2	0.211	-57.7
1500.00	0.539	161.2	2.067	50.6	0.162	49.5	0.202	-60.2
1600.00	0.558	158.0	1.945	48.9	0.169	52.1	0.190	-63.7
1700.00	0.565	152.1	1.847	46.0	0.181	50.8	0.179	-68.3
1800.00	0.567	148.5	1.814	43.0	0.194	51.9	0.166	-74.4
1900.00	0.561	145.6	1.737	38.9	0.205	49.8	0.152	-80.5
2000.00	0.574	144.1	1.693	33.8	0.219	47.9	0.142	-86.6

V<sub>CE</sub> = 3 V, I<sub>c</sub> = 7 mA

FREQUENCY MHz	S <sub>11</sub>		S <sub>21</sub>		S <sub>12</sub>		S <sub>22</sub>	
	MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG
100.00	0.729	-58.5	17.087	141.0	0.037	66.1	0.838	-29.0
200.00	0.612	-95.4	12.153	118.7	0.052	52.6	0.618	-42.2
300.00	0.529	-119.9	9.023	105.1	0.064	47.7	0.467	-48.4
400.00	0.492	-135.6	7.052	97.4	0.072	48.8	0.382	-49.2
500.00	0.481	-147.4	5.805	91.0	0.078	49.2	0.321	-48.7
600.00	0.476	-157.4	4.986	87.6	0.087	51.9	0.291	-47.9
700.00	0.469	-166.0	4.341	80.7	0.094	52.3	0.265	-47.0
800.00	0.469	-171.8	3.951	77.3	0.106	53.1	0.248	-47.6
900.00	0.471	-176.4	3.408	71.8	0.112	54.6	0.233	-48.7
1000.00	0.487	178.6	3.268	68.1	0.123	53.4	0.213	-51.0
1100.00	0.497	172.9	2.959	65.2	0.132	55.1	0.197	-53.1
1200.00	0.496	166.5	2.748	60.9	0.142	53.9	0.179	-55.6
1300.00	0.490	163.3	2.598	57.8	0.155	54.0	0.164	-57.0
1400.00	0.485	161.2	2.365	54.4	0.161	53.4	0.149	-59.0
1500.00	0.513	158.7	2.230	50.5	0.172	52.0	0.140	-61.3
1600.00	0.531	155.9	2.100	49.0	0.180	54.1	0.127	-65.2
1700.00	0.539	150.3	1.990	46.2	0.194	52.2	0.115	-70.6
1800.00	0.543	146.9	1.955	43.4	0.207	52.8	0.102	-78.3
1900.00	0.539	144.2	1.867	39.4	0.218	50.2	0.088	-87.0
2000.00	0.552	142.6	1.820	34.3	0.233	47.9	0.080	-95.5

No part of this document may be copied or reproduced in any form or by any means without the prior written consent of NEC Corporation. NEC Corporation assumes no responsibility for any errors which may appear in this document.

NEC Corporation does not assume any liability for infringement of patents, copyrights or other intellectual property rights of third parties by or arising from use of a device described herein or any other liability arising from use of such device. No license, either express, implied or otherwise, is granted under any patents, copyrights or other intellectual property rights of NEC Corporation or others.

While NEC Corporation has been making continuous effort to enhance the reliability of its semiconductor devices, the possibility of defects cannot be eliminated entirely. To minimize risks of damage or injury to persons or property arising from a defect in an NEC semiconductor device, customer must incorporate sufficient safety measures in its design, such as redundancy, fire-containment, and anti-failure features.

NEC devices are classified into the following three quality grades:

"Standard", "Special", and "Specific". The Specific quality grade applies only to devices developed based on a customer designated "quality assurance program" for a specific application. The recommended applications of a device depend on its quality grade, as indicated below. Customers must check the quality grade of each device before using it in a particular application.

Standard: Computers, office equipment, communications equipment, test and measurement equipment, audio and visual equipment, home electronic appliances, machine tools, personal electronic equipment and industrial robots

Special: Transportation equipment (automobiles, trains, ships, etc.), traffic control systems, anti-disaster systems, anti-crime systems, safety equipment and medical equipment (not specifically designed for life support)

Specific: Aircrafts, aerospace equipment, submersible repeaters, nuclear reactor control systems, life support systems or medical equipment for life support, etc.

The quality grade of NEC devices in "Standard" unless otherwise specified in NEC's Data Sheets or Data Books. If customers intend to use NEC devices for applications other than those specified for Standard quality grade, they should contact NEC Sales Representative in advance.

Anti-radioactive design is not implemented in this product.