

RC310xxB

VersaClock 7 Programmable Jitter Attenuator Family

Description

The RC310xxB are high-performance programmable jitter attenuators with network synchronization capabilities. The devices support JEDEC JESD204B/C for converter synchronization, and SyncE for network-based synchronization.

The RC310xxB are ideal for driving converter circuits in wire-line infrastructure, data center equipment, and instrumentation applications.

Applications

- Switches / Routers
- Synchronous Ethernet (SyncE) equipment
- Telecom Time Slave Clock (T-TSC) equipment
- Jitter attenuation for 10 / 25 / 40 / 100 / 200 / 400
 Gbps Ethernet PHYs or Switches
- Small Cell for 4.5G and 5G

Features

- 169fs RMS phase jitter at 156.25MHz (typ.)
- PCIe[®] Gen7 Common Clock jitter: 8fs RMS (typ.)
- Compliant with ITU-T G.8262 and G.8262.1 for synchronous Ethernet Equipment Clock (EEC/eEEC)
- Jitter attenuation with programmable loop bandwidth from 0.1Hz to 12kHz
- 1kHz to 650MHz LVDS/LP-HCSL outputs
- 1kHz to 200MHz LVCMOS outputs
- Simple AC-coupling to LVPECL and CML
- Integrated 100Ω and 85Ω LP-HCSL terminations
- JESD204B/C support on differential or singleended outputs with DC-coupling or AC-coupling
- Up to four single-ended or two differential clock inputs; one crystal/TCXO/OCXO input
- 400kHz I²C / SMBus or 20MHz SPI support
- Configuration via factory-programmed One-Time Programmable (OTP) memory, serial interface, or external I2C EEPROM
- OTP holds up to four complete or 27 partial configurations
- 1.8V, 2.5V, 3.3V, -40° to +85°C operation

- RC31012B 12 output pairs/24 single-ended outputs
 - 6 × 6 mm 48-QFN, integrated crystal option
- RC31008B 8 differential/16 single-ended outputs
 - 5 × 5 mm 40-QFN, integrated crystal option
- RC31005B 5 differential/10 single-ended outputs
 - 4 × 4 mm 32-LGA with integrated crystal

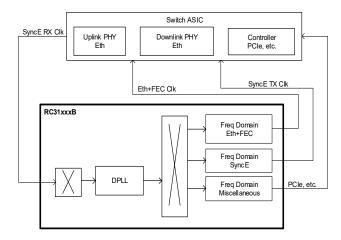


Figure 1. Typical Wire-line Infrastructure Use Case

RC310xxB Block Diagram

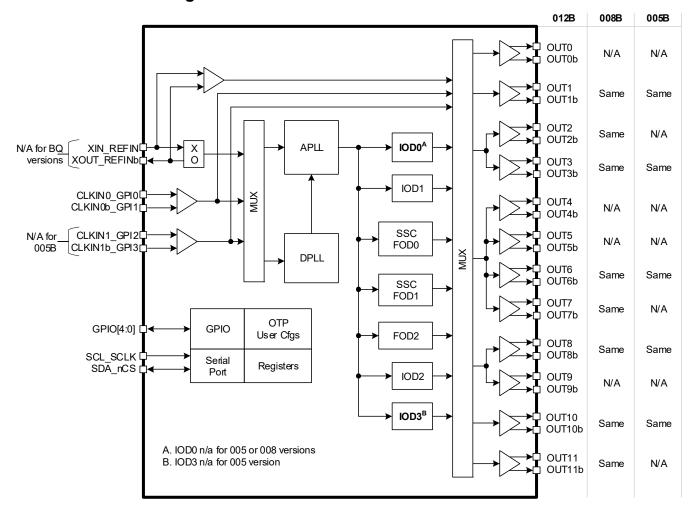


Figure 2. RC310xxB Block Diagram

Contents

1.	Pin In	formation	1	. 8
	1.1	Pin Assi	ignments – RCxxx12B (Top View)	. 8
	1.2	Pin Des	criptions – RCxxx12B	. 8
	1.3	Pin Assi	ignments – RCxxx12BQ (Top View)	10
	1.4	Pin Des	criptions – RCxxx12BQ	10
	1.5	Pin Assi	ignments – RCxxx08B (Top View)	12
	1.6	Pin Des	criptions – RCxxx08B.	12
	1.7	Pin Assi	ignments – RCxxx08BQ (Top View)	14
	1.8		criptions – RCxxx08BQ	
	1.9	Pin Assi	ignments – RCxxx05BQ (Top View)	16
	1.10		criptions – RCxxx05BQ	
	1.11		racteristics	
2.	Specif			
	2.1		e Maximum Ratings	
	2.2		nended Operating Conditions	
	2.3		al Characteristics	
•				
3.			cription	
	3.1		Jp, Configuration, and Serial Interfaces	
	3.2	-	ocks	
		3.2.1	Crystal/Reference Input	
		3.2.2	Clock Inputs	
	3.3		put Monitors	
	3.4			
			APLL Lock Detector	
	3.5			
	3.6		eference Selection	
		3.6.1	Manual Reference Selection	
		3.6.2	Automatic Reference Selection	
		3.6.3	Hitless Reference Switching.	
	3.7	DPLL O	perating Modes	
		3.7.1	Free-run	45
		3.7.2	Acquire	45
		3.7.3	Normal	45
		3.7.4	Holdover	45
		3.7.5	Hitless Switch	45
		3.7.6	Write Frequency	45
		3.7.7	Manual Mode	45
	3.8	DPLL Lo	ock Detector	45
	3.9	Output I	Dividers	46
		3.9.1	Integer Output Dividers	46
		3.9.2	Fractional Output Dividers	46
	3.10	Clock O	outputs	46
		3.10.1	Output Types	47
		3.10.2	Output Banks	47
4.	Applic	ation Info	ormation	48
	4.1		nendations for Unused Pins	
		4.1.1	XIN_REFIN/XOUT_REFINB	
		4.1.2	CLKIN/CLKINb [1:0] Inputs	
		4.1.3	GPIO/GPI Pins	
		4.1.4	LVCMOS Outputs	
		4.1.5	Differential Outputs	
				, 0

RC310xxB Datasheet

	4.2	CI KINI/	/CLKINb Clock Inputs Interface	/1Ω
	4.3		riving the XTAL Interface	
	4.5	4.3.1	XTAL Interface Set to Input Buffer Mode	
		4.3.2	XTAL Interface oct to Input Buffer Mode Not Selected	
	4.4		ntial Output Terminations	
	4.4			
		4.4.1	Direct-Coupled LP-HCSL Termination	
		4.4.2	Direct-Coupled LVDS Termination	
		4.4.3	AC-Coupled Differential Terminations for Other Protocols	 . 51
	4.5	Crystal	I Recommendations	 . 52
		4.5.1	Choosing Crystals	 . 52
		4.5.2	Tuning the Crystal Load Capacitor	 . 52
	4.6	Externa	al I2C Serial EEPROM Recommendations	 . 53
	4.7	Power (Considerations	 . 53
		4.7.1	Power Sequencing Considerations	 . 53
5.	Thern	nal Inforn	mation	 . 55
	5.1	VFQFP	PN ePad Thermal Release Path	 . 55
	5.2	Therma	al Characteristics	 . 55
6.	Packa	age Outlir	ne Drawings	 . 58
7.			rams	
8.			mation	
9.		•	ory	
v.	116113		VI Y	

RC310xxB Datasheet

Figures

Figure 1. Typical Wire-line Infrastructure Use Case	1
Figure 2. RC310xxB Block Diagram	2
Figure 3. I2C/SMBus Target Timing Diagram	40
Figure 4. SPI Bus Timing	41
Figure 5. Programmable Input Buffer Logical Diagram	48
Figure 6. Input Buffer Behavior by Protocol	49
Figure 7. 1.2V LVCMOS Driver to XTAL Input Interface	50
Figure 8. LVCMOS Driver to XTAL Input Interface	50
Figure 9. LVPECL Driver to XTAL Input Interface	50
Figure 10. Standard HCSL Termination	51
Figure 11. Standard LVDS Termination	51
Figure 12. AC-Coupling Termination	51
Figure 13. Crystal Load Capacity	52
Figure 14. Power Supply Sequencing Recommendations – Power-Up Using PWRGD/PWRDN# or POR#	54
Figure 15. P.C. Assembly for Exposed Pad Thermal Release Path – Side View	55
Figure 16. Pin 1 Orientation in Tape and Reel Packaging	59

Tables


Table 1, RCxxx12B Pin Descriptions 8 Table 3, RCxxx16B Pin Descriptions 10 Table 4, RCxxx08B Pin Descriptions 12 Table 5, RCxxx08B Pin Descriptions 14 Table 6, RCxxx08B Pin Descriptions 16 Table 6, Pin Characteristics 17 Table 6, Pin Characteristics 17 Table 7, Absolute Maximum Ratings 19 Table 8, Recommended Operating Conditions 19 Table 9, PClo Refelx Painse Jitter, Fance Jitter, Fance Mode, VDDO = 1,8V12,5V3,3V 20 Table 11, Pinase Jitter and Phase Noise — 1,8V VDDO 21 Table 12, Phase Jitter and Phase Noise — 2,5V VDDO 22 Table 13, Phase Jitter and Phase Noise — 2,5V VDDO 22 Table 14, Jitter Attenuator and Network Synchronization 25 Table 15, Lone Input Frequencies 26 Table 16, External Crystal Characteristics (2 26 Table 17, Internal Crystal Characteristics (2 26 Table 18, Output Enable/Disable Timing 27 Table 20, Uput-to-Output, Input-to-Output Skew – LVDS Outputs 1,8V12,5V3,3V VDDO 28 Table 22, Uctive Coutput, Input-to-Output Skew – LVDS Outputs 1,8V12,5V3,3V VDDO 28 <th></th> <th></th>		
Table 3. RCxxx088 Pin Descriptions 12 Table 6. RCxxx086BQ Pin Descriptions 14 Table 6. Pin Characteristics 17 Table 6. Pin Characteristics 17 Table 7. Absolute Maximum Ratings 19 Table 8. Recommended Operating Conditions 19 Table 9. PCIe Refalk Pdativitive Phase Jitter, rancut Mode, VDDO = 1.8V/2.5V/3.3V 20 Table 10. PCIE Refalk Additive Phase Jitter, rancut Mode, VDDO = 1.8V/2.5V/3.3V 20 Table 11. Phase Jitter and Phase Noise - 2.5V VDDO 21 Table 12. Phase Jitter and Phase Noise - 2.5V VDDO 21 Table 13. Phase Jitter and Phase Noise - 2.5V VDDO 23 Table 14. Jitter Attenuator and Network Synchronization 25 Table 15. Lock Input Frequencies 26 Table 16. External Crystal Characteristics (Q Versions Only) 26 Table 17. Internal Crystal Characteristics (Q Versions Only) 26 Table 19. Output Frequencies and Startup Times 27 Table 20. Unput-to-Output, Input-to-Output Skew – LY-HCSL Outputs 1.8V/2.5V/3.3V VDDO 28 Table 21. Output-to-Output, Input-to-Output Skew – LVCMOS Output Skew – LVCMOS Output Skew – LVCMOS Output Characteristics – 25 29 Table 22. LVCMOS AC/DC	Table 1. RCxxx12B Pin Descriptions	8
Table 1, RCxxx08BQ Pin Descriptions	·	
Table 5, RCxxx058Q Pin Descriptions	Table 3. RCxxx08B Pin Descriptions	12
Table 6, Pin Characteristics 17 Table 7, Absolute Maximum Ratings 19 Table 8, Recommended Operating Conditions 19 Table 9, PCIe RefcIk Phase Jitter, Clock Generator Mode, VDDO = 1.8V/2.5V/3.3V 20 Table 10, PCIe RefcIk Phase Jitter and Phase Noise = 1.8V VDDO 21 Table 12, Phase Jitter and Phase Noise = 1.8V VDDO 21 Table 13, Phase Jitter and Phase Noise = 3.3V VDDO 23 Table 14, Jitter Attenuator and Network Synchronization 25 Table 15, Clock Input Frequencies 26 Table 16, Schrand Crystal Characteristics 26 Table 16, Divide Trequencies and Startup Times 26 Table 17, Internal Crystal Characteristics (Q Versions Only) 26 Table 18, Output Enable/Disable Timing 27 Table 19, Output Frequencies and Startup Times 27 Table 20, Output-to-Output, Input-to-Output Skew – LVDS Outputs 1.8W/2.5W/3.3V VDDO 28 Table 21, Output-to-Output, Input-to-Output Skew – LVDS Outputs 1.8W/2.5W/3.3V VDDO 28 Table 22, Output-to-Output, Input-to-Output Skew – LVDS Outputs 1.8W/2.5W/3.3V VDDO 28 Table 23, Static Phase Offset - Zero Delay Buffer Mode 29 Table 24, LVCMOS AC/DC Output Cha	Table 4. RCxxx08BQ Pin Descriptions	14
Table 7. Absolute Maximum Ratings	Table 5. RCxxx05BQ Pin Descriptions	16
Table 8. Recommended Operating Conditions 19 Table 9. PCIe Refcik Phase Jitter, Clock Generator Mode, VDDO = 1.8V/2.5V/3.3V 20 Table 10. PCIe Refcik Pdditive Phase Jitter, Fanout Mode, VDDO = 1.8V/2.5V/3.3V 21 Table 11. Phase Jitter and Phase Noise = 2.5V VDDO 21 Table 12. Phase Jitter and Phase Noise = 2.3V VDDO 23 Table 13. Phase Jitter and Phase Noise = 3.3V VDDO 24 Table 14. Jitter Attenuator and Network Synchronization 25 Table 15. Clock Input Frequencies 26 Table 16. Scarnal Crystal Characteristics (Q Versions Only) 26 Table 17. Internal Crystal Characteristics (Q Versions Only) 26 Table 18. Output Inputable Timing 27 Table 19. Output Frequencies and Startup Times 27 Table 20. Output-to-Output, Input-to-Output Skew – LVDRS Outputs 1.8V/2.5V/3.3V VDDO 28 Table 21. Output-to-Output, Input-to-Output Skew – LVCMOS Outputs 1.8V/2.5V/3.3V VDDO 28 Table 22. Output-to-Output, Input-to-Output Skew – LVCMOS Output 5.8V/2.5V/3.3V VDDO 28 Table 23. Static Phase Offset - Zero Delay Buffer Mode 29 Table 24. LVCMOS AC/DC Output Characteristics – 1.8V VDDO 29 Table 25. LVCMOS AC/DC Output Characteristics – 2.5V/3.3	Table 6. Pin Characteristics	17
Table 19, PCIe RefcIk Phase Jitter, Clock Generator Mode, VDDO = 1.8V/Z.5V/3.3V 20 Table 10, PCIe RefcIk Additive Phase Jitter, Fanout Mode, VDDO = 1.8V/Z.5V/3.3V 21 Table 12, Phase Jitter and Phase Noise = 1.8V VDDO 21 Table 12, Phase Jitter and Phase Noise = 2.5V VDDO 23 Table 13, Phase Jitter and Phase Noise = 3.3V VDDO 24 Table 16, Litter Attenuator and Network Synchronization 25 Table 15, Clock Input Frequencies 26 Table 16, Schard Crystal Characteristics (Q Versions Only) 26 Table 17, Internal Crystal Characteristics (Q Versions Only) 26 Table 18, Output Frequencies and Startup Times 27 Table 19, Output-Frequencies and Startup Times 27 Table 20, Output-Fo-Output, Input-to-Output Skew – LP-HCSL Outputs 1.8W/2.5V/3.3V VDDO 28 Table 21, Output-to-Output, Input-to-Output Skew – LVDS Outputs 1.8W/2.5V/3.3V VDDO 28 Table 22, Output-to-Output, Input-to-Output Skew – LVDS Output Skew – LVDGO Output Skew	Table 7. Absolute Maximum Ratings	19
Table 10. PCIe Refolk Additive Phase Jitter, Fanout Mode, VDDO = 1.8V/2,5V/3.3V 21 Table 11. Phase Jitter and Phase Noise – 1.8V VDDO 27 Table 12. Phase Jitter and Phase Noise – 2.5V VDDO 23 Table 13. Phase Jitter and Phase Noise – 3.3V VDDO 24 Table 14. Jitter Attenuator and Network Synchronization 25 Table 16. External Crystal Characteristics 26 Table 16. External Crystal Characteristics (Q Versions Only) 26 Table 17. Internal Crystal Characteristics (Q Versions Only) 26 Table 19. Output Frequencies and Startup Times 27 Table 19. Output Frequencies and Startup Times 27 Table 20. Output-to-Output, Input-to-Output Skew – LP-HCSL Outputs 1.8W/2.5W/3.3V VDDO 28 Table 20. Output-to-Output, Input-to-Output Skew – LVCMOS Outputs 1.8W/2.5W/3.3V VDDO 28 Table 22. Output-to-Output, Input-to-Output Skew – LVCMOS Outputs 1.8W/2.5W/3.3V VDDO 28 Table 23. Static Phase Offset - Zero Delay Buffer Mode 29 Table 24. LVCMOS AC/DC Output Characteristics – 1.8V VDDO 29 Table 25. LVCMOS AC/DC Output Characteristics – 3.3V VDDO 30 Table 27. LVDS AC/DC Output Characteristics – 1.8V VDDO 30 Table 28. LVDS AC/DC Output Character	Table 8. Recommended Operating Conditions	19
Table 11. Phase Jitter and Phase Noise – 1.8V VDDO	Table 9. PCIe Refclk Phase Jitter, Clock Generator Mode, VDDO = 1.8V/2.5V/3.3V	20
Table 12. Phase Jitter and Phase Noise – 2.5V VDDO 23 Table 13. Phase Jitter and Phase Noise – 3.3V VDDO 24 Table 15. Phase Jitter and Phase Noise – 3.3V VDDO 25 Table 16. External Crystal Characteristics 26 Table 15. Clock Input Frequencies 26 Table 16. External Crystal Characteristics (Q Versions Only) 26 Table 18. Output Enable/Disable Timing 27 Table 19. Output Frequencies and Startup Times 27 Table 20. Output-to-Output, Input-to-Output Skew – LP-HCSL Outputs 1.8V/2.5V/3.3V VDDO 28 Table 21. Output-to-Output, Input-to-Output Skew – LVCMOS Outputs 1.8V/2.5V/3.3V VDDO 28 Table 22. Output-to-Output, Input-to-Output Skew – LVCMOS Outputs 1.8V/2.5V/3.3V VDDO 28 Table 23. Static Phase Offset - Zero Delay Buffer Mode 29 Table 24. LVCMOS AC/DC Output Characteristics – 1.8V VDDO 29 Table 25. LVCMOS AC/DC Output Characteristics – 2.5V VDDO 29 Table 26. LVCMOS AC/DC Output Characteristics – 3.3V VDDO 30 Table 27. LVDS AC/DC Output Characteristics – 1.8V VDDO 30 Table 28. LVDS AC/DC Output Characteristics, Non-PCle Frequencies – 2.5V/3.3V VDDO 31 Table 29. LP-HCSL AC/DC Characteristics, Non-PCle Frequencies – 2.5	Table 10. PCIe Refclk Additive Phase Jitter, Fanout Mode, VDDO = 1.8V/2,5V/3.3V	21
Table 13. Phase Jitter and Phase Noise – 3.3V VDDO 24 Table 14. Jitter Attenuator and Network Synchronization 25 Table 16. Clock Input Frequencies 26 Table 16. External Crystal Characteristics (Q Versions Only) 26 Table 17. Internal Crystal Characteristics (Q Versions Only) 26 Table 18. Output Enable/Disable Timing 27 Table 19. Output-frequencies and Startup Times 27 Table 20. Output-to-Output, Input-to-Output Skew – LP-HCSL Outputs 1.8V/2.5V/3.3V VDDO 28 Table 20. Output-to-Output, Input-to-Output Skew – LVCMOS Outputs 1.8V/2.5V/3.3V VDDO 28 Table 23. Static Phase Offset - Zero Delay Buffer Mode 29 Table 24. LVCMOS AC/DC Output Characteristics – 1.8V VDDO 29 Table 25. LVCMOS AC/DC Output Characteristics – 1.8V VDDO 29 Table 26. LVCMOS AC/DC Output Characteristics – 1.8V VDDO 30 Table 27. LVDS AC/DC Output Characteristics – 1.8V VDDO 30 Table 28. LVDS AC/DC Output Characteristics – 2.5V/3.3V VDDO 30 Table 29. LP-HCSL AC/DC Characteristics, Non-PCle Frequencies – 1.8V VDDO 30 Table 30. LP-HCSL AC/DC Characteristics, Non-PCle Frequencies – 2.5V/3.3V VDDO 32 Table 31. LP-HCSL AC/DC Characteristics, Non-PCle	Table 11. Phase Jitter and Phase Noise – 1.8V VDDO	21
Table 14. Jitter Attenuator and Network Synchronization 25 Table 15. Clock Input Frequencies 26 Table 16. External Crystal Characteristics 26 Table 17. Internal Crystal Characteristics (Q Versions Only) 26 Table 18. Output Enable/Disable Timing 27 Table 19. Output Frequencies and Startup Times 27 Table 20. Output-to-Output, Input-to-Output Skew – LP-HCSL Outputs 1.8V/2.5V/3.3V VDDO 28 Table 21. Output-to-Output, Input-to-Output Skew – LVCMOS Outputs 1.8V/2.5V/3.3V VDDO 28 Table 22. Output-to-Output, Input-to-Output Skew – LVCMOS Outputs 1.8V/2.5V/3.3V VDDO 28 Table 23. Static Phase Offset - Zero Delay Buffer Mode 29 Table 24. LVCMOS AC/DC Output Characteristics – 1.8V VDDO 29 Table 25. LVCMOS AC/DC Output Characteristics – 2.5V VDDO 29 Table 26. LVCMOS AC/DC Output Characteristics – 3.3V VDDO 30 Table 27. LVDS AC/DC Output Characteristics – 1.8V VDDO 30 Table 28. LVDS AC/DC Output Characteristics – 1.8V VDDO 30 Table 29. LP-HCSL AC/DC Characteristics, Non-PCIe Frequencies – 1.8V VDDO 32 Table 30. LP-HCSL AC/DC Characteristics, 100MHz PCIe – 1.8V VDDO 34 Table 31. LP-HCSL AC/DC Characteristics, 100MHz PCIe	Table 12. Phase Jitter and Phase Noise – 2.5V VDDO	23
Table 15. Clock Input Frequencies 26 Table 16. External Crystal Characteristics 26 Table 17. Internal Crystal Characteristics (Q Versions Only) 26 Table 18. Output Enable/Disable Timing 27 Table 19. Output Frequencies and Startup Times 27 Table 20. Output-to-Output, Input-to-Output Skew – LP-HCSL Outputs 1.8V/2.5V/3.3V VDDO 28 Table 21. Output-to-Output, Input-to-Output Skew – LVCMOS Outputs 1.8V/2.5V/3.3V VDDO 28 Table 22. Output-to-Output, Input-to-Output Skew – LVCMOS Outputs 1.8V/2.5V/3.3V VDDO 28 Table 23. Static Phase Offset - Zero Delay Buffer Mode 29 Table 23. Static Phase Offset - Zero Delay Buffer Mode 29 Table 25. LVCMOS AC/DC Output Characteristics – 2.8V VDDO 29 Table 26. LVCMOS AC/DC Output Characteristics – 2.8V VDDO 30 Table 27. LVDS AC/DC Output Characteristics – 3.8V VDDO 30 Table 28. LVDS AC/DC Output Characteristics – 2.8V/3.3V VDDO 30 Table 29. LP-HCSL AC/DC Characteristics, Non-PCIe Frequencies – 1.8V VDDO 31 Table 30. LP-HCSL AC/DC Characteristics, Non-PCIe Frequencies – 2.5V/3.3V VDDO 32 Table 31. LP-HCSL AC/DC Characteristics, 100MHz PCIe – 1.8V VDDO 34 Table 32. LP-HCSL AC/DC Cha	Table 13. Phase Jitter and Phase Noise – 3.3V VDDO	24
Table 16. External Crystal Characteristics (Q Versions Only) 26 Table 17. Internal Crystal Characteristics (Q Versions Only) 26 Table 18. Output Enable/Disable Timing 27 Table 19. Output-tro-Output, Input-to-Output Skew – LP-HCSL Outputs 1.8V/2.5V/3.3V VDDO 28 Table 20. Output-to-Output, Input-to-Output Skew – LVDS Outputs 1.8V/2.5V/3.3V VDDO 28 Table 21. Output-to-Output, Input-to-Output Skew – LVDS Outputs 1.8V/2.5V/3.3V VDDO 28 Table 22. Static Phase Offset - Zero Delay Buffer Mode 29 Table 23. Static Phase Offset - Zero Delay Buffer Mode 29 Table 24. LVCMOS AC/DC Output Characteristics – 1.8V VDDO 29 Table 25. LVCMOS AC/DC Output Characteristics – 2.5V VDDO 29 Table 26. LVCMOS AC/DC Output Characteristics – 3.3V VDDO 30 Table 27. LVDS AC/DC Output Characteristics – 3.3V VDDO 30 Table 28. LVDS AC/DC Output Characteristics – 2.5V/3.3V VDDO 30 Table 29. LP-HCSL AC/DC Characteristics, Non-PCIe Frequencies – 1.8V VDDO 31 Table 31. LP-HCSL AC/DC Characteristics, Non-PCIe Frequencies – 2.5V/3.3V VDDO 32 Table 33. LP-HCSL AC/DC Characteristics, 100MHz PCIe – 1.8V VDDO 34 Table 34. Spread-Spectrum Programmability 36	Table 14. Jitter Attenuator and Network Synchronization	25
Table 17. Internal Crystal Characteristics (Q Versions Only) 26 Table 18. Output Enable/Disable Timing 27 Table 19. Output Frequencies and Startup Times 27 Table 20. Output-to-Output, Input-to-Output Skew – LP-HCSL Outputs 1.8V/2.5V/3.3V VDDO 28 Table 21. Output-to-Output, Input-to-Output Skew – LVCMOS Outputs 1.8V/2.5V/3.3V VDDO 28 Table 22. Output-to-Output, Input-to-Output Skew – LVCMOS Outputs 1.8V/2.5V/3.3V VDDO 28 Table 23. Static Phase Offset - Zero Delay Buffer Mode 29 Table 24. LVCMOS AC/DC Output Characteristics – 1.8V VDDO 29 Table 25. LVCMOS AC/DC Output Characteristics – 1.8V VDDO 29 Table 26. LVCMOS AC/DC Output Characteristics – 1.8V VDDO 30 Table 27. LVDS AC/DC Output Characteristics – 1.8V VDDO 30 Table 28. LVDS AC/DC Output Characteristics – 1.8V VDDO 30 Table 29. LP-HCSL AC/DC Characteristics, Non-PCle Frequencies – 1.8V VDDO 30 Table 30. LP-HCSL AC/DC Characteristics, Non-PCle Frequencies – 2.5V/3.3V VDDO 32 Table 31. LP-HCSL AC/DC Characteristics, Non-PCle Frequencies – 2.5V/3.3V VDDO 33 Table 34. LP-HCSL AC/DC Characteristics, Non-PCle Frequencies – 2.5V/3.3V VDDO 34 Table 33. 10MMtz PCle Output Clock Accuracy and SSC	Table 15. Clock Input Frequencies	26
Table 18. Output Enable/Disable Timing 27 Table 19. Output Frequencies and Startup Times 27 Table 20. Output-to-Output, Input-to-Output Skew – LP-HCSL Outputs 1.8V/2.5V/3.3V VDDO 28 Table 21. Output-to-Output, Input-to-Output Skew – LVCMOS Outputs 1.8V/2.5V/3.3V VDDO 28 Table 22. Output-to-Output, Input-to-Output Skew – LVCMOS Outputs 1.8V/2.5V/3.3V VDDO 28 Table 23. Static Phase Offset - Zero Delay Buffer Mode 29 Table 24. LVCMOS AC/DC Output Characteristics – 1.8V VDDO 29 Table 25. LVCMOS AC/DC Output Characteristics – 2.5V VDDO 29 Table 26. LVCMOS AC/DC Output Characteristics – 3.3V VDDO 30 Table 27. LVDS AC/DC Output Characteristics – 1.8V VDDO 30 Table 28. LVDS AC/DC Output Characteristics, Non-PCle Frequencies – 1.8V VDDO 31 Table 29. LP-HCSL AC/DC Characteristics, Non-PCle Frequencies – 1.8V VDDO 32 Table 30. LP-HCSL AC/DC Characteristics, Non-PCle Frequencies – 2.5V/3.3V VDDO 34 Table 31. LP-HCSL AC/DC Characteristics, 100MHz PCle – 1.8V VDDO 34 Table 32. LP-HCSL AC/DC Characteristics, 100MHz PCle – 1.8V VDDO 35 Table 33. Spread-Spectrum Programmability 37 Table 34. Spread-Spectrum Programmability 37	Table 16. External Crystal Characteristics	26
Table 19. Output Frequencies and Startup Times 27 Table 20. Output-to-Output, Input-to-Output Skew – LP-HCSL Outputs 1.8V/2.5V/3.3V VDDO 28 Table 21. Output-to-Output, Input-to-Output Skew – LVCMOS Outputs 1.8V/2.5V/3.3V VDDO 28 Table 22. Output-to-Output, Input-to-Output Skew – LVCMOS Outputs 1.8V/2.5V/3.3V VDDO 28 Table 23. Static Phase Offset - Zero Delay Buffer Mode 29 Table 24. LVCMOS AC/DC Output Characteristics – 1.8V VDDO 29 Table 25. LVCMOS AC/DC Output Characteristics – 2.5V VDDO 29 Table 26. LVCMOS AC/DC Output Characteristics – 3.3V VDDO 30 Table 27. LVDS AC/DC Output Characteristics – 1.8V VDDO 30 Table 28. LVDS AC/DC Output Characteristics – 2.5V/3.3V VDDO 31 Table 29. LP-HCSL AC/DC Characteristics, Non-PCIe Frequencies – 1.8V VDDO 32 Table 30. LP-HCSL AC/DC Characteristics, Non-PCIe Frequencies – 2.5V/3.3V VDDO 32 Table 31. LP-HCSL AC/DC Characteristics, 100MHz PCIe – 1.8V VDDO 35 Table 33. LP-HCSL AC/DC Characteristics, 100MHz PCIe – 2.5V/3.3V VDDO 35 Table 34. Spread-Spectrum Programmability 36 Table 35. CLKIN Differential Electrical Characteristics 36 Table 36. GPI/GPIO Electrical Characteristics – 1.8V VDDD, VDDR, or VDDX <td< td=""><td>Table 17. Internal Crystal Characteristics (Q Versions Only)</td><td> 26</td></td<>	Table 17. Internal Crystal Characteristics (Q Versions Only)	26
Table 20. Output-to-Output, Input-to-Output Skew – LP-HCSL Outputs 1.8V/2.5V/3.3V VDDO 28 Table 21. Output-to-Output, Input-to-Output Skew – LVDS Outputs 1.8V/2.5V/3.3V VDDO 28 Table 22. Output-to-Output, Input-to-Output Skew – LVDS Outputs 1.8V/2.5V/3.3V VDDO 28 Table 22. Output-to-Output, Input-to-Output Skew – LVDS Outputs 1.8V/2.5V/3.3V VDDO 29 Table 24. LVCMOS AC/DC Output Characteristics – 1.8V VDDO 29 Table 25. LVCMOS AC/DC Output Characteristics – 2.5V VDDO 29 Table 26. LVCMOS AC/DC Output Characteristics – 2.5V VDDO 30 Table 27. LVDS AC/DC Output Characteristics – 1.8V VDDO 30 Table 28. LVDS AC/DC Output Characteristics, Non-PCIe Frequencies – 1.8V VDDO 30 Table 29. LP-HCSL AC/DC Characteristics, Non-PCIe Frequencies – 1.8V VDDO 32 Table 30. LP-HCSL AC/DC Characteristics, Non-PCIe Frequencies – 2.5V/3.3V VDDO 33 Table 31. LP-HCSL AC/DC Characteristics, 100MHz PCIe – 1.8V VDDO 34 Table 32. LP-HCSL AC/DC Characteristics, 100MHz PCIe – 1.8V VDDO 35 Table 33. 100MHz PCIe Output Clock Accuracy and SSC 36 Table 34. Spread-Spectrum Programmability 37 Table 35. CLKIN Differential Electrical Characteristics 37 Table 36. GPI/GPIO Electrical Characteristics –	Table 18. Output Enable/Disable Timing	27
Table 21. Output-to-Output, Input-to-Output Skew – LVDS Outputs 1.8V/2.5V/3.3V VDDO 28 Table 22. Output-to-Output, Input-to-Output Skew – LVCMOS Outputs 1.8V/2.5V/3.3V VDDO 28 Table 23. Static Phase Offset - Zero Delay Buffer Mode 29 Table 24. LVCMOS AC/DC Output Characteristics – 1.8V VDDO 29 Table 25. LVCMOS AC/DC Output Characteristics – 2.5V VDDO 29 Table 26. LVCMOS AC/DC Output Characteristics – 3.3V VDDO 30 Table 27. LVDS AC/DC Output Characteristics – 1.8V VDDO 30 Table 28. LVDS AC/DC Output Characteristics – 1.8V VDDO 30 Table 29. LP-HCSL AC/DC Characteristics, Non-PCIe Frequencies – 1.8V VDDO 31 Table 30. LP-HCSL AC/DC Characteristics, Non-PCIe Frequencies – 2.5V/3.3V VDDO 33 Table 31. LP-HCSL AC/DC Characteristics, 100MHz PCIe – 1.8V VDDO 34 Table 32. LP-HCSL AC/DC Characteristics, 100MHz PCIe – 1.8V VDDO 35 Table 33. 10MHz PCIe Output Clock Accuracy and SSC 36 Table 34. Spread-Spectrum Programmability 37 Table 35. CLKIN Differential Electrical Characteristics – 1.8V VDDD, VDDR, or VDDX 37 Table 36. GPI/GPIO Electrical Characteristics – 2.5V VDDD, VDDR, or VDDX 38 Table 37. GPI/GPIO Electrical Characteristics – 3.3V VDDD, VDDR, or VDDX	Table 19. Output Frequencies and Startup Times	27
Table 22. Output-to-Output, Input-to-Output Skew – LVCMOS Outputs 1.8V/2.5V/3.3V VDDO 28 Table 23. Static Phase Offset - Zero Delay Buffer Mode 29 Table 24. LVCMOS AC/DC Output Characteristics – 1.8V VDDO 29 Table 25. LVCMOS AC/DC Output Characteristics – 2.5V VDDO 30 Table 26. LVCMOS AC/DC Output Characteristics – 3.3V VDDO 30 Table 27. LVDS AC/DC Output Characteristics – 1.8V VDDO 30 Table 28. LVDS AC/DC Output Characteristics, 1.8V VDDO 31 Table 29. LP-HCSL AC/DC Characteristics, Non-PCIe Frequencies – 1.8V VDDO 32 Table 30. LP-HCSL AC/DC Characteristics, Non-PCIe Frequencies – 2.5V/3.3V VDDO 33 Table 31. LP-HCSL AC/DC Characteristics, 100MHz PCIe – 1.8V VDDO 34 Table 32. LP-HCSL AC/DC Characteristics, 100MHz PCIe – 1.8V VDDO 35 Table 33. 100MHz PCIe Output Clock Accuracy and SSC 36 Table 34. Spread-Spectrum Programmability 37 Table 35. CLKIN Differential Electrical Characteristics 37 Table 36. GPI/GPIO Electrical Characteristics – 1.8V VDDD, VDDR, or VDDX 37 Table 37. GPI/GPIO Electrical Characteristics – 3.3V VDDD, VDDR, or VDDX 38 Table 39. CMOS GPI/GPIO Common Electrical Characteristics 40 Table 40. Power Supply Current 39	Table 20. Output-to-Output, Input-to-Output Skew – LP-HCSL Outputs 1.8V/2.5V/3.3V VDDO	28
Table 23. Static Phase Offset - Zero Delay Buffer Mode 29 Table 24. LVCMOS AC/DC Output Characteristics - 1.8V VDDO 29 Table 25. LVCMOS AC/DC Output Characteristics - 2.5V VDDO 29 Table 26. LVCMOS AC/DC Output Characteristics - 3.3V VDDO 30 Table 27. LVDS AC/DC Output Characteristics - 1.8V VDDO 30 Table 28. LVDS AC/DC Output Characteristics - 2.5V/3.3V VDDO 31 Table 29. LP-HCSL AC/DC Characteristics, Non-PCIe Frequencies - 1.8V VDDO 32 Table 30. LP-HCSL AC/DC Characteristics, Non-PCIe Frequencies - 2.5V/3.3V VDDO 33 Table 31. LP-HCSL AC/DC Characteristics, 100MHz PCIe - 1.8V VDDO 34 Table 33. 10MHz PCIe Output Clock Accuracy and SSC 36 Table 33. 100MHz PCIe Output Clock Accuracy and SSC 36 Table 34. Spread-Spectrum Programmability 37 Table 35. CLKIN Differential Electrical Characteristics 37 Table 36. GPI/GPIO Electrical Characteristics - 1.8V VDDD, VDDR, or VDDX 37 Table 37. GPI/GPIO Electrical Characteristics - 2.5V VDDD, VDDR, or VDDX 38 Table 39. CMOS GPI/GPIO Common Electrical Characteristics 38 Table 40. Power Supply Current 39 Table 41. 12C/SMBus Bus DC Electrical Characteristics 40 Table 44. Power Supply No	Table 21. Output-to-Output, Input-to-Output Skew – LVDS Outputs 1.8V/2.5V/3.3V VDDO	28
Table 24. LVCMOS AC/DC Output Characteristics – 1.8V VDDO 29 Table 25. LVCMOS AC/DC Output Characteristics – 2.5V VDDO 29 Table 26. LVCMOS AC/DC Output Characteristics – 3.3V VDDO 30 Table 27. LVDS AC/DC Output Characteristics – 1.8V VDDO 30 Table 28. LVDS AC/DC Output Characteristics – 2.5V/3.3V VDDO 31 Table 29. LP-HCSL AC/DC Characteristics, Non-PCle Frequencies – 1.8V VDDO 32 Table 30. LP-HCSL AC/DC Characteristics, Non-PCle Frequencies – 2.5V/3.3V VDDO 33 Table 31. LP-HCSL AC/DC Characteristics, 100MHz PCle – 1.8V VDDO 34 Table 32. LP-HCSL AC/DC Characteristics, 100MHz PCle – 2.5V/3.3V VDDO 35 Table 33. 100MHz PCle Output Clock Accuracy and SSC 36 Table 34. Spread-Spectrum Programmability 37 Table 35. CLKIN Differential Electrical Characteristics 37 Table 36. GPI/GPIO Electrical Characteristics – 1.8V VDDD, VDDR, or VDDX 38 Table 37. GPI/GPIO Electrical Characteristics – 2.5V VDDD, VDDR, or VDDX 38 Table 39. CMOS GPI/GPIO Common Electrical Characteristics 38 Table 41. 12C/SMBus Bus DC Electrical Characteristics 40 Table 42. 12C/SMBus Bus AC Electrical Characteristics 40 Table 43. SPI Target Interface Electrical Characteristics 42	Table 22. Output-to-Output, Input-to-Output Skew – LVCMOS Outputs 1.8V/2.5V/3.3V VDDO	28
Table 25. LVCMOS AC/DC Output Characteristics – 2.5V VDDO 29 Table 26. LVCMOS AC/DC Output Characteristics – 3.3V VDDO 30 Table 27. LVDS AC/DC Output Characteristics – 1.8V VDDO 30 Table 28. LVDS AC/DC Output Characteristics – 2.5V/3.3V VDDO 31 Table 29. LP-HCSL AC/DC Characteristics, Non-PCle Frequencies – 1.8V VDDO 32 Table 30. LP-HCSL AC/DC Characteristics, Non-PCle Frequencies – 2.5V/3.3V VDDO 33 Table 31. LP-HCSL AC/DC Characteristics, 100MHz PCle – 1.8V VDDO 34 Table 32. LP-HCSL AC/DC Characteristics, 100MHz PCle – 2.5V/3.3V VDDO 35 Table 33. 100MHz PCle Output Clock Accuracy and SSC 36 Table 34. Spread-Spectrum Programmability 37 Table 35. CLKIN Differential Electrical Characteristics 37 Table 35. CLKIN Differential Electrical Characteristics – 1.8V VDDD, VDDR, or VDDX 37 Table 37. GPI/GPIO Electrical Characteristics – 2.5V VDDD, VDDR, or VDDX 38 Table 38. GPI/GPIO Electrical Characteristics – 3.3V VDDD, VDDR, or VDDX 38 Table 39. CMOS GPI/GPIO Common Electrical Characteristics 38 Table 40. Power Supply Current 39 Table 41. I2C/SMBus Bus DC Electrical Characteristics 40 Table 44. Power Supply Noise Rejection 42 <	Table 23. Static Phase Offset - Zero Delay Buffer Mode	29
Table 26. LVCMOS AC/DC Output Characteristics – 3.3V VDDO 30 Table 27. LVDS AC/DC Output Characteristics – 1.8V VDDO 30 Table 28. LVDS AC/DC Output Characteristics – 2.5V/3.3V VDDO 31 Table 29. LP-HCSL AC/DC Characteristics, Non-PCIe Frequencies – 1.8V VDDO 32 Table 30. LP-HCSL AC/DC Characteristics, Non-PCIe Frequencies – 2.5V/3.3V VDDO 33 Table 31. LP-HCSL AC/DC Characteristics, 100MHz PCIe – 1.8V VDDO 34 Table 32. LP-HCSL AC/DC Characteristics, 100MHz PCIe – 2.5V/3.3V VDDO 35 Table 33. 100MHz PCIe Output Clock Accuracy and SSC 36 Table 34. Spread-Spectrum Programmability 37 Table 35. CLKIN Differential Electrical Characteristics 37 Table 36. GPI/GPIO Electrical Characteristics – 1.8V VDDD, VDDR, or VDDX 37 Table 37. GPI/GPIO Electrical Characteristics – 2.5V VDDD, VDDR, or VDDX 38 Table 38. GPI/GPIO Electrical Characteristics – 3.3V VDDD, VDDR, or VDDX 38 Table 39. CMOS GPI/GPIO Common Electrical Characteristics 38 Table 40. Power Supply Current 39 Table 41. I2C/SMBus Bus AC Electrical Characteristics 40 Table 42. I2C/SMBus Bus AC Electrical Characteristics 40 Table 43. SPI Target Interface Electrical Characteristics 42	Table 24. LVCMOS AC/DC Output Characteristics – 1.8V VDDO	29
Table 27. LVDS AC/DC Output Characteristics – 1.8V VDDO 30 Table 28. LVDS AC/DC Output Characteristics – 2.5V/3.3V VDDO 31 Table 29. LP-HCSL AC/DC Characteristics, Non-PCIe Frequencies – 1.8V VDDO 32 Table 30. LP-HCSL AC/DC Characteristics, Non-PCIe Frequencies – 2.5V/3.3V VDDO 33 Table 31. LP-HCSL AC/DC Characteristics, 100MHz PCIe – 1.8V VDDO 34 Table 32. LP-HCSL AC/DC Characteristics, 100MHz PCIe – 2.5V/3.3V VDDO 35 Table 33. 100MHz PCIe Output Clock Accuracy and SSC 36 Table 34. Spread-Spectrum Programmability 37 Table 35. CLKIN Differential Electrical Characteristics 37 Table 36. GPI/GPIO Electrical Characteristics – 1.8V VDDD, VDDR, or VDDX 37 Table 37. GPI/GPIO Electrical Characteristics – 2.5V VDDD, VDDR, or VDDX 38 Table 38. GPI/GPIO Electrical Characteristics – 3.3V VDDD, VDDR, or VDDX 38 Table 39. CMOS GPI/GPIO Common Electrical Characteristics 38 Table 40. Power Supply Current 39 Table 41. I2C/SMBus Bus DC Electrical Characteristics 40 Table 42. I2C/SMBus Bus AC Electrical Characteristics 40 Table 44. Power Supply Noise Rejection 42 Table 45. Output Bank Source Mapping 47 Table 46. VDD Pin Assignments fo	Table 25. LVCMOS AC/DC Output Characteristics – 2.5V VDDO	29
Table 28. LVDS AC/DC Output Characteristics – 2.5V/3.3V VDDO 31 Table 29. LP-HCSL AC/DC Characteristics, Non-PCIe Frequencies – 1.8V VDDO 32 Table 30. LP-HCSL AC/DC Characteristics, Non-PCIe Frequencies – 2.5V/3.3V VDDO 33 Table 31. LP-HCSL AC/DC Characteristics, 100MHz PCIe – 1.8V VDDO 34 Table 32. LP-HCSL AC/DC Characteristics, 100MHz PCIe – 2.5V/3.3V VDDO 35 Table 33. 100MHz PCIe Output Clock Accuracy and SSC 36 Table 34. Spread-Spectrum Programmability 37 Table 35. CLKIN Differential Electrical Characteristics 37 Table 36. GPI/GPIO Electrical Characteristics – 1.8V VDDD, VDDR, or VDDX 37 Table 37. GPI/GPIO Electrical Characteristics – 2.5V VDDD, VDDR, or VDDX 38 Table 38. GPI/GPIO Electrical Characteristics – 3.3V VDDD, VDDR, or VDDX 38 Table 39. CMOS GPI/GPIO Common Electrical Characteristics 38 Table 40. Power Supply Current 39 Table 41. I2C/SMBus Bus DC Electrical Characteristics 40 Table 42. I2C/SMBus Bus AC Electrical Characteristics 40 Table 43. SPI Target Interface Electrical Characteristics 42 Table 44. Power Supply Noise Rejection 42 Table 45. Output Bank Source Mapping 47 Table 46. VDD Pin Assignments	Table 26. LVCMOS AC/DC Output Characteristics – 3.3V VDDO	30
Table 29. LP-HCSL AC/DC Characteristics, Non-PCIe Frequencies – 1.8V VDDO 32 Table 30. LP-HCSL AC/DC Characteristics, Non-PCIe Frequencies – 2.5V/3.3V VDDO 33 Table 31. LP-HCSL AC/DC Characteristics, 100MHz PCIe – 1.8V VDDO 34 Table 32. LP-HCSL AC/DC Characteristics, 100MHz PCIe – 2.5V/3.3V VDDO 35 Table 33. 100MHz PCIe Output Clock Accuracy and SSC 36 Table 34. Spread-Spectrum Programmability 37 Table 35. CLKIN Differential Electrical Characteristics 37 Table 36. GPI/GPIO Electrical Characteristics – 1.8V VDDD, VDDR, or VDDX 37 Table 37. GPI/GPIO Electrical Characteristics – 2.5V VDDD, VDDR, or VDDX 38 Table 38. GPI/GPIO Electrical Characteristics – 3.3V VDDD, VDDR, or VDDX 38 Table 39. CMOS GPI/GPIO Common Electrical Characteristics 38 Table 40. Power Supply Current 39 Table 41. I2C/SMBus Bus DC Electrical Characteristics 40 Table 42. I2C/SMBus Bus AC Electrical Characteristics 40 Table 43. SPI Target Interface Electrical Characteristics 42 Table 44. Power Supply Noise Rejection 42 Table 45. Output Bank Source Mapping 47 Table 46. VDD Pin Assignments for Outputs, Integer Output Dividers, and Fractional Output Dividers 47	Table 27. LVDS AC/DC Output Characteristics – 1.8V VDDO	30
Table 30. LP-HCSL AC/DC Characteristics, Non-PCIe Frequencies – 2.5V/3.3V VDDO 33 Table 31. LP-HCSL AC/DC Characteristics, 100MHz PCIe – 1.8V VDDO 34 Table 32. LP-HCSL AC/DC Characteristics, 100MHz PCIe – 2.5V/3.3V VDDO 35 Table 33. 100MHz PCIe Output Clock Accuracy and SSC 36 Table 34. Spread-Spectrum Programmability 37 Table 35. CLKIN Differential Electrical Characteristics 37 Table 36. GPI/GPIO Electrical Characteristics – 1.8V VDDD, VDDR, or VDDX 37 Table 37. GPI/GPIO Electrical Characteristics – 2.5V VDDD, VDDR, or VDDX 38 Table 38. GPI/GPIO Electrical Characteristics – 3.3V VDDD, VDDR, or VDDX 38 Table 39. CMOS GPI/GPIO Common Electrical Characteristics 38 Table 40. Power Supply Current 39 Table 41. I2C/SMBus Bus DC Electrical Characteristics 40 Table 42. I2C/SMBus Bus AC Electrical Characteristics 40 Table 43. SPI Target Interface Electrical Characteristics 42 Table 44. Power Supply Noise Rejection 42 Table 45. Output Bank Source Mapping 47 Table 46. VDD Pin Assignments for Outputs, Integer Output Dividers, and Fractional Output Dividers 47 Table 48. XTAL[5:0] Tuning Capacitor 52 Table 49. Thermal Characteris	Table 28. LVDS AC/DC Output Characteristics – 2.5V/3.3V VDDO	31
Table 31. LP-HCSL AC/DC Characteristics, 100MHz PCIe – 1.8V VDDO 34 Table 32. LP-HCSL AC/DC Characteristics, 100MHz PCIe – 2.5V/3.3V VDDO 35 Table 33. 100MHz PCIe Output Clock Accuracy and SSC 36 Table 34. Spread-Spectrum Programmability 37 Table 35. CLKIN Differential Electrical Characteristics 37 Table 36. GPI/GPIO Electrical Characteristics – 1.8V VDDD, VDDR, or VDDX 37 Table 37. GPI/GPIO Electrical Characteristics – 2.5V VDDD, VDDR, or VDDX 38 Table 38. GPI/GPIO Electrical Characteristics – 3.3V VDDD, VDDR, or VDDX 38 Table 39. CMOS GPI/GPIO Common Electrical Characteristics 38 Table 40. Power Supply Current 39 Table 41. I2C/SMBus Bus DC Electrical Characteristics 40 Table 42. I2C/SMBus Bus AC Electrical Characteristics 40 Table 43. SPI Target Interface Electrical Characteristics 42 Table 44. Power Supply Noise Rejection 42 Table 45. Output Bank Source Mapping 47 Table 46. VDD Pin Assignments for Outputs, Integer Output Dividers, and Fractional Output Dividers 47 Table 48. XTAL[5:0] Tuning Capacitor 52 Table 49. Thermal Characteristics (48-pin with External Crystal) 55	Table 29. LP-HCSL AC/DC Characteristics, Non-PCIe Frequencies – 1.8V VDDO	32
Table 32. LP-HCSL AC/DC Characteristics, 100MHz PCIe – 2.5V/3.3V VDDO 35 Table 33. 100MHz PCIe Output Clock Accuracy and SSC 36 Table 34. Spread-Spectrum Programmability 37 Table 35. CLKIN Differential Electrical Characteristics 37 Table 36. GPI/GPIO Electrical Characteristics – 1.8V VDDD, VDDR, or VDDX 37 Table 37. GPI/GPIO Electrical Characteristics – 2.5V VDDD, VDDR, or VDDX 38 Table 38. GPI/GPIO Electrical Characteristics – 3.3V VDDD, VDDR, or VDDX 38 Table 39. CMOS GPI/GPIO Common Electrical Characteristics 38 Table 40. Power Supply Current 39 Table 41. I2C/SMBus Bus DC Electrical Characteristics 40 Table 42. I2C/SMBus Bus AC Electrical Characteristics 40 Table 43. SPI Target Interface Electrical Characteristics 42 Table 44. Power Supply Noise Rejection 42 Table 45. Output Bank Source Mapping 47 Table 46. VDD Pin Assignments for Outputs, Integer Output Dividers, and Fractional Output Dividers 47 Table 47. Input Buffer Programming Options for Specific Signaling Protocols 49 Table 48. XTAL[5:0] Tuning Capacitor 52 Table 49. Thermal Characteristics (48-pin with External Crystal) 55	Table 30. LP-HCSL AC/DC Characteristics, Non-PCIe Frequencies – 2.5V/3.3V VDDO	33
Table 33. 100MHz PCIe Output Clock Accuracy and SSC36Table 34. Spread-Spectrum Programmability37Table 35. CLKIN Differential Electrical Characteristics37Table 36. GPI/GPIO Electrical Characteristics – 1.8V VDDD, VDDR, or VDDX37Table 37. GPI/GPIO Electrical Characteristics – 2.5V VDDD, VDDR, or VDDX38Table 38. GPI/GPIO Electrical Characteristics – 3.3V VDDD, VDDR, or VDDX38Table 39. CMOS GPI/GPIO Common Electrical Characteristics38Table 40. Power Supply Current39Table 41. I2C/SMBus Bus DC Electrical Characteristics40Table 42. I2C/SMBus Bus AC Electrical Characteristics40Table 43. SPI Target Interface Electrical Characteristics42Table 44. Power Supply Noise Rejection42Table 45. Output Bank Source Mapping47Table 46. VDD Pin Assignments for Outputs, Integer Output Dividers, and Fractional Output Dividers47Table 47. Input Buffer Programming Options for Specific Signaling Protocols49Table 48. XTAL[5:0] Tuning Capacitor52Table 49. Thermal Characteristics (48-pin with External Crystal)55	Table 31. LP-HCSL AC/DC Characteristics, 100MHz PCIe – 1.8V VDDO	34
Table 34. Spread-Spectrum Programmability37Table 35. CLKIN Differential Electrical Characteristics37Table 36. GPI/GPIO Electrical Characteristics – 1.8V VDDD, VDDR, or VDDX37Table 37. GPI/GPIO Electrical Characteristics – 2.5V VDDD, VDDR, or VDDX38Table 38. GPI/GPIO Electrical Characteristics – 3.3V VDDD, VDDR, or VDDX38Table 39. CMOS GPI/GPIO Common Electrical Characteristics38Table 40. Power Supply Current39Table 41. I2C/SMBus Bus DC Electrical Characteristics40Table 42. I2C/SMBus Bus AC Electrical Characteristics40Table 43. SPI Target Interface Electrical Characteristics42Table 44. Power Supply Noise Rejection42Table 45. Output Bank Source Mapping47Table 46. VDD Pin Assignments for Outputs, Integer Output Dividers, and Fractional Output Dividers47Table 47. Input Buffer Programming Options for Specific Signaling Protocols49Table 48. XTAL[5:0] Tuning Capacitor52Table 49. Thermal Characteristics (48-pin with External Crystal)55	Table 32. LP-HCSL AC/DC Characteristics, 100MHz PCIe – 2.5V/3.3V VDDO	35
Table 35. CLKIN Differential Electrical Characteristics37Table 36. GPI/GPIO Electrical Characteristics – 1.8V VDDD, VDDR, or VDDX37Table 37. GPI/GPIO Electrical Characteristics – 2.5V VDDD, VDDR, or VDDX38Table 38. GPI/GPIO Electrical Characteristics – 3.3V VDDD, VDDR, or VDDX38Table 39. CMOS GPI/GPIO Common Electrical Characteristics38Table 40. Power Supply Current39Table 41. I2C/SMBus Bus DC Electrical Characteristics40Table 42. I2C/SMBus Bus AC Electrical Characteristics40Table 43. SPI Target Interface Electrical Characteristics42Table 44. Power Supply Noise Rejection42Table 45. Output Bank Source Mapping47Table 46. VDD Pin Assignments for Outputs, Integer Output Dividers, and Fractional Output Dividers47Table 47. Input Buffer Programming Options for Specific Signaling Protocols49Table 48. XTAL[5:0] Tuning Capacitor52Table 49. Thermal Characteristics (48-pin with External Crystal)55	Table 33. 100MHz PCIe Output Clock Accuracy and SSC	36
Table 36. GPI/GPIO Electrical Characteristics – 1.8V VDDD, VDDR, or VDDX37Table 37. GPI/GPIO Electrical Characteristics – 2.5V VDDD, VDDR, or VDDX38Table 38. GPI/GPIO Electrical Characteristics – 3.3V VDDD, VDDR, or VDDX38Table 39. CMOS GPI/GPIO Common Electrical Characteristics38Table 40. Power Supply Current39Table 41. I2C/SMBus Bus DC Electrical Characteristics40Table 42. I2C/SMBus Bus AC Electrical Characteristics40Table 43. SPI Target Interface Electrical Characteristics42Table 44. Power Supply Noise Rejection42Table 45. Output Bank Source Mapping47Table 46. VDD Pin Assignments for Outputs, Integer Output Dividers, and Fractional Output Dividers47Table 47. Input Buffer Programming Options for Specific Signaling Protocols49Table 48. XTAL[5:0] Tuning Capacitor52Table 49. Thermal Characteristics (48-pin with External Crystal)55	Table 34. Spread-Spectrum Programmability	37
Table 37. GPI/GPIO Electrical Characteristics – 2.5V VDDD, VDDR, or VDDX38Table 38. GPI/GPIO Electrical Characteristics – 3.3V VDDD, VDDR, or VDDX38Table 39. CMOS GPI/GPIO Common Electrical Characteristics38Table 40. Power Supply Current39Table 41. I2C/SMBus Bus DC Electrical Characteristics40Table 42. I2C/SMBus Bus AC Electrical Characteristics40Table 43. SPI Target Interface Electrical Characteristics42Table 44. Power Supply Noise Rejection42Table 45. Output Bank Source Mapping47Table 46. VDD Pin Assignments for Outputs, Integer Output Dividers, and Fractional Output Dividers47Table 47. Input Buffer Programming Options for Specific Signaling Protocols49Table 48. XTAL[5:0] Tuning Capacitor52Table 49. Thermal Characteristics (48-pin with External Crystal)55	Table 35. CLKIN Differential Electrical Characteristics	37
Table 38. GPI/GPIO Electrical Characteristics – 3.3V VDDD, VDDR, or VDDX38Table 39. CMOS GPI/GPIO Common Electrical Characteristics38Table 40. Power Supply Current39Table 41. I2C/SMBus Bus DC Electrical Characteristics40Table 42. I2C/SMBus Bus AC Electrical Characteristics40Table 43. SPI Target Interface Electrical Characteristics42Table 44. Power Supply Noise Rejection42Table 45. Output Bank Source Mapping47Table 46. VDD Pin Assignments for Outputs, Integer Output Dividers, and Fractional Output Dividers47Table 47. Input Buffer Programming Options for Specific Signaling Protocols49Table 48. XTAL[5:0] Tuning Capacitor52Table 49. Thermal Characteristics (48-pin with External Crystal)55	Table 36. GPI/GPIO Electrical Characteristics – 1.8V VDDD, VDDR, or VDDX	37
Table 39. CMOS GPI/GPIO Common Electrical Characteristics38Table 40. Power Supply Current39Table 41. I2C/SMBus Bus DC Electrical Characteristics40Table 42. I2C/SMBus Bus AC Electrical Characteristics40Table 43. SPI Target Interface Electrical Characteristics42Table 44. Power Supply Noise Rejection42Table 45. Output Bank Source Mapping47Table 46. VDD Pin Assignments for Outputs, Integer Output Dividers, and Fractional Output Dividers47Table 47. Input Buffer Programming Options for Specific Signaling Protocols49Table 48. XTAL[5:0] Tuning Capacitor52Table 49. Thermal Characteristics (48-pin with External Crystal)55	Table 37. GPI/GPIO Electrical Characteristics – 2.5V VDDD, VDDR, or VDDX	38
Table 40. Power Supply Current39Table 41. I2C/SMBus Bus DC Electrical Characteristics40Table 42. I2C/SMBus Bus AC Electrical Characteristics40Table 43. SPI Target Interface Electrical Characteristics42Table 44. Power Supply Noise Rejection42Table 45. Output Bank Source Mapping47Table 46. VDD Pin Assignments for Outputs, Integer Output Dividers, and Fractional Output Dividers47Table 47. Input Buffer Programming Options for Specific Signaling Protocols49Table 48. XTAL[5:0] Tuning Capacitor52Table 49. Thermal Characteristics (48-pin with External Crystal)55	Table 38. GPI/GPIO Electrical Characteristics – 3.3V VDDD, VDDR, or VDDX	38
Table 41. I2C/SMBus Bus DC Electrical Characteristics40Table 42. I2C/SMBus Bus AC Electrical Characteristics40Table 43. SPI Target Interface Electrical Characteristics42Table 44. Power Supply Noise Rejection42Table 45. Output Bank Source Mapping47Table 46. VDD Pin Assignments for Outputs, Integer Output Dividers, and Fractional Output Dividers47Table 47. Input Buffer Programming Options for Specific Signaling Protocols49Table 48. XTAL[5:0] Tuning Capacitor52Table 49. Thermal Characteristics (48-pin with External Crystal)55		
Table 42. I2C/SMBus Bus AC Electrical Characteristics40Table 43. SPI Target Interface Electrical Characteristics42Table 44. Power Supply Noise Rejection42Table 45. Output Bank Source Mapping47Table 46. VDD Pin Assignments for Outputs, Integer Output Dividers, and Fractional Output Dividers47Table 47. Input Buffer Programming Options for Specific Signaling Protocols49Table 48. XTAL[5:0] Tuning Capacitor52Table 49. Thermal Characteristics (48-pin with External Crystal)55	Table 40. Power Supply Current	39
Table 42. I2C/SMBus Bus AC Electrical Characteristics40Table 43. SPI Target Interface Electrical Characteristics42Table 44. Power Supply Noise Rejection42Table 45. Output Bank Source Mapping47Table 46. VDD Pin Assignments for Outputs, Integer Output Dividers, and Fractional Output Dividers47Table 47. Input Buffer Programming Options for Specific Signaling Protocols49Table 48. XTAL[5:0] Tuning Capacitor52Table 49. Thermal Characteristics (48-pin with External Crystal)55		
Table 44. Power Supply Noise Rejection42Table 45. Output Bank Source Mapping47Table 46. VDD Pin Assignments for Outputs, Integer Output Dividers, and Fractional Output Dividers47Table 47. Input Buffer Programming Options for Specific Signaling Protocols49Table 48. XTAL[5:0] Tuning Capacitor52Table 49. Thermal Characteristics (48-pin with External Crystal)55	Table 42. I2C/SMBus Bus AC Electrical Characteristics	40
Table 44. Power Supply Noise Rejection42Table 45. Output Bank Source Mapping47Table 46. VDD Pin Assignments for Outputs, Integer Output Dividers, and Fractional Output Dividers47Table 47. Input Buffer Programming Options for Specific Signaling Protocols49Table 48. XTAL[5:0] Tuning Capacitor52Table 49. Thermal Characteristics (48-pin with External Crystal)55	Table 43. SPI Target Interface Electrical Characteristics	42
Table 45. Output Bank Source Mapping47Table 46. VDD Pin Assignments for Outputs, Integer Output Dividers, and Fractional Output Dividers47Table 47. Input Buffer Programming Options for Specific Signaling Protocols49Table 48. XTAL[5:0] Tuning Capacitor52Table 49. Thermal Characteristics (48-pin with External Crystal)55	-	
Table 46. VDD Pin Assignments for Outputs, Integer Output Dividers, and Fractional Output Dividers47Table 47. Input Buffer Programming Options for Specific Signaling Protocols49Table 48. XTAL[5:0] Tuning Capacitor52Table 49. Thermal Characteristics (48-pin with External Crystal)55		
Table 47. Input Buffer Programming Options for Specific Signaling Protocols 49 Table 48. XTAL[5:0] Tuning Capacitor 52 Table 49. Thermal Characteristics (48-pin with External Crystal) 55	•	
Table 48. XTAL[5:0] Tuning Capacitor		
Table 49. Thermal Characteristics (48-pin with External Crystal)		
• • •		
	Table 50. Thermal Characteristics (40-pin with External Crystal)	
	Table 51. Thermal Characteristics (48-pin with Internal Crystal)	

RC310xxB Datasheet

Table 52. Thermal Characteristics (40-pin with Internal Crystal)		56
Table 53. Thermal Characteristics (32-pin with Internal Crystal)		57
Table 54 Ordering Information	6	36

1. Pin Information

1.1 Pin Assignments – RCxxx12B (Top View)

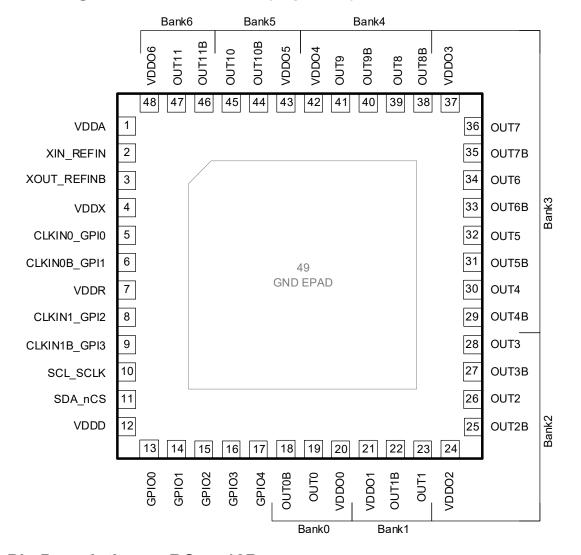

1.2 Pin Descriptions – RCxxx12B

Table 1. RCxxx12B Pin Descriptions

Number	Name	Type	Description
1	VDDA	Power	Analog power supply. See Table 8 for supported voltages.
2	XIN_REFIN	I	Crystal Input or differential reference clock positive input / CMOS single-ended reference clock input.
3	XOUT_REFINb	I/O	Crystal Output or differential reference clock negative input. This pin should be connected to a crystal. If an oscillator is connected to XIN_REFIN, then this pin must be left unconnected.
4	VDDX	Power	Crystal oscillator power supply. See Table 8 for supported voltages.
5	CLKIN0_GPI0	I	Differential clock positive input / CMOS single-ended reference clock input or general purpose input pin GPI0.
6	CLKIN0b_GPI1	I	Differential clock negative input / CMOS single-ended reference clock input or general purpose input pin GPI1.
7	VDDR	Power	CLKIN (receiver) power supply. See Table 8 for supported voltages.
8	CLKIN1_GPI2	I	Differential clock positive input / CMOS single-ended reference clock input or general purpose input pin GPI2.


Table 1. RCxxx12B Pin Descriptions (Cont.)

Number	Name	Type	Description
9	CLKIN1b_GPI3	I	Differential clock negative input / CMOS single-ended reference clock input or general purpose input pin GPI3.
10	SCL_SCLK	1	I2C Mode: I ² C interface bi-directional clock. SPI Mode: Serial Clock This pin is 3.3V tolerant.
11	SDA_nCS	1	I2C Mode: I ² C interface bi-directional data in open-drain mode. SPI Mode: Chip Select (active low) This pin is 3.3V tolerant.
12	VDDD	Power	Digital core and GPIO power supply. See Table 8 for supported voltages. When programming the OTP, this supply must be 2.5V or 3.3V.
13	GPIO0	I/O	General purpose input/output. 3-level logic input during power-up and CMOS level logic after unless set to 3-level.
14	GPIO1	I/O	General purpose input/output. 3-level logic input during power-up and CMOS level logic after unless set to 3-level.
15	GPIO2	I/O	General purpose input/output. 3-level logic input during power-up and CMOS level logic after unless set to 3-level.
16	GPIO3	I/O	General purpose input/output.
17	GPIO4	I/O	General purpose input/output.
18	OUT0b	0	Output Clock 0 negative.
19	OUT0	0	Output Clock 0 positive.
20	VDD00	Power	Power supply for output bank 0 and IOD 0. See Table 8 for supported voltages.
21	VDDO1	Power	Power supply for output bank 1 and IOD 1. See Table 8 for supported voltages.
22	OUT1b	0	Output Clock 1 negative.
23	OUT1	0	Output Clock 1 positive.
24	VDDO2	Power	Power supply for output bank 2 and FOD 0. See Table 8 for supported voltages.
25	OUT2b	0	Output Clock 2 negative.
26	OUT2	0	Output Clock 2 positive.
27	OUT3b	0	Output Clock 3 negative.
28	OUT3	0	Output Clock 3 positive.
29	OUT4b	0	Output Clock 4 negative.
30	OUT4	0	Output Clock 4 positive.
31	OUT5b	0	Output Clock 5 negative.
32	OUT5	0	Output Clock 5 positive.
33	OUT6b	0	Output Clock 6 negative.
34	OUT6	0	Output Clock 6 positive.
35	OUT7b	0	Output Clock 7 negative.
36	OUT7	0	Output Clock 7 positive.
37	VDDO3	Power	Power supply for output bank 3 and FOD 1. See Table 8 for supported voltages.
38	OUT8b	0	Output Clock 8 negative.
39	OUT8	0	Output Clock 8 positive.
40	OUT9b	0	Output Clock 9 negative.
41	OUT9	0	Output Clock 9 positive.
42	VDDO4	Power	Power supply for output bank 4 and FOD 2. See Table 8 for supported voltages.
43	VDDO5	Power	Power supply for output bank 5 and IOD 2. See Table 8 for supported voltages.
44	OUT10b	0	Output Clock 10 negative.
45	OUT10	0	Output Clock 10 positive.
46	OUT11b	0	Output Clock 11 negative.
47	OUT11	0	Output Clock 11 positive.

Table 1. RCxxx12B Pin Descriptions (Cont.)

Number	Name	Туре	Description
48	VDDO6	Power	Supply voltage for output bank 6 and IOD 3. See Table 8 for supported voltages.
EPAD	GND	Power	Ground. ePad must be connected to ground before any VDD is applied.

1.3 Pin Assignments – RCxxx12BQ (Top View)

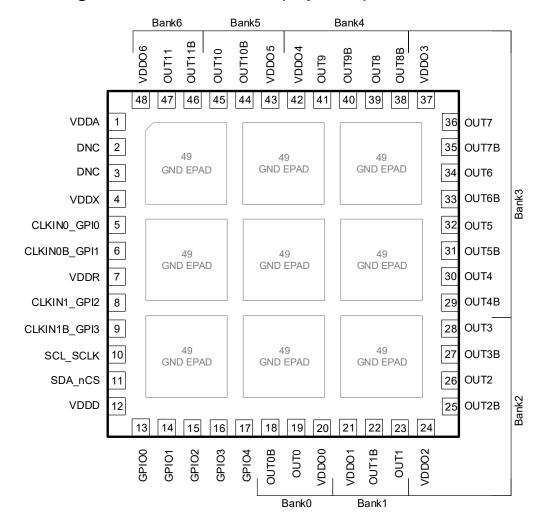

1.4 Pin Descriptions – RCxxx12BQ

Table 2. RCxxx12B Pin Descriptions

Number	Name	Туре	Description
1	VDDA	Power	Analog power supply. See Table 8 for supported voltages.
2	DNC	N/A	Do not connect. This pin should have no stubs.
3	DNC	N/A	Do not connect. This pin should have no stubs.
4	VDDX	Power	Crystal oscillator power supply. See Table 8 for supported voltages.
5	CLKIN0_GPI0	I	Differential clock positive input / CMOS single-ended reference clock input or general purpose input pin GPI0.
6	CLKIN0b_GPI1	I	Differential clock negative input / CMOS single-ended reference clock input or general purpose input pin GPI1.
7	VDDR	Power	CLKIN (receiver) power supply. See Table 8 for supported voltages.
8	CLKIN1_GPI2	I	Differential clock positive input / CMOS single-ended reference clock input or general purpose input pin GPI2.


Table 2. RCxxx12B Pin Descriptions (Cont.)

Number	Name	Type	Description
9	CLKIN1b_GPI3	1	Differential clock negative input / CMOS single-ended reference clock input or general purpose input pin GPI3.
10	SCL_SCLK	I	I2C Mode: I ² C interface bi-directional clock. SPI Mode: Serial Clock This pin is 3.3V tolerant.
11	SDA_nCS	1	I2C Mode: I ² C interface bi-directional data in open-drain mode. SPI Mode: Chip Select (active low) This pin is 3.3V tolerant.
12	VDDD	Power	Digital core and GPIO power supply. See Table 8 for supported voltages. When programming the OTP, this supply must be 2.5V or 3.3V.
13	GPIO0	I/O	General purpose input/output. 3-level logic input during power-up and CMOS level logic after unless set to 3-level.
14	GPIO1	I/O	General purpose input/output. 3-level logic input during power-up and CMOS level logic after unless set to 3-level.
15	GPIO2	I/O	General purpose input/output. 3-level logic input during power-up and CMOS level logic after unless set to 3-level.
16	GPIO3	I/O	General purpose input/output.
17	GPIO4	I/O	General purpose input/output.
18	OUT0b	0	Output Clock 0 negative.
19	OUT0	0	Output Clock 0 positive.
20	VDDO0	Power	Power supply for output bank 0 and IOD 0. See Table 8 for supported voltages.
21	VDDO1	Power	Power supply for output bank 1 and IOD 1. See Table 8 for supported voltages.
22	OUT1b	0	Output Clock 1 negative.
23	OUT1	0	Output Clock 1 positive.
24	VDDO2	Power	Power supply for output bank 2 and FOD 0. See Table 8 for supported voltages.
25	OUT2b	0	Output Clock 2 negative.
26	OUT2	0	Output Clock 2 positive.
27	OUT3b	0	Output Clock 3 negative.
28	OUT3	0	Output Clock 3 positive.
29	OUT4b	0	Output Clock 4 negative.
30	OUT4	0	Output Clock 4 positive.
31	OUT5b	0	Output Clock 5 negative.
32	OUT5	0	Output Clock 5 positive.
33	OUT6b	0	Output Clock 6 negative.
34	OUT6	0	Output Clock 6 positive.
35	OUT7b	0	Output Clock 7 negative.
36	OUT7	0	Output Clock 7 positive.
37	VDDO3	Power	Power supply for output bank 3 and FOD 1. See Table 8 for supported voltages.
38	OUT8b	0	Output Clock 8 negative.
39	OUT8	0	Output Clock 8 positive.
40	OUT9b	0	Output Clock 9 negative.
41	OUT9	0	Output Clock 9 positive.
42	VDDO4	Power	Power supply for output bank 4 and FOD 2. See Table 8 for supported voltages.
43	VDDO5	Power	Power supply for output bank 5 and IOD 2. See Table 8 for supported voltages.
44	OUT10b	0	Output Clock 10 negative.
45	OUT10	0	Output Clock 10 positive.
46	OUT11b	0	Output Clock 11 negative.
47	OUT11	0	Output Clock 11 positive.

Table 2. RCxxx12B Pin Descriptions (Cont.)

Number	Name	Туре	Description
48	VDDO6	Power	Supply voltage for output bank 6 and IOD 3. See Table 8 for supported voltages.
EPAD	GND	Power	Ground. ePad must be connected to ground before any VDD is applied.

1.5 Pin Assignments – RCxxx08B (Top View)

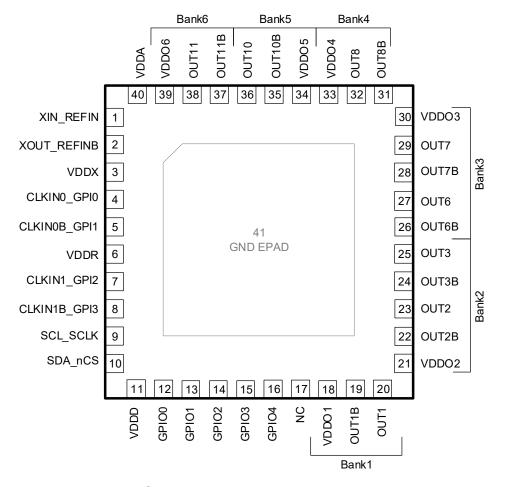

1.6 Pin Descriptions – RCxxx08B


Table 3. RCxxx08B Pin Descriptions

Number	Name	Туре	Description
1	XIN_REFIN	I	Crystal Input or differential reference clock positive input / CMOS single-ended reference clock input.
2	XOUT_REFIND	I/O	Crystal Output or differential reference clock negative input. This pin should be connected to a crystal. If an oscillator is connected to XIN_REFIN, then this pin must be left unconnected.
3	VDDX	Power	Crystal oscillator power supply. See Table 8 for supported voltages.
4	CLKIN0_GPI0	I	differential clock positive input / CMOS single-ended reference clock input or general purpose input pin GPI0.
5	CLKIN0b_GPI1	I	differential clock negative input / CMOS single-ended reference clock input or general purpose input pin GPI1.
6	VDDR	Power	CLKIN (receiver) power supply. See Table 8 for supported voltages.
7	CLKIN1_GPI2	I	Differential clock positive input / CMOS single-ended reference clock input or general purpose input pin GPI2.

Table 3. RCxxx08B Pin Descriptions (Cont.)

Number	Name	Туре	Description
8	CLKIN1b_GPI3	1	Differential clock negative input / CMOS single-ended reference clock input or general purpose input pin GPI3.
9	SCL_SCLK	I	I2C Mode: I ² C interface bi-directional clock. SPI Mode: Serial Clock This pin is 3.3V tolerant.
10	SDA_nCS	I/O	I2C Mode: I ² C interface bi-directional data in open-drain mode. SPI Mode: Chip Select (active low) This pin is 3.3V tolerant.
11	VDDD	Power	Digital core and GPIO power supply. See Table 8 for supported voltages. When programming the OTP, this supply must be 2.5V or 3.3V.
12	GPIO0	I/O	General purpose input/output. 3-level logic input during power-up and CMOS level logic after unless set to 3-level.
13	GPIO1	I/O	General purpose input/output. 3-level logic input during power-up and CMOS level logic after unless set to 3-level.
14	GPIO2	I/O	General purpose input/output. 3-level logic input during power-up and CMOS level logic after unless set to 3-level.
15	GPIO3	I/O	General purpose input/output.
16	GPIO4	I/O	General purpose input/output.
17	NC	Į	Not connected.
18	VDDO1	Power	Power supply for output bank 1 and IOD 1. See Table 8 for supported voltages.
19	OUT1b	0	Output Clock 1 negative.
20	OUT1	0	Output Clock 1 positive
21	VDDO2	Power	Power supply for output bank 2 and FOD 0. See Table 8 for supported voltages.
22	OUT2b	0	Output Clock 2 negative.
23	OUT2	0	Output Clock 2 positive.
24	OUT3b	0	Output Clock 3 negative.
25	OUT3	0	Output Clock 3 positive.
26	OUT6b	0	Output Clock 6 negative.
27	OUT6	0	Output Clock 6 positive.
28	OUT7b	0	Output Clock 7 negative.
29	OUT7	0	Output Clock 7 positive.
30	VDD03	Power	Power supply for output bank 3 and FOD 1. See Table 8 for supported voltages.
31	OUT8b	0	Output Clock 8 negative.
32	OUT8	0	Output Clock 8 positive.
33	VDDO4	Power	Power supply for output bank 4 and FOD 2. See Table 8 for supported voltages.
34	VDDO5	Power	Power supply for output bank 5 and IOD 2. See Table 8 for supported voltages.
35	OUT10b	0	Output Clock 10 negative.
36	OUT10	0	Output Clock 10 positive.
37	OUT11b	0	Output Clock 11 negative.
38	OUT11	0	Output Clock 11 positive.
39	VDD06	Power	Supply voltage for output bank 6 and IOD 3. See Table 8 for supported voltages.
40	VDDA	Power	Analog power supply. See Table 8 for supported voltages.
EPAD	GND	Power	Ground. ePad must be connected to ground before any VDD is applied.

1.7 Pin Assignments – RCxxx08BQ (Top View)

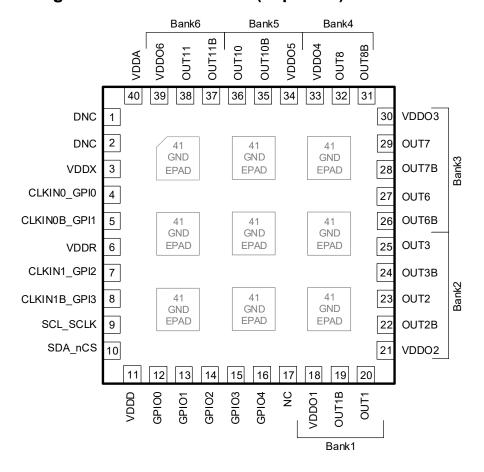

1.8 Pin Descriptions – RCxxx08BQ


Table 4. RCxxx08BQ Pin Descriptions

Number	Name	Туре	Description
1	DNC	N/A	Do not connect. This pin should have no stubs.
2	DNC	N/A	Do not connect. This pin should have no stubs.
3	VDDX	Power	Crystal oscillator power supply. See Table 8 for supported voltages.
4	CLKIN0_GPI0	1	Differential clock positive input / CMOS single-ended reference clock input or general purpose input pin GPI0.
5	CLKIN0b_GPI1	1	Differential clock negative input / CMOS single-ended reference clock input or general purpose input pin GPI1.
6	VDDR	Power	CLKIN (receiver) power supply. See Table 8 for supported voltages.
7	CLKIN1_GPI2	I	Differential clock positive input / CMOS single-ended reference clock input or general purpose input pin GPI2.
8	CLKIN1b_GPI3	I	Differential clock negative input / CMOS single-ended reference clock input or general purpose input pin GPI3.
9	SCL_SCLK	I	I2C Mode: I ² C interface bi-directional clock. SPI Mode: Serial Clock This pin is 3.3V tolerant.
10	SDA_nCS	I/O	I2C Mode: I ² C interface bi-directional data in open-drain mode. SPI Mode: Chip Select (active low) This pin is 3.3V tolerant.
11	VDDD	Power	Digital core and GPIO power supply. See Table 8 for supported voltages. When programming the OTP, this supply must be 2.5V or 3.3V.

Table 4. RCxxx08BQ Pin Descriptions (Cont.)

Number	Name	Туре	Description
12	GPIO0	I/O	General purpose input/output. 3-level logic input during power-up and CMOS level logic after unless set to 3-level.
13	GPIO1	I/O	General purpose input/output. 3-level logic input during power-up and CMOS level logic after unless set to 3-level.
14	GPIO2	I/O	General purpose input/output. 3-level logic input during power-up and CMOS level logic after unless set to 3-level.
15	GPIO3	I/O	General purpose input/output.
16	GPIO4	I/O	General purpose input/output.
17	NC	1	Not connected.
18	VDDO1	Power	Power supply for output bank 1 and IOD 1. See Table 8 for supported voltages.
19	OUT1b	0	Output Clock 1 negative.
20	OUT1	0	Output Clock 1 positive
21	VDDO2	Power	Power supply for output bank 2 and FOD 0. See Table 8 for supported voltages.
22	OUT2b	0	Output Clock 2 negative.
23	OUT2	0	Output Clock 2 positive.
24	OUT3b	0	Output Clock 3 negative.
25	OUT3	0	Output Clock 3 positive.
26	OUT6b	0	Output Clock 6 negative.
27	OUT6	0	Output Clock 6 positive.
28	OUT7b	0	Output Clock 7 negative.
29	OUT7	0	Output Clock 7 positive.
30	VDDO3	Power	Power supply for output bank 3 and FOD 1. See Table 8 for supported voltages.
31	OUT8b	0	Output Clock 8 negative.
32	OUT8	0	Output Clock 8 positive.
33	VDDO4	Power	Power supply for output bank 4 and FOD 2. See Table 8 for supported voltages.
34	VDDO5	Power	Power supply for output bank 5 and IOD 2. See Table 8 for supported voltages.
35	OUT10b	0	Output Clock 10 negative.
36	OUT10	0	Output Clock 10 positive.
37	OUT11b	0	Output Clock 11 negative.
38	OUT11	0	Output Clock 11 positive.
39	VDD06	Power	Supply voltage for output bank 6 and IOD 3. See Table 8 for supported voltages.
40	VDDA	Power	Analog power supply. See Table 8 for supported voltages.
EPAD	GND	Power	Ground. ePad must be connected to ground before any VDD is applied.

1.9 Pin Assignments – RCxxx05BQ (Top View)

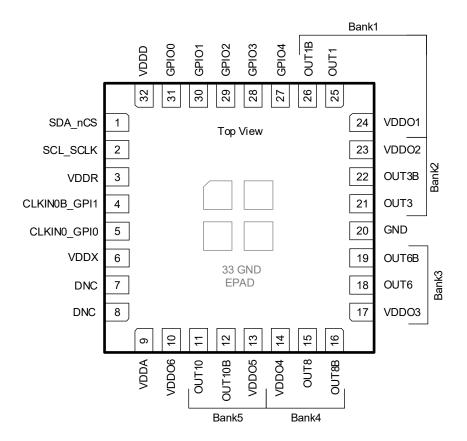

1.10 Pin Descriptions - RCxxx05BQ

Table 5. RCxxx05BQ Pin Descriptions

Number	Name	Туре	Description
1	SDA_nCS	I/O	I2C Mode: I ² C interface bi-directional data in open-drain mode. SPI Mode: Chip Select (active low) This pin is 3.3V tolerant.
2	SCL_SCLK	1	I2C Mode: I ² C interface bi-directional clock. SPI Mode: Serial Clock This pin is 3.3V tolerant.
3	VDDR	Power	CLKIN (receiver) power supply. See Table 8 for supported voltages.
4	CLKIN0b_GPI1	I	Differential clock negative input / CMOS single-ended reference clock input or general purpose input pin GPI1
5	CLKIN0_GPI0	I	Differential clock positive input / CMOS single-ended reference clock input or general purpose input pin GPI0
6	VDDX	Power	Crystal oscillator power supply. See Table 8 for supported voltages.
7	DNC	NA	Do not connect. This pin should have no stubs.
8	DNC	NA	Do not connect. This pin should have no stubs.
9	VDDA	Power	Analog power supply. See Table 8 for supported voltages.
10	VDDO6	Power	Supply voltage for output bank 6 and IOD 3. See Table 8 for supported voltages.
11	OUT10	0	Output Clock 10 positive.
12	OUT10b	0	Output Clock 10 negative.
13	VDDO5	Power	Power supply for output bank 5 and IOD 2. See Table 8 for supported voltages.

Table 5. RCxxx05BQ Pin Descriptions (Cont.)

Number	Name	Туре	Description		
14	VDDO4	Power	Power supply for output bank 4 and FOD 2. See Table 8 for supported voltages.		
15	OUT8	0	Output Clock 8 positive.		
16	OUT8b	0	Output Clock 8 negative.		
17	VDDO3	Power	Power supply for output bank 3 and FOD 1. See Table 8 for supported voltages.		
18	OUT6	0	Output Clock 6 positive.		
19	OUT6b	0	Output Clock 6 negative.		
20	GND	Power	Ground		
21	OUT3	0	Output Clock 3 positive.		
22	OUT3b	0	Output Clock 3 negative.		
23	VDDO2	Power	Power supply for output bank 2 and FOD 0. See Table 8 for supported voltages.		
24	VDDO1	Power	Power supply for output bank 1 and IOD 1. See Table 8 for supported voltages.		
25	OUT1	0	Output Clock 1 positive		
26	OUT1b	0	Output Clock 1 negative.		
27	GPIO4	I/O	General purpose input/output		
28	GPIO3	I/O	General purpose input/output		
29	GPIO2	I/O	General purpose input/output 3-level logic input during power-up and CMOS level logic after unless set to 3-level.		
30	GPIO1	I/O	General purpose input/output 3-level logic input during power-up and CMOS level logic after unless set to 3-level.		
31	GPIO0	I/O	General purpose input/output 3-level logic input during power-up and CMOS level logic after unless set to 3-level.		
32	VDDD	Power	Digital core and GPIO power supply. See Table 8 for supported voltages. When programming the OTP, this supply must be 2.5V or 3.3V.		
EPAD	GND	Power	Ground. ePad must be connected to ground before any VDD is applied.		

1.11 Pin Characteristics

Table 6. Pin Characteristics

Symbol	Parameter	Test Conditions	Minimum	Typical	Maximum	Unit
		CLKIN[1:0], CLKIN[1:0]b, GPI[0:3]	-	2	-	
		SCL_SCLK, SDA_nCS	-	3	-	
C _{IN}	Input Capacitance	XIN_REFIN [1]	-	5	-	pF
		XOUT_REFINb [1]	-	4	-	
		GPIO[0:4]	-	5	-	
R _{PULLUP}	Input Pull-Up Resistor	All pins with internal pull up capability	-	52.6	-	- kΩ
R _{PULLDOWN}	Input Pull-Down Resistor	All pins with internal pull down capability	-	52.6	-	
	Single-ended LP-HCSL Output Impedance	50Ω single-ended (100 Ω differential).	-	51	-	40 to 60Ω
Z _{OUTDC}		42.5Ω single-ended (85Ω differential).	-	44	-	34 to 51Ω
-00100		VDDO = 3.3V	-	17.3	-	
	LVCMOS Output Impedance	VDDO = 2.5V.	-	19.5	-	Ω
		VDDO = 1.8V	-	17.6	-	

^{1.} When used as clock input.





2. Specifications

The absolute maximum ratings are stress ratings only. Stresses greater than those listed below can cause permanent damage to the device. Functional operation of the RC310xxB at absolute maximum ratings is not implied. Exposure to absolute maximum rating conditions may affect device reliability.

2.1 Absolute Maximum Ratings

Table 7. Absolute Maximum Ratings

Symbol	Parameter	Conditions	Minimum	Maximum	Unit
V_{DD}	Supply Voltage with respect to Ground	Any VDD pin	-0.5	3.63	V
		XIN_REFIN, XOUT_REFINb [2]	-0.5	V _{DD} + 0.3	V
V_{IN}	Input Voltage ^[1]	CLKIN[1:0]_GPI[1:0], CLKIN[1:0]b_GPI[3:2]	-0.5	V _{DD} + 0.3	V
		GPIO[4:0] used as inputs	-0.5	V _{DD} + 0.3	V
		SCL_SCLK, SDA_nCS	-0.5	V _{DD} + 0.3 V _{DD} + 0.3	V
I _{IN}	Input Current	CLKIN[1:0]_GPI[1:0], CLKIN[1:0]b_GPI[3:2]	-	±50	mA
	Output Current - Continuous	OUT[11:0], OUT[11:0]b	-	30	mA
	Output Current - Continuous	GPIO[4:0] used as outputs, SDA_nCS	-	25	mA
I _{OUT}	Output Current - Surge	OUT[11:0], OUT[11:0]b	-	60	mA
	Output Current - Surge	GPIO[4:0] used as outputs, SDA_nCS	-	50	mA
TJ	Maximum Junction Temperature	-	-	150	°C
T _S	Storage Temperature	Storage Temperature	-65	150	°C
ESD	Human Body Model	JESD22-A114 (JS-001) Classification	-	2000	V
ESD	Charged Device Model	JESD22-C101 Classification	-	500	V

^{1.} VDD refers to the VDD pin that supplies the particular input. To determine to which VDD pin the specification applies, see Table 46.

2.2 Recommended Operating Conditions

Table 8. Recommended Operating Conditions [1][2]

Symbol	Parameter	Conditions	Minimum	Typical	Maximum	Unit
Тл	Maximum Junction Temperature	-	-	-	125	°C
T _A	Ambient Operating temperature	-	-40	-	85	°C
	Supply Voltage with respect to Ground	Any VDD pin, 1.8V supply	1.71	1.8	1.89	V
V_{DDx}		Any VDD pin, 2.5V supply	2.375	2.5	2.625	V
		Any VDD pin, 3.3V supply	3.135	3.3	3.465	V
t _{PU}	Power-up time for all VDDs to reach minimum specified voltage.	Power ramps must be monotonic. For more considerations, see Application Information.	0.2	-	5	ms

^{1.} All electrical characteristics are specified over Recommended Operating Conditions unless noted otherwise.

^{2.} This limit only applies when XIN_REFIN/XOUT_REFINb are configured as an "Input Buffer" for use with an external oscillator. No limit is implied when connected directly to a crystal.

^{2.} All conditions in this table must be met to guarantee device functionality and performance.

2.3 Electrical Characteristics

Table 9. PCIe Refclk Phase Jitter, Clock Generator Mode, VDDO = 1.8V/2.5V/3.3V [1][2]

Symbol	Parameter	Condition	Typical	Maximum	PCle Limit	Unit
t _{jphPCleG1-CC}	PCle Gen1 (2.5 GT/s)		1821	4450	86,000	fs p-p
+	PCle Gen2 Hi Band (5.0 GT/s)	Clock Generator Mode	157	382	3,100	
t _{jphPCleG2-CC}	PCle Gen2 Lo Band (5.0 GT/s)	Clock Generator Mode	60	241	3,000	
t _{jphPCleG3-CC}	PCle Gen3 (8.0 GT/s)	Common Clocked (CC)	51	120	1,000	
t _{jphPCleG4-CC}	PCle Gen4 (16.0 GT/s)	Architecture	51	120	500 ^[3]	fs RMS
t _{jphPCleG5-CC}	PCle Gen5 (32.0 GT/s)	SSC = -0% (off)	19	46	150 ^[4]	
t _{jphPCleG6-CC}	PCIe Gen6 (64.0 GT/s)		12	29	100 [5]	
t _{jphPCleG7-CC}	PCIe Gen7 (128.0 GT/s)		8	20	67 ^[6]	
t _{jphPCleG1-CC}	PCle Gen1 (2.5 GT/s)		4190	6910	86,000	fs p-p
4	PCle Gen2 Hi Band (5.0 GT/s)		371	590	3,100	
^t jphPCleG2-CC	PCle Gen2 Lo Band (5.0 GT/s)	Clock Generator Mode,	131	279	3,000	
t _{jphPCleG3-CC}	PCle Gen3 (8.0 GT/s)		123	199	1,000	
t _{jphPCleG4-CC}	PCle Gen4 (16.0 GT/s) [7]		123	199	500	fs RMS
t _{jphPCleG5-CC}	PCle Gen5 (32.0 GT/s)		48	77	150	
t _{jphPCleG6-CC}	PCle Gen6 (64.0 GT/s)		28	47	100	
t _{jphPCleG7-CC}	PCIe Gen7 (128.0 GT/s)		20	33	67	
t _{jphPCleG2-IR}	PCIe Gen2 (5.0 GT/s)		159	441		
t _{jphPCleG3-IR}	PCle Gen3 (8.0 GT/s)	Clock Generator Mode	60	158		
t _{jphPCleG4-IR}	PCIe Gen4 (16.0 GT/s)	Clock Generator Mode, CC Architecture SSC = -0.5% Clock Generator Mode, Independent Reference No Spread (IR-SRNS) Architecture, SSC = 0% Clock Generator Mode, Independent Reference Separate Spread (IR-SRIS) Architecture, SSC = -0.5%	62	164		
t _{jphPCleG5-IR}	PCle Gen5 (32.0 GT/s)	, ,	16	41		
t _{jphPCleG6-IR}	PCIe Gen6 (64.0 GT/s)	SSC = 0%	12	33		
t _{jphPCleG7-IR}	PCle Gen7 (128.0 GT/s)		9	23		
t _{jphPCleG2-IR}	PCle Gen2 (5.0 GT/s)	*	1322	1382	ro.	
t _{jphPCleG3-IR}	PCle Gen3 (8.0 GT/s)	· ·	481	499	[8]	fs RMS
t _{jphPCleG4-IR}	PCIe Gen4 (16.0 GT/s)		315	342		
t _{jphPCleG5-IR}	PCIe Gen5 (32.0 GT/s)	Clock Generator Mode,	77	128		
t _{jphPCleG6-IR}	PCIe Gen6 (64.0 GT/s)	IR-SRIS Architecture, SSC = -0.3%	61	66	1	
^t jphPCleG7-IR	PCIe Gen7 (128.0 GT/s)	Clock Generator Mode, IR-SRIS Architecture, SSC = -0.15%	31	36		

- 1. The Refclk jitter is measured after applying the filter functions found in the *PCI Express Base Specification 7.0*. For the exact measurement setup, see Test Loads. The worst case results for each data rate are summarized in this table. Equipment noise is removed from all measurements.
- 2. Jitter measurements are made with a capture of at least 100,000 clock cycles captured by a real-time oscilloscope (RTO) with a sample rate of 20GS/s or greater. Broadband oscilloscope noise must be minimized in the measurement. The measured PP jitter is used (no extrapolation) for RTO measurements. Alternately, jitter measurements can be made with a Phase Noise Analyzer (PNA) extending (flat) and integrating and folding the frequency content up to an offset from the carrier frequency of at least 200MHz (at 300MHz absolute frequency) below the Nyquist frequency. For PNA measurements for the 2.5GT/s data rate, the RMS jitter is converted to peak-to-peak jitter using a multiplication factor of 8.83.
- 3. Note that 0.7ps RMS is to be used in channel simulations to account for additional noise in a real system.
- 4. Note that 0.25ps RMS is to be used in channel simulations to account for additional noise in a real system.
- 5. Note that 0.15ps RMS is to be used in channel simulations to account for additional noise in a real system.
- 6. Note that 0.10ps RMS is to be used in channel simulations to account for additional noise in a real system.
- 7. SSC spurs from the fundamental and harmonics are removed up to a cutoff frequency of 2MHz taking care to minimize removal of any non-SSC content
- 8. The *PCI Express Base Specification* 7.0 provides the filters necessary to calculate IR jitter values; it does not provide specification limits, therefore, the reference to this footnote. IR values are informative only. A common practice is to split the common clock budget in half. For 16GT/s data rates and above, the user must choose whether to use the output jitter specification, or the input jitter specification, which includes an allocation for the jitter added by the channel. Using 32GT/s, the Refclk output jitter budget is 150fs RMS. One half of the Refclk jitter budget is 106fs RMS. At the clock input, the system must deliver a Refclk with <250fs RMS phase jitter. One half of this value is 177fs RMS. If the clock is placed next to the PCIe device in an IR system, the channel is very short and the user can choose to use this more relaxed value as the jitter limit.



Table 10. PCIe Refclk Additive Phase Jitter, Fanout Mode, VDDO = 1.8V/2,5V/3.3V [1][2]

Symbol	Parameter	Condition	Typical	Maximum	PCle Limit [3]	Unit
t _{jphPCleG1-CCadd}	PCle Gen1 (2.5 GT/s)		2008	3955	86,000	fs p-p
•	PCIe Gen2 Hi Band (5.0 GT/s)		199	361	3,100	
	PCle Gen2 Lo Band (5.0 GT/s)		88	183	3,000	
t _{jphPCleG3-CCadd}	PCle Gen3 (8.0 GT/s)	Fanout mode, CC	67	122	1,000	
t _{jphPCleG4-CCadd}	PCIe Gen4 (16.0 GT/s) [4][5]	Architecture	67	122	500	fs RMS
t _{jphPCleG5-CCadd}	PCIe Gen5 (32.0 GT/s) [3][6]	-	27	49	150	
t _{jphPCleG6-CCadd}	PCIe Gen6 (64.0 GT/s) [3][7]		16	29	100	
t _{jphPCleG7-CCadd}	PCIe Gen7 (128.0 GT/s) [3][8]		11	20	67	
t _{jphPCleG2-lRadd}	PCIe Gen2 (5.0 GT/s)		185	329		
t _{jphPCleG3-lRadd}	PCIe Gen3 (8.0 GT/s)		72	124		
t _{jphPCleG4-lRadd}	PCle Gen4 (16.0 GT/s)	Fanout mode, IR (SRIS,	74	128	[9]	fs RMS
t _{jphPCleG5-lRadd}	PCIe Gen5 (32.0 GT/s)	— Ortivo) Architecture	20	36]	IS KIVIS
t _{jphPCleG6-lRadd}	PCIe Gen6 (64.0 GT/s)	Fanout mode, IR (SRIS, SRNS) Architecture	15	26		
t _{jphPCleG7-lRadd}	PCIe Gen7 (128.0 GT/s)		10	18		

- 1. The Refclk jitter is measured after applying the filter functions found in the *PCI Express Base Specification 7.0*. For the exact measurement setup, see Test Loads. The worst case results for each data rate are summarized in this table. Equipment noise is removed from all measurements.
- 2. Jitter measurements are made with a capture of at least 100,000 clock cycles captured by a real-time oscilloscope (RTO) with a sample rate of 20GS/s or greater. Broadband oscilloscope noise must be minimized in the measurement. The measured PP jitter is used (no extrapolation) for RTO measurements. Alternately, jitter measurements can be made with a Phase Noise Analyzer (PNA) extending (flat) and integrating and folding the frequency content up to an offset from the carrier frequency of at least 200MHz (at 300MHz absolute frequency) below the Nyquist frequency. For PNA measurements for the 2.5GT/s data rate, the RMS jitter is converted to peak-to-peak jitter using a multiplication factor of 8.83.
- 3. The sum of the input jitter and the RC310xxB additive jitter must be less than these values. Peak to peak values are calculated with an arithmetic sum and RMS values are calculated with an RMS sum,
- SSC spurs from the fundamental and harmonics are removed up to a cutoff frequency of 2MHz taking care to minimize removal of any non-SSC content
- 5. Note that 0.7ps RMS is to be used in channel simulations to account for additional noise in a real system.
- 6. Note that 0.25ps RMS is to be used in channel simulations to account for additional noise in a real system.
- Note that 0.15ps RMS is to be used in channel simulations to account for additional noise in a real system.
- 8. Note that 0.10ps RMS is to be used in channel simulations to account for additional noise in a real system.
- 9. The PCI Express Base Specification 7.0 provides the filters necessary to calculate IR jitter values; it does not provide specification limits, therefore, the reference to this footnote. IR values are informative only. A common practice is to split the common clock budget in half. For 16GT/s data rates and above, the user must choose whether to use the output jitter specification, or the input jitter specification, which includes an allocation for the jitter added by the channel. Using 32GT/s, the Refclk output jitter budget is 150fs RMS. One half of the Refclk jitter budget is 106fs RMS. At the clock input, the system must deliver a Refclk with <250fs RMS phase jitter. One half of this value is 177fs RMS. If the clock is placed next to the PCIe device in an IR system, the channel is very short and the user can choose to use this more relaxed value as the jitter limit.

Table 11. Phase Jitter and Phase Noise - 1.8V VDDO [1][2]

Symbol	Parameter	Conditions	Typical	Maximum	Unit
	Random Phase Jitter,	122.88MHz (VCO: 9.8304GHz, IOD 0, 1, 2 or 3)	194	266	_
tjit(Φ)	10kHz to 20MHz (68MHz XTAL, Synthesizer Mode)	156.25MHz (VCO: 10GHz, FOD 0, 1 or 2)	213	271	fs (RMS)
	[2]	245.76MHz (VCO: 9.8304GHz, IOD 0, 1, 2 or 3)	186	249	
	Random Phase Jitter, 10kHz to 20MHz (68MHz XTAL, JA Mode) ^[2]	122.88MHz (VCO: 9.8304GHz, FOD 0, 1 or 2)	211	274	
		156.25MHz (VCO: 10GHz, FOD 0, 1 or 2)	208	258	
tiit(क)		245.76MHz (VCO: 9.8304GHz, FOD 0, 1 or 2)	201	259	fs
tjit(Φ)		312.5MHz (VCO: 10GHz, FOD 0, 1 or 2)	202	298	(RMS)
		322.265625MHz (VCO: 10.3125GHz, FOD 0, 1 or 2)	195	221	
		644.53125MHz (VCO: 10.3125GHz, FOD 0, 1 or 2)	187	209	

Table 11. Phase Jitter and Phase Noise – 1.8V VDDO [1][2] (Cont.)

Symbol	Parameter	Conditions	Typical	Maximum	Unit
ΦSSB(100)		100Hz Offset	-104	-	
ΦSSB(1k)	Single-Sideband Phase Noise	1kHz Offset	-114	-	
ФSSB(10k)	(68MHz Crystal, JA Mode with 10Hz loop bandwidth, 25MHz input from SMA-100, one output enabled at 156.25MHz)	10kHz Offset	-129	-	
ФSSB(100k)		100kHz Offset	-134	-	dBc/Hz
ΦSSB(1M)		1MHz Offset	-145	-	
ФSSB(10M)		10MHz Offset	-155	-	
ФSSB(30M)	,	30MHz Offset	-158	-	
ФSSB(10)		10Hz Offset	-80	-	
ΦSSB(100)		100Hz Offset	-97	-	
ΦSSB(500)	0: 1 0:11 151	500Hz Offset	-106	-	
ΦSSB(1k)	Single-Sideband Phase Noise	1kHz Offset	-108	-	
ΦSSB(10k)	(68MHz Crystal, JA Mode	10kHz Offset	-123	-	-ID - /I I -
ФSSB(100k)	with 10Hz loop bandwidth, 25MHz input	100kHz Offset	-133	-	dBc/Hz
ФSSB(200k)	from SMA-100, one IOD	200kHz Offset	-134	-	
ФSSB(800k)	enabled at 245.76MHz)	800kHz Offset	-142	-	
ΦSSB(5M)		5MHz Offset	-153	-	
ФSSB(>10M)		> 10MHz Offset	-157	-	
ФSSB(10)		10Hz Offset	-86	-	
ΦSSB(100)	Single-Sideband Phase Noise	100Hz Offset	-103	-	
ΦSSB(1k)	(68MHz Crystal, JA Mode	1kHz Offset	-113	-	".
ФSSB(10k)	with 10Hz loop bandwidth,25MHz input	10kHz Offset	-129	-	dBc/Hz
ФSSB(100k)	from SMA-100, one IOD	100kHz Offset	-139	-	
ΦSSB(>1M)	enabled at 122.88MHz)	>1MHz Offset	-163	-	
		2Hz to < 100Hz	66	-	
	Spurious Signal Rejection (245.76MHz)	100Hz to < 1kHz	77	-	dB
	(243.70IVII IZ)	1kHz to < 491.52MHz	70	-	
Φ		2Hz to < 100Hz	80	-	
	Spurious Signal Rejection (122.88MHz)	100Hz to < 1kHz	84	-	dB
	(122.00IVII IZ)	1kHz to < 245.76MHz	70	-	
	Harmonic Rejection	245.76MHz	13	-	
-	(Even order harmonics)	122.88MHz	12	-	dBc
-	Output-to-output	OUTx = 312.5MHz	51	-	dB
-	Isolation: Measured in One Specific	OUTx = 491.52MHz	54	-	dB
-	Configuration Between 2 Outputs	OUTx = 491.52MHz, with 7.68MHz actively running	75	-	dB

Electrical parameters are guaranteed over the specified ambient operating temperature range, which is established when the device is mounted
in a test socket with maintained transverse airflow greater than 500lfpm. The device will meet specifications after thermal equilibrium has been
reached under these conditions.

^{2.} Characterized using a Rohde and Schwarz SMA100 overdriving the XTAL interface.

Table 12. Phase Jitter and Phase Noise – 2.5V VDDO [1][2]

Symbol	Parameter	Conditions	Typical	Maximum	Unit
	Random Phase Jitter,	122.88MHz (VCO: 9.8304GHz, IOD 0, 1, 2 or 3)	214	229	
$tjit(\Phi)$	10kHz to 20MHz (68MHz XTAL, Synthesizer Mode)	156.25MHz (VCO: 10GHz, FOD 0, 1 or 2)	231	253	fs (RMS)
	[2]	245.76MHz (VCO: 9.8304GHz, IOD 0, 1, 2 or 3)	209	222	(11110)
		122.88MHz (VCO: 9.8304GHz, FOD 0, 1 or 2)	232	272	
		156.25MHz (VCO: 10GHz, FOD 0, 1 or 2)	231	252	
4114/ ± \	Random Phase Jitter,	245.76MHz (VCO: 9.8304GHz, FOD 0, 1 or 2)	220	253	fs
tjit(Φ) 10kHz to 20MHz (68MHz XTAL, JA Mode) [2]	312.5MHz (VCO: 10GHz, FOD 0, 1 or 2)	220	234	(RMS)	
	,	322.265625MHz (VCO: 10.3125GHz, FOD 0, 1 or 2)	223	252	
		644.53125MHz (VCO: 10.3125GHz, FOD 0, 1 or 2)	214	240	
ΦSSB(100)		100Hz Offset	-101	-	
ΦSSB(1k)	Single-Sideband Phase	1kHz Offset	-115	-	
ФSSB(10k)	Noise (68MHz Crystal, JA Mode with 10Hz loop	10kHz Offset	-128	-	
ФSSB(100k)	bandwidth, 25MHz input	100kHz Offset	-137	-	dBc/Hz
ΦSSB(1M)	from SMA-100, one output enabled at	1MHz Offset	-146	-	
ΦSSB(10M)	156.25MHz)	10MHz Offset	-155	-	
ΦSSB(30M)		30MHz Offset	-157	-	
ΦSSB(10)		10Hz Offset	-80	-	
ΦSSB(100)		100Hz Offset	-97	-	
ΦSSB(500)	Single-Sideband Phase	500Hz Offset	-108	-	
ΦSSB(1k)		1kHz Offset	-111	-	
ФSSB(10k)	Noise (68MHz Crystal, JA Mode with 10Hz loop	10kHz Offset	-125	-	
ΦSSB(100k)	bandwidth, 25MHz input	100kHz Offset	-133	-	dBc/Hz
ΦSSB(200k)	from SMA-100, one IOD enabled at 245.76MHz)	200kHz Offset	-133	-	
ΦSSB(800k)	,	800kHz Offset	-140	-	
ΦSSB(5M)		5MHz Offset	-153	-	
ФSSB(>10M)		>10MHz Offset	-156	-	
ФSSB(10)		10Hz Offset	-87	-	
ΦSSB(100)	Single-Sideband Phase	100Hz Offset	-104	-	
ΦSSB(1k)	Noise (68MHz Crystal, JA Mode with 10Hz loop	1kHz Offset	-117	-	
ФSSB(10k)	bandwidth,25MHz input	10kHz Offset	-131	-	dBc/Hz
ΦSSB(100k)	from SMA-100, one IOD enabled at 122.88MHz)	100kHz Offset	-139	-	
ΦSSB(>1M)		>1MHz Offset	-163	-	
		2Hz to <100Hz	65	-	
	Spurious Signal Rejection	100Hz to <1kHz	86	-	dB
	(245.76MHz)	1kHz to < 491.52MHz	70	-	
Φ		2Hz to < 100Hz	78	-	
	Spurious Signal Rejection	100Hz to < 1kHz	89	-	dB
	(122.88MHz)	1kHz to < 245.76MHz	76	-	
	Harmonic Rejection	245.76MHz	13	-	
-	(Even order harmonics)	122.88MHz	12	_	dBc

Table 12. Phase Jitter and Phase Noise – 2.5V VDDO [1][2] (Cont.)

Symbol	Parameter	Conditions	Typical	Maximum	Unit
-	Output-to-output Isolation:	OUTx = 312.5MHz	51	-	dB
-	Measured in One Specific Configuration Between 2	OUTx = 491.52MHz	54	-	dB
-	Outputs Only	OUTx = 491.52MHz, with 7.68MHz actively running	74	-	dB

^{1.} Electrical parameters are guaranteed over the specified ambient operating temperature range, which is established when the device is mounted in a test socket with maintained transverse airflow greater than 500lfpm. The device will meet specifications after thermal equilibrium has been reached under these conditions.

Table 13. Phase Jitter and Phase Noise – 3.3V VDDO [1][2]

Symbol	Parameter	Conditions	Typical	Maximum	Unit
	Random Phase Jitter,	122.88MHz (VCO: 9.8304GHz, IOD 0, 1, 2 or 3)	211	225	
tjit(Φ)	10kHz to 20MHz (68MHz XTAL, Synthesizer Mode)	156.25MHz (VCO: 10GHz, FOD 0, 1 or 2)	231	245	fs (RMS)
	[2]	245.76MHz (VCO: 9.8304GHz, IOD 0, 1, 2 or 3)	211	240	, ()
		122.88MHz (VCO: 9.8304GHz, FOD 0, 1 or 2)	233	263	
		156.25MHz (VCO: 10GHz, FOD 0, 1 or 2)	227	249	
tiit/₼\	Random Phase Jitter, 10kHz to 20MHz (68MHz	245.76MHz (VCO: 9.8304GHz, FOD 0, 1 or 2)	220	240	fs
tjit(Φ)	XTAL, JA Mode) [2]	312.5MHz (VCO: 10GHz, FOD 0, 1 or 2)	217	235	(RMS)
		322.265625MHz (VCO: 10.3125GHz, FOD 0, 1 or 2)	220	249	
		644.53125MHz (VCO: 10.3125GHz, FOD 0, 1 or 2)	212	236	
ΦSSB(100)		100Hz Offset	-102	-	
ΦSSB(1k)	Noise (68MHz Crystal, JA Mode	1kHz Offset	-113	-	
ΦSSB(10k)		10kHz Offset	-128	-	
ФSSB(100k)	with 10Hz loop bandwidth, 25MHz input	100kHz Offset	-137	-	dBc/Hz
ΦSSB(1M)	from SMA-100, one	1MHz Offset	-147	-	
ФSSB(10M)	output enabled at 156.25MHz)	10MHz Offset	-155	-	
ФSSB(30M)	,	30MHz Offset	-157	-	
ΦSSB(10)		10Hz Offset	-85	-	
ΦSSB(100)		100Hz Offset	-96	-	
ΦSSB(500)	Circula Cidaband Dhaca	500Hz Offset	-107	-	
ΦSSB(1k)	Single-Sideband Phase Noise	1kHz Offset	-110	-	
ΦSSB(10k)	(68MHz Crystal, JA Mode	10kHz Offset	-124	-	dBc/Hz
ΦSSB(100k)	with 10Hz loop bandwidth, 25MHz input	100kHz Offset	-133	-	ubc/nz
ΦSSB(200k)	from SMA-100, one IOD enabled at 245.76MHz)	200kHz Offset	-134	-	
ФSSB(800k)	- Enabled at 245.701VIDZ)	800kHz Offset	-143	-	1
ΦSSB(5M)	1	5MHz Offset	-153	-	1
ΦSSB(>10M)		>10MHz Offset	-157	-]

^{2.} Characterized using a Rohde and Schwarz SMA100 overdriving the XTAL interface.

Table 13. Phase Jitter and Phase Noise - 3.3V VDDO [1][2] (Cont.)

Symbol	Parameter	Conditions	Typical	Maximum	Unit
ΦSSB(10)	Cinale Cideband Dhace	10Hz Offset	-88	-	
ΦSSB(100)	Single-Sideband Phase Noise	100Hz Offset	-104	-	
ΦSSB(1k)	(68MHz Crystal, JA Mode	1kHz Offset	-116	-	dBc/Hz
ФSSB(10k)	with 10Hz loop bandwidth,25MHz input	10kHz Offset	-130	-	UBC/FIZ
ФSSB(100k)	from SMA-100, one IOD enabled at 122.88MHz)	100kHz Offset	-139	-	
ФSSB(>1M)	eriabled at 122.00ivii 12)	>1MHz Offset	-163	-	
	Spurious Signal Rejection (245.76MHz)	2Hz to < 100Hz	65	-	
		100Hz to < 1kHz	83	-	dB
Φ		1kHz to < 491.52MHz	70	-	
Ψ		2Hz to < 100Hz	71	-	
	Spurious Signal Rejection (122.88MHz)	100Hz to < 1kHz	85	-	dB
	(12210011112)	1kHz to < 245.76MHz	76	-	
	Harmonic Rejection	245.76MHz	13	-	dBc
-	(Even order harmonics)	122.88MHz	12	-	UBC
-	Output-to-output	OUTx = 312.5MHz	51	-	dB
-	Isolation: Measured in One Specific	OUTx = 491.52MHz	54	-	dB
-	Configuration Between 2 Outputs Only	OUTx = 491.52MHz, with 7.68MHz actively running	74	-	dB

^{1.} Electrical parameters are guaranteed over the specified ambient operating temperature range, which is established when the device is mounted in a test socket with maintained transverse airflow greater than 500lfpm. The device will meet specifications after thermal equilibrium has been reached under these conditions.

Table 14. Jitter Attenuator and Network Synchronization [1]

Symbol	Parameter	Conditions	Minimum	Typical	Maximum	Unit
f	Loop Bandwidth (-3dB cut-off	SETS Mode	0.1	-	10	Hz
f _c	frequency)	JA Mode	15	-	12,000	112
K _p	Gain Peaking	Wander tolerance according to [ITU-T G.8262], clause 9.1 ([ITU-T G.8262.1], clause 9.2) at input [2]	-	0.171	0.2	dB
t	Output Phase Change using	< 1MHz input	50	150	500	ps
t _{HS}	Hitless Switching [3]	≥ 1MHz input	20	80	250	ps
Δf _{HO}	Initial Frequency Offset entering Holdover	Using holdover filter of 1mHz with settling time of 1hr.	-	0.00148	1	ppb
Δt _{HO}	Initial Phase Shift entering Holdover	Using short-term monitor (LOS) for disqualification	-	0	250	ps

^{1.} Electrical parameters are guaranteed over the specified ambient operating temperature range, which is established when the device is mounted in a test socket with maintained transverse airflow greater than 500lfpm. The device will meet specifications after thermal equilibrium has been reached under these conditions.

^{2.} Characterized using a Rohde and Schwarz SMA100 overdriving the XTAL interface.

^{2.} For eEEC only devices - Wander tolerance according to [ITU-T G.8262.1], clause 9.1 at input.

^{3.} This parameter will vary with the quality of the TDC and system DPLL references. The typical value shown assumes an ideal reference is used as input to the TDC and system DPLL.

Table 15. Clock Input Frequencies [1]

Symbol	Parameter	Conditions	Minimum	Typical	Maximum	Unit
		Over-driving Crystal Input, Doubler Logic Disabled	1	-	650	
f _{INAPLL}	APLL Input Frequency for clock generation.	Over-driving Crystal Input, Doubler Logic Enabled	1	-	250	MHz
		CLKIN[1:0] Differential Mode	1	-	650	
		CLKIN[1:0] Single-ended Mode	1	-	250	
f	JA Input Frequency	CLKIN[1:0] Differential Mode	1	-	650	MHz
f _{INJA}		CLKIN[1:0] Single-ended Mode	0.008	-	250	MHZ

^{1.} For crystal characteristics, see Table 16.

Table 16. External Crystal Characteristics

Symbol	Parameter	Conditions	Minimum	Typical	Maximum	Unit
-	Resonance Mode	-		Fundamental		-
f _{INXTAL} [1]	Crystal input frequency	Fundamental mode	8	-	80	MHz
		8MHz ≤ f _{INXTAL} ≤ 12MHz, C _L = 12pF	-	-	120	
ESR [1]	Equivalent Series	12MHz < f _{INXTAL} ≤ 28MHz, C _L = 12pF	-	-	80	
ESK 111	Resistance	28MHz < f _{INXTAL} ≤ 54MHz, C _L = 12pF	-	-	50	Ω
		54MHz < f _{INXTAL} ≤ 80MHz, C _L = 8pF	-	-	50	
C _O [1]	Shunt Capacitance	-	-	7	-	
C _L [1]	Load Capacitance	-	6	8	12	pF
Drive [1]	Drive Level	-	-	-	100	μW
F _{TOL}	Frequency Tolerance	Center frequency at 25°C	-	-		
F _{STAB}	Frequency Stability	Over Operating Temperature Range with respect to F _{TOL}	-	-	[2]	ppm
Aging	Per Year	-	-	-		

^{1.} These parameters are required, regardless of crystal used.

Table 17. Internal Crystal Characteristics (Q Versions Only)

Symbol	Parameter	Conditions	Minimum	Typical	Maximum	Unit
-	Resonance Mode	-	Fundamental			-
f _{INXTAL}	Crystal frequency	Fundamental mode	-	68	-	MHz
F _{STAB}	Frequency Stability	Includes both initial accuracy and variation over temperature.	-	-	±30	ppm
-	Aging	Over the first ten years	-	-	±5	

^{2.} These parameters are customer/application dependent. Common maximum values are F_{TOL} = ±20ppm, F_{STAB} = ±20ppm, and Aging = ±5ppm/10years. The customer is free to adjust these parameters to their particular requirements.

Symbol	Parameter	Conditions	Minimum	Typical	Maximum	Unit
	t _{OE} Output Enable/Disable Time	Synchronous Glitch-Free Mode. Any GPI/GPIO configured as group OE or global OE, any output type. Differential clock types are referenced to true output.	4 + 1 clock period	-	12 + 2 clock periods	ns
·OE		Asynchronous Non-Glitch-Free Mode. Any GPI/GPIO configured as group OE or global OE, any output type. Differential clock types are referenced to true output. [2]	4	-	12	ns

- 1. The enable/disable circuit incurs a 1 or 2 clock period delay to insure glitch-free start and stop of the outputs. The clock period specified is the period of the output clock. If an OE is used to control different output frequencies, the period of the lowest output frequency should be used.
- 2. Asynchronous Non-Glitch-Free Mode is sometimes referred to as Squelch Mode. This mode does not synchronize the enable/disable signal to the output and may result is glitches or runt pulses on the outputs.

Table 19. Output Frequencies and Startup Times [1]

Symbol	Parameter	Conditions	Minimum	Typical	Maximum	Unit
	Outrot Francisco	Differential Output.	0.001	-	650	MHz
f _{OUT}	Output Frequency	LVCMOS Output.	0.001	-	200	IVIHZ
f _{MON}	Reference Monitor Operating Frequency	-	-	-	40	MHz
f _{VCO}	VCO (APLL) Operating Frequency	-	9.5	-	10.7	GHz
Δf_{OUT}	DPLL frequency tuning resolution in DCO mode	DPLL Frequency Write		0.91		
Δf_{OUT}	Output frequency tuning resolution in NCO mode	Fractional Output Divider		58.21		
f _{PFD}	Analog Phase / Frequency Detector (PFD) Operating Frequency	-	-	-	108	MHz
f _{TDC}	Digital Phase Detector Operating Frequency	-	-	-	33	
t _{STARTUP}	Start-up Time [2][3]	Synthesizer mode	-	6	10	ms
t _{STARTUP}	Start-up Time [2][3]	DPLL mode, with a loop bandwidth setting of 300Hz	-	263	400	ms

Electrical parameters are guaranteed over the specified ambient operating temperature range, which is established when the device is mounted
in a test socket with maintained transverse airflow greater than 500lfpm. The device will meet specifications after thermal equilibrium has been
reached under these conditions.

3. Start-up time will depend on the actual configuration used. For more information, please contact Renesas technical support.

Measured from when all power supplies have reached > 90% of nominal voltage to the first stable clock edge on the output. A stable clock is
defined as one generated from a locked PLL (as appropriate for the configuration listed) with no further perturbations in frequency expected.
Includes time needed to load a configuration from internal OTP. For important additional power supply sequencing considerations, see Power
Considerations.

Table 20. Output-to-Output, Input-to-Output Skew - LP-HCSL Outputs 1.8V/2.5V/3.3V VDDO [1]

Symbol	Parameter	Conditions	Minimum	Typical	Maximum	Unit
		FOD1 driving output banks [2:4]	-	18	90	
4	Output to Output Skow [2][3]	FOD1 driving all output banks	-	39	124	
t _{SK}	Output-to-Output Skew [2][3]	FOD1 driving Bank2	-	21	63	ps
		IOD1 driving bank 2	-	22	65	
t _{PD}	Input-to-Output Delay [3][4]	Fanout buffer path to any output	1.2	2	2.6	ns
Δt _{PD}	Input-to-Output Delay Variation [3][4]	Fanout buffer, single device, at a fixed voltage, over temperature	-	2	4	ps/°C

- 1. Electrical parameters are guaranteed over the specified ambient operating temperature range, which is established when the device is mounted in a test socket with maintained transverse airflow greater than 500lfpm. The device will meet specifications after thermal equilibrium has been reached under these conditions.
- 2. Defined as the time between the rising edges of two outputs of the same frequency, configuration, loading, and supply voltage.
- 3. This parameter is defined in accordance with JEDEC Standard 65
- 4. Defined as the time between to output rising edge and the input rising edge that caused it.

Table 21. Output-to-Output, Input-to-Output Skew - LVDS Outputs 1.8V/2.5V/3.3V VDDO [1]

Symbol	Parameter	Conditions	Minimum	Typical	Maximum	Unit
	Output-to-Output Skew [2][3]	FOD1 driving output banks [2:4]	-	16	93	
		FOD1 driving all output banks	-	44	101	ne
t _{SK}		FOD1 driving Bank2	-	14	53	ps
		IOD1 driving bank 2	-	20	67	
t _{PD}	Input-to-Output Delay [3][4]	Fanout buffer path to any output	1.3	2	2.8	ns

- 1. Electrical parameters are guaranteed over the specified ambient operating temperature range, which is established when the device is mounted in a test socket with maintained transverse airflow greater than 500lfpm. The device will meet specifications after thermal equilibrium has been reached under these conditions.
- 2. Defined as the time between the rising edges of two outputs of the same frequency, configuration, loading, and supply voltage.
- 3. This parameter is defined in accordance with JEDEC Standard 65
- 4. Defined as the time between to output rising edge and the input rising edge that caused it.

Table 22. Output-to-Output, Input-to-Output Skew - LVCMOS Outputs 1.8V/2.5V/3.3V VDDO [1]

Symbol	Parameter	Conditions	Minimum	Typical	Maximum	Unit
		FOD1 driving output banks [2:4]	-	50	130	
t _{SK}	Outrot to Outrot Olean [2][3]	FOD1 driving all output banks	-	76	180	
	Output-to-Output Skew [2][3]	FOD1 driving Bank2	-	22	64	ps
		IOD1 driving bank 2	-	29	79	
t _{PD}	Input-to-Output Delay ^{[3][4]}	Fanout buffer path to any output - 1.8V VDDO	2.3	3.2	4.3	
		Fanout buffer path to any output - 2.5V VDDO	1.7	2.4	3.4	ns
		Fanout buffer path to any output - 3.3V VDDO	1.6	2.2	3	

^{1.} Electrical parameters are guaranteed over the specified ambient operating temperature range, which is established when the device is mounted in a test socket with maintained transverse airflow greater than 500lfpm. The device will meet specifications after thermal equilibrium has been reached under these conditions.

- 2. Defined as the time between the rising edges of two outputs of the same frequency, configuration, loading, and supply voltage.
- 3. This parameter is defined in accordance with JEDEC Standard 65
- 4. Defined as the time between to output rising edge and the input rising edge that caused it.

Table 23. Static Phase Offset - Zero Delay Buffer Mode

Symbol	Parameter	Conditions	Minimum	Typical	Maximum	Unit
APLL Static Phase Offset [1]	APLL Static Phase	LVDS or LP-HCSL signaling, feedback frequency = 50MHz. VDDR = VDDOx = 2.5V or 3.3V. CLKIN0 used as feedback in.	-	197	270	
	LVDS or LP-HCSL signaling, feedback frequency = 50MHz. VDDR = VDDOx = 1.8V. CLKIN0 used as feedback in.	-	192	350	ps	
t _{ΦDPLL} DPLL Static Phase Offset [¹]	LVDS or LP-HCSL signaling, feedback frequency = 50MHz. VDDR = VDDOx = 2.5V or 3.3V. CLKIN1 used as feedback in.	-	27	110	nc	
	Offset [1]	LVDS or LP-HCSL signaling, feedback frequency = 50MHz. VDDR = VDDOx = 1.8V. CLKIN1 used as feedback in.	-	57	230	ps

This parameter is defined in accordance with JEDEC Standard 65B, which defines static phase offset as the time interval between similar points
on the waveforms of the averaged input reference clock and the averaged feedback input signal when the PLL is locked and the input reference
frequency is stable.

Table 24. LVCMOS AC/DC Output Characteristics - 1.8V VDDO[1]

Symbol	Parameter	Conditions	Minimum	Typical	Maximum	Unit
V _{OH}	Output High Voltage [2]	I _{OH} = -2mA	1.6	1.75	VDDO + 0.3	V
V _{OL}	Output Low Voltage [2]	I _{OL} = 2mA	-	0.04	0.4	\ \ \
I _{OZ}	Output Leakage Current	Outputs Tri-stated	-5	-	5	μА
		ODRV_CNFG[3:2] = 0	0.8	1.5	2.2	
dV/dt	Slew Rate ^[3]	ODRV_CNFG[3:2] = 1	0.7	1.5	2.2	V/ns
uv/ut	dv/dt Siew Ratei	ODRV_CNFG[3:2] = 2	0.7	1.5	2.4	V/115
	ODRV_CNFG[3:2] = 3	0.8	1.5	2.3		
tDC	Output Duty Cycle	V _T = VDDO/2	45	51	55	%

^{1.} See Test Loads for additional information.

Table 25. LVCMOS AC/DC Output Characteristics – 2.5V VDDO^[1]

Symbol	Parameter	Conditions	Minimum	Typical	Maximum	Unit
V _{OH}	Output High Voltage [2]	I _{OH} = -2mA	2.2	2.4	VDDO + 0.3	V
V _{OL}	Output Low Voltage [2]	I _{OL} = 2mA	-	0.04	0.4	v
I _{OZ}	Output Leakage Current	Outputs Tri-stated	-5	-	5	μΑ
		ODRV_CNFG[3:2] = 0	1.2	2.2	3.6	V/ns
dV/dt	Slew Rate ^[3]	ODRV_CNFG[3:2] = 1	0,6	1.6	3.2	
uv/ut	Siew Mater	ODRV_CNFG[3:2] = 2	0,5	1.4	2.6	
		ODRV_CNFG[3:2] = 3	0.9	2.0	3.4	
tDC	Output Duty Cycle	$V_T = VDDO/2$	45	51	55	%

^{1.} See Test Loads for additional information.

^{2.} These values are compliant with JESD8-7A.

^{3.} $V_T = 20\%$ to 80% of VDDO, $C_L = 4.7 pF$.

 $^{2. \}quad \text{These values are compliant with JESD8-5A.01}.$

^{3.} V_T = 20% to 80% of VDDO, C_L = 4.7pF.

Table 26. LVCMOS AC/DC Output Characteristics - 3.3V VDDO^[1]

Symbol	Parameter	Conditions	Minimum	Typical	Maximum	Unit
V _{OH}	Output High Voltage [2]	I _{OH} = -2mA	2.4	3.2	VDDO + 0.3	V
V _{OL}	Output Low Voltage [2]	I _{OL} = 2mA	-	0.03	0.4	v
l _{OZ}	Output Leakage Current	Outputs Tri-stated	-5	-	5	μА
		ODRV_CNFG[3:2] = 0	1.3	3.1	4.9	
dV/dt	Slew Rate ^[3]	ODRV_CNFG[3:2] = 1	1.2	2.5	4.0	V/ns
uv/ut	Olew Ivarers	ODRV_CNFG[3:2] = 2	1.2	2.4	4.0	V/IIS
		ODRV_CNFG[3:2] = 3	1.4	2.8	4.1	
tDC	Output Duty Cycle	V _T = VDDO/2	45	50.7	55	%

- 1. See Test Loads for additional information.
- 2. These values are compliant with JESD8C.01.
- 3. $V_T = 20\%$ to 80% of VDDO, $C_L = 4.7$ pF.

Table 27. LVDS AC/DC Output Characteristics – 1.8V $V_{\rm DDO}$ [1]

Symbol	Parameter	Conditions	Minimum	Typical	Maximum	Unit
V _{OT} (+)	TRUE binary state.	out prog = 0x00	243	346	448	mV
V _{OT} (-)	FALSE binary state.	out_prog = 0x00	-462	-355	-248	IIIV
V _{OT} (+)	TRUE binary state.	out prog = 0x01	257	362	468	mV
V _{OT} (-)	FALSE binary state.	out_prog = 0x01	-482	-372	-262	IIIV
V _{OT} (+)	TRUE binary state.	out prog = 0x02	219	310	400	mV
V _{OT} (-)	FALSE binary state.	out_prog = 0x02	-419	-323	-227	IIIV
V _{OT} (+)	TRUE binary state.	out prog = 0x03	232	328	425	mV
V _{OT} (-)	FALSE binary state.	out_plog = 0x00	-441	-338	-235	IIIV
ΔV _{OT}	Change in V _{OT} between Complimentary Output States	-	14	37	60	mV
V _{CMR}	Output Common Mode Voltage	-	1.07	1.21	1.35	V
ΔV_{CMR}	Change in V _{CMR} between Complimentary Output States	-	-	25	37	mV
I _{OS}	Output Short Circuit Current	V _{OUT+} or V _{OUT-} = 0V or VDD	-	7.5	-	
I _{OSD}	Differential Output Short Circuit Current	V _{OUT+} = V _{OUT-}	-	3.3	-	mA
t _R /t _F	Rise/Fall Time ^[2] V _T = 20% to 80% of swing.	-	138	252	365	ps
t	Output Duty Cycle [3]	$f \le 400MHz, V_T = 0V.$	45	49.7	55	%
t _{DC}	Output Duty Oyole 117	f > 400MHz., V _T = 0V.	43.9	49.7	56.1	%

- 1. See Test Loads for additional test conditions.
- 2. Single-ended measurement
- 3. Measured from differential waveform.

Table 28. LVDS AC/DC Output Characteristics – 2.5V/3.3V V_{DDO} [1]

Symbol	Parameter	Conditions	Minimum	Typical	Maximum	Unit
V _{OT} (+)	TRUE binary state.	out prog = 0v00	240	348	457	m)/
V _{OT} (-)	FALSE binary state.	out_prog = 0x00	-464	-356	-247	- mV
V _{OT} (+)	TRUE binary state.	out prog = 0v01	255	366	477	mV
V _{OT} (-)	FALSE binary state.	out_prog = 0x01	-483	-372	-261	IIIV
V _{OT} (+)	TRUE binary state.	out prog = 0x02	211	311	411	mV
V _{OT} (-)	FALSE binary state.	- out_prog = 0x02	-427	-325	-224	IIIV
V _{OT} (+)	TRUE binary state.	out prog = 0v03	225	330	434	mV
V _{OT} (-)	FALSE binary state.	out_prog = 0x03	-446	-341	-235	- mv
ΔV _{OT}	Change in V _{OT} between Complimentary Output States	-	14	37	60	mV
V _{CMR}	Output Common Mode Voltage	-	1.16	1.21	1.32	V
ΔV_{CMR}	Change in V _{CMR} between Complimentary Output States	-	-	25	37	mV
I _{OS}	Output Short Circuit Current	V _{OUT+} or V _{OUT-} = 0V or VDD	-	7.5	-	
I _{OSD}	Differential Output Short Circuit Current	V _{OUT+} = V _{OUT-}	-	3.3	-	mA
t _R /t _F	Rise/Fall Time ^[2] V _T = 20% to 80% of swing.	-	138	252	365	ps
t	Output Duty Cycle [3]	$f \le 400MHz, V_T = 0V.$	45	49.7	55	%
t _{DC}	Output Duty Cycle 1-3	f > 400MHz, V _T = 0V.	43.9	49.7	56.1	%

^{1.} See Test Loads for additional test conditions.

^{2.} Single-ended measurement

^{3.} Measured from differential waveform.

Table 29. LP-HCSL AC/DC Characteristics, Non-PCle Frequencies – 1.8V $V_{\rm DDO}^{\,\,[1]}$

Symbol	Parameter	Conditions	Minimum	Typical	Maximum	Unit
V	Output High Voltage [2] f < 400MHz		680	849	1018	
V _{OH}	Output High Voltage ^[2] f ≥ 400MHz		522	657	792	mV
V _{OL}	Output Low Voltage [2]		-130	-4	123	
V _{CROSS}	Crossing Voltage (abs) [3]	V _{HIGH} = 800mV,	166	423	680	
ΔV _{CROSS}	Crossing Voltage (var) [3][4][5]	Fast Slew Rate, 25MHz, 100MHz, 156.25MHz, 312.5MHz or 625MHz.	-	30	43	
A /A	Rise/Fall Time [2] V _T = 20% to 80% of swing, f < 400MHz		232	392	552	
t _R /t _F	Rise/Fall Time [2] $V_T = 20\%$ to 80% of swing, $f \ge 400MHz$		160	300	439	ps
V	Output High Voltage [2] f < 400MHz		718	924	1130	
V _{OH}	Output High Voltage ^[2] f ≥ 400MHz		551	703	855	mV
V _{OL}	Output Low Voltage [2]		-164	-2	160	
V _{CROSS}	Crossing Voltage (abs) [3]	V _{HIGH} = 900mV, Fast Slew Rate, 25MHz, 100MHz,	170	446	722	
ΔV _{CROSS}	Crossing Voltage (var) [3][4][5]	156.25MHz, 312.5MHz or	-	27	41	
+ /+	Rise/Fall Time ^[2] V _T = 20% to 80% of swing, f < 400MHz	625MHz.	217	402	588	no
t _R /t _F	Rise/Fall Time [2] $V_T = 20\%$ to 80% of swing, $f \ge 400MHz$		169	298	428	ps
t	Output Duty Cycle [6]	Across all settings, f < 400MHz V _T = 0V.	47	50	53	- %
t _{DC}	Output Duty Cycle ^[6]	Across all settings, f ≥ 400MHz V _T = 0V.	45	50	55	70

^{1.} Standard high impedance load with C_L = 2pF. See Test Loads

^{2.} Measured from single-ended waveform.

^{3.} Measured at crossing point where the instantaneous voltage value of the rising edge of CLK equals the falling edge of CLKb.

^{4.} Refers to the total variation from the lowest crossing point to the highest, regardless of which edge is crossing. Refers to all crossing points for this measurement.

Defined as the total variation of all crossing voltages of Rising CLK and Falling CLKb. This is the maximum variance in V_{CROSS} for any particular system.

^{6.} Measured from differential waveform.

Table 30. LP-HCSL AC/DC Characteristics, Non-PCle Frequencies $-2.5V/3.3V V_{DDO}$ [1]

Symbol	Parameter	Conditions	Minimum	Typical	Maximum	Unit
V	Output High Voltage ^[2] f < 400MHz.		667	861	1055	mV
V _{OH}	Output High Voltage ^[2] f ≥ 400MHz.		552	717	881	mV
V _{OL}	Output Low Voltage [2]		-164	-4	156	mV
V _{CROSS}	Crossing Voltage (abs) [3]	V _{HIGH} = 800mV,	261	384	507	mV
ΔV_{CROSS}	Crossing Voltage (var) [3][4][5]	Fast Slew Rate, 25MHz, 100MHz, 156.25MHz, 312.5MHz or 625MHz.	-	27	42	mV
A /A	Rise/Fall Time [2] V _T = 20% to 80% of swing, f < 400MHz.	100.25 2, 0 /2.5 2 51 025 2.	214	393	606	
t _R /t _F	Rise/Fall Time [2] $V_T = 20\%$ to 80% of swing $f \ge 400MHz$		148	302	456	ps
V	Output High Voltage ^[2] f < 400MHz.		694	917	1140	mV
V _{OH}	Output High Voltage ^[2] f ≥ 400MHz.		598	757	917	mV
V _{OL}	Output Low Voltage [2]		-164	-8	148	mV
V _{CROSS}	Crossing Voltage (abs) [3]	V _{HIGH} = 900mV,	238	455	673	mV
ΔV _{CROSS}	Crossing Voltage (var) [3][4][5]	Fast Slew Rate, 25MHz, 100MHz, 156.25MHz, 312.5MHz or 625MHz.	-	27	42	mV
. /-	Rise/Fall Time [2] V _T = 20% to 80% of swing, f < 400MHz.	100.2011112, 012.011112 01 02011112	218	397	581	
^L R/ ^L F	R/t _F Rise/Fall Time [2] $V_T = 20\%$ to 80% of swing $f \ge 400MHz$		174	300	426	- ps
t	t _{DC} Output Duty Cycle ^[6]	Across all settings, f < 400MHz V _T = 0V.	48	50	52	- %
чDС		Across all settings, f ≥ 400MHz V _T = 0V.	45	50	55	70

^{1.} Standard high impedance load with C_L = 2pF. See Test Loads.

^{2.} Measured from single-ended waveform.

^{3.} Measured at crossing point where the instantaneous voltage value of the rising edge of CLK equals the falling edge of CLKb.

^{4.} Refers to the total variation from the lowest crossing point to the highest, regardless of which edge is crossing. Refers to all crossing points for this measurement.

^{5.} Defined as the total variation of all crossing voltages of Rising CLK and Falling CLKb. This is the maximum allowed variance in V_{CROSS} for any particular system.

^{6.} Measured from differential waveform.

Table 31. LP-HCSL AC/DC Characteristics, 100MHz PCIe – 1.8V V_{DDO} [1]

Symbol	Parameter	Conditions	Minimum	Typical	Maximum	Spec. Limit [2]	Unit
V _{MAX}	Absolute Max Voltage Includes 300mV of overshoot (Vovs) [3][4]	V	-	-	1103	1150	>/
V _{MIN}	Absolute Min Voltage Includes -300mV of undershoot (Vuds) [3][5]	V _{HIGH} set to 900mV.	-152	-	-	-300	- mV
V _{HIGH}	Voltage High [3]	\/\/\/\/\/\/\/\	825	886	984	-	
V _{LOW}	Voltage Low [3]	V _{HIGH} set to 800mV.	-70	-15	44	-	>/
V _{CROSS}	Crossing Voltage (abs) [3][6][7]	V _{HIGH} set to 800mV,	266	406	545	250 to 550	- mV
ΔV_{CROSS}	Crossing Voltage (var) [3][6][8]	scope averaging off.	-	27	49	140	
dv/dt	Slew rate [9][10]	V _{HIGH} set to 800mV, Fast slew rate, scope averaging on.	1.6	2.6	3.6	1 to 4	V/ns
uv/ut	ordit Siew rate Care	V _{HIGH} set to 800mV, Slow slew rate, scope averaging on.	1.2	1.8	2.4	1 104	V/IIS
$\Delta T_{R/F}$	Rise/fall matching [3][11]	V _{HIGH} set to 800mV. Fast or slow slew rate.	-	7	19.3	20	%
V _{HIGH}	Voltage High [3]	\/\/\/\/\/\/\/\	844	940	1037	-	
V _{LOW}	Voltage Low [3]	V _{HIGH} set to 900mV.	-79	-14	51	-	\
V _{CROSS}	Crossing Voltage (abs) [3][6][7]	V _{HIGH} set to 900mV,	301	451	600	300 to 600	- mV
ΔV _{CROSS}	Crossing Voltage (var) [3][6][8]	scope averaging off.	-	28	44	140	
dv/dt	Slew rate [9][10]	V _{HIGH} set to 900mV, Fast slew rate, scope averaging on.	1.7	2.7	3.7	1 to 4	V/ns
dv/dt	Siew rate (on to)	V _{HIGH} set to 900mV, Slow slew rate, scope averaging on.	1.3	1.9	2.5	1 10 4	V/IIS
$\Delta T_{R/F}$	Rise/fall matching [3][11]	V _{HIGH} set to 900mV. Fast or slow slew rate.	-	4	18.5	20	%
t _{DC}	Output Duty Cycle [9]	V _T = 0V.	49	50	51	45 to 55	1
t _{jcyc-cyc}	Jitter, Cycle to cycle [9]	Across all settings in this table at 100MHz.	-	33	49.3	50	ps

- 1. Standard high impedance load with C_L= 2pF. See Test Loads.
- 2. The specification limits are taken from either the PCIe Base Specification Revision 7.0 or from relevant x86 processor specifications, whichever is more stringent.
- 3. Measured from single-ended waveform.
- 4. Defined as the maximum instantaneous voltage including overshoot.
- 5. Defined as the minimum instantaneous voltage including undershoot.
- 6. Measured at crossing point where the instantaneous voltage value of the rising edge of REFCLK+ equals the falling edge of REFCLK-.
- 7. Refers to the total variation from the lowest crossing point to the highest, regardless of which edge is crossing. Refers to all crossing points for this measurement.
- 8. Defined as the total variation of all crossing voltages of Rising REFCLK+ and Falling REFCLK-. This is the maximum allowed variance in V_{CROSS} for any particular system.
- 9. Measured from differential waveform.
- 10. Measured from -150 mV to +150 mV on the differential waveform (derived from REFCLK+ minus REFCLK-). The signal must be monotonic through the measurement region for rise and fall time. The 300 mV measurement window is centered on the differential zero crossing.
- 11. Matching applies to rising edge rate for REFCLK+ and falling edge rate for REFCLK-. It is measured using a ±75 mV window centered on the median cross point where REFCLK+ rising meets REFCLK- falling. The median cross point is used to calculate the voltage thresholds the oscilloscope is to use for the edge rate calculations. The Rise Edge Rate of REFCLK+ should be compared to the Fall Edge Rate of REFCLK-; the maximum allowed difference should not exceed 20% of the slowest edge rate.

Table 32. LP-HCSL AC/DC Characteristics, 100MHz PCIe – 2.5V/3.3V V_{DDO} [1]

Symbol	Parameter	Conditions	Minimum	Typical	Maximum	Spec. Limit [2]	Unit
V_{MAX}	Absolute Max Voltage Includes 300mV of overshoot (Vovs) [3][4]	V	-	-	1088	1150	.,
V_{MIN}	Absolute Min Voltage Includes -300mV of undershoot (Vuds) [3][5]	V _{HIGH} set to 900mV.	-174	-	-	-300	mV
V _{HIGH}	Voltage High [3]	\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\	743	869	994	-	
V _{LOW}	Voltage Low [3]	V _{HIGH} set to 800mV.	-92	-7	58	-	\/
V _{CROSS}	Crossing Voltage (abs) [3][6][7]	V _{HIGH} set to 800mV,	256	406	533	250 to 550	mV
ΔV_{CROSS}	Crossing Voltage (var) [3][6][8]	scope averaging off.	-	27	40	140	
dv/dt	Slew rate [9][10]	V _{HIGH} set to 800mV, Fast slew rate, scope averaging on.	1.3	2.6	3.9	1 to 4	V/ns
av/at	dv/dt Siew rate 1-x 1-3	V _{HIGH} set to 800mV, Slow slew rate, scope averaging on.	1	1.7	3.1	1 10 4	V/ns
$\Delta T_{R/F}$	Rise/fall matching [3][11]	V _{HIGH} set to 800mV. Fast or slow slew rate.	-	8	19.7	20	%
V _{HIGH}	Voltage High [3]	\/\	800	925	1051	-	
V_{LOW}	Voltage Low [3]	V _{HIGH} set to 900mV.	-95	-2	68	-	\/
V _{CROSS}	Crossing Voltage (abs) [3][6][7]	V _{HIGH} set to 900mV,	286	454	629	250 to 600	mV
ΔV _{CROSS}	Crossing Voltage (var) [3][6][8]	scope averaging off.	-	27	40	140	
alı (lat	Slew rate [9][10]	V _{HIGH} set to 900mV, Fast slew rate, scope averaging on.	1.4	2.8	4.2	1 to 4.2	V/ns
dv/dt	Siew rate (on to)	V _{HIGH} set to 900mV, Slow slew rate, scope averaging on.	1.2	2.0	3	1 10 4.2	V/IIS
$\Delta T_{R/F}$	Rise/fall matching [3][11]	V _{HIGH} set to 900mV. Fast or slow slew rate.	-	6	18.7	20	%
t _{DC}	Output Duty Cycle [9]	V _T = 0V.	49	50	51	45 to 55	
t _{jcyc-cyc}	Jitter, Cycle to cycle [9]	Across all settings in this table at 100MHz.	-	30	48.3	50	ps

- 1. Standard high impedance load with C_L = 2pF. See Test Loads.
- The specification limits are taken from either the PCIe Base Specification Revision 7.0 or from relevant x86 processor specifications, whichever is more stringent.
- 3. Measured from single-ended waveform.
- 4. Defined as the maximum instantaneous voltage including overshoot.
- 5. Defined as the minimum instantaneous voltage including undershoot.
- 6. Measured at crossing point where the instantaneous voltage value of the rising edge of REFCLK+ equals the falling edge of REFCLK-.
- 7. Refers to the total variation from the lowest crossing point to the highest, regardless of which edge is crossing. Refers to all crossing points for this measurement.
- 8. Defined as the total variation of all crossing voltages of Rising REFCLK+ and Falling REFCLK-. This is the maximum allowed variance in V_{CROSS} for any particular system.
- 9. Measured from differential waveform.
- 10. Measured from -150 mV to +150 mV on the differential waveform (derived from REFCLK+ minus REFCLK-). The signal must be monotonic through the measurement region for rise and fall time. The 300 mV measurement window is centered on the differential zero crossing.
- 11. Matching applies to rising edge rate for REFCLK+ and falling edge rate for REFCLK-. It is measured using a ±75 mV window centered on the median cross point where REFCLK+ rising meets REFCLK- falling. The median cross point is used to calculate the voltage thresholds the oscilloscope is to use for the edge rate calculations. The Rise Edge Rate of REFCLK+ should be compared to the Fall Edge Rate of REFCLK-; the maximum allowed difference should not exceed 20% of the slowest edge rate.

Table 33. 100MHz PCIe Output Clock Accuracy and SSC

Symbol	Parameter	Conditions	Minimum	Typical	Maximum	PCIe Limit ^[1]	Unit
T _{PERIOD_AVG_3} 2G_64G_CC	Average Clock Period Accuracy for devices supporting 32GT/s or 64GT/s CC mode at any speed. [2][3]	SSC ≤ -0.5%, includes spread- spectrum modulation, if any.	0	-	2410	-100 to +2600	ppm
T _{PERIOD_AVG_3} 2G_64G_SRIS	Average Clock Period Accuracy for devices supporting 32GT/s SRIS mode at any speed. [2][3]	SSC ≤ -0.3%, includes spread- spectrum modulation, if any.	0	-	1430	-100 to +1600	
T _{PERIOD_AVG_3} 2G_64G	Average Clock Period Accuracy for devices supporting 32GT/s CC/SRNS mode at any speed. [2][3]	SSC = 0% (SSC Off).	0	-	0	±100	
T _{PERIOD_ABS_32} G_64G_CC	Average Clock Period Accuracy for devices supporting 32GT/s CC mode at any speed. [2][4]	SSC ≤ -0.5%, includes jitter and spread-spectrum modulation.	10	-	10.024	9.849 to 10.201	ns
T _{PERIOD_ABS_32} G_64G_SRIS	Average Clock Period Accuracy for devices supporting 32GT/s SRIS mode at any speed. [2][4]	SSC ≤ -0.3%, includes jitter and spread-spectrum modulation.	10	-	10.014	9.849 to 10.181	
T _{PERIOD_ABS_32} G_64G	Average Clock Period Accuracy for devices supporting 32GT/s CC/SRNS mode at any speed. [2][4]	SSC = 0% (SSC Off), includes jitter.	10	-	10	9.849 to 10.151	
F _{REFCLK_32G_64}	Refclk Frequency for devices that support 32GT/s or 64GT/s.	SSC = 0% (SSC Off)	100	-	100	99.99 to 100.01	MHz
F _{SSC}	SSC Modulation Frequency		31.2	31.5	31.9	30 to 33	kHz
T _{SSC_FREQ_} DEV	SSC Deviation for all devices and architectures except 32GT/s or 64GT/s devices operating in SRIS mode.	SSC = -0.5%	-0.490	-0.488	-0.486	-0.5	%
T _{SSC_FREQ_} DEV_32G_64G_S RIS	SSC Deviation for devices that support 32 or 64GT/s operating in SRIS mode, at any speeds.	SSC = -0.3%	-0.300	-0.295	-0.290	-0.3	%
T _{SSC_MAX_} FREQ_SLEW	Max df/dt of the SSC. [5]	-	-	310	372	1250	ppm/u s
T _{TRANSPORT_D} ELAY	Tx-Rx transport delay used for PCle Jitter calculations. ^[6]	Applies to Common Clocked architectures only.	-	-	12	12	ns

^{1.} The specification limits are taken from either the *PCle Base Specification, Revision 7.0* or from relevant x86 processor specifications, whichever is more stringent.



^{2.} Measured from differential waveform.

^{3.} PPM refers to parts per million and is a DC absolute period accuracy specification. 1 PPM is 1/1,000,000th of 100.000000MHz exactly or 100Hz. For 100PPM, then we have an error budget of 100Hz/PPM * 100PPM = 10kHz. The period is to be measured with a frequency counter with measurement window set to 100 ms or greater. The ±100PPM applies to systems that do not employ Spread-Spectrum Clocking, or that use common clock source. For systems employing Spread-Spectrum Clocking, there is an additional 2,500PPM nominal shift in maximum period resulting from the 0.5% down spread resulting in a maximum average period specification of +2,600PPM for Common Clock Architectures. SRIS Architectures may have a lower allowed spread percentage. Devices meeting these specifications automatically meet the less stringent -300ppm to +2800ppm tolerances for data rates ≤16GT/s. Refer to Section 8.6 of the *PCle Base Specification, Revision 7.0*.

Defined as the absolute minimum or maximum instantaneous period. This includes cycle-to-cycle jitter, relative PPM tolerance, and spreadspectrum modulation. Devices meeting these specifications automatically meet the less stringent and 9.847ns to 10.203ns tolerances for data rates ≤16GT/s.

^{5.} Measurement is made over a 0.5us time interval with a 1st order LPF with an fC of 60x the SSC modulation frequency (1.89MHz for 31.5kHz modulation frequency).

This is the default value used for all PCle Common Clock architecture jitter calculations. There are form factors (for example topologies including long cables) that may exceed this limit. Contact Renesas for assistance calculating jitter if your topology exceeds 12ns.

Table 34. Spread-Spectrum Programmability

Symbol	Parameter	Conditions	Minimum	Typical	Maximum	Unit
f _{SSCMOD}	SSC Modulation Frequency	Modulation frequency.	30	-	63	kHz
SSC%	Spread percentage [1]	Down Spread.	-1	-	-0.05	%
330 %		Center Spread.	±0.025	-	±0.75	70
fourssc	Output frequency	Allowable output frequency range when SSC is enabled.	33	-	650	MHz

^{1.} Spread off is 0%.

Table 35. CLKIN Differential Electrical Characteristics [1]

Symbol	Parameter	Conditions	Minimum	Typical	Maximum	Unit
V _{PP_DIF}	Peak-to-Peak differential input voltage ^[2]	VDDR = 1.8V, 2.5V or 3.3V	0.3	-	2.2	V
V	Common mode voltage range - low range setting [3]	VDDR = 1.8V	0.15	-	0.6	V
V _{CMR_LOW}		VDDR = 2.5V or 3.3V	0.15	-	<v<sub>DDR/2</v<sub>	V
V	Common mode voltage range -	VDDR = 1.8V	0.75	-	V _{DDR} -0.3	V
V _{CMR_HIGH}	high range setting [3]	VDDR = 2.5V or 3.3V	≥V _{DDR} /2	-	V _{DDR} -0.3	V
t _{SLEW}	CLKIN differential slew rate	20/80% threshold	0.5	-	-	V/ns

^{1.} This table applies when CLKIN0 or CLKIN1 are used as differential input clocks. If used as single-ended input clocks, the values in the GPO/GPIO Electrical Characteristics tables apply. The DC input voltage limits specified in the GPI/GPIO Electrical Characteristics tables must be followed at all times. This means that an input clock with VPP_DIF = 0.3V will have a wider range of allowable common mode voltages than an input clock with a higher VPP_DIF.

- 2. This value is 2 x the single-ended amplitude of the CLKIN signal.
- 3. The correct setting is automatically selected by the RICBox design software.

Table 36. GPI/GPIO Electrical Characteristics – 1.8V VDDD, VDDR, or VDDX [1][2]

Symbol	Parameter	Conditions	Minimum	Typical	Maximum	Unit
V _{IH}	Input High Voltage ^[3]	XIN_REFIN, XOUT_REFINB, GPI[3:0], GPIO[4:0].	0.65 VDD	-	VDD + 0.3	
V _{IL}	Input Low Voltage [3]	XIN_REFIN, XOUT_REFINB, GPI[3:0], GPIO[4:0].	-0.3	-	0.35 VDD	
V _{OH}	Output High Voltage [3]	GPIO[4:0], IOH = -2mA.	VDD - 0.45	-	VDD + 0.3	V
V _{OL}	Output Low Voltage [3]	GPIO[4:0], IOL = 2mA.	-	-	0.45	
V _{IH}	Input High Voltage	GPIO[2:0], when set to tri-level.	0.75 VDD	-	VDD + 0.3	
V _{IM}	Input Mid Voltage	GPIO[2:0], when set to tri-level.	0.45 VDD	-	0.55 VDD	
V _{IL}	Input Low Voltage	GPIO[2:0], when set to tri-level.	-0.3	-	0.25 VDD	

Input specifications refer to signals XIN_REFIN, XOUT_REFINb, GPI[3:0], GPIO[4:0], when acting as inputs. Output specifications refer to signals GPIO[4:0], when acting as outputs. To determine which VDD pin is referenced for each group in Table 36, see GPI and GPIO VDD pin assignments in Pin Information. For SCL_SCLK, SDA_SDI, see the I2C/SMBus electrical characteristics Table 41 and Table 42.

- CLKIN[1:0]/CLKIN[1:0]b used as two single-ended clocks rather than as a differential clock.
- 3. These values are compliant with JESD8-7A. These values only apply to XIN_REFIN and XOUT_REFINB when "Input Buffer" mode is selected. See the Applications section for more details.

Table 37. GPI/GPIO Electrical Characteristics – 2.5V VDDD, VDDR, or VDDX [1][2]

Symbol	Parameter	Conditions	Minimum	Typical	Maximum	Unit
V _{IH}	Input High Voltage [3]	XIN_REFIN, XOUT_REFINB, GPI[3:0], GPIO[4:0].	1.7	-	VDD + 0.3	
V _{IL}	Input Low Voltage [3]	XIN_REFIN, XOUT_REFINB, GPI[3:0], GPIO[4:0].	-0.3	-	0.7	
V _{OH}	Output High Voltage [3]	GPIO[4:0], IOH = -2mA.	1.7	-	VDD + 0.3	V
V _{OL}	Output Low Voltage [3]	GPIO[4:0], IOL = 2mA.	-	-	0.7	
V _{IH}	Input High Voltage	GPIO[2:0], when set to tri-level.	0.75 VDD	-	VDD + 0.3	
V _{IM}	Input Mid Voltage	GPIO[2:0], when set to tri-level.	0.45 VDD	-	0.55 VDD	
V _{IL}	Input Low Voltage	GPIO[2:0], when set to tri-level.	-0.3	-	0.25 VDD	

^{1.} Input specifications refer to signals XIN_REFIN, XOUT_REFINb, GPI[3:0], GPIO[4:0], when acting as inputs. Output specifications refer to signals GPIO[4:0], when acting as outputs. To determine which VDD pin is referenced for each group in Table 37, see GPI and GPIO VDD pin assignments in Pin Information. For SCL_SCLK, SDA_SDI, see the I2C/SMBus electrical characteristics Table 41 and Table 42.

- 2. CLKIN[1:0]/CLKIN[1:0]b used as two single-ended clocks rather than as a differential clock.
- 3. These values are compliant with JESD8-5A.01. These values only apply to XIN_REFIN and XOUT_REFINB when "Input Buffer" mode is selected. See the Applications section for more details.

Table 38. GPI/GPIO Electrical Characteristics - 3.3V VDDD, VDDR, or VDDX [1][2]

Symbol	Parameter	Conditions	Minimum	Typical	Maximum	Unit
V _{IH}	Input High Voltage [3]	XIN_REFIN, XOUT_REFINB, GPI[3:0], GPIO[4:0].	2.2	-	VDD + 0.3	
V _{IL}	Input Low Voltage [3]	XIN_REFIN, XOUT_REFINB, GPI[3:0], GPIO[4:0].	-0.3	-	0.8	
V _{OH}	Output High Voltage [3]	GPIO[4:0], IOH = -2mA.	2.4	-	VDD + 0.3	V
V _{OL}	Output Low Voltage [3]	GPIO[4:0], IOL = 2mA.	-	-	0.4	
V _{IH}	Input High Voltage	GPIO[2:0], when set to tri-level.	0.75 VDD	-	VDD + 0.3	
V _{IM}	Input Mid Voltage	GPIO[2:0], when set to tri-level.	0.45 VDD	-	0.55 VDD	
V _{IL}	Input Low Voltage	GPIO[2:0], when set to tri-level.	-0.3	-	0.25 VDD	

^{1.} Input specifications refer to signals XIN_REFIN, XOUT_REFINb, GPI[3:0], GPIO[4:0], when acting as inputs. Output specifications refer to signals GPIO[4:0], when acting as outputs. To determine which VDD pin is referenced for each group in Table 38, see GPI and GPIO VDD pin assignments in Pin Information. For SCL_SCLK, SDA_SDI, see the I2C/SMBus electrical characteristics Table 41 and Table 42.

- 2. CLKIN[1:0]/CLKIN[1:0]b used as two single-ended clocks rather than as a differential clock.
- 3. These values are compliant with JESD8-5A.01. These values only apply to XIN_REFIN and XOUT_REFINB when "Input Buffer" mode is selected. See the Applications section for more details.

Table 39. CMOS GPI/GPIO Common Electrical Characteristics [1][2]

Symbol	Parameter	Conditions	Minimum	Typical	Maximum	Unit
I _{IL}	Input Leakage Current	Includes input pull up/pull down resistor current. V _{IL} = 0V, V _{IH} = V _{DD} .	-15	-	15	μА

^{1.} Input specifications refer to signals XIN_REFIN, XOUT_REFINb, GPI[3:0], GPIO[4:0], when acting as inputs. Output specifications refer to signals GPIO[4:0], when acting as outputs. For VDD pin mapping, see GPI and GPIO VDD pin assignments in Pin Information.

2. CLKIN[1:0]/CLKIN[1:0]b used as two single-ended clocks rather than as a differential clock.



Table 40. Power Supply Current [1]

Symbol	Parameter	Conditions	Typical	Maximum	Uni	
		CMOS inputs (per input) [2][3]	11	20		
		HCSL inputs (per input pair) [3]	12	15		
		LVDS inputs (per input pair) [2][3]	13	14		
I _{DDR}	V _{DDR} Supply Current	LVPECL inputs (per input pair) [3][4] V _{DDR} = 2.5V or 3.3V,	13	15	mA	
BBK		CML inputs (per input pair) [3][4] V _{DDR} = 2.5V or 3.3V, input termination disabled.	14	16		
		CML inputs (per input pair) [3][4] V _{DDR} = 2.5V or 3.3V, input termination enabled.	33	54		
I _{DDRBIAS}	Bias Supply Current	Internal DC-bias circuit when enabled for AC-coupled external clock (per input pair) [3]	13	24	mA	
I _{DDX}	V _{DDX} Supply Current	Crystal oscillator supply	3.5	5	mA	
I _{DDA}	V _{DDA} Supply Current	V _{DDA} = any valid supply.	142	151	mA	
I _{DDD}	V _{DDD} Supply Current	V _{DDD} = any valid supply.	69	73	m/	
	V _{DDO} Supply Current per	V _{DDO} = 1.8V <u>+</u> 5%.	13	20		
	output pair, CMOS mode (both OUT[x] and OUT[x]b enabled). [5][6]	V _{DDO} = 2.5V <u>+</u> 5%.	18	24	m/	
1		V _{DDO} = 3.3V <u>+</u> 5%.	25	33		
I _{DDO_CMOS}	V _{DDO} Supply Current per	V _{DDO} = 1.8V <u>+</u> 5%.	8	16		
	output pair, CMOS mode (OUT[x] or OUT[x]b enabled,	V _{DDO} = 2.5 <u>+</u> 5%.	11	17	m/	
	other output Hi-Z). [5][6]	V _{DDO} = 3.3 <u>+</u> 5%.	15	23		
	V Supply Current per	LP-HCSL outputs, 85ohm impedance, fast slew rate, 650MHz. V _{DDO} = any valid supply.	12	19		
I _{DDO_LPHCSL}	V _{DDO} Supply Current per output pair ^{[5][6]}	LP-HCSL outputs, 85ohm impedance, fast slew rate, 100MHz for PCIe. V _{DDO} = any valid supply.	13	17	mA	
I _{DDO_LVDS}	V _{DDO} Supply Current per output pair, LVDS mode ^{[3][4]}	V _{DDO} = any valid supply.	8	17	mA	
I _{DD_IOD}	V _{DDO} Divider Supply Current	Portion of VDDO used by IOD	25	28	m/	
I _{DD_FOD}	V _{DDO} Divider Supply Current	Portion of VDDO used by FOD	38	51	m/	
		Power Down Mode Enabled, VDDs = 1.8V	13	16		
I_{DD_PD}	Total Power Down Current	Power Down Mode Enabled, VDDs = 2.5V	15	23	m/	
		Power Down Mode Enabled, VDDs = 3.3V	19	38		

^{1.} Current consumption figures represent a worst-case consumption with all functions associated with the particular voltage supply enabled and all outputs running at maximum speed, unless otherwise noted. This information is provided to allow for design of appropriate power supply circuits that will support all possible register-based configurations for the device. To determine actual consumption for the user's device configuration, see Power Considerations. Outputs are not terminated. Values apply to all voltage levels unless noted.



Voltage of the input signal must be appropriate for the V_{DDR} voltage supply level when using a DC-coupled connection. For example, when supplying an LVDS input signal that is referenced to a 2.5V supply at its source, the V_{DDR} supply must also be 2.5V nominal voltage. When using a 3.3V CMOS input signal, V_{DDR} must be 3.3V

^{3.} There are two possible input clock pairs. If both are used, the current for each type must be added together. If the external clock(s) is/are AC-coupled, the internal DC-bias must be enabled and also added to the total I_{DDR} current.

^{4.} LVPECL and CML input clocks are not supported when V_{DDR} = 1.8V.

^{5.} IDDO_x denotes the current consumed by each output driver and does not include output divider current. These values are measured at maximum output frequency, unless otherwise stated (200MHz for LVCMOS outputs and 650MHz for differential outputs).

Please refer to the Output Driver and Output Divider V_{DDO} Pin Assignments Table to determine the allocation of I_{DDO_IOD}, I_{DDO_FOD} and I_{DDO_X} to each V_{DDO} pin.

Table 44	12C/CMP.IC	Puo DC	Electrical	Characteris	tion [1]
Table 41.	12C/SIVIBIIS	BUS DC.	FIECTRICAL	Characteris	ניו פחוד

Symbol	Parameter	Conditions	Minimum	Typical	Maximum	Unit
V _{IH}	High-level input voltage for SCL_SCLK and SDA_nCS	-	0.7 V _{DDD}	-	-	V
V _{IL}	Low-level input voltage for SCL_SCLK and SDA_nCS	-	-	-	0.3 V _{DDD}	V
V _{HYS}	Hysteresis of Schmitt trigger inputs	-	0.05 V _{DDD}	-	-	V
V _{OL}	Low-level output voltage for SCL_SCLK and SDA_nCS	I _{OL} = 4mA	-	-	0.4	V
I _{IN}	Input leakage current per pin	-	-10	-	10	μA
C _B	Capacitive Load for Each Bus Line	-	-	-	400	pF

^{1.} V_{OH} is governed by the V_{PUP} , the voltage rail to which the pull up resistors are connected.

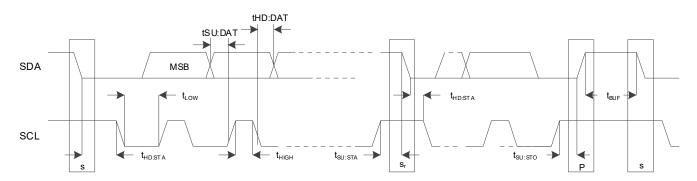



Figure 3. I²C/SMBus Target Timing Diagram

Table 42. I²C/SMBus Bus AC Electrical Characteristics

Symbol	Parameter	Conditions	100kHz Class Minimum	100kHz Class Maximum	400kHz Class Minimum	400kHz Class Maximum	Unit
fSMB	I ² C/SMBus Operating Frequency [1]	-	10	100	10	400	kHz
tBUF	Bus free time between STOP and START Condition	-	4.7	-	1.3	-	
thd:sta	Hold time after (REPEATED) START Condition [2]	-	4	-	0.6	-	μs
tsu:sta	REPEATED START Condition setup time	-	4.7	-	0.6	-	
tsu:sto	STOP Condition setup time	-	4	-	0.6	-	
thd:dat	Data hold time target	-	0	-	0	-	
tsu:dat	Data setup time	-	250	-	100	-	ns
ttimeout	Detect SCL_SCLK low timeout [3]	-	25	35	25	35	
ttimeout	Detect SDA_nCS low timeout [4]	-	25	35	25	35	ms
tLOW	Clock low period	-	4.7	-	1.3	-	
thigh	Clock high period ^[5]	-	4	-	0.6	-	μs
tLOW:SEXT	Cumulative clock low extend time (target device) [6]	-	N/A, the	RC310xxB do	not extend the	clock low.	
tLOW:MEXT	Cumulative clock low extend time (controller device) [7]	-	N/A, the RC310xxB are not bus controllers.				ms
tF	Clock/Data Fall Time [8]	-	-	1000	-	300	
tR	Clock/Data Rise Time [8]	-	-	300	-	300	ns
tspike	Noise spike suppression time [9]	-	-	N/A	-	50	1

- 1. A controller should not drive the clock at a frequency below the minimum f_{SMB}. Further, the operating clock frequency should not be reduced below the minimum value of f_{SMB} due to periodic clock extending by target devices as defined in Section 5.3.3 of the SMBus 3.2 Specification. This limit does not apply to the bus idle condition, and this limit is independent from the t_{LOW:SEXT} and t_{LOW:MEXT} limits. For example, if the SMBCLK is high for t_{HIGH:MAX}, the clock must not be periodically stretched longer than 1/f_{SMB:MIN} t_{HIGH:MAX}. This requirement does not pertain to a device that extends the SMBCLK low for data processing of a received byte, data buffering and so forth for longer than 100µs in a non-periodic way.
- 2. A device must internally provide sufficient hold time for the SMBDAT signal (with respect to the V_{IH:MIN} of the SMBCLK signal) to bridge the undefined region of the falling edge of SMBCLK.
- 3. Devices participating in a transfer can abort the transfer in progress and release the bus when any single clock low interval exceeds the value of t_{TIMEOUT:MIN}. After the controller in a transaction detects this condition, it must generate a stop condition within or after the current data byte in the transfer process. Devices that have detected this condition must reset their communication and be able to receive a new START condition no later than t_{TIMEOUT:MAX}. Typical device examples include the host controller, and embedded controller, and most devices that can control the SMBus. Some simple devices do not contain a clock low drive circuit; this simple kind of device typically may reset its communications port after a start or a stop condition. A timeout condition can only be ensured if the device that is forcing the timeout holds the SMBCLK low for t_{TIMEOUT:MAX} or longer.
- 4. The device has the option of detecting a timeout if the SDA_nCS pin is also low for this time.
- 5. t_{HIGH:MAX} provides a simple guaranteed method for controllers to detect bus idle conditions. A controller can assume that the bus is free if it detects that the clock and data signals have been high for greater than t_{HIGH:MAX}.
- t_{HIGH:MAX} provides a simple guaranteed method for controllers to detect bus idle conditions. A controller can assume that the bus is free if it detects
 that the clock and data signals have been high for greater than t_{HIGH:MAX}.
- 7. t_{LOW:SEXT} is the cumulative time a given target device is allowed to extend the clock cycles in one message from the initial START to the STOP. It is possible that another target device or the controller will also extend the clock causing the combined clock low extend time to be greater than t_{LOW:SEXT}. Therefore, this parameter is measured with the target device as the sole target of a full-speed controller.
- 8. The rise and fall time measurement limits are defined as follows:
 - Rise Time Limits: ($V_{IL:MAX}$ 0.15V) to ($V_{IH:MIN}$ + 0.15V)
- Fall Time Limits: (V_{IH:MIN} + 0.15V) to (V_{IL:MAX} 0.15V)
- 9. Devices must provide a means to reject noise spikes of a duration up to the maximum specified value.

spi_clk_sel = 0

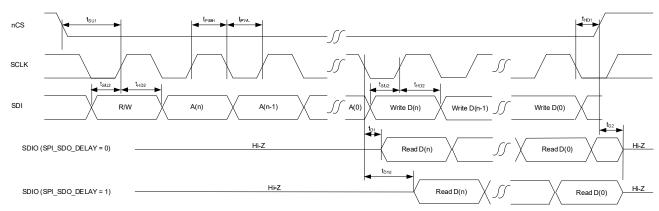

spi_clk_sel = 1

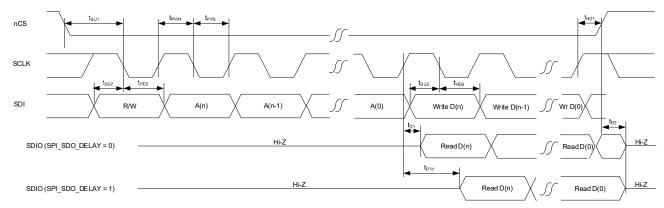


Figure 4. SPI Bus Timing

Table 43. SPI Target Interface Electrical Characteristics

Symbol	Parameter	Conditions	Minimum	Typical	Maximum	Unit
f _{OP}	Operating frequency	-	0.1	-	20	MHz
t _{PWH}	SCLK Pulse Width High	-	-	25	-	no
t _{PWL}	SCLK Pulse Width Low	-	-	25	-	ns
t _{SU1}	nCS Setup Time to SCLK rising or falling edge	-	-	7	-	ns
t _{HD1}	nCS Hold Time from SCLK rising or falling edge	-	-	10	-	ns
t _{SU2}	SDIO Setup Time to SCLK rising or falling edge	-	-	4	-	ns
t _{HD2}	SDIO Hold Time from SCLK rising or falling edge	-	-	1	-	ns
t _{D1}	Read Data Valid Time from SCLK rising or falling edge with no data delay added	-	-	6	-	ns
t _{D1d}	Read Data Valid Time from SCLK rising or falling edge including half period of SCLK delay added to data timing	[1]	-	6 + half SCLK period	-	ns
t _{D2}	SDIO Read Data Hi-Z Time from CS High	[2]	-	10	-	ns

^{1.} Adding the extra half period of delay is a register programming option to emulate read data being clocked out on the opposite edge of the SCLK to the write data.

Table 44. Power Supply Noise Rejection

Symbol	Parameter	Conditions	Minimum	Typical	Maximum	Unit
		f _{NOISE} ≤ 1MHz, VDDO[0:6] ^[5]	-146	-112	-	
		f _{NOISE} ≤ 1MHz	-76	-69	-	
	Power Supply Noise Rejection [1][2][3][4] 1.8V operation	f _{NOISE} ≤ 100kHz	-138	-135	-	
DONID		f _{NOISE} ≤ 100kHz	-97	-85	-	dBc
PONK		100kHz ≤ f _{NOISE} ≤ 500kHz	-140	-139	-	ubc
		100kHz ≤ f _{NOISE} ≤ 500kHz	-138	-105	-	
		500kHz ≤ f _{NOISE} ≤ 1MHz	-144	-143	-	
		500kHz ≤ f _{NOISE} ≤ 1MHz	-93	-90	-	
		f _{NOISE} ≤ 1MHz, VDDO[0:6] ^[5]	-146	-112	-	
		f _{NOISE} ≤ 1MHz	-76	-69	-	
		f _{NOISE} ≤ 100kHz	-138	-135	-	
PSNR	Power Supply Noise Rejection [1][3][4][6]	f _{NOISE} ≤ 100kHz	-94	-85	-	dBc
POINT	2.5V or 3.3V operation	100kHz ≤ f _{NOISE} ≤ 500kHz	-140	-139	-	ubc
	'	100kHz ≤ f _{NOISE} ≤ 500kHz	-138	-105	-	
		500kHz ≤ f _{NOISE} ≤ 1MHz	-144	-143	-	
		500kHz ≤ f _{NOISE} ≤ 1MHz	-93	-90	-	

^{1.} Electrical parameters are guaranteed over the specified ambient operating temperature range, which is established when the device is mounted in a test socket with maintained transverse airflow greater than 500lfpm. The device will meet specifications after thermal equilibrium has been reached under these conditions.

- 2. $VDDX = VDDR = VDDR2 = VDDA = VDD[0:6] = 1.8V \pm 5\%$, VSS = 0V, TA = -40°C to 85°C.
- 3. 50mV peak-to-peak sine wave applied injected on indicated power supply pin(s).
- 4. Noise spur amplitude measured relative to 156.25MHz carrier frequency.
- 5. Excluding VDDOx of the output being measured.
- 6. $VDDX = VDDR = VDDR2 = VDDA = VDD[0:6] = 2.5V \text{ or } 3.3V \pm 5\%, VSS = 0V, TA = -40^{\circ}C \text{ to } 85^{\circ}C.$



^{2.} This is the time until the device releases the signal. Rise time to any specific voltage is dependent on pull-up resistor strength and PCB trace loading.

3. Functional Description

The RC310xxB is a small-form factor, fully integrated, low-power, high performance frequency synthesizer with jitter attenuation and network synchronization capabilities. The device is optimized to deliver excellent phase noise as required for driving Ethernet PHYs/switch, ASICs, or FPGAs. The RC310xxB supports JEDEC JESD204B/C for converter synchronization, JEDEC JESD204B/C converter synchronization, IEEE1588, and SyncE for network-based synchronization.

The following sections provide an overview of the RC310xxB.

3.1 Power-Up, Configuration, and Serial Interfaces

The RC310xxB can be powered up and configured in three ways:

- 1. From 1 of 27 internal non-volatile memory using OTP user configurations (UserCfgs)
- 2. From its target serial interface
- From an external I2C EEPROM

The RC310xxB supports three target serial interfaces (I2C, SPI, and SMBUS), and one serial host interface (I2C). These interfaces share the same pins, so only one is available at a time.

3.2 Input Clocks

The RC310xxB supports one crystal/reference input that is used as a reference to the analog PLL (APLL) and up to two differential or four single-ended clock inputs that are used as a reference to the digital PLL (DPLL) and support hitless reference switching.

3.2.1 Crystal/Reference Input

The crystal input supports crystal frequencies of 8MHz to 80MHz. It has programmable internal load capacitors to support crystals with CL = 6pF to 12pF.

The crystal input may being over-driven with differential or single-ended inputs with proper external terminations. It also supports being over-driven with a clipped sine-wave TCXO with a 0.8V_{PP} signal.

The supported frequency range is same as reference clock inputs: 1kHz to 650MHz in differential mode, and 1kHz to 200MHz in single-ended mode.

An available LOS monitor detects the loss of signal on crystal input.

3.2.2 Clock Inputs

There are two differential clock inputs that support LVDS, HCSL, or single-ended CMOS logic levels without external terminations. LVPECL or CML clock inputs may be supported with external terminations and/or AC coupling. Internal terminations are available for both HCSL and LVDS logic levels. Additionally, HCSL input terminations support both 100ohm and 85ohm operating environments.

If set to single-ended type, the differential inputs turn into two single-ended inputs. CLKIN0 drives clkin0 internally, CLKIN0b drives clkin1 internally. CLKIN1 drives clkin2 internally, and CLKIN1b drives clkin3 internally. If set to differential type, CLKIN0/CLKIN0b pair drives clkin0 while CLKIN1/CLKIN1b pair drives clkin2. Internal biasing is available for AC-coupled applications. The two clock inputs can be left floating when unused. An available LOS monitor detects the loss of signal on crystal input. Frequency monitoring is also available on the clock inputs.

3.3 Clock Input Monitors

There are two types of reference clock monitors. The APLL input is monitored for Loss of Signal (LOS). While the DPLL clock inputs (CLKIN0, CLKIN0B, CLKIN1, CLKIN1B) each have LOS, activity and frequency monitoring.

The LOS monitor detects missing edges over a window of several reference clock periods. For the best
accuracy, it is recommended to program the window to be equal to at least 8 times that of the measuring clock
period.



- The frequency monitor may be configured to measure the reference over a nominal 5ms time window in order to achieve ~1ppm granularity.
- The frequency monitor may be configured to measure the reference over a nominal 0.4s time window in order to achieve ~12ppb granularity.

3.4 **APLL**

The APLL is fractional LC-VCO based PLL with an operating range from 9.5GHz to 10.7GHz. Any of the available input clocks can be selected to drive the APLL, and the input clock can be frequency doubled for increased performance. The APLL is temperature compensated for the utmost frequency stability. For synchronous, deterministic requirements, the APLL also supports ZDB mode where CLKIN0 is used for the feedback input.

3.4.1 APLL Lock Detector

The APLL lock detector indicates whether the APLL is locked to a functioning crystal or reference input by monitoring the phase errors. Lock status can be sent on to a GPIO pin or in the register map.

3.5 **DPLL**

To operate as a network synchronizer or jitter attenuator, the DPLL and APLL are nested and form a fractional-N DPLL architecture. The System APLL locks to an input clock from a crystal or a crystal oscillator and generates an output clock of approximately 10GHz. The APLL uses a fractional feedback divider with 26-b numerator and fixed 26-b denominator to generate its feedback clock. The fractional feedback divide ratio is dynamically controlled by the DPLL. The DPLL also uses the APLL's VCO clock to generate the fractional divided DPLL feedback clock. The DPLL fractional feedback divider, which is comprised of 48-b numerator and 48-b denominator, is static during normal operation. The DPLL can also be optionally disabled to operate the RC31008/31012A in synthesizer/DCO mode.

3.6 DPLL Reference Selection

The DPLL can lock to one of either the two differential or the four single ended input clocks. The reference selection can be either automatic or manual and when enabled, hitless switching results in negligible (< 100ps) output clock initial phase hit during reference switching or the DPLL exiting from holdover.

3.6.1 Manual Reference Selection

In manual mode, the selection is set either by GPIO or GPI pins or in the register map.

3.6.2 Automatic Reference Selection

In automatic mode, the selection is based on clock quality statuses and priorities. The quality statuses are from clock monitors. If two clock inputs are programmed to the same priority, the one with lower index number takes precedence (e.g., clkin0 takes precedence over clkin1).

The automatic reference selection can either be revertive or non-revertive. In revertive mode, the reference clock that is qualified and of the highest priority is always selected. If a reference clock of higher priority than the currently selected one becomes qualified, the DPLL will switch to that reference clock; if a reference clock of equal or lower priority than the currently selected one becomes qualified, the DPLL will keep the current reference clock. In non-revertive mode, if there is a higher priority reference clock is coming back (from disqualified to qualified), the current selected reference clock remains selected unless it gets disqualified.

3.6.3 Hitless Reference Switching

If hitless switching is enabled, the output clock initial phase hit will be minimized (< 100ps) during reference switching or the DPLL exiting from holdover, while the input clock and output clock may no longer be aligned. If hitless switching is disabled, the output clock phase change slope is determined by DPLL loop characteristics and phase slope limit.



Minimal initial phase hit of < 100ps can only be met during reference switching when the reference clocks are of same fractional frequency offset. If they are of different fractional frequency offset (up to 200ppm), the output clock phase will track to the new reference clock.

3.7 DPLL Operating Modes

The DPLL can operate in six different states: Free-run, Acquire, Normal, Holdover, Hitless-switch, and Write-frequency. The state transitions can either be manual or automatic.

3.7.1 Free-run

During power-on reset or VCO calibration or in synthesizer mode, the DPLL is in the free-run state. In this state, no reference clock is used and the output clocks are tracking the APLL reference clock.

3.7.2 Acquire

When there is at least one qualified reference, the DPLL will be tracking the selected qualified reference at the acquisition bandwidth and damping factor settings. If the reference clock is disqualified and no other qualified reference clock is available, the DPLL transitions to either the free-run state or the holdover state. When lock-detector detects a lock, DPLL transitions to the normal state.

3.7.3 Normal

In the normal state, the DPLL is tracking the selected reference clock with the normal locking bandwidth and damping factor settings. If the selected reference clock is disqualified, the state machine goes to either the holdover or the free-run state. At a reference switch, the state machine goes via the Holdover state to the Hitless Switch state or the Acquire state.

3.7.4 Holdover

In the holdover state, the DPLL output frequency will be held at the instantaneous value or a value that is low pass filtered and/or restored from the holdover history registers. The initial holdover accuracy is less than 50ppb.

3.7.5 Hitless Switch

At a hitless reference switch or a hitless transition from the holdover state, the DPLL's TDC will measure the phase offset between the (newly) selected reference clock and the feedback clock, both of which are averaged. This offset is stored in an internal phase offset register. As a result, the output clocks will experience a minimal phase transient due to the reference switch or coming out of holdover. After the hitless switch procedure has finished, the state machine transitions to the Acquire state unless the reference clock fails.

3.7.6 Write Frequency

In the write-frequency mode the DPLL is not tracking any reference clock. The DPLL output frequency offset is directly controlled by preset value in the register map.

3.7.7 Manual Mode

The DPLL operation can be forced to the free-run, holdover, and write-frequency states.

3.8 DPLL Lock Detector

The DPLL lock detector declares lock when the phase from the phase detector remains within a programmable range for a programmable time interval both of which are set in the register map. This indicates that the DPLL is locked to the reference clock input. Once the phase output from the phase detector has been below the lock threshold for half of the programmed lock interval, the internal lock signal is asserted and the normal loop filter bandwidth and damping applied to the DPLL's loop filter instead of the acquire filter settings.



3.9 Output Dividers

The RC310xxB provides four integer and three fractional output dividers.

3.9.1 Integer Output Dividers

All four Integer Output Dividers (IOD) are identical. They use a 25-bit divider to provide output frequencies of 1kHz to 650MHz from the VCO clock. Changing IOD values results in an immediate change to the new frequency. Glitch-less squelch and release of the IOD clock is supported. When enabled, this mimics a gapped clock behavior when an IOD frequency is changed.

3.9.1.1 SYSREF Generation

The RC310xxB supports pulse mode SYSREF generation within each IOD and the number of pulses is programmable. Partial SYSREF (generating SYSREF pulses on a subset of the outputs configured for SYSREF) is also supported. The phase of each IOD in the group can be independently adjusted if skew is intended.

3.9.2 Fractional Output Dividers

There are three Fractional Output Dividers (FOD). Each FOD can divide down the VCO clock to provide frequencies from 1kHz to 650MHz. Each FOD is implemented in two stages. The first stage is an 8-bit fractional divider with Digital Control Delay (DCD) correction. The DCD FOD allows a divide down of the VCO clock to 30MHz to 650MHz. A 17-bit second-stage integer divider with minimum divide ratio of 4 and a maximum ratio of 2*(2¹⁷-1) allows output frequencies lower than 30MHz. For output frequencies above 30MHz, this second-stage divider may be bypassed.

3.9.2.1 Spread-Spectrum Clocking

FOD0 and FOD1 support Spread-Spectrum Clocking (SSC).

When SSC is enabled, the spread spectrum engine modulates the FOD divider ratio with a triangular modulation pattern. The modulation can be programmed for either down-spread or center-spread. The SSC modulation frequency can be programmed to a value between 30kHz to 63kHz. The SSC amplitude can be programmed in 0.05% steps to -1.5% for down spread, or ±1.5% for center spread. When turning off SSC, the current modulation cycle completes, returning the output to the non-spreading frequency before the SSC stops.

3.9.2.2 Sync and Phase Adjustment

Each FOD can adjust its output clock phase with a step size of 1/4 VCO period up to about ±20ns. The adjustment can be of either positive or negative directions.

IOD phase adjustment is same as FOD phase adjustment but with a step size of one VCO period.

3.9.2.3 Digital Controlled Oscillator (DCO) Mode

In DCO mode, a frequency control word is passed directly from an external processor or FPGA to the DPLL with a step size of 1/2⁴⁰ or 0.91 parts per trillion (ppt) and a full-range of ±244 parts per million (ppm) from the nominal DPLL output frequency. The frequency control word (FCW) is written to a 29-b wide register in two's-complement and then applied to the DPLL feedback divider. The reference clock inputs are unused in this mode.

3.9.2.4 Numerically Controlled Oscillator (NCO) Mode

In NCO mode, each FOD can adjust its output clock frequency with a step size of $1/2^{34}$ or 58.21 ppt and is based on incrementing the numerator while holding the 34-b denominator at a fixed value. This frequency change at the output clock is gradual without glitches. The APLL can be in either clock synthesizer/DCO or in jitter attenuator mode.

3.10 Clock Outputs

The RC310xxB supports up to 12 differential or 24 single-ended clock outputs or any combination of differential and single-ended clock outputs. Every differential clock output can be programmed as two single-ended clock outputs.



3.10.1 Output Types

The RC310xxB outputs drive HCSL inputs (such as those used in PCIe applications) directly. They use Low-Power HCSL (LP-HCSL) driver technology to eliminate external termination resistors. The LP-HCSL outputs can be set to 85ohm or 100ohm differential output impedance. The LP-HCSL outputs have selectable output swing and slew rate settings.

The RC310xxB outputs may also be set to LVDS. LVDS outputs require only a 100ohm resistor between the true and complement inputs of the receiver clock input. LVDS outputs have selectable amplitude. Both LVDS and LP-HCSL outputs provide LVPECL and CML-compatible output swing levels by using external AC coupling.

If set to single-ended mode, the output pair can drive either pin or both pins. If both pins are enabled, they can be in phase, or inverted phase. The single-ended outputs support CMOS swings of 1.8V, 2.5V, or 3.3V as determined by their VDDO voltage.

3.10.2 Output Banks

The RC310xxB maps the internal and external frequency sources to output banks, that can be programmed in register out_bank_src, according to Table 45. There are up to 12 clock outputs arranged in seven output banks. Each bank sits on its own VDDO (each VDDO also supplies an IOD or FOD according to Table 46).

Bank 0 Bank 1 Bank 2 Bank 3 Bank 5 Bank 6 Bank 4 output_bank_src OUT0 OUT1 OUT[2:3] OUT[4:7] OUT[8:9] **OUT10 OUT11** IOD0 N/A CLKIN1 0x0 IOD1 N/A XIN REFIN N/A 0x1 IOD2 0x2 N/A 0x3 N/A IOD3 FOD0 N/A 0x4 0x5 FOD1 FOD2 0x6 N/A 0x7 N/A CLKIN0

Table 45. Output Bank Source Mapping

Table 46. VDD Pin Assignments for Outputs, Integer Output Dividers, and Fractional Output Dividers

V _{DDO0}	V _{DDO1}	V _{DDO2}	V _{DDO3}	V _{DDO4}	V _{DDO5}	V_{DDO6}	V _{DDX}	V _{DDR}	V_{DDD}	V _{DDA}
IOD0, OUT0	IOD1, OUT1	FOD0, OUT[2:3]	FOD1, OUT[4:7]	FOD2, OUT[8:9]	IOD2, OUT10	IOD3, OUT11	XO, XIN_REFIN, XOUT_REFIN b	GPI[3:0]	SCL_SCLK, SDA_nCS, GPIO[4:0], DPLL	PLL

4. Application Information

4.1 Recommendations for Unused Pins

4.1.1 XIN_REFIN/XOUT_REFINB

If used as a crystal input, both XIN_REFIN and XOUT_REFINB must be connected to a crystal. If using these pins as XIN_REFIN/XOUT_REFINB, see Overdriving the XTAL Interface for important information. If XIN_REFIN and XOUT_REFINB are unused, the pins should be left floating with no trace attached.

4.1.2 CLKIN/CLKINb [1:0] Inputs

For applications that do not require the use of reference clock inputs, both CLKIN and CLKINb should be left floating. If the CLKIN/CLKINb inputs are connected but not used by the device, Renesas recommends that CLKIN and CLKINb be connected to static signals, not active signals.

4.1.3 GPIO/GPI Pins

LVCMOS control pins have selectable internal pull-ups and/or pull-downs and can be left floating. Additional resistance is not required but can be added for additional protection. If additional resistance is used, it is recommended to enable the internal pull-down and add an external $10k\Omega$ resistor to GND.

4.1.4 LVCMOS Outputs

Any LVCMOS output may be left floating if unused. There should be no trace attached. The mode of the output buffer should be set to high impedance state to avoid unnecessary noise generation.

4.1.5 Differential Outputs

All unused differential outputs may be left floating. There should be no trace attached. Both sides of the differential output pair should be treated the same, either left floating or terminated.

4.2 CLKIN/CLKINb Clock Inputs Interface

The RC310xxB provides a programmable input buffer for reference clock inputs, as shown in Figure 5. This programmable buffer supports most standard signaling protocols with no need for external termination components at the receiver end of the transmission line.

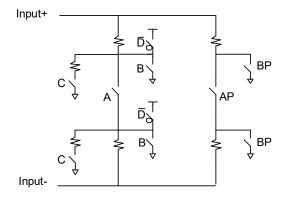


Figure 5. Programmable Input Buffer Logical Diagram

By making appropriate register selections, the switches labeled in Figure 5 can be closed as shown in Table 47 to support the indicated protocols. With the switches closed as indicated, the input buffer will operate as shown in Figure 6 for the various input reference signal protocols. Note that HCSL is used in both 100ohm and 85ohm transmission line environments and this input buffer supports both with no external terminations required.

Input Signaling Protocol	Switches Closed	V _{DDR} Voltage Required
2.5V LVPECL	A, C	2.5V
3.3V LVPECL	A, C	3.3V
LVDS (85 ohms)	A, AP	1.8V / 2.5V / 3.3V
LVDS (100 ohms)	A	1.8V / 2.5V / 3.3V
1.8V LVCMOS	-	1.8V
2.5V LVCMOS	-	2.5V
3.3V LVCMOS	-	3.3V
CML	D	3.3V
HCSL (42.5 ohms)	B, BP	1.8V / 2.5V / 3.3V
HCSL (42 ohms)	В	1.8V / 2.5V / 3.3V
Externally AC-coupled ^[1]	-	1.8V / 2.5V / 3.3V

Table 47. Input Buffer Programming Options for Specific Signaling Protocols

^{1.} In this mode of operation, AC-coupling capacitors must be used to isolate the voltage level of the transmitter from the receiver. The signal must be properly terminated on the transmitter side of the AC-coupling capacitors. Bias terminations are needed between the AC-coupling capacitors and the RC310xxB.

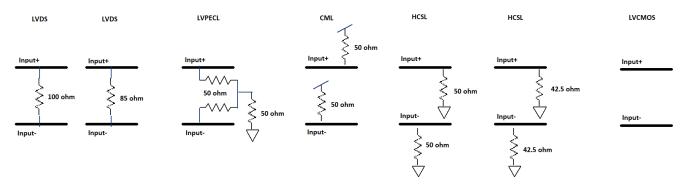


Figure 6. Input Buffer Behavior by Protocol

4.3 Overdriving the XTAL Interface

4.3.1 XTAL Interface Set to Input Buffer Mode

The RC310xxB has two bits to disconnect the internal XO and enable input buffer mode on the XIN_REFIN/XOUT_REFINb pins. First, setting sel_ib_xo = 0, disconnects the internal XO. Next, setting xo_ib_cmos_sel = 1 enables the LVCMOS input clock path. Setting these two bits as indicated removes any AC-coupling or input voltage requirements for overdriving the XTAL interface. Note that the maximum input swing is still governed by the VDDX supply rail. Once set to Input Buffer Mode, the input can be directly driven with a single-ended or differential oscillator. There is no internal termination capability when using the XTAL interface in input buffer mode. Other than this lack of internal terminations, the input buffer mode has all capabilities of the CLKIN/CLKINb interfaces.

4.3.2 XTAL Interface in XO Mode, Input Buffer Mode Not Selected

If the two bits mentioned above are not set as indicated, then there is a limitation of 1.2V on the XIN_REFIN/XOUT_REFINb pins. Input buffer mode is preferred as described in section 4.3.1.

The XIN_REFIN input can be overdriven by an LVCMOS driver or by one side of a differential driver through an AC coupling capacitor. The XOUT pin can be left floating. The amplitude of the input signal should be between 500mV and 1.2V, and the slew rate must be ≥0.2V/ns. For 1.2V LVCMOS, inputs can be DC-coupled into the device as shown in Figure 7. For LVCMOS drivers with > 1.2V swing, the amplitude must be reduced from full

swing to at least 1.2V in order to prevent signal interference with the power rail. The sum of the driver output impedance and Rs must equal the transmission line impedance to prevent overshoot and undershoot.

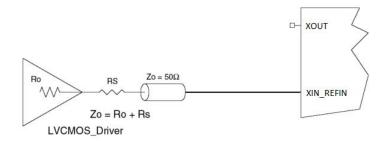


Figure 7. 1.2V LVCMOS Driver to XTAL Input Interface

Figure 8 shows an example of the interface diagram for a high-speed 3.3V LVCMOS driver. This configuration requires that the sum of the output impedance of the driver (Ro) and the series resistance (Rs) equal the transmission line impedance. This can be done in one of two ways. First, R1 and R2 in parallel should equal the transmission line impedance. We also need to scale the 3.3V LVCMOS swing to 1.2V (\sim 1/3 of the swing). This yields R1 = 2 x R2 while R1 || R2 = 50Ω . Solving for a 50Ω ohm system gives R1 = 150Ω and R2 = 75Ω . The values of the resistors can be increased to reduce the loading for a slower and weaker LVCMOS driver. Different scaling factors are required for 2.5V and 1.8V LVCMOS drivers.

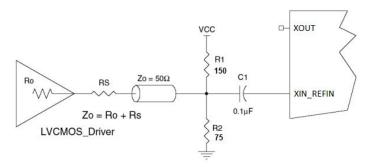


Figure 8. LVCMOS Driver to XTAL Input Interface

Figure 9 shows an example of the interface diagram for an LVPECL driver. This is a standard LVPECL termination with one side of the driver feeding the XIN_REFIN input. Renesas recommends that all components in the schematics be placed in the layout. Though some components may not be used by the application, they can be used for debugging purposes.

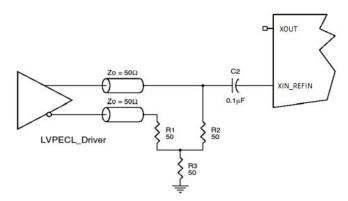


Figure 9. LVPECL Driver to XTAL Input Interface

4.4 Differential Output Terminations

4.4.1 Direct-Coupled LP-HCSL Termination

For the LP-HCSL differential protocol, the following termination scheme is recommended (see Figure 10). The RC310xxB supports internal source terminations (see Figure 10) for 85 ohm or 100 ohm differential transmission lines. No external components are needed.

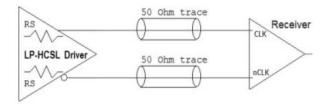


Figure 10. Standard HCSL Termination

4.4.2 Direct-Coupled LVDS Termination

For LVDS differential protocol, the following termination scheme is recommended (see Figure 11). The recommended value for the termination impedance (Z_T) is between 90Ω and 132Ω . The actual value should be selected to match the differential impedance (Z_0) of the transmission line. A typical point-to-point LVDS design uses a 100Ω parallel resistor at the receiver in a 100Ω differential transmission-line environment. In order to avoid any transmission-line reflection issues, any external components should be surface-mounted and must be placed as close to the receiver as possible.

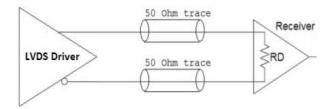


Figure 11. Standard LVDS Termination

4.4.3 AC-Coupled Differential Terminations for Other Protocols

Alternate differential protocols including LVPECL, CML and SSTL can be supported with AC-coupled LP-HCSL outputs. Figure 12 shows a typical AC-coupled termination scheme for a 100Ω differential transmission-line environment. The RC310xxB supports a differential swing of 1.6V or 1.8V in LP-HCSL mode.

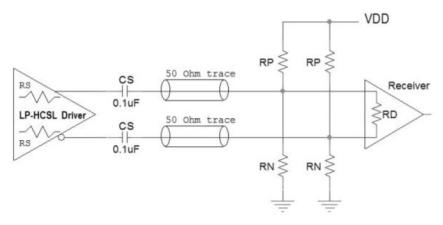


Figure 12. AC-Coupling Termination

No terminations are needed between the RC310xxB and the AC-coupling capacitors. The resistors on the receiver side of the AC-coupling capacitors provide an appropriate voltage bias for the particular receiver. Finally,

a 100Ω resistor across the differential pair (located near the receiver) attenuates reflections that may corrupt the clock signal integrity.

Often, receivers used with a high-performance device like the RC310xxB are equipped with internal terminations, voltage biasing, and even AC-coupling. Please consult your particular the receiver specification to determine if any or all of the indicated external components in Figure 12 are needed.

Refer to *Driving LVPECL, LVDS, CML, and SSTL Logic with Renesas' "Universal" Low-Power HCSL Outputs"* (AN-891) on the RC310xxB product page for additional information on both re-biasing and amplitude attenuation.

If a smaller differential swing is desired as a starting point, refer to "LVDS Termination" in *Quick Guide - Output Terminations (AN-953)* located on the RC310xxB product page.

Please contact Renesas for additional support, if necessary.

4.5 Crystal Recommendations

For the latest vendor / frequency recommendations, please contact Renesas.

4.5.1 Choosing Crystals

A crystal manufacturer will calibrate its crystals to the nominal frequency with a certain load capacitance value. When the oscillator load capacitance matches the crystal load capacitance, the oscillation frequency will be accurate. When the oscillator load capacitance is lower than the crystal load capacitance, the oscillation frequency will be higher than nominal, and vice versa. Therefore, for an accurate oscillation frequency, ensure to match the oscillator load capacitance with the crystal load capacitance.

4.5.2 Tuning the Crystal Load Capacitor




Figure 13. Crystal Load Capacity

Ci1 and Ci2 are on-chip capacitors that are programmable.

Cs is stray capacitance in the PCB and Ce is external capacitors for frequency fine tuning or for achieving load capacitance values beyond the range of the on-chip programmability.

The value of each capacitor is composed of a fixed capacitance amount plus a variable capacitance amount set with the XTAL[5:0] register. Ci1 and Ci2 are commonly programmed to be the same value. Adjustment of the crystal tuning capacitors allows maximum flexibility to accommodate crystals from various manufacturers.

The range of tuning capacitor values available are in accordance with the following table. Ci1/Ci2 starts at 0pF with setting 0x00, and can be increased up to 26.8pF with setting 0x3F. The step per bit is 0.42pF.

Table 48. XTAL[5:0] Tuning Capacitor				

Parameter	Bits	Step (pF)	Minimum (pF)	Maximum (pF)
XTAL	6	0.42	0	26.8

The following equation can be written for this capacitance:

CXIN = Ci1 + Cs1 + Ce1CXOUT = Ci2 + Cs2 + Ce2

The final load capacitance of the crystal:

 $C_1 = CXIN \times CXOUT / (CXIN + CXOUT)$

It is recommended to set the capacitors to the same value at each crystal pin, meaning: CXIN = CXOUT.

Example 1: The crystal load capacitance is specified as 8pF and the stray capacitance at each crystal pin is Cs = 1.5pF and package stray capacitance is Ce = 7pF.

Assuming equal capacitance value at XIN and XOUT = 6.72pF. The equation follows:

 $C_L = (6.72pF + 7.5pF + 1.5pF)/2 = 7.86pF$ XTAL[5:0] = 10000

4.6 External I²C Serial EEPROM Recommendations

An external I²C EEPROM can be used to store configuration data, please contact Renesas for specific recommendations. A specific configuration code is required for the devices to access an external I²C serial EEPROM at power up. See the ordering information.

4.7 Power Considerations

The electrical characteristics tables provide current consumption values for various blocks and output configurations, and can be used to estimate total current consumption for a particular design. The Renesas IC Toolbox, available on the Renesas website, can also be used to estimate current consumption. A quick note on terms used in this section: "power rail" refers to the power connection to a particular VDD pin. This means that different VDD pins might be connected to the same voltage, yet may also be connected to different power rails. We will use "power rail" when discussing power sequencing considerations.

4.7.1 Power Sequencing Considerations

The RC310xxB has no specific power sequencing requirements. The design software may be used to disconnect unused power supply pins in the silicon, which then allows the user to leave these unused supply pins unconnected. These unused pins are then removed from power sequencing considerations.

The RC310xxB also has two GPIO functions (PWRGD/PWRDN# or PWRGD/RESTART#) which give the user more control over power up timing in applications environments such as data centers. These environments often need to hold clocks in reset until the devices receiving the clocks have completed their power-up housekeeping and are ready to receive clocks. We discuss operation without this GPIO function first, followed by a discussion with this GPIO function.

4.7.1.1 Power-Up Operation without PWRGD/PWRDN# or PWRGD/RESTART# Function

When PWRGD/PWRDN# or PWRGD/RESTART# is not used, the RC310xxB outputs are gated by the last VDD pin to become valid. See Table 19 for details.

4.7.1.2 Power-Up Using PWRGD/PWRDN# or PWRGD/RESTART#

Using the PWRGD/PWRDN# or PWRGD/RESTART# GPIO configuration gives the user more control over power-up behavior. Holding the pin low, pauses the RC310xxB start-up sequence until the pin is asserted high. This pin should be held low from the very beginning of the power up sequence. The pin function is defined as follows:

PWRGD means Power is Good (active high). Asserting PWRGD/PWRDN# or PWRGD/RESTART# high after all power rails are valid, tells the RC310xxB that power is good, power up completely and begin operation. The first high assertion of PWRGD/PWRDN# loads a new configuration into the device (selected by external pins if there are multiple configurations). Subsequent high assertions of PWRGD/PWRDN# return to the previously loaded configuration.



- PWRDN# means enter Power Down (active low). Asserting PWRGD/PWRDN# low puts (or keeps) the RC310xxB in a low power state, turning off as much internal logic as possible (including the APLL) to save the most power while keeping the power rails active. Returning from PWRDN# by asserting PWRGD/PWRDN# high resumes the previous operating state.
- RESTART# means Restart (active low). Asserting PWRGD/RESTART# low resets the RC310xxB and prepares
 it for a complete restart of entire power up sequence without having to remove the power supplies. Returning
 from RESTART# by asserting the PWRGD/RESTART# pin high loads a new configuration, which may or may
 not be different from the one used before RESTART# asserted low.

Figure 14 shows use of a PWRGD/PWRDN# or PWRGD/RESTART# input to hold the entire RC310xxB until all power supply rails reach 1.62V. The PWRGD\PWRDN# pin must be held low for at least t_{HOLD}after the last VDDO pin reaches 1.62V. It may be held longer. Using the PWRGD/PWRDN# or PWRGD/RESTART# GPIO function isolates the RC310xxB from changes to power supply sequencing that may be induced by changes to other devices in the system. A configuration can contain PWRGD/PWRDN# or PWRGD/RESTART#, not both. If the power down state is not used, PWRGD/RESTART# is the preferred configuration, since it allows more flexibility with GPI/GPIO assignment.

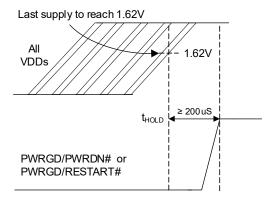


Figure 14. Power Supply Sequencing Recommendations – Power-Up Using PWRGD/PWRDN# or POR#

5. Thermal Information

5.1 VFQFPN ePad Thermal Release Path

In order to maximize both the removal of heat from the package and the electrical performance, a land pattern must be incorporated on the Printed Circuit Board (PCB) within the footprint of the package corresponding to the exposed metal pad or exposed heat slug on the package, as shown in Figure 15. The solderable area on the PCB, as defined by the solder mask, should be at least the same size/shape as the exposed pad/slug area on the package to maximize the thermal/electrical performance. Sufficient clearance should be designed on the PCB between the outer edges of the land pattern and the inner edges of pad pattern for the leads to avoid any shorts.

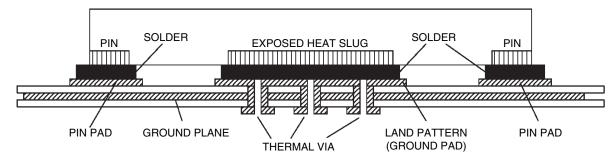


Figure 15. P.C. Assembly for Exposed Pad Thermal Release Path - Side View

While the land pattern on the PCB provides a means of heat transfer and electrical grounding from the package to the board through a solder joint, thermal vias are necessary to effectively conduct from the surface of the PCB to the ground plane(s). The land pattern must be connected to ground through these vias. The vias act as "heat pipes." The number of vias (i.e., "heat pipes") are application specific and dependent on the package power dissipation as well as electrical conductivity requirements. Thus, thermal and electrical analysis and/or testing are recommended to determine the minimum number needed.

Maximum thermal and electrical performance is achieved when an array of vias is incorporated in the land pattern. It is recommended to use as many vias connected to ground as possible. It is also recommended that the via diameter should be 12 to 13mils (0.30 to 0.33 mm) with 1oz copper via barrel plating. This is desirable to avoid any solder wicking inside the via during the soldering process which may result in voids in solder between the exposed pad/slug and the thermal land. Precautions should be taken to eliminate any solder voids between the exposed heat slug and the land pattern. Note: These recommendations are to be used as a guideline only. For further information, please refer to the Application Note on the Surface Mount Assembly of Amkor's Thermally/ Electrically Enhance Lead frame Base Package, Amkor Technology.

5.2 Thermal Characteristics

Table 49. Thermal Characteristics (48-pin with External Crystal) [1]

Symbol	Parameter	Value	Unit
θ _{JC}	Theta J _C . Junction to Device Case Thermal Coefficient ^[2]	20.1	
θ _{JB}	Theta J _B . Junction to Board Thermal Coefficient ^[2]	1.9	
	Junction to Ambient Air Thermal Coefficient (still air)	25.8	°C/W
Δ	Junction to Ambient Air Thermal Coefficient 1 m/s air flow	21.5	C/VV
θ_{JA}	Junction to Ambient Air Thermal Coefficient 2 m/s air flow	18.8	
	Junction to Ambient Air Thermal Coefficient 3 m/s air flow	17.9	
-	Moisture Sensitivity Rating (Per J-STD-020)	3	N/A

^{1.} JEDEC Standard PCB (101.6 x 114.5 x 1.6 mm) with two ground and two voltage planes.

^{2.} Assumes ePad is connected to a ground plane using a grid of 25 thermal vias.

Table 50. Thermal Characteristics (40-pin with External Crystal) [1]

Symbol	Parameter	Value	Unit
θ_{JC}	Theta J _C . Junction to Device Case Thermal Coefficient ^[2]	35.7	
θ_{JB}	Theta J _B . Junction to Board Thermal Coefficient ^[2]	1.9	
	Junction to Ambient Air Thermal Coefficient (still air)	28.9	°C/W
0	Junction to Ambient Air Thermal Coefficient 1 m/s air flow	25.6	C/VV
θ_{JA}	Junction to Ambient Air Thermal Coefficient 2 m/s air flow	23	
	Junction to Ambient Air Thermal Coefficient 3 m/s air flow	21.8	
-	Moisture Sensitivity Rating (Per J-STD-020)	3	N/A

^{1.} JEDEC Standard PCB (101.6 \times 114.5 \times 1.6 mm) with two ground and two voltage planes.

Table 51. Thermal Characteristics (48-pin with Internal Crystal) [1]

Symbol	Parameter	Value	Unit
θ _{JC}	Theta J _C . Junction to Device Case Thermal Coefficient ^[2]	24.5	
θ_{JB}	Theta J _B . Junction to Board Thermal Coefficient ^[2]	15	
	Junction to Ambient Air Thermal Coefficient (still air)	37.3	°C/W
0	Junction to Ambient Air Thermal Coefficient 1 m/s air flow	35	C/VV
θ_{JA}	Junction to Ambient Air Thermal Coefficient 2 m/s air flow	33	
	Junction to Ambient Air Thermal Coefficient 3 m/s air flow	32	
-	Moisture Sensitivity Rating (Per J-STD-020)	3	N/A

^{1.} JEDEC Standard PCB (101.6 x 114.5 x 1.6 mm) with two ground and two voltage planes.

Table 52. Thermal Characteristics (40-pin with Internal Crystal) [1]

Symbol	Parameter	Value	Unit
θ_{JC}	Theta J _C . Junction to Device Case Thermal Coefficient ^[2]	35	
θ_{JB}	Theta J _B . Junction to Board Thermal Coefficient ^[2]	52.4	
	Junction to Ambient Air Thermal Coefficient (still air)	70.7	°C/W
0	Junction to Ambient Air Thermal Coefficient 1 m/s air flow	65.9	C/VV
θ_{JA}	Junction to Ambient Air Thermal Coefficient 2 m/s air flow	62.5	
	Junction to Ambient Air Thermal Coefficient 3 m/s air flow	61	
-	Moisture Sensitivity Rating (Per J-STD-020)	3	N/A

^{1.} JEDEC Standard PCB (101.6 \times 114.5 \times 1.6 mm) with two ground and two voltage planes.

^{2.} Assumes ePad is connected to a ground plane using a grid of 16 thermal vias.

^{2.} Assumes ePad is connected to a ground plane using a grid of 25 thermal vias.

^{2.} Assumes ePad is connected to a ground plane using a grid of 16 thermal vias.

Table 53. Thermal Characteristics (32-pin with Internal Crystal) [1]

Symbol	Parameter	Value	Unit
θ_{JC}	Theta J _C . Junction to Device Case Thermal Coefficient ^[2]	61.2	
θ_{JB}	Theta J _B . Junction to Board Thermal Coefficient ^[2]	7.4	
	Junction to Ambient Air Thermal Coefficient (still air)	40.3	°C/W
0	Junction to Ambient Air Thermal Coefficient 1 m/s air flow	37.4	C/VV
$\theta_{ m JA}$	Junction to Ambient Air Thermal Coefficient 2 m/s air flow	34.8	
	Junction to Ambient Air Thermal Coefficient 3 m/s air flow	33	
-	Moisture Sensitivity Rating (Per J-STD-020)	3	N/A

^{1.} JEDEC Standard PCB (101.6 x 114.5 x 1.6 mm) with two ground and two voltage planes.

^{2.} Assumes ePad is connected to a ground plane using a grid of 4 thermal vias.

6. Package Outline Drawings

The package outline drawings are located at the end of this document and are accessible from the Renesas website. The package information is the most current data available and is subject to change without revision of this document.

7. Marking Diagrams

RC31008 BdddGND #YYWW\$

LOT

- Lines 1 and 2: part number.
 - "ddd" indicates preprogrammed device custom configuration dash code.
- Line 3
 - "#" indicates the stepping number.
 - "YYWW" indicates the last two digits of the year and work week the part was assembled.
 - · "\$" indicates the mark code.

RC31008Bddd

RC31012B dddGNA #YYWW\$

LOT

- Lines 1 and 2: part number.
 - "ddd" indicates preprogrammed device custom configuration dash code.
- Line 3
 - "#" indicates the stepping number.
 - "YYWW" indicates the last two digits of the year and work week the part was assembled.
 - · "\$" indicates the mark code.

RC31012Bddd

68.0 S DC

RC31005BQdd

Due to package construction, the marking of the RC31005BQdd is that of the integrated crystal. The "dd" dash-code is encoded in a unique digital register "marking" that is documented in the addendum. The crystal marking is defined as follows:

- Line 1: Indicates 68.0MHz crystal frequency.
- Line 2: "S" is crystal vendor. "DC" is the date code which is encoded as follows:

Last Digit of Year	D (Year Code)	Month	C (Month Code)
1	A	1	Α
2	В	2	В
3	С	3	С
4	D	4	D
5	E	5	E
6	F	6	F
7	G	7	G
8	Н	8	Н
9	J	9	J
0	К	10	К
-	-	11	L
-	-	12	M

RC31008 BQddGL2 #YWW**\$

- Lines 1 and 2: part number.
 - "dd" indicates preprogrammed device custom configuration dash code.
- Line 3:
 - "#" indicates the stepping number.
 - "YWW" indicates the last digit of the year and work week the part was assembled.
 - "**" indicates the lot sequence number
 - "\$" indicates the mark code.

RC31008BQdd



- Lines 1 and 2: part number.
 - "dd" indicates preprogrammed device custom configuration dash code.
- Line 3:
 - "#" indicates the stepping number.
 - "YYWW" indicates the last two digits of the year and work week the part was assembled.
 - · "\$" indicates the mark code.

RC31012BQdd

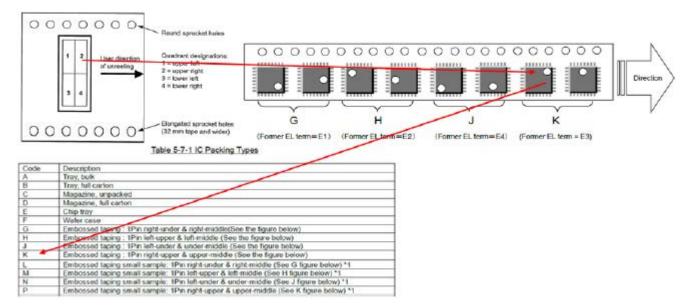


Figure 16. Pin 1 Orientation in Tape and Reel Packaging

8. Ordering Information

Table 54. Ordering Information

Part Number	Description	Number of Output Pairs	Carrier Type ^[1]	Pkg. Desc.	Temp. Range
RC31008B000GND#BB0		8	Tray	5 × 5 × 0.9 mm,	
RC31008B000GND#KB0	Un-programmed part	0	Tape and Reel	40-QFN	-40° to
RC31012B000GNA#BB0	with external crystal. I2C address is 0x09.	12	Tray	6 × 6 × 0.9 mm,	+85°C
RC31012B000GNA#KB0		12	Tape and Reel	48-VFQFPN	
RC31008B001GND#BB0	Un-programmed part	8	Tray	5 × 5 × 0.9 mm,	
RC31008B001GND#KB0	with external crystal for use with external I2C	0	Tape and Reel	40-QFN	
RC31012B001GNA#BB0	EEPROM.		Tray		-40° to +85°C
RC31012B001GNA#KB0	I2C address is 0x09 after I2C EEPROM is loaded.	12	Tape and Reel	6 × 6 × 0.9 mm, 48-VFQFPN	+63 C
RC31008BdddGND#BB0 [2]		•	Tray	5 × 5 × 0.9 mm,	
RC31008BdddGND#KB0 [2]	Preprogrammed part	8	Tape and Reel	40-QFN	-40° to
RC31012BdddGNA#BB0 [2]	with external crystal.	40	Tray	6 × 6 × 0.9 mm,	+85°C
RC31012BdddGNA#KB0 [2]		12	Tape and Reel	48-VFQFPN	
RC31005BQ00GL2#BB0		5	Tray	4 × 4 × 1.0 mm,	-40° to +85°C
RC31005BQ00GL2#KB0		5	Tape and Reel	32-LGA	
RC31008BQ00GL2#BD0	Un-programmed part	0	Tray	5 × 5 × 1.7 mm, 40-LGA	
RC31008BQ00GL2#KD0	with internal crystal. I2C address is 0x09.	8	Tape and Reel		
RC31012BQ00GL3#BB0		40	Tray	6 × 6 × 0.9 mm,	
RC31012BQ00GL3#KB0		12	Tape and Reel	48-LGA	
RC31005BQ01GL2#BB0	Un-programmed part	5	Tray	4 × 4 × 1.0 mm,	
RC31005BQ01GL2#KB0	with internal crystal for	5	Tape and Reel	32-LGA	
RC31008BQ01GL2#BD0	use with external I2C EEPROM.	0	Tray	5 × 5 × 1.7 mm,	-40° to
RC31008BQ01GL2#KD0	I2C address is 0x09	8	Tape and Reel	40-LGA	+85°C
RC31012BQ01GL3#BB0	after I2C EEPROM is	40	Tray	6 × 6 × 0.9 mm,	
RC31012BQ01GL3#KB0	loaded.	12	Tape and Reel	48-LGA	
RC31005BQddGL2#BB0 [2]		<u></u>	Tray	4 × 4 × 1.0 mm,	
RC31005BQddGL2#KB0 [2]		5	Tape and Reel	32-LGA	
RC31008BQddGL2#BD0 [2]	Preprogrammed part	C	Tray	5 × 5 × 1.7 mm,	-40° to
RC31008BQddGL2#KD0 [2]	with internal crystal.	8	Tape and Reel	40-LGA	+85°C
RC31012BQddGL3#BB0 [2]		12	Tray	6 × 6 × 0.9 mm,	
RC31012BQddGL3#KB0 [2]		12	Tape and Reel	48-LGA	

^{1.} Tape and Reel pin 1 orientation follows EIA-481-D unless noted.

^{2.} Replace "ddd" or "dd" with the preprogrammed configuration code provided by Renesas in response to a custom configuration request.

9. Revision History

Revision	Date	Description
1.23	Nov 3, 2025	Changed all references to PCIe Base Specification, Revision 6.0 to PCIe Base Specification, Revision 7.0
1.22	Sep 24, 2025	Added XIN_REFIN/XOUT_REFINB Updated GPIO/GPI Pins
1.21	Jul 23, 2025	Fixed some typos in Table 9 and Table 10 Added Choosing Crystals and Tuning the Crystal Load Capacitor
1.20	Jun 4, 2025	Updated the 11th bullet in Features to "400kHz I ² C / SMBus or 20MHz SPI support" Completed other minor changes
1.19	Feb 11, 2025	 Updated front page text to indicate PCIe Gen7 compliance Changed nOUT0b to OUT0b in Table 1 and Table 2 Added Table 18 Updated PCIe Refclk phase jitter tables as follows: Added PCIe Gen7 CC and Gen7 IR to the tables Listed IR with no SSC (SRNS) separately from IR with SSC (SRIS) Separated SSC for the IR parameters according to the PCIe SIG specification Separated Clock Generator and Fanout mode additive jitter into separate tables Merged VDDO = 1.8V/2.5V/3.3V into single table Updated thD:DAT in I²C/SMBus Bus AC Electrical Characteristics from 300ns to 0ns to be compatible with SMBus Specification Version 3.2. Updated footnotes accordingly Updated Table 42 as follows: Changed "master/slave" references to "host/target" Removed maximum values of t_{HIGH} Corrected Clock/Data Fall Time and Clock/Data Rise Time values
1.18	Jun 24, 2024	Updated the output duty cycle in Table 27 and Table 28
1.17	Jun 4, 2024	Updated the packaging information for the 32-LGA package in Ordering Information
1.16	May 1, 2024	Added Table 35 (CLKIN Differential Electrical Characteristics)
1.15	Apr 5, 2024	 Updated the Configuration and OTP bullets in Features Added cross-references in Table 1, Table 2, Table 3, Table 4, and Table 5 to Table 8
1.14	Mar 13, 2024	Updated several part numbers in Ordering Information (RC31012BQ00GL3#BB0, RC31012BQ00GL3#KB0, RC31012BQ01GL3#BB0, and RC31012BQ01GL3#KB0)
1.13	Feb 15, 2024	Added the internal crystal RC31005BQ, RC31008BQ, and RC31012BQ information to the datasheet Added BQ orderable part numbers to Ordering Information Rearranged Ordering Information for readability Completed other minor changes
1.12	Jan 11, 2024	 Updated the typical and maximum values for t_{⊕APLL} in Table 23 Updated the document to the latest template
1.11	Dec 21, 2023	Updated Static Phase Offset - Zero Delay Buffer Mode table with characterized values Moved to final data sheet for RC31012B and RC31008B
1.10	Nov 10, 2023	Corrected two package links in Ordering Information
1.09	Oct 30, 2023	 Updated the down-spread maximum value in Table 34 Introduced a new document number for the datasheet
1.08	May 31, 2023	Changed t _{HOLD} to 200uS from 200mS in Figure 14
1.07	May 8, 2023	Updated the device block diagram in Figure 2
1.06	Apr 14, 2023	Corrected an RC31005BQ part number in Ordering Information

RC310xxB Datasheet

Revision	Date	Description
1.05	Mar 29, 2023	 Updated document for B-rev as follows: Updated front page references to B-rev and simplified the block diagram. Added RC31012BQ pin out and pin descriptions. Added RC11005BQ pin out and pin descriptions. Updated ordering information with new devices and revisions. Changed ePad outline and ePad text in the Pin Diagrams to grey color to highlight that the view is Top View and the ePad is on the bottom of the package. Added thermal data for 005BQ and 012BQ package. Corrected all theta ja descriptions from 0, 1, 3, and 5 m/s airflow to 0, 1, 2, and 3 m/s airflow. Updated Power Considerations for the B-rev silicon. Added Static Phase Offset - Zero Delay Buffer Mode specification.
1.04	Nov 23, 2022	 Added LVCMOS AC/DC characteristics tables (see Table 24 to Table 26). Completed an extensive update to Power Considerations, specifically power sequencing considerations. Clarified Overdriving the XTAL Interface.
1.03	Oct 7, 2022	Changed the minimum value for t _{PU} in Table 8. Revised the condition for t _{HS} in Table 14. Updated Power Sequencing Considerations. Updated the Marking Diagrams and Ordering Information, added 01 and 001 dash codes to indicate configurations that load from external I ² C EEPROMs. Also updated the table footnotes accordingly. Removed references to RC31005A pending final qualification. For the latest documentation on this device, please contact Renesas. Completed other minor changes.
1.02	Sep 6, 2022	Completed minor updates to various Electrical Characteristics values.
1.01	Aug 9, 2022	 Corrected a typo in Pin Assignments. Completed minor updates to various values in Electrical Characteristics. Completed other minor changes.
1.00	Jul 25, 2022	Initial release.