

Renesas RA Family

RA MQTT/TLS Azure Cloud Connectivity Solution - Cellular

Introduction

This application note describes IoT Cloud connectivity solutions in general and introduces you briefly to the IoT Cloud solution provider, Microsoft Azure. It covers the RA FSP MQTT/TLS module along with the Azure IoT SDK for embedded C, using Cellular connectivity.

This application project is built with the integrated Azure's Embedded Wireless Framework (EWF) and "Azure IoT SDK for Embedded C" package which allows small embedded (IoT) devices like Renesas RA family of MCUs RA6M3/RA6M4/RA6M5 to communicate with Azure IoT services.

The application example uses Azure IoT DPS (Device Provisioning Service) to provision, register the IoT device, and send and receive data to and from the development kit.

This application note enables you to effectively use the RA FSP modules in your own design with the FSP-integrated Azure IoT SDK. Upon completion of this guide, you will be able to add the FSP modules to your own design, configure it correctly with Azure IoT SDK for the target application, and write code using the included application example code as a reference and efficient starting point. References to more detailed API descriptions and sample code, that demonstrate advanced usage of FSP modules are available in the *RA FSP Software Package (FSP) User's Manual* (see Next Steps and References section) and serve as valuable resources in creating more complex designs. Explaining the underlying operation of Azure IoT SDK for Embedded C is beyond the scope of this document. Users should refer to the documentation from Microsoft for education on topics related to the Azure IoT SDK section: <https://learn.microsoft.com/en-us/azure/iot-hub/iot-hub-devguide-sdks>

In this release, the CK-RA6M5v2 kit is used for the application project.

Required Resources

To build and run the MQTT/TLS application example, you need:

Development Tools and Software

- e² studio version: v2024-04 or later
- RA Flexible Software Package (FSP) v5.3.0
- SEGGER J-Link® RTT viewer version: 7.96a or later
- Azure IoT explorer 0.14.13.0 or later (PC tool for validating the Cloud side). Download Link: [Releases : Azure/azure-iot-explorer \(github.com\)](#)
- Azure CLI 2.44 or later (Azure command-line interface is a set of commands used to create and manage Azure resources) Download Link: [How to install the Azure CLI | Microsoft Learn](#)
- Access to Azure Cloud Connectivity Portal (<https://portal.azure.com/#home>) to create IoT Devices (If you are new to Azure IoT)

Hardware

- Renesas CK-RA6M5v2 kit ([CK-RA6M5 - Cloud Kit Based on RA6M5 MCU Group | Renesas](#))
- PC running Windows® 10, Tera Term console or similar application, and an installed web browser (Google Chrome, Internet Explorer, Microsoft Edge, Mozilla Firefox, or Safari).
- Micro USB cable
- USB-C cable for Power supply
- Renesas LTE Cat-M1 Cellular IoT Module ([RYZ014A - LTE Cat-M1 Cellular IoT Module | Renesas](#))

- **Note:** Renesas announces the discontinuation of the existing Sequans-sourced LTE module known as the part number RYZ014A and will no longer be shipping this product. If you have one of these in a current design or production, the Sequans part number GM01Q is a pin and functionally compatible replacement for RYZ014A. FSP Cellular driver of works for the GM01Q alternate product.
- RYZ014A Cellular control module: Sequans GM01Q is the compatible module.
Regarding EOL notice of the RYZ014A, please see:
[The link] <https://www.renesas.com/document/elc/plc-240004-end-life-eol-process-select-part-numbers?r=1503996>
[The product page] <https://www.renesas.com/us/en/products/wireless-connectivity/cellular-iot-modules/ryz014a-lte-cat-m1-cellular-iot-module>

Prerequisites and Intended Audience

This application note assumes that you have some experience with the Renesas e² studio ISDE and RA FSP Software Package (FSP). Before you perform the procedures in this application note, follow the procedure in the *FSP User Manual* to build and run the Blinky project. Doing so enables you to become familiar with the e² studio and the FSP and also validates that the debug connection to your board functions properly. In addition, this application note assumes you have some knowledge of MQTT/TLS and its communication protocols.

The intended audience is users who want to develop applications with MQTT/TLS modules using Cellular modules on Renesas RA6 MCU Series.

Note: If you are a first-time user of e² studio and FSP, we highly recommend you install e² studio and FSP on your system in order to run the Blinky Project and to get familiar with the e² studio and FSP development environment before proceeding to the next sections.

Note: If you are new to the Azure Internet of Things, we recommend you get started with Introduction to the Azure IoT: <https://learn.microsoft.com/en-us/azure/iot/iot-introduction>.

Prerequisites

- Access to online documentation available for Azure in the Cloud Connectivity under References sections 5 and 6
- Access to the latest documentation for identified Renesas FSP as referenced sections 5 and 6
- Prior knowledge of operating e² studio and built-in (or standalone) RA Configurator
- Access to associated hardware documentation such as User Manuals and Schematics

Using this Application Note

Section 1 of this document covers the General Overview of the Cloud Connectivity, Azure IoT Solution using IoT Central, Azure DPS, MQTT, TLS Protocols, and Device certificates and Keys used in the Cloud Connectivity.

Section 2 covers the modules provided by RA FSP to establish connectivity to Cloud service providers and the features supported by the module.

Section 3 covers the architecture of the reference application project, includes an overview of the software components, and includes step-by-step guidelines for recreation using the FSP configurator. It also covers setting up the Azure IoT Hub, creating the self-signed certificates, and storing the certificates in a flash using the application CLI.

Section 4 covers Importing, building, and running the Application project.

Note: We recommend that you operate with your own Microsoft Azure Cloud credentials and use the Cloud configurations you created to run the application. The default sample configuration detailed in this project is for reference only and may have access issues to Azure since the application is communicating with a test account.

Note: For a quick validation using the provided application project, you can skip sections 1 to 2 and go to sections 3 and 4 for instructions on setting up the Azure IoT Hub, creating the self-signed certificates, storing the certificates in the flash using the application CLI, and running the application project on the CK-RA6M5v2 board.

Contents

1. Introduction to Cloud Connectivity.....	5
1.1 Cloud Connectivity Overview	5
1.2 Microsoft Azure IoT Solution	6
1.2.1 Overview.....	6
1.2.2 IoT Hub and Device Provisioning Service	6
1.2.2.1 Azure IoT Hub and IoT Hub Device Provisioning Service (DPS).....	6
1.2.3 Authentication Methods	7
1.2.3.1 X.509	7
1.2.3.2 Per-Device Key Authentication.....	7
1.3 MQTT Protocol Overview	7
1.4 TLS Protocol Overview	8
1.4.1 Device Certificates and Keys.....	9
1.4.2 Device Security Recommendations.....	9
2. RA FSP MQTT/TLS Cloud Solution	10
2.1 MQTT Client Module Introduction.....	10
2.1.1 Design Considerations	10
2.1.2 Supported Features	10
2.2 TLS Session Module Introduction.....	10
2.2.1 Design Considerations	10
2.2.2 Supported Features	11
2.3 Azure IoT Device SDK Module Introduction	11
2.3.1 Design Considerations	11
2.3.2 Supported Features	11
3. MQTT/TLS Application Example	12
3.1 Application Overview	12
3.2 Creating the Application Project using the FSP configurator.....	17
3.3 Install Azure CLI	26
3.4 Create an IoT Hub	27
3.5 Certificate Creation Process.....	30
3.6 View Device Properties	33
3.7 Set IoT Hub	33
3.8 Register an IoT Hub Device.....	37
3.9 Prepare the Device	38
3.10 Building the Application	39
3.11 Download and Run the Project.....	39
3.12 Activating the SIM card	43
3.13 Storing Device Certificate, Host Name, Device ID	45
3.14 Send Device-to-Cloud Message.....	50

3.15	Send Cloud-to-Device Message	50
4.	Importing, Building, and Loading the Project	51
4.1	Importing	52
4.2	Building the Latest Executable Binary	52
4.3	Loading the Executable Binary into the Target MCU	52
4.3.1	Using a Debugging Interface with e ² studio	52
4.3.2	Using J-Link Tools	52
4.3.3	Using Renesas Flash Programmer	52
5.	Next Steps and References	52
6.	MQTT/TLS References	52
7.	Known Issues and Limitations	52
7.1	SIM Card Activation Issues and Workarounds	53
8.	Website and Support	54
	Revision History	55

1. Introduction to Cloud Connectivity

1.1 Cloud Connectivity Overview

Internet of Things (IoT) is a sprawling set of technologies described as connecting everyday objects, like sensors or smartphones, to the World Wide Web. IoT devices are intelligently linked together to enable newforms of communication between things and people and among things.

These devices, or things, connect to the network. Using sensors, they provide the information they gather from the environment or allow other systems to reach out and act on the world through actuators. In the process, IoT devices generate massive amounts of data, and Cloud computing provides a pathway, enabling data to travel to its destination.

The IoT Cloud Connectivity Solution includes the following major components:

1. Devices or Sensors
2. Gateway
3. IoT Cloud services
4. End-user application/system

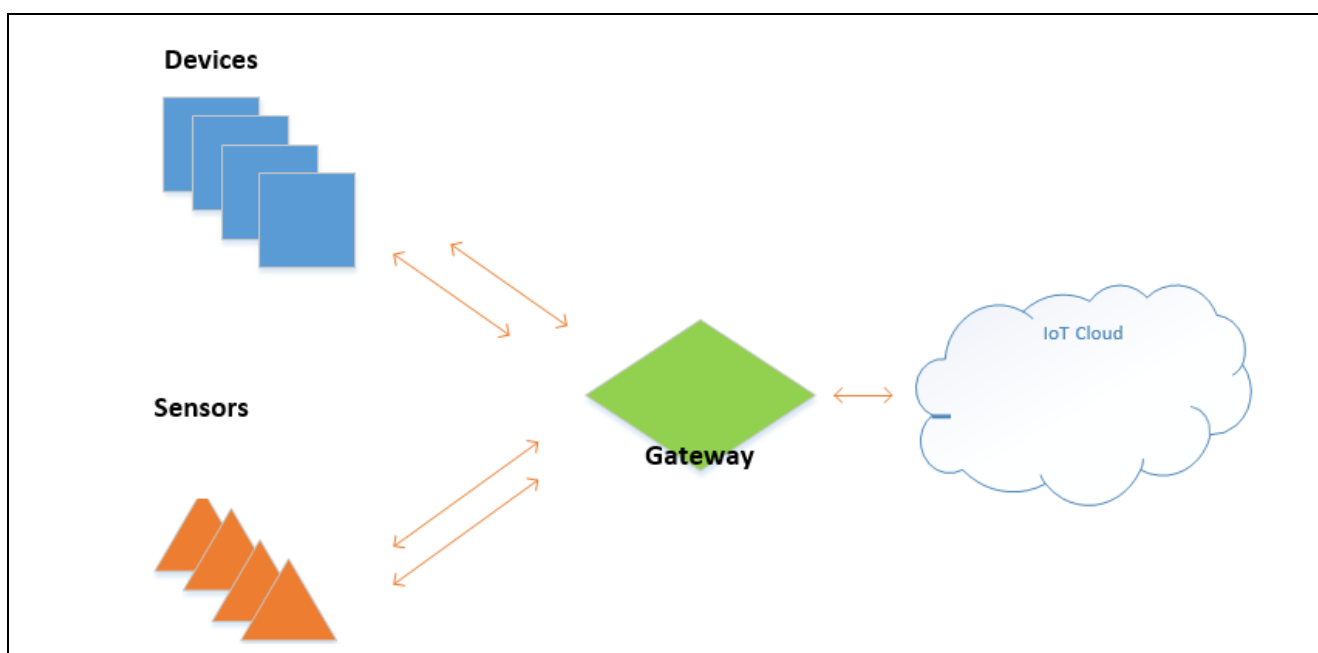


Figure 1. IoT Cloud Connectivity Architecture

Devices or Sensors

A device includes hardware and software that interacts directly with the world. Devices connect to a network to communicate with each other or to centralized applications. Devices may connect to the Internet either directly or indirectly.

Gateway

A gateway enables devices that are not directly connected to the Internet to reach Cloud services. The data from each device is sent to the Cloud Platform, where it is processed and combined with data from other devices and potentially with other business-transactional data. Most of the common communication gateways support one or more communication technologies such as Wi-Fi, Ethernet, or Cellular to connect to the IoT Cloud Service provider.

IoT Cloud

Many IoT devices produce lots of data. You need an efficient, scalable, affordable way to manage those devices, handle all that information, and make it work for you. When it comes to storing, processing, and analyzing data, especially big data, it is hard to surpass the Cloud.

1.2 Microsoft Azure IoT Solution

1.2.1 Overview

Microsoft's end-to-end IoT platform is a complete IoT offering so that enterprises can build and realize value from IoT solutions quickly and efficiently. Azure IoT Central solutions are used with backend support from the Azure IoT Hub Device Provisioning Service.

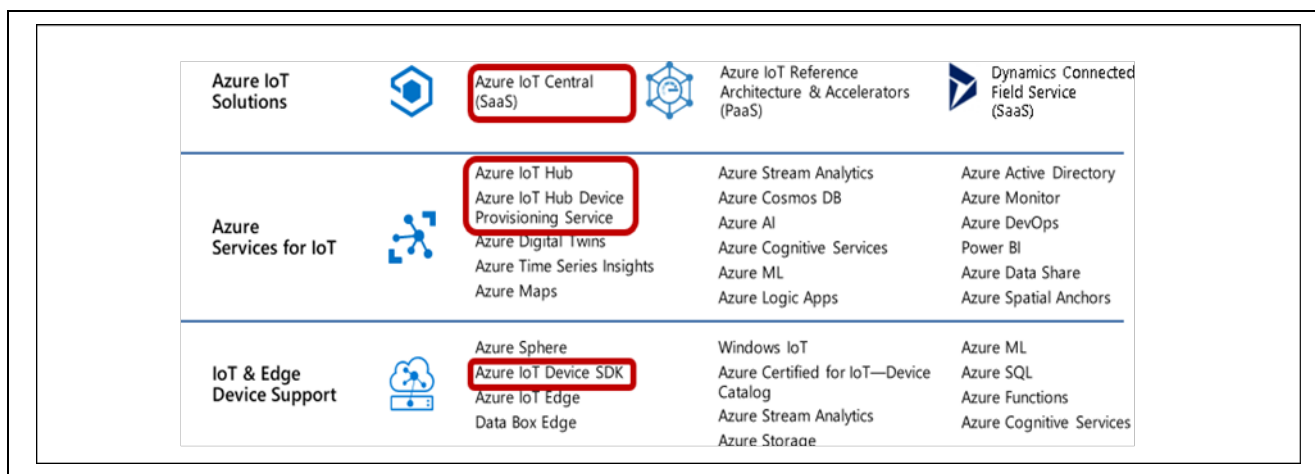


Figure 2. Microsoft Azure IoT Cloud Solution

1.2.2 IoT Hub and Device Provisioning Service

1.2.2.1 Azure IoT Hub and IoT Hub Device Provisioning Service (DPS)

IoT Hub provides built-in support for the MQTT v3.1.1 protocol. See the following webpage for more understanding of the IoT Hub and Device Provisioning Services (DPS): <https://learn.microsoft.com/en-us/azure/iot-dps/>

(1) Device Provisioning Service

High-level sequence of events to connect a Device to IoT Hub:

1. After the device is manufactured, the device enrollment information is added to the DPS. This is the only manual step in the process.
2. At some point afterward, which could be a day or it could be several months, the device goes online and connects to DPS to find its IoT solution home.
3. DPS and the device go through an attestation handshake using the device enrollment information. DPS proves the device's identity.
4. DPS registers the device to the IoT hub and populates the initial desired device state.
5. IoT Hub returns the connection info for the device.
6. DPS gives the device its IoT Hub connection information.
7. The device now establishes a connection with IoT Hub and retrieves its initial configuration from IoT Hub, and makes any changes/updates as needed.
8. The device starts sending telemetry to the IoT Hub.

(2) Embedded C SDK

The Embedded C SDK, the newer addition to the Azure SDKs family, was designed to allow embedded IoT devices to leverage Azure services, like device to Cloud telemetry, Cloud to-device messages, direct methods, device twin, device provisioning, and IoT Plug and play, all while maintaining a minimal footprint.

It allows full control over memory allocation and the flexibility to bring your own MQTT client, TLS, and Socket layers.

Written in C, this version of the SDK is optimized to be used on small and embedded devices with limited capabilities and resources.

The Azure IoT SDK is open source and published on GitHub (<https://github.com/Azure/azure-sdk-for-c>). This is also distributed with FSP version 5.3.0 and above.

1.2.3 Authentication Methods

Security is a critical concern when deploying and managing IoT devices. IoT Hub offers the security features described in the following sections.

1.2.3.1 X.509

The communication path between devices and Azure IoT Hub, or between gateways and Azure IoT Hub, is secured using the industry-standard Transport Layer Security (TLS) with Azure IoT Hub, authenticated using the X.509 standard.

To protect devices from unsolicited inbound connections, Azure IoT Hub does not open any connection to the device. The device initiates all connections.

1.2.3.2 Per-Device Key Authentication

Figure 3 shows authentication in the IoT Hub using security tokens.

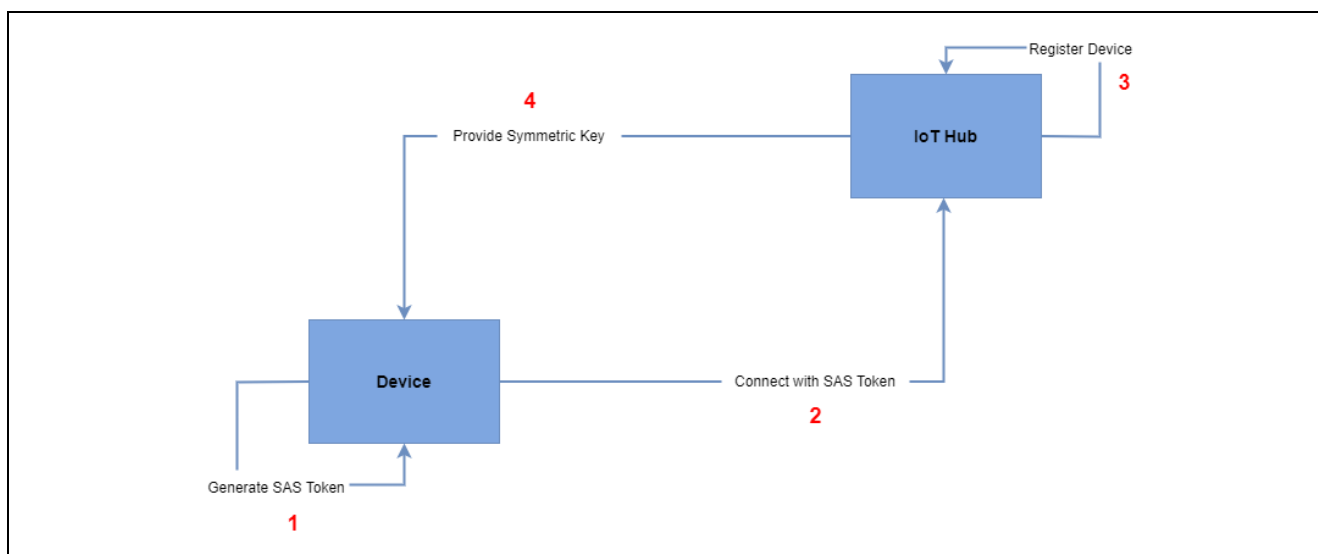


Figure 3. Authentication using Security Tokens

1. The device prepares a shared access signature (SAS) token using the device endpoint, device ID, and primary key (generated as part of the device addition to the IoT Hub).
2. When connecting to the IoT Hub, the device presents the SAS token as the password in the MQTT CONNECT message. The username content is the combination of the device endpoint and device name, along with the additional Azure-defined string.
3. The IoT Hub verifies the SAS token and registers the device, and the connection is established.
4. IoT Hub provides a Symmetric key for Data encryption.
Note: The connection is closed when the SAS token expires.

1.3 MQTT Protocol Overview

MQTT stands for **Message Queuing Telemetry Transport**. MQTT is a Client Server publish-subscribe messaging transport protocol. It is an extremely lightweight, open, simple messaging protocol designed for constrained devices, as well as low-bandwidth, high-latency, or unreliable networks. These characteristics make it ideal for use in many situations, including constrained environments, such as communication in machine-to-machine (M2M) and IoT contexts, where a small code footprint is required and/or network bandwidth is at a premium.

An MQTT client can publish information to other clients through a broker. A client, if interested in a topic, can subscribe to the topic through the broker. A broker is responsible for authentication and authorization of clients, as well as delivering published messages to any of its clients who subscribe to the topic. In this publisher/subscriber model, multiple clients may publish data on the same topic. A client will receive the messages published if the client subscribes to the same topic.

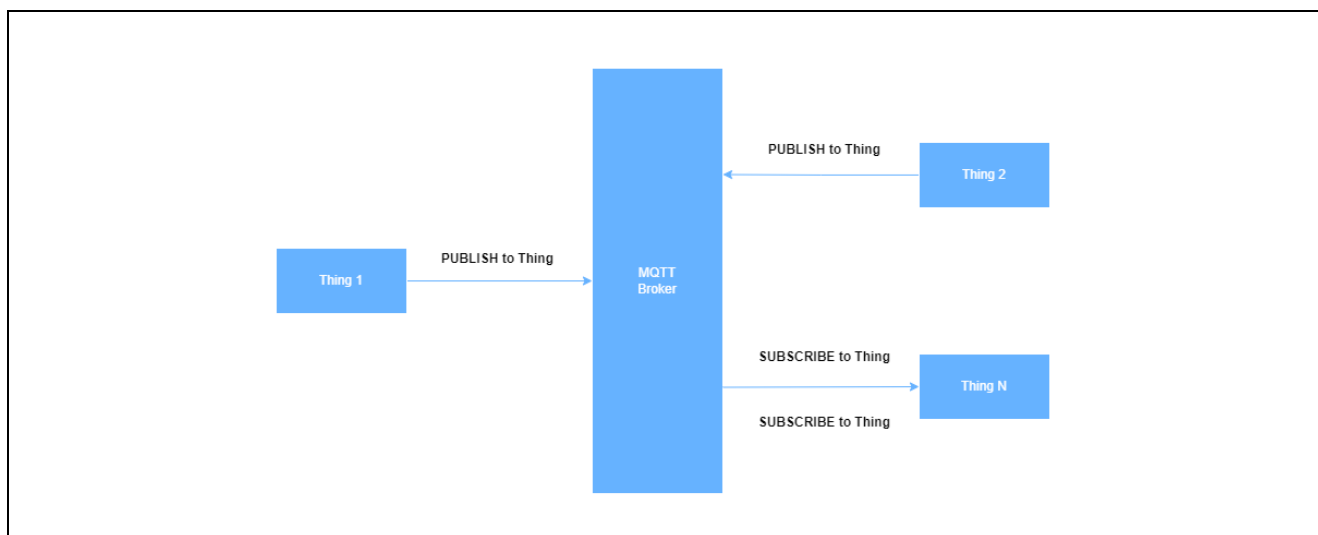


Figure 4. MQTT Client Publish/Subscribe Model

In the Pub/Sub model used by MQTT, there is no direct connection between a publisher and the subscriber. To handle the challenges of a Pub/Sub system, the MQTT generally uses quality of service (QoS) levels.

There are three QoS levels in MQTT:

- At most once (0)
- At least once (1)
- Exactly once (2)

At most once (0)

A message will not be acknowledged by the receiver or stored and redelivered by the sender.

At least once (1)

It is guaranteed that a message will be delivered at least once to the receiver. However, the message can also be delivered more than once. The sender will store the message until it gets an acknowledgment in the form of a PUBACK command message from the receiver.

Exactly once (2)

It guarantees that each message is received only once by the counterpart. It is the safest and the slowest QoS level.

1.4 TLS Protocol Overview

Transport Layer Security (TLS) protocol and its predecessor, Secure Sockets Layer (SSL), are cryptographic protocols that provide communications security over a computer network.

The TLS/ SSL protocol provides privacy and reliability between two communicating applications. It has the following basic properties:

Encryption: The messages exchanged between communicating applications are encrypted to ensure that the connection is private. A symmetric cryptography mechanism such as AES (Advanced Encryption Standard) is used for data encryption.

Authentication: A mechanism to check the peer's identity using certificates.

Integrity: A mechanism to detect message tampering and forgery ensures that the connection is reliable. A Message Authentication Code (MAC), such as the Secure Hash Algorithm (SHA), ensures message integrity.

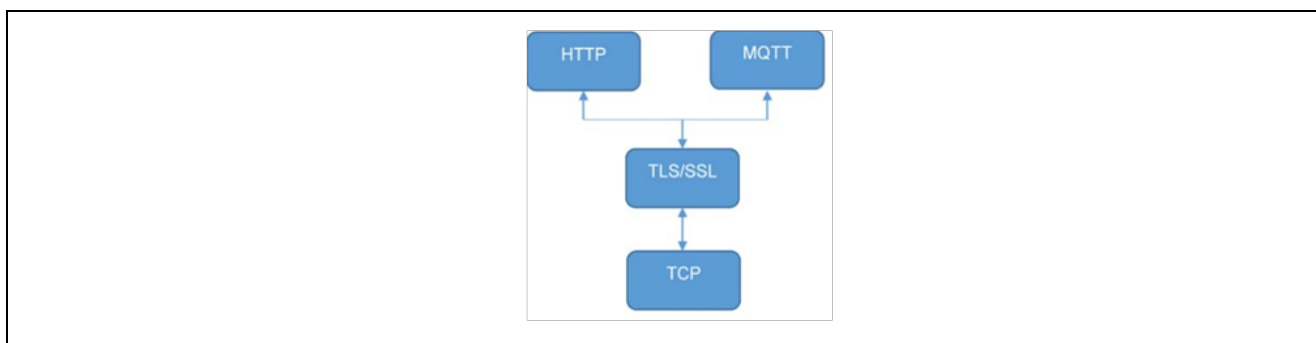


Figure 5. SSL/TLS Hierarchy

1.4.1 Device Certificates and Keys

Device certificates, public and private keys, and the ways they can be generated are discussed in this section.

Security is a critical concern when deploying and managing IoT devices. In general, each of the IoT devices needs an identity before they can communicate with the Cloud. Digital certificates are the most common method for authenticating a remote host in TLS. Essentially, a digital certificate is a document with specific formatting that provides identity information for a device.

TLS normally uses a format called X.509, a standard developed by the International Telecommunication Union (ITU), though other formats for certificates may apply if TLS hosts can agree on a format to use. X.509 defines a specific format for certificates and various encodings that can be used to produce a digital document. Most X.509 certificates used with TLS are encoded using a variant of ASN.1, which is another telecommunication standard. Within ASN.1, there are various digital encodings, but the most common encoding for TLS certificates is the Distinguished Encoding Rules (DER) standard. DER is a simplified subset of the ASN.1.

Though DER-formatted binary certificates are used in the actual TLS protocol, they may be generated and stored in a number of different encodings with file extensions such as `.pem`, `.crt`, and `.p12`. The most common alternative certificate encoding is Privacy-Enhanced Mail (PEM). The PEM format is a base-64 encoded version of the DER encoding.

Depending on your application, you may generate your own certificates, be provided certificates by a manufacturer or government organization, or purchase certificates from a commercial certificate authority.

Loading Certificates onto your Device

To use a digital certificate in your NetX™ Secure application, you must first convert your certificate into a binary DER format, and optionally convert the associated private key into a binary format, typically, a PKCS#1-formatted, DER-encoded RSA key. Once converted, it is up to you how to load the certificate and the private key onto the device. Possible options include using a flash-based file system or generating a C array from the data (using a tool such as `xxd` from Linux® with the `-i` option) and compiling the certificate and key into your application as constant data.

Once your certificate is loaded on the device, you can use the TLS API to associate your certificate with a TLS session.

1.4.2 Device Security Recommendations

The following security recommendations are not enforced by Cloud IoT Core but will help you secure your devices and connections.

- The private key of the device should be kept secret.
- Use the latest version of TLS (v1.2 or above) when communicating with IoT Cloud and verify that the server certificate is valid using trusted root certificate authorities.
- Each device should have a unique public/private key pair. If multiple devices share a single key and one of those devices is compromised, an attacker could impersonate all the devices that have been configured with that one key.
- Keep the public key secure when registering it with Cloud IoT Core. If an attacker can tamper with the public key and trick the provisioner into swapping the public key and registering the wrong public key, the attacker will subsequently be able to authenticate on behalf of the device.

- The key pair is used to authenticate the device to Cloud IoT Core and should not be used for other purposes or protocols.
- Depending on the device's ability to store keys securely, key pairs should be rotated periodically. When practical, all keys should be discarded when the device is reset.
- If your device runs an operating system, make sure you have a way to securely update it. Android Things provides a service for secure updates. For devices that don't have an operating system, ensure that you can securely update the device's software if security vulnerabilities are discovered after deployment.

2. RA FSP MQTT/TLS Cloud Solution

2.1 MQTT Client Module Introduction

The NetX Duo MQTT Client module provides high-level APIs for a Message Queuing Telemetry Transport (MQTT) protocol-based client. The MQTT protocol works on top of TCP/IP, and therefore, the MQTT client is implemented on top of NetX Duo IP and NetX Duo Packet pool. NetX Duo IP attaches itself to the appropriate link layer frameworks, such as Ethernet, Wi-Fi, or Cellular.

The NetX Duo MQTT client module can be used in normal or secure mode. In normal mode, the communication between the MQTT client and broker is not secure. In secure mode, the communication between the MQTT client and broker is secured using the TLS protocol.

2.1.1 Design Considerations

- By default, the MQTT client does not use TLS; communication is not secure between a MQTT client and broker.
- The RA FSP Azure RTOS NetX Duo IoT middleware module provides the NetX Duo TLS session block. It adds Azure RTOS NetX Secure block. This block defines/controls the common properties of NetX Secure.

2.1.2 Supported Features

NetX Duo MQTT Client supports the following features:

- Compliant with OASIS MQTT version 3.1.1 Oct 29, 2014. The specification can be found at <http://mqtt.org/>.
- Provides an option to enable/disable TLS for secure communication using NetX Secure in FSP.
- Supports QoS and provides the ability to choose the levels that can be selected while publishing the message.
- Internally buffers and maintains the queue of received messages.
- Provides a mechanism to register callback when a new message is received.
- Provides a mechanism to register callback when the connection with the broker is terminated.

2.2 TLS Session Module Introduction

The NetX Duo TLS session module provides high-level APIs for the TLS protocol-based client. It uses services provided by the RA FSP Crypto Engine (SCE) to carry out hardware-accelerated encryption and decryption.

The NetX Duo TLS Session module is based on Azure RTOS NetX Secure which implements the Secure Socket Layer (SSL) and its replacement, TLS protocol, as described in RFC 2246 (version 1.0) and 5246 (version 1.2). NetX Secure also includes routines for the basic X.509 (RFC 5280) format. NetX Secure is intended for applications using ThreadX RTOS in the project.

2.2.1 Design Considerations

- NetX Secure TLS performs only basic path validation on incoming server certificates. Once the basic path validation is complete, TLS then invokes the certificate verification callback supplied by the application.
- It is the responsibility of the application to perform any additional validation of the certificate. To help with the additional validation, NetX Secure provides X.509 routines for common validation operations, including DNS validation and Certificate Revocation List checking.
- Software-based cryptography is processor-intensive.

NetX Secure software-based cryptographic routines have been optimized for performance but depending on the capabilities of the target processor, operation times can be very long. When hardware-based cryptography is available, it should be used for optimal performance of the NetX Secure TLS.

- Due to the nature of embedded devices, some applications may not have the resources to support the maximum TLS record size of 16 KB.

NetX Secure can handle 16 KB records on devices with sufficient resources.

2.2.2 Supported Features

- Support for RFC 2246 Transport Layer Security (TLS) Protocol Version 1.0
- Support for RFC 5246 TLS Protocol Version 1.2
- Support for RFC 5280 X.509 PKI Certificates (v3)
- Support for RFC 3268 Advanced Encryption Standard (AES) Cipher suites for TLS
- RFC 3447 Public-Key Cryptography Standards (PKCS) #1: RSA Cryptography Specifications Version 2.1
- RFC 2104 HMAC: Keyed-Hashing for Message Authentication
- RFC 6234 US Secure Hash Algorithms (SHA and SHA-based HMAC and HKDF)
- RFC 4279 Pre-Shared Key Cipher suites for TLS

2.3 Azure IoT Device SDK Module Introduction

The Azure IoT device SDK is a set of libraries designed to simplify the process of developing IoT applications for Azure Cloud to make sending and receiving messages easy from the Azure IoT Hub service. There are different variations of the SDK, each targeting a specific platform, but in this application note we will describe the Azure IoT device SDK for C.

The Azure IoT device SDK for C is written in ANSI C (C99) to maximize portability. This feature makes the libraries well suited to operate on multiple platforms and devices, especially where minimizing disk and memory footprint is a priority.

In this application note we will cover how to initialize the device library, send data to IoT Hub, and receive messages from it.

More details on the Azure IoT Device SDK can be found at the reference link [The Azure IoT device SDK for C | Microsoft Docs](#).

2.3.1 Design Considerations

The Azure IoT Device SDK is integrated with FSP and is available for the customers to use. To add the SDK to the application, users are required to use the **Stacks** tab and select **Networking > Azure RTOS NetX Duo IOT Middleware**.

When the components are selected using the **Stacks** tab, and the project is created, the SDK and libraries can be seen under the `ra/microsoft/azure-rtos/netxduo/addons/azure_iot` and `ra/microsoft/azure-rtos/netxduo/addons/cloud` folders.

Note: In the following sections, step by step procedure of adding the Azure IoT middleware is explained in detail.

2.3.2 Supported Features

Table 1. IoT SDK Supported features

Features	Descriptions
Send device-to-cloud messages	Send device-to-cloud messages to IoT Hub with the option to add custom message properties.
Receive cloud-to-device messages	Receive cloud-to-device messages and associated properties from IoT Hub.
Device twins	IoT Hub persists a device twin for each device that you connect to IoT Hub. The device can perform operations like get twin document and subscribe to desired property updates.
Direct methods	IoT Hub gives you the ability to invoke direct methods on devices from the Cloud.

Features	Descriptions
Device Provisioning Service (DPS)	This SDK supports connecting your device to the Device Provisioning Service, for example, through individual enrollment using an X.509 leaf certificate.
Protocol	The Azure SDK for Embedded C supports only MQTT.
Retry policies	The Azure SDK for Embedded C provides guidelines for retries, but actual retries should be handled by the application.
IoT plug and play	IoT Plug and Play enables solution builders to integrate smart devices with their solutions without any manual configuration.

3. MQTT/TLS Application Example

3.1 Application Overview

This application project demonstrates the Renesas RA IoT Cloud Connectivity solution using the FSP and uses Microsoft® Azure as the Cloud provider. Cellular is used as the primary communication interface between the MQTT device and the Azure IoT Services.

The CK-RA6M5v2 kit acts as an MQTT node and connects to the Azure IoT service using MQTT/TLS protocol over the Cellular interface. The application periodically reads the onboard sensor values and publishes this information to the Azure IoT Hub. It also subscribes to a User LED state MQTT topic. You can turn the User LEDs ON/OFF by publishing the LED state remotely. This application reads the updated LED state and turns the User LEDs ON/OFF.

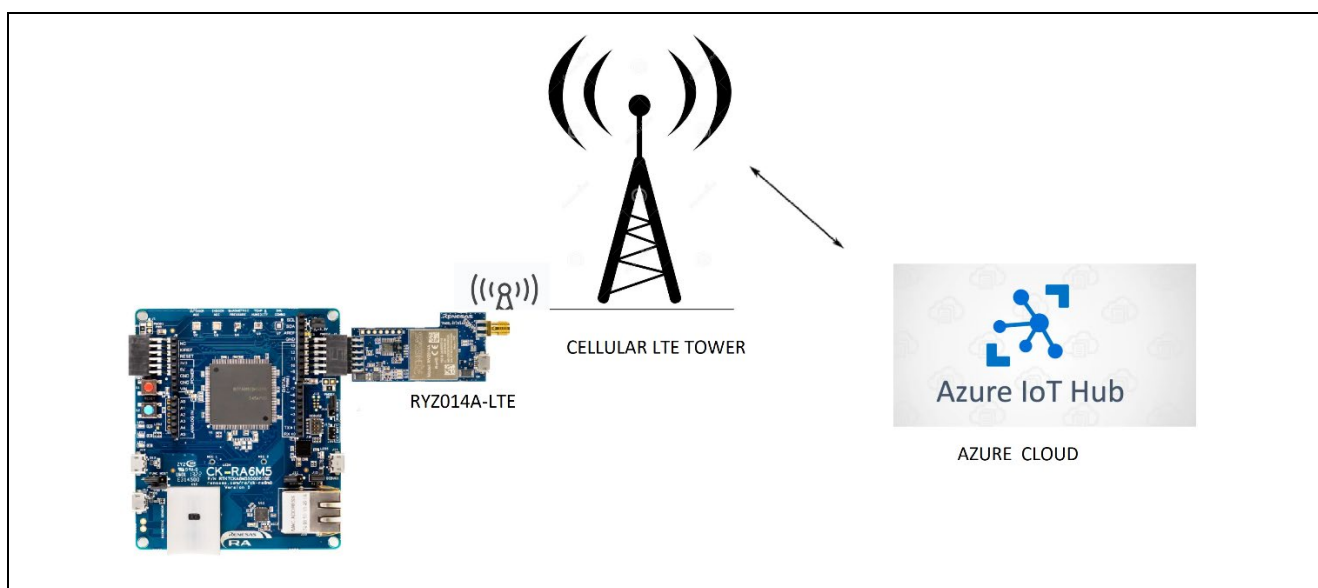


Figure 6. RA MQTT/TLS Application HW Connection Overview

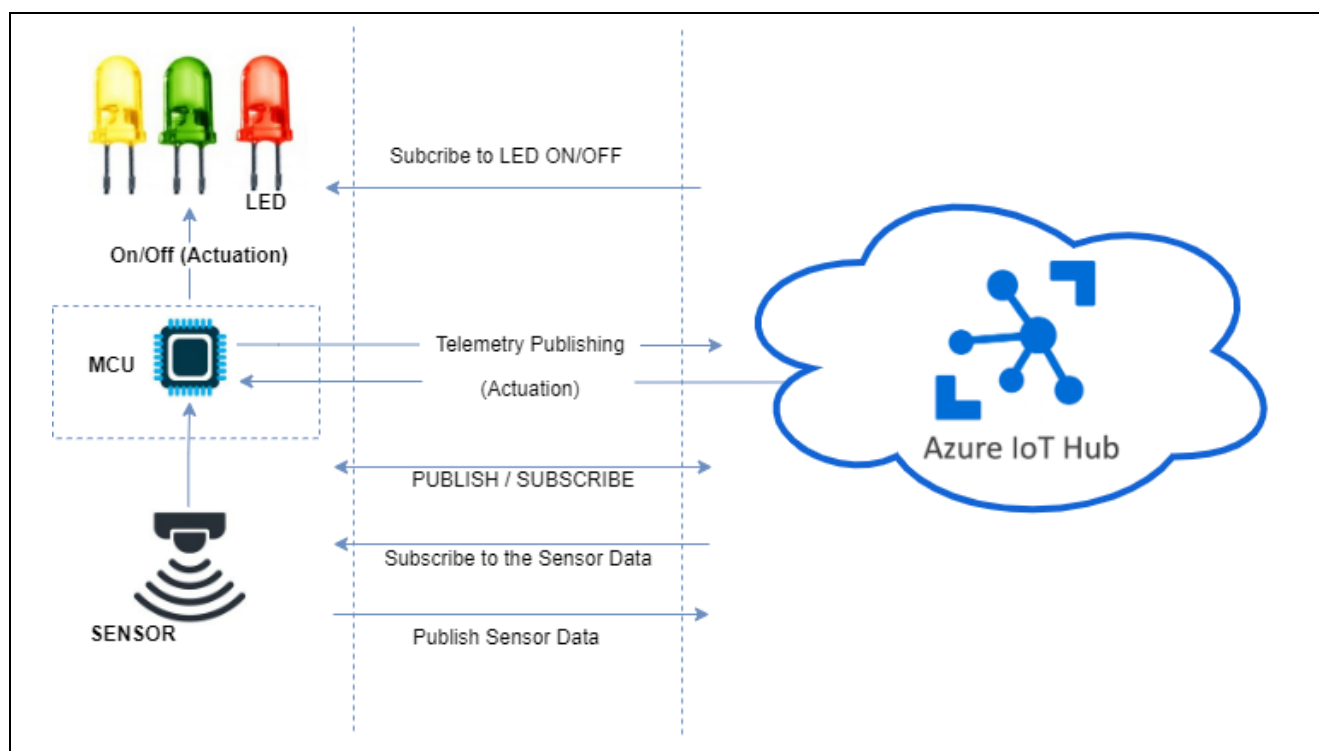


Figure 7. MQTT Publish/Subscribe to/from Azure IoT Central

The following files from this application project serve as a reference.

Table 2. Files Used in Application Project

No.	Filename	Purpose
1.	src/application_thread_entry.c	Contains initialization code and has the main thread used in Cloud Connectivity application.
2.	src/common_utils.c	Contains data structures, and functions commonly used across the project.
3.	src/common_utils.h	Contains macros, data structures, and functions prototypes commonly used across the project.
4.	src/Console_Thread_entry.c	Contains the code for command line interface and flash memory operations.
5.	src/ICM42605.c	Contains the code for the 6-Axis MEMS Motion Tracking™ Sensor
6.	src/ICM42605.h	Contains the Data structure function prototypes for the 6-Axis MEMS Motion Tracking™ Sensor
7.	src/icm.h	Contains user defined data types and function prototypes which have implementation in RA_ICM42605.c
8.	src/ICP_20100.c	Contains the code for Barometric Pressure and Temperature Sensor
9.	src/ICP_20100.h	Contains the Data structure and function prototypes for Barometric Pressure and Temperature Sensor
10.	src/icp.h	Contains user defined data types and function prototypes which have implementation in RA_ICP20100.c
11.	src/OB_1203_Thread_entry.c	Contains the code for Heart Rate, Blood Oxygen Concentration, Pulse Oximetry, Proximity, Light and Color Sensor
12.	src/oximeter.c	Contains data structures and functions used for the oximeter sensor

No.	Filename	Purpose
13.	src/oximeter.h	Contains the Data structure and function prototypes for the oximeter sensor
14.	src/r_typedefs.h	Contains the common derived data types
15.	src/RA_HS3001.c	Contains the code for the Renesas Relative Humidity and Temperature Sensor
16.	src/RA_HS3001.h	Contains function prototypes for Relative Humidity and Temperature Sensor
17.	src/RA_ICM42605.c	Contains codes for 6 Axis sensor (Gyroscope, Accelerometer) sensor's initialization and measurement.
18.	src/RA_ICP20100.c	Contains codes for Barometric Pressure and Temperature sensor's initialization and measurement.
19.	src/RA_ZMOD4XXX_Common.c	Contains the common code for Renesas ZMOD sensors
20.	src/RA_ZMOD4XXX_Common.h	Contains the common data structure's function prototypes for the Renesas ZMOD sensors
21.	src/RA_ZMOD4XXX_IAQ1stGen.c	Contains the common code for the Renesas ZMOD Internal Air Quality sensors
22.	src/RA_ZMOD4XXX_OAQ1stGen.c	Contains the common code for the for the Renesas ZMOD Outer Air Quality sensors
23.	src/RmcI2C.c	Contains the I2C wrapper functions for the third-party sensors not integrated with FSP
24.	src/RmcI2C.h	Contains the I2C function prototypes for wrapper functions for the third-party sensors not integrated with FSP
25.	src/user_choice.h	Contains the Function prototypes for the Sensor and its user configuration for the different sensors and its data accessibility.
26.	src/usr_config.h	To customize the user configuration to run the application.
27.	src/usr_hal.c	Contains data structures and functions used for the Hardware Abstraction Layer (HAL) initialization and associated utilities.
28.	src/usr_hal.h	Accompanying header for exposing functionality provided by usr_hal.c.
29.	src/cellular_setup.c	Contains data structures and functions used to operate the Cellular Module. This file is for Cellular Modem specific usage
30.	src/usr_network.c	Contains data structures and functions used to operate the NetX Duo TCP/IP and Cellular Module. This file is for Network-specific usage.
31.	src/usr_network.h	Accompanying header for exposing functionality provided by usr_network.c. This file is for Network-specific use.
32.	src/ZMOD4410_Thread_entry.c	Contains the code for indoor air quality sensor
33.	src/sample_pnp_environmental_sensor_component.c	PNP Telemetry for HS3001 Temperature sensor data
34.	src/sample_pnp_gas_component.c	PNP Telemetry for ZMOD4410 IAQ Sensor Data
35.	src/sample_pnp_barometric_pressure_sensor_component.c	PNP Telemetry for ICP20100 Pressure Sensor data
36.	src/sample_pnp_inertial_sensor_component.c	PNP Telemetry for ICM42605 Inertial Sensor data
37.	src/sample_pnp_gas_oaq.c	PNP Telemetry for ZMOD4510 OAQ Sensor Data

No.	Filename	Purpose
38.	src/sample_pnp_biometric_sensor_component.c	PNP Telemetry for OB1203 Biometric Sensor Data
39.	src/ZMOD4510_Thread_entry.c	Reading Outdoor Air Quality Data
40.	src/console_menu/console.c	Contains data structures and functions used to print data on console using UART
41.	src/console_menu/console.h	Contains the Function prototypes used to print data on console using UART
42.	src/console_menu/menu_flash.c	Contains data structures and functions used to provide CLI flash memory related menu
43.	src/console_menu/menu_flash.h	Contains the Function prototypes and macros used to provide CLI flash memory related menu
44.	src/console_menu/menu_kis.c	Contains functions to get the FSP version, get UUID and help option for main menu on CLI
45.	src/console_menu/menu_kis.h	Contains the Function prototypes and macros used to get FSP version, get UUID and help option for main menu on CLI
46.	src/console_menu/menu_main.c	Contains data structures and functions used to provide CLI main menu options
47.	src/console_menu/menu_main.h	Contains the Function prototypes and macros used to provide CLI main menu options
48.	src/console_menu/menu_catm.c	Contains functions to get to IMEI, ICCID and help option for main menu on CLI
49.	src/console_menu/menu_catm.h	Contains functions prototypes to get IMEI, ICCID and help option for main menu on CLI
50.	src/flash/ flash_hp.c	Contains data structures and functions used to perform flash memory related operations
51.	src/flash/ flash_hp.h	Contains the function prototypes and macros used to perform flash memory related operations
52.	src/I2C/i2c.c	Contains data structures and functions used for I2C communication
53.	src/I2C/i2c.h	Contains the Function prototypes and macros used for I2C communication
54.	src/ob1203_bio/KALMAN/kalman.c	Contains algorithm for Heart Rate, Blood Oxygen Concentration, Pulse Oximetry, Proximity, Light and Color Sensor sample calculations
55.	src/ob1203_bio/KALMAN/kalman.h	
56.	src/ob1203_bio/ob1203_bio.c	
57.	src/ob1203_bio/ob1203_bio.h	
58.	src/ob1203_bio/SAVGOL/SAVGOL.c	
59.	src/ob1203_bio/SAVGOL/SAVGOL.h	
60.	src/ob1203_bio/SPO2/SPO2.c	
61.	src/ob1203_bio/SPO2/SPO2.h	
62.	src/nx_azure_iot_cert.c	Azure IoT Interface code. These have the reference to the working sample implementation and other features such as Device Twin and Direct Method. These files can be used as reference for developing the application
63.	src/nx_azure_iot_cert.h	
64.	src/nx_azure_iot_ciphersuites.c	
65.	src/nx_azure_iot_ciphersuites.h	
66.	src/sample_azure_iot_embedded_sdk.c	
67.	src/sample_config.h	
68.	src/usr_app.c	Contains data structures and functions used to operate the user application functions.
69.	src/usr_app.h	Accompanying header for exposing functionality provided by <code>usr_app.c</code> .
70.	src/base64_decode.c	Contains function used for BASE64 to Hex Conversion

No.	Filename	Purpose
71.	src/base64.h	Contains function prototype used for BASE64 to Hex Conversion
72.	src/c2d_thread_entry.c	Contains data structures functions and main thread used in Cloud to Device message handling.
73.	src/hal_entry.c	Auto generated unused file for Non RTOS thing.
74.	src/commandRX_Thread_entry.c	Cloud to Device Commands reception
75.	src/uart_CATM.c	Contains code for the CATM info get for activation
76.	src/uart_CATM.h	Contains code for the CATM info get for activation
77.	src/SEGGER_RTT/SEGGER_RTT.c	Implementation of SEGGER real-time transfer (RTT) which allows real-time communication on targets which support debugger memory accesses while the CPU is running.
78.	src/SEGGER_RTT/SEGGER_RTT.h	
79.	src/SEGGER_RTT/SEGGER_RTT_Conf.h	
80.	src/SEGGER_RTT/SEGGER_RTT_printf.c	
81.	src/Sensor_Thread_entry.c	Contains the Code to access the Sensor data from the different sensors and order topic to publish.

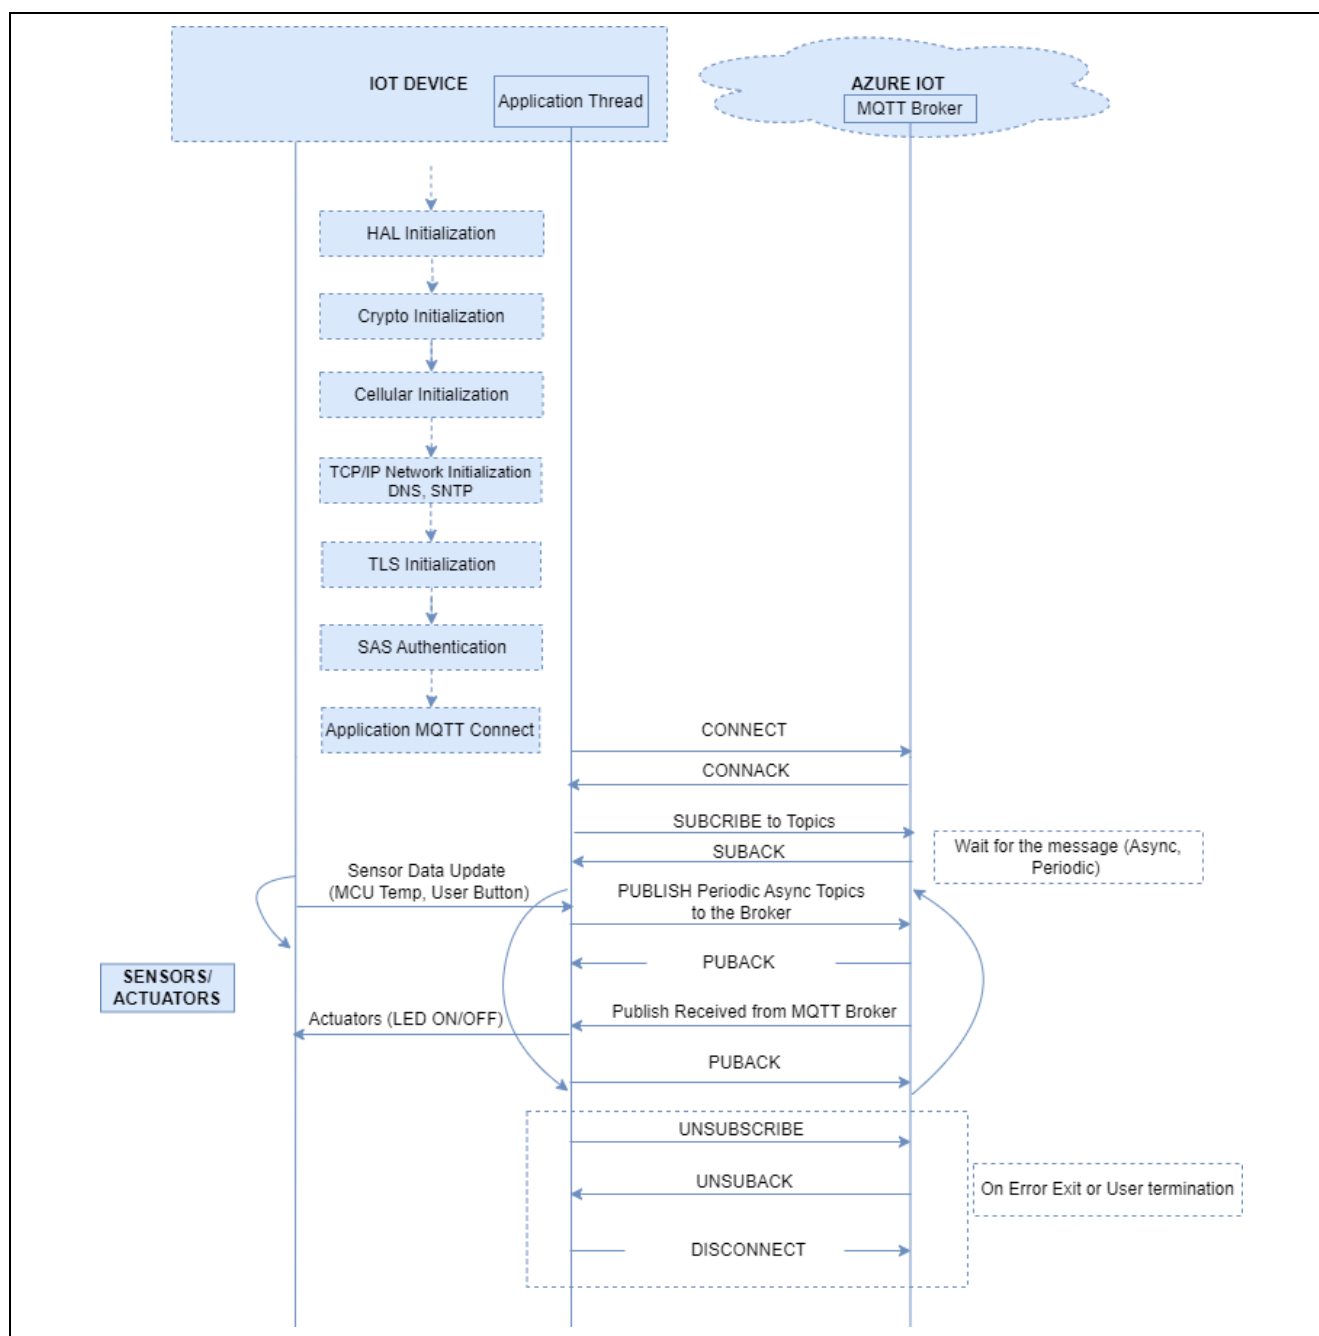


Figure 8. Application Example Implementation Details

3.2 Creating the Application Project using the FSP configurator

Note: Skip this section, if you are planning to import, build and run the project attached with this application note.

Complete the steps to create the project from the start using the e² studio and FSP configurator. The following table shows the step-by-step process of creating the project. It is assumed that the user is familiar with the e² studio and FSP configurator. Launch the installed e² studio for the FSP.

Table 3. Step-by-step Details for Creating the Application Project

	Steps	Intermediate Steps
1	Project Creation:	File → New → Renesas C/C++ Project → Renesas RA
2	Project Template: Templates for Renesas RA Project	Renesas RA C/C++ Project → Next

	Steps	Intermediate Steps
3	e ² studio - Project Configuration: Renesas RA C/C++ Project Project Name and Location	Project Name (Name for the project of your choice) → Next
4	Device and Tools Selection	
	Device Selection	FSP Version: 5.3.0 Board: CK-RA6M5 V2 Device: R7FA6M5BH3CFC Language: C
5	Toolchains	Toolchain: GNU ARM Embedded (Default) Toolchain version: 13.2.1.arm-13-7 Debugger: J-Link ARM → Next
6	Project Type Selection	Flat (Non-TrustZone) Project → Next
7	Build Artifact and RTOS Selection	Build Artifact Selection: Executable RTOS Selection: Azure RTOS ThreadX (v6.2.1+fsp5.3.0) → Next
8	Project Template Selection	Azure RTOS ThreadX – Minimal → Finish
9	Clocks tab	HOCO 20MHz → PLL Src: HOCO → PLL Div/2 → PLL Mul x20.0 → PLL200MHz
10	Stacks tab (Part of the FSP Configurator)	Threads → New Thread
11	Configure Property → Thread	Symbol: application_thread Name: Application Thread Stack size (bytes): 0x4000 Priority: 3 Auto start: Disabled Time slicing interval (ticks): 25 Note: The stack size of the application thread needs to be a minimum of 0x1000 bytes or greater. This is the requirement for the NetX Duo Crypto use.
12	Adding the NetX IoT Middleware, SNTP Clients, and Packet Pool to the Application Thread. Keep the default names g_dns0 , g_sntp_client0 . The default configuration provided by the FSP configurator is used, so there is no need to change any of the specific configurations in the Property window.	
12a	Adding DHCP Client	
	New Stack	Networking → Azure RTOS NetX Duo IoT Middleware
	Adding Packet Pool for the NetX Duo DNS Client	Click on Add NetX Duo Packet Pool → Use → g_packet_pool0 Azure RTOS NetX Duo Packet Pool Instance
	Adding NetX Duo Network Driver	Click on Add NetX Duo Network Driver → New → Azure EWF NetXDuo Middleware
	Adding EWF Adapter	Click on Add Requires EWF Adapter → New → Azure EWF Adapter on RYZ014A
12b	Configuring Azure EWF interface on r_uart	
	Common →	Parameter checking → Enabled Enable Logging → Enabled Verbose Logging → Enabled EWF Log Function → Keep it Blank
	Config Pins for UART	
		Pin Group Selection: Mixed Operation Mode: Custom

	Steps	Intermediate Steps
	Pins Tab → Pin Selection → Peripherals → Connectivity: SPI → SPI1	MISOB: None MOSIB: None SSLB0: None
12c	Configuring g_uart0 UART (r_sci_uart)	
	Common	FIFO Support: Enable DTC Support: Disable Flow Control Support: Enable
	Module g_uart0 UART (r_sci_uart)	Baud → Baud Rate: 921600 Flow Control → CTS/RTS Selection: Hardware CTS and Software RTS Software RTS Port → 04 Software RTS Pin → 12
12d	Modifying the BSP tab → Property → RA Common for Main stack and Heap Settings)	
	Property settings for RA Common	Main stack size(bytes): 0x4000 Heap size (bytes): 0x4000 Subclock Populated: Not Populated Main Oscillator Populated: Populated
13	Note: After the Azure IoT Middleware is added, the configurator reports the following errors when you hover over the red Blocks. Error: Hardware TCP/IP support must be enabled in NetX Duo. Error: Interface Capability must be enabled in NetX Duo. Error: NetX Duo Azure IoT Middleware Requires NetX Secure to be enabled. Error: NetX Duo Azure IoT Middleware Requires IP Packet Filter to be enabled. Error: NetX Duo Azure IoT Middleware Requires MQTT Cloud to be enabled. Error: A NetX Crypto Implementation must be added. Note: To fix these errors, enable them as explained in the following steps	
	Enabled Hardware TCP/IP support	Azure RTOS NetX Duo Common → Common → Common → TCP/IP Offload: Enable
	Enable Interface capability	g_packet_pool0 Azure RTOS NetX Duo Packet Pool Instance → Common → Common → Interface Capability: Enable
	Enable the NetX Secure	g_dns0 Azure RTOS NetX Duo DNS Client → Property → Common → MQTT → Client → NX Secure: Enable
	Enable MQTT Cloud	g_dns0 Azure RTOS NetX Duo DNS Client → Property → Common → MQTT → Client → Cloud Enable: Enable
	Enable IP Packet Filter	g_dns0 Azure RTOS NetX Duo DNS Client → Property → Common → Common → IP Packet Filter: Enabled
	Add NetX Crypto Implementation	Click on Add NetX Crypto SW Only or HW/SW Implementation → New → Azure RTOS NetX Crypto HW Acceleration
	Enable the Extended Notify Support	g_dns0 Azure RTOS NetX Duo DNS Client → Property → Common → Common → Extended Notify Support: Enabled
14	NetX Secure Component is added from the HW Crypto perspective. IoT SDK also works with SW crypto. But in this application the HW Crypto Accelerators are used. Configure Azure RTOS NetX Secure property values (Only values which changed from the default are shown here)	
	PSK Cipher Suite	Enable
	ECC Cipher Suite	Enable
	TLSv1.0	Enable
	TLSv1.1 Legacy Mode	Enable
	TLSV1.1	Enable
	TLSV1.3	Disable
	Server Mode	Disable

	Steps	Intermediate Steps
14a	Configure Azure RTOS NetX Crypto HW Acceleration property values (Only values which changed from the default are shown here)	
	Common → Hardware Acceleration → Public Key Cryptography (PKC) → RSA	RSA: Use Hardware
	Common → Hardware Acceleration → Public Key Cryptography (PKC) → RSA	RSA 3072 Verify/Encryption (HW): Enabled
	Common → Hardware Acceleration → Public Key Cryptography (PKC) → RSA	RSA 4096 Verify/Encryption (HW): Enabled
	Common → Hardware Acceleration → Public Key Cryptography (PKC) → RSA	RSA Scratch Buffer Size: Disabled (HW)
	Common	Standalone Usage: Use with TLS
	Note: Increase the Stack size in the BSP tab to get rid of the error in configurator for NetX Crypto HW Acceleration	Refer to the Modifying the BSP tab → Properties → RA Common for (Main stack and Heap Settings) section in step 11 of this table. Note: For crypto operation it is recommended to have a stack size of 4K or more.
14b	Adding SNTP Client	
	New Stack	Networking → Azure RTOS NetX Duo SNTP Client
	Adding NetX Duo IP instance for SNTP Client	Click on Add NetX Duo IP Instance → Use → g_ip0 NetX Duo IP Instance
	Adding Packet Pool for the SNTP Client	Click on Add NetX Duo Packet Pool → Use → g_packet_pool0 Azure RTOS NetX Duo Packet Pool Instance
	Increase the Number of Packets in Pool	
		Click on g_packet_pool0 Azure RTOS NetX Duo Packet Pool Instance → Property → Module g_packet_pool0 Azure RTOS NetX Duo Packet Pool Instance → Number of Packets in Pool: 50 (To allow enough buffer for the packets). This can be tuned based on the frequency and size.
	Note: After adding the SNTP the configurator reports the following errors when you hover over the red Blocks. Error: Maximum time adjustment (milliseconds) should be greater than unicast poll interval (seconds). Note: To fix these errors, enable them as explained in the following steps	
15	Reduce the starting poll interval for unicast update requests (seconds)	g_sntp_client0 Azure RTOS NetX Duo SNTP Client → Property → Common → SNTP → Client → Starting poll interval for unicast update request (seconds): 36
	Add Cloud to Device Processing Thread to the Application	
	Stacks tab (Part of the FSP Configurator)	Threads → New Thread
	Configure Thread Properties	Symbol: c2d_thread
		Name: Cloud2Device Thread
		Stack size (bytes): 2048
		Priority: 4
		Auto start: Disabled
	Time slicing interval (ticks): 25	

	Steps	Intermediate Steps
16	Adding the HAL Modules as required for the Application Project	
	HAL/Common Stacks → New Stack	Timers → Timer, General PWM (r_gpt)
	Property Settings for r_gpt → General	Name: gpt
		Channel: 0
		Mode: Periodic
		Period: 1
	Interrupts:	Period Unit: Seconds
		Callback: g_gpt_timer_cb
		Overflow/Crest Interrupt Priority: Priority 10
17	Adding Azure RTOS Objects for the Application (Topic Queue needs to be created for the application – Message Queue)	
	Stacks Tab → Objects	New Object → Queue
	Property Settings for the Queue	Name: Topic Queue
		Symbol: g_topic_queue
		Message Size (Words): 16
		Queue Size (Bytes): 64
	Stacks Tab → Objects	New Object → Mutex
	Property Settings for the Mutex	Name: consolprint_mutex
		Symbol: consolprint_mutex
		Priority Inheritance: Disabled
	Stacks Tab → Objects	New Object → Queue
	Property Settings for the Queue	Name: OB1203 Queue
		Symbol: g_ob1203_queue
		Message Size (Words): 3
		Queue Size (Bytes): 12
	Stacks Tab → Objects	New Object → Queue
	Property Settings for the Queue	Name: HS3001 Queue
		Symbol: g_hs3001_queue
		Message Size (Words): 2
		Queue Size (Bytes): 8
	Stacks Tab → Objects	New Object → Queue
	Property Settings for the Queue	Name: ZMOD4410 Queue
		Symbol: g_iaq_queue
		Message Size (Words): 3
		Queue Size (Bytes): 12
	Stacks Tab → Objects	New Object → Queue
	Property Settings for the Queue	Name: ZMOD4510 Queue
		Symbol: g_oaq_queue
		Message Size (Words): 1
		Queue Size (Bytes): 4
	Stacks Tab → Objects	New Object → Queue
	Property Settings for the Queue	Name: ICM Queue
		Symbol: g_icm_queue
		Message Size (Words): 12
		Queue Size (Bytes): 48
	Stacks Tab → Objects	New Object → Queue
		Name: ICP Queue

	Steps	Intermediate Steps
	Property Settings for the Queue	Symbol: g_icp_queue Message Size (Words): 4 Queue Size (Bytes): 16
18	Adding Sensor_Thread, this thread used to access sensor's values of HS3001, ICP-20100 and ICM-42605; and prepare topics to publish message via using gpt timer and g_topic_queue. Stacks Tab → Config Thread Properties→	Threads → New Thread Symbol: Sensor_Thread Name: Sensor_Thread Stack size (bytes): 8192 Priority: 4 Auto start: Disabled Time slicing interval (ticks): 100
18a	Adding the HS300X Temperature/Humidity Sensor Module to the Sensor_Thread New Stack → Config HS300X Temperature/Humidity sensor → Under I2C Shared Bus → Add I2C Communications Peripheral → Config for I2C Master →	Sensor → HS300X Temperature/Humidity Sensor Name: g_hs300x_sensor0 Callback: hs300x_callback New → I2C Master(r_iic_master) Name: g_i2c_master0 Channel: 0 Rate: Fast-mode Interrupt Priority Level: Priority 12
18b	Adding ICP-20100 and ICM-42605 sensors to the Sensor_Thread. Note: FSP doesn't provide an integrated module for ICP-20100 and ICM-42605 sensors. This needs to be integrated via the i2c communication device and external IRQ manually. Also, its related sensor driver code needs to be added to the src folder. New Stack → Config I2C Communication Device → Under the I2C Communication Device → Add I2C Shared Bus → New Stack → Config for External IRQ	Connectivity → I2C Communication Device Name: g_comms_i2c_device4 Slave Address: 0x63 Callback: ICP_comms_i2c_callback Use → g_comms_i2c_bus0 I2C Shared Bus Input → External IRQ Name: g_external_irq6 Channel: 6 Trigger: Falling Callback: ICP_IRQ_CALLBACK
18c	Adding I2C Communication Device and External IRQ for ICM-42605 into Sensor_Thread New Stack → Config I2C Communication Device → Add I2C Shared Bus → New Stack → Config for External IRQ	Connectivity → I2C Communication Device Name: g_comms_i2c_device5 Slave Address: 0x68 Callback: ICM_comms_i2c_callback Use → g_comms_i2c_bus0 I2C Shared Bus Input → External IRQ Name: g_external_irq3 Channel: 3 Trigger: Falling Callback: ICM_42605_Callback2

	Steps	Intermediate Steps
	New Stack →	Input → External IRQ
	Config for External IRQ	Name: g_external_irq12
		Channel: 12
		Trigger: Falling
		Callback: ICM_42605_Callback1
19	Add ZMOD4410 Thread for ZMOD4410 IAQ sensor's handling	
	Stacks tab (Part of the FSP Configurator)	Threads → New Thread
	Configure Thread Properties	Symbol: ZMOD4410_Thread
		Name: ZMOD4410_Thread
		Stack size (bytes): 2048
		Priority: 4
		Auto start: Disabled
		Time slicing interval (ticks): 1
19a	Adding ZMOD4XXX Gas Sensor Module to ZMOD4410_Thread	
	New Stack →	Sensor → ZMOD4XXX Gas Sensor
	Config ZMOD4XXX Gas Sensor Property →	Name: g_zmod4xxx_sensor0
		Callback: zmod4xxx_comms_i2c_callback
		IRQ Callback: zmod4xxx_irq0_callback
	Under the ZMOD4XXX Gas Sensor → Add Requires ZMOD Library →	New → ZMOD4410 IAQ 1st Generation
	Under the ZMOD4410 IAQ 1st Generation → I2C Communication Device →	Name: g_comms_i2c_device1
	Under the I2C Communication Device → Add I2C Share Bus →	New → I2C Shared Bus
	Config I2C Shared Bus →	Name: g_comms_i2c_bus2
	Under I2C Shared Bus → Add I2C Communications Peripheral →	New → I2C Master (r_iic_master)
	Config I2C Master →	Name: g_i2c_master2
		Channel: 2
		Rate: Fast-mode
		Interrupt Priority Level: Priority 12
	Under the ZMOD4XXX Gas Sensor → Add IRQ Driver for measurement →	New → External IRQ
	Config External IRQ	Name: g_external_irq4
		Channel: 4
		Trigger: Falling
		Pin Interrupt Priority: Priority 5
19b	Add ZMOD4510 Thread for ZMOD4510 OAQ sensor's handling	
	Stacks tab (Part of the FSP Configurator)	Threads → New Thread
	Configure Thread Properties	Symbol: ZMOD4510_Thread
		Name: ZMOD4510_Thread
		Stack size (bytes): 2048
		Priority: 4
		Auto start: Disabled
		Time slicing interval (ticks): 1
	Adding ZMOD4XXX Gas Sensor Module to ZMOD4510_Thread	
	New Stack →	Sensor → ZMOD4XXX Gas Sensor
	Config ZMOD4XXX Gas Sensor Properties →	Name: g_zmod4xxx_sensor1
		Callback: zmod4xxx_comms_i2c1_callback
		IRQ Callback: zmod4xxx_irq1_callback
	Under the ZMOD4XXX Gas Sensor →	New → ZMOD4510 OAQ 1st Generation

	Steps	Intermediate Steps
	Add Requires ZMOD Library →	
	Under the ZMOD4510 OAQ 1st Generation → I2C Communication Device →	Name: g_comms_i2c_device2
	Add I2C Shared Bus →	Use → g_comms_i2c_bus2 I2C Shared Bus
	Under the ZMOD4XXX Gas Sensor → Add IRQ Driver for measurement →	New → External IRQ
	Config External IRQ	Name: g_external_irq15
		Channel: 15
		Trigger: Falling
		Pin Interrupt Priority: Priority 12
20	Add OB1203 (optical biosensor) Processing Thread to the Application	
	Stacks tab (Part of the FSP Configurator)	Threads → New Thread
	Configure Thread Properties	Symbol: OB_1203_Thread
		Name: OB_1203_Thread
		Stack size (bytes): 2048
		Priority: 4
		Auto start: Disabled
		Time slicing interval (ticks): 25
20a	Adding OB1203 Sensor into OB_1203_Thread	
	New Stack →	Sensor → OB1203 Light/Proximity/PPG Sensor
	Config OB1203 Light/Proximity/PPG Sensor →	Name: g_ob1203_sensor0
		Callback: ob1203_comms_i2c_callback
		IRQ Callback: ob1203_irq_callback
	Add Requires OB1203 Operation mode →	→ New → OB1203 PPG mode
	Under the OB1203 PPG mode → I2C Communication Device →	Name: g_comms_i2c_device3
	Under the I2C Communication Device → Add I2C Shared Bus →	New → I2C Shared Bus
	Config I2C Shared Bus →	Name: g_comms_i2c_bus1
	Under I2C Shared Bus → Add I2C Communications Peripheral →	New → I2C Master (r_iic_master)
	Config I2C Master →	Name: g_i2c_master1
		Channel: 1
		Rate: Standard
		Interrupt Priority Level: Priority 12
	Add IRQ Driver for measurement	→ New → External IRQ (r_icu)
	Config for External IRQ → Property → Module g_external_irq14 External IRQ (r_icu)	Name: g_external_irq14
		Channel: 14
		Trigger: Falling
		Pin Interrupt Priority: Priority 12
	→ Pins	IRQ14: P403
	New Stack →	Sensor → OB1203 Light/Proximity/PPG Sensor
	Config OB1203 Light/Proximity/PPG Sensor →	Name: g_ob1203_sensor1
	Add Requires OB1203 Operation mode	→ New → OB1203 Proximity mode
	Under the OB1203 Proximity mode → I2C Communication Device →	Name: g_comms_i2c_device6
	Add I2C Shared Bus	→ Use → g_comms_i2c_bus1 I2C Shared Bus
	Add IRQ Driver for measurement	→ Use → g_external_irq14 External IRQ (r_icu)

	Steps	Intermediate Steps
21	Add CLI Processing Thread to the Application	
	Stacks tab (Part of the FSP Configurator)	Threads → New Thread
	Configure Thread Properties	Symbol: Console_Thread
		Name: Console_Thread
		Stack size (bytes): 4096
		Priority: 4
		Auto start: Enabled
		Time slicing interval (ticks): 50
21a	Adding UART to Console_Thread	
	New Stack →	Connectivity → UART (r_sci_uart)
	Property → Common →	FIFO Support: Enable
		DTC Support: Disable
		Flow Control Support: Enable
	Property → Module g_console_uart UART → General →	Name: g_console_uart
		Channel: 5
		Data Bits: 8bits
		Parity: None
		Stop Bits: 1bit
	Baud →	Baudrate: 115200
	Interrupts →	Callback: g_console_uart_callback
	Adding Flash to Console_Thread	
	New Stack →	Storage → Flash (r_flash_hp)
	Property → Module Flash →	Name: user_flash
		Data Flash Background Operation: Disabled
		Callback: flash_callback
		Flash Ready Interrupt Priority: Priority 6
		Flash Error Interrupt Priority: Priority 6
	Adding back door entry to the CATM1 module via the UART to Console_Thread	
	New Stack →	Connectivity → UART (r_sci_uart)
	Property → Common →	FIFO Support: Enable
		DTC Support: Disable
		Flow Control Support: Enable
	Property → Module UART → General →	Name: g_catm1_uart
		Channel: 0
		Data Bits: 8bits
		Parity: None
		Stop Bits: 1bit
	Baud →	Baudrate: 921600
	Interrupts →	Callback: catm1_uart_callback
	Add Cloud to Device Command Reception Thread to the Application	

	Steps	Intermediate Steps
22	Stacks tab (Part of the FSP Configurator)	Threads → New Thread
	Configure Thread Properties	Symbol: CommandRX_Thread
		Name: CommandRX_Thread
		Stack size (bytes): 2048
		Priority: 4
		Auto start: Disabled
23	Add linker flag and Enable "Use float with nano printf" to print float values	
	Project → Properties → C/C++ Build → Settings → Tool Settings tab → GNU ARM Cross C Linker → Miscellaneous	→ Check the box : Use float with nano printf (-u _printf_float)
		Other linker flags : --specs=rdimon.specs

The above configuration is a prerequisite to generate the required stacks and features for the Cloud connectivity application provided with this app note. Once the **Generate Project Content** button is clicked, e² studio generates the source code for the project. The generated source code contains the required drivers, stacks, and middleware. The user application files must be added to the src folder.

For the validation of the created project, the same source files listed in the section 3, MQTT/TLS Application Example, Table 2, may be added. This is the quickest way to create and build the application without writing the code for the configuration created in the above section.

Note: After you follow the instructions in section 3.2 to recreate the Application project using the FSP configurator and add the src code to the project, the project is ready for building.

Note: If you get an error while assigning PIN to External IRQ, go to **Pins** tab > **Pin Number** and select the IRQ function for that pin number, for example, for External IRQ channel number 4, you can select Function IRQ14 for pin number 4.

Note: As part of the manual creation of this project, you might encounter known issues/pin errors with the Pin configurator while selecting the peripherals. It is recommended to select the operation mode, disable/enable, and select the pins. You can also refer to the attached project as a working reference.

3.3 Install Azure CLI


To prepare Azure Cloud resources and connect a device to Azure, you can use Azure CLI. Azure CLI can be installed locally on your PC.

1. Azure CLI can be downloaded from the Microsoft site (<https://learn.microsoft.com/en-us/cli/azure/install-azure-cli>)
2. The installer name will be similar to `azure-cli-2.44.x.msi`. or later. Click on the installer and the install shield will guide you through the installation process. Install it to your desired directory. For example: `c:\AzureCLI`
3. Install the current release of the Azure CLI. After the installation is complete, you will need to close and reopen any active Windows Command Prompt or PowerShell windows to use the Azure CLI.
4. After the Azure CLI installation is successful, open and launch the Windows PowerShell to use the Azure CLI. A screenshot of the Windows PowerShell is shown below.



Figure 9. Windows Power Shell

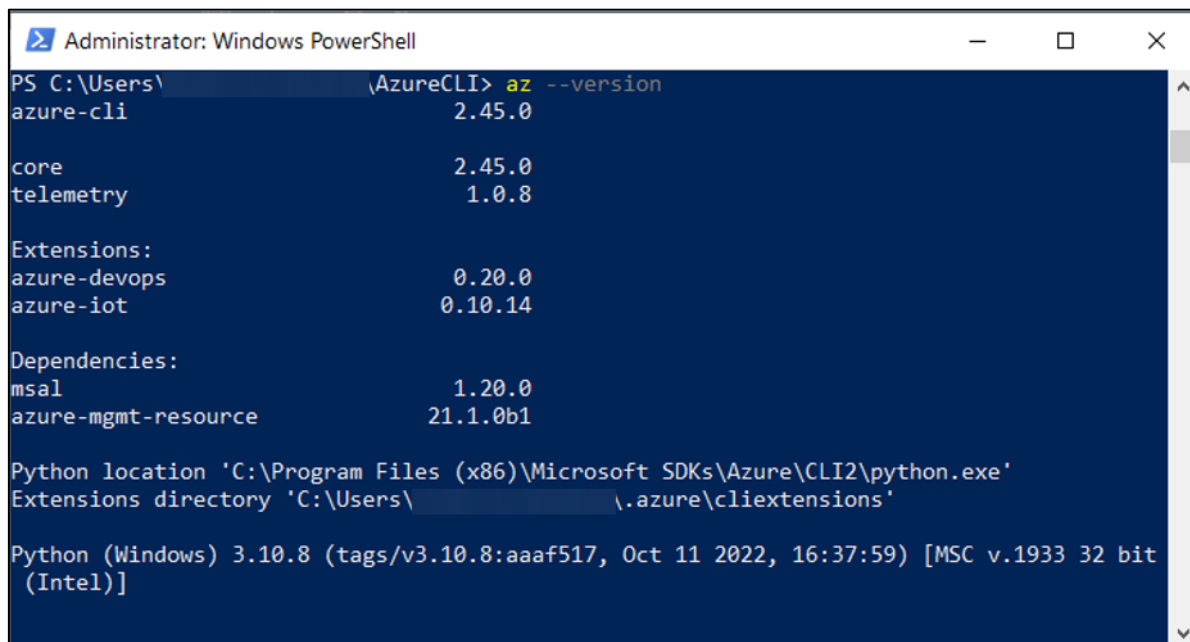5. If you already have Azure CLI installed locally, go to the directory of the installed AzureCLI and run `az --version` to check the version. This application note requires Azure CLI 2.44.0 or later.



```
Administrator: Windows PowerShell
PS C:\Users\ \AzureCLI> az --version
azure-cli                        2.45.0

core                            2.45.0
telemetry                       1.0.8

Extensions:
azure-devops                   0.20.0
azure-iot                      0.10.14

Dependencies:
msal                           1.20.0
azure-mgmt-resource            21.1.0b1

Python location 'C:\Program Files (x86)\Microsoft SDKs\Azure\CLI2\python.exe'
Extensions directory 'C:\Users\ \.azure\cliextensions'

Python (Windows) 3.10.8 (tags/v3.10.8:aaaf517, Oct 11 2022, 16:37:59) [MSC v.1933 32 bit
(Intel)]
```

Figure 10. Azure CLI Version

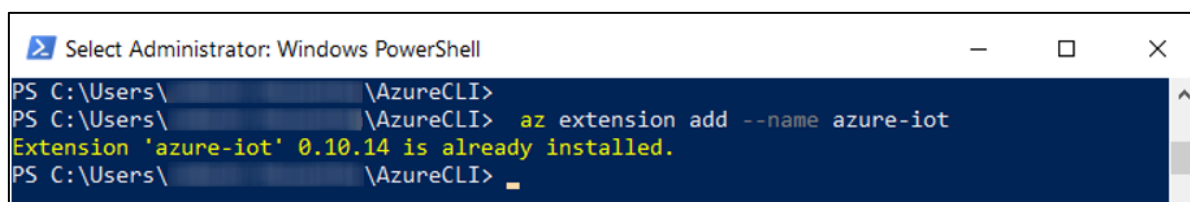
3.4 Create an IoT Hub

You can use Azure CLI to create an IoT Hub that handles events and messaging for your device.

- Note 1: Before you start creating the IoT Hub, you are required to log in to your Azure Portal via a web browser. If you are not logged in, then you may notice an error that you are not logged in while creating the IoT Hub: <https://portal.azure.com/>
- Note 2: If you do not have an Azure account, you can create one which is valid for 12 months with limited features from the following link: <https://azure.microsoft.com/en-us/free/>
- Note 3: Some of the user parameters needed to be unique when creating the IoT Hub. Users are required totake care of this while creating the IoT Hub credentials.
- Note 4: When you run the command for the first time, you may not notice the output on the console as shown in Figure 11. It just accepts the command.

To create an IoT Hub:

1. In your CLI console, run the “`az extension add`” command to add the Microsoft Azure IoT Extension for Azure CLI to your CLI shell. The IoT Extension adds IoT Hub, IoT Edge, and IoT Device Provisioning Service (DPS) specific commands to Azure CLI.
— `az extension add --name azure-iot`



```
Select Administrator: Windows PowerShell
PS C:\Users\ \AzureCLI>
PS C:\Users\ \AzureCLI> az extension add --name azure-iot
Extension 'azure-iot' 0.10.14 is already installed.
PS C:\Users\ \AzureCLI>
```

Figure 11. Add Extension for Azure CLI

- Run the `az login` command to login to the Azure account. Running the `az login` command opens the browser for login. You can enter the login credentials to login to the Azure account. You will notice a similar message on the browser upon successful login.

Note: You can find more info on the Azure CLI at [Azure Command-Line Interface \(CLI\) - Overview | Microsoft Learn](#)

You have logged into Microsoft Azure!

You can close this window, or we will redirect you to the [Azure CLI documentation](#) in 1 minute.

Announcements

[Windows only] Starting in May 2023, Azure CLI will authenticate using the [Web Account Manager](#) (WAM) broker by default.


To help us collect feedback on the new login experience, you may opt-in to use WAM by running the following commands:

```
az config set core.allow_broker=true
az account clear
az login
```

Figure 12. Successful Login to the Azure Account

- Run the `az group create` command to create a resource group. The following command creates a resource group named `MyRAResourceGroup` in the `westus` region.
- Note: Optionally, to set an alternate location, run `az account list-locations` to see available locations. Then specify the alternate location in the following command in place of `westus`.
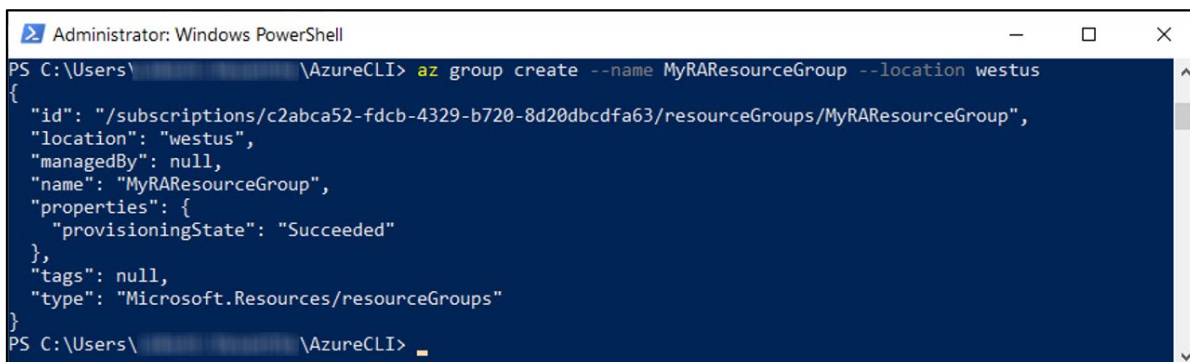
```
— az group create --name MyRAResourceGroup --location westus
```



```
Administrator: Windows PowerShell
PS C:\Users\... \AzureCLI> az group create --name MyRAResourceGroup --location westus
{
  "id": "/subscriptions/c2abca52-fdc3-4329-b720-8d20dbcdfa63/resourceGroups/MyRAResourceGroup",
  "location": "westus",
  "managedBy": null,
  "name": "MyRAResourceGroup",
  "properties": {
    "provisioningState": "Succeeded"
  },
  "tags": null,
  "type": "Microsoft.Resources/resourceGroups"
}
PS C:\Users\... \AzureCLI>
```

Figure 13. Create Resource Group

- Run the `az iot hub create` command to create an IoT Hub. It might take a few minutes to create an IoT Hub.
 Replace the `YourIoTHubName` placeholder below with the name you chose for your IoT Hub. An IoT Hub name must be globally unique in Azure. This placeholder is used in the rest of this tutorial to represent your unique IoT Hub name. Use any command given below.

```
— az iot hub create --resource-group MyRAResourceGroup --name
  {YourIoTHubName}
```

OR

```
— az iot hub create --resource-group MyRAResourceGroup --name
  {YourIoTHubName} --location {YourLocation}
```

Note: It may take few minutes to create the IoT Hub. In this case the IoT Hub name used is `RACLOUDHUB`.

Note: Microsoft recommends to create new IoT Hub. If the IoT Hub was created previously (2-3 years old) it may not work as desired. So, we recommend to create new IoT Hub to run the application to yield the proper results

```

Administrator: Windows PowerShell
https://docs.microsoft.com/en-US/cli/azure/iot/hub#az_iot_hub_create
Read more about the command in reference docs
PS C:\Users\ > az iot hub create --resource-group MyRAResourceGroup --name RACLOUDHUB
--location westus
| Running ..
  
```

Figure 14. IoT Hub Creation in Progress

- After the IoT Hub is created, view the JSON output in the console and copy the `hostName` value to a safe place. You use this value in a later step. The `hostName` value looks like the following example:

— {Your IoT hub name}.azure-devices.net

```

https://docs.microsoft.com/en-US/cli/azure/iot/hub#az_iot_hub_create
Read more about the command in reference docs
PS C:\Users\ > az iot hub create --resource-group MyRAResourceGroup --name RACLOUDHUB
--location westus
{
  "etag": "AAAAHyUlkI=",
  "id": "/subscriptions/c2abca52-fdc3-4329-b720-8d20dbcd6a63/resourceGroups/MyRAResourceGroup/providers/Micr
osoft.Devices/IotHubs/RACLOUDHUB",
  "identity": {
    "principalId": null,
    "tenantId": null,
    "type": "None",
    "userAssignedIdentities": null
  },
  "location": "westus",
  "name": "RACLOUDHUB",
  "properties": {
    "allowedFqdnList": [],
    "authorizationPolicies": null,
    "cloudToDevice": {
      "defaultTtlAsIso8601": "1:00:00",
      "feedback": {
        "lockDurationAsIso8601": "0:00:05",
        "maxDeliveryCount": 10,
        "ttlAsIso8601": "1:00:00"
      },
      "maxDeliveryCount": 10
    },
    "comments": null,
    "deviceStreams": null,
    "disableDeviceSas": null,
    "disableLocalAuth": null,
    "disableModuleSas": null,
    "enableDataResidency": null,
    "enableFileUploadNotifications": false,
    "encryption": null,
    "eventHubEndpoints": {
      "events": {
        "endpoint": "sb://iothub-ns-raccloudhub-15367392-546ab7522b.servicebus.windows.net/",
        "partitionCount": 4,
        "partitionIds": [
          "0",
          "1",
          "2",
          "3"
        ],
        "path": "raccloudhub",
        "retentionTimeInDays": 1
      }
    },
    "features": "GWV2",
    "hostName": "RACLOUDHUB.azure-devices.net",
    "ipFilterRules": [],
    "locations": [
  
```

Figure 15. JSON Output After IoT Hub Creation

3.5 Certificate Creation Process

You can use the GIT Bash utility for this process. If not installed on your computer, you can download and install it ([Git for Windows](#) or [Git for Windows \(github.com\)](#)).

1. Install Git for Windows.
2. Launch the Git Bash
3. Create a directory of your choice (for example, `mkdir Azure`).
4. Go to the directory and create the configuration. This created directory is the place where your self-signed certificate is created and stored.
5. Copy paste the configuration listed below to create `x509_config.cfg` as shown in the following figure.

```
cat > x509_config.cfg <<EOT

[req]

req_extensions = client_auth
distinguished_name = req_distinguished_name

[req_distinguished_name]

[ client_auth ]
basicConstraints = CA:FALSE
keyUsage = digitalSignature, keyEncipherment
extendedKeyUsage = clientAuth

EOT
```

Note: All OpenSSL commands and self-signed certificate creation process is given at this [link](#).

The steps are as follows:

1. Set x509 configuration file for common name in cert.


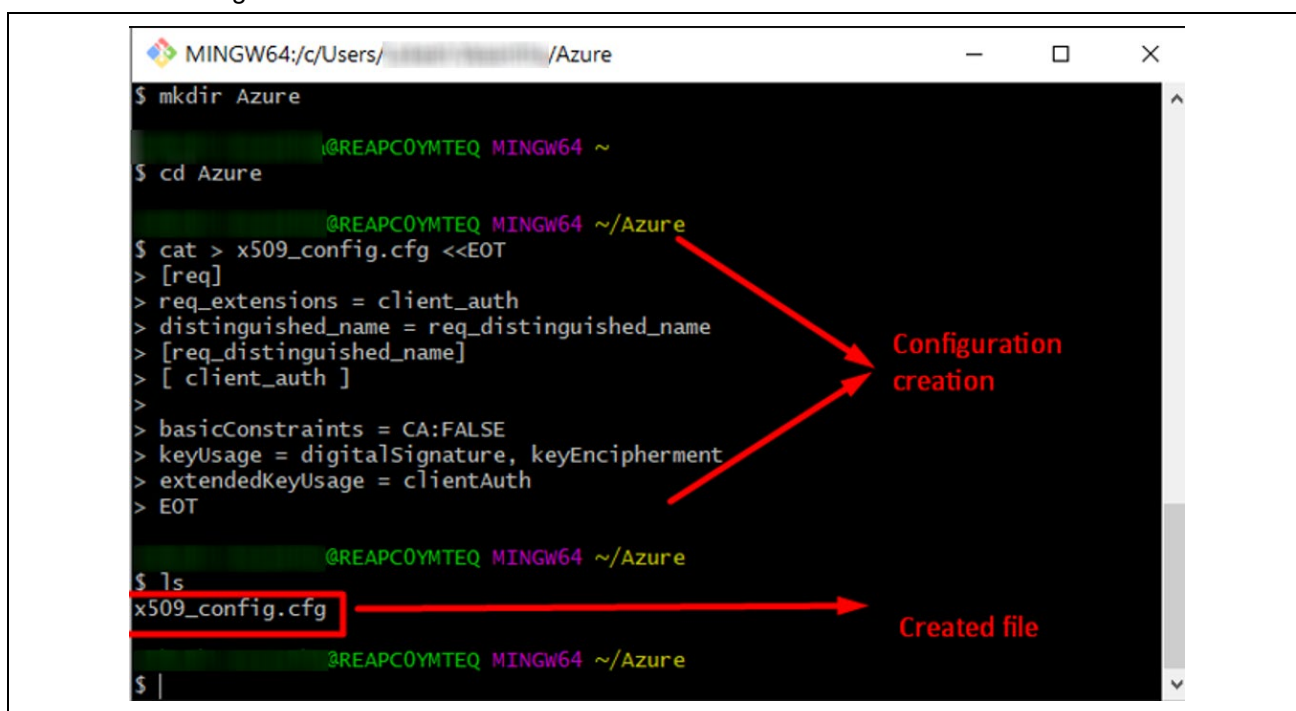


Figure 16. Set X509 Configuration File

2. Create RSA self-signed certificate.

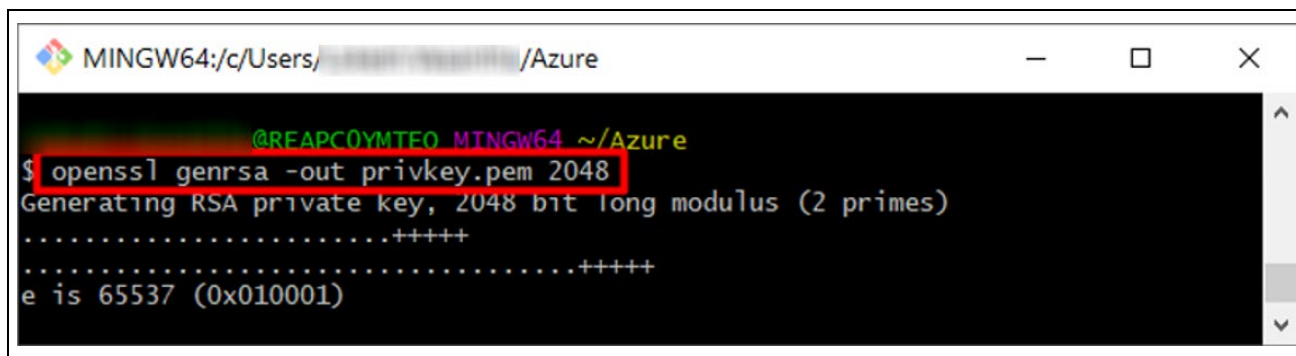Generate private key and certificate (public key) using the command as shown in the snapshot
“openssl genrsa -out privkey.pem 2048”



```
MINGW64:/c/Users/.../Azure
@REAPCOYMQTEQ MINGW64 ~/Azure
$ openssl genrsa -out privkey.pem 2048
Generating RSA private key, 2048 bit long modulus (2 primes)
.....+++++
.....+++++
e is 65537 (0x010001)
```


Figure 17. Generate Private Key and Certificate (public key)

3. Embed the Device ID in the certificate

This command will not give you any response if successfully executed.

```
openssl req -new -days 365 -nodes -x509 -key privkey.pem -out cert.pem -
config x509_config.cfg -subj "//CN=<Same as device Id>"
```

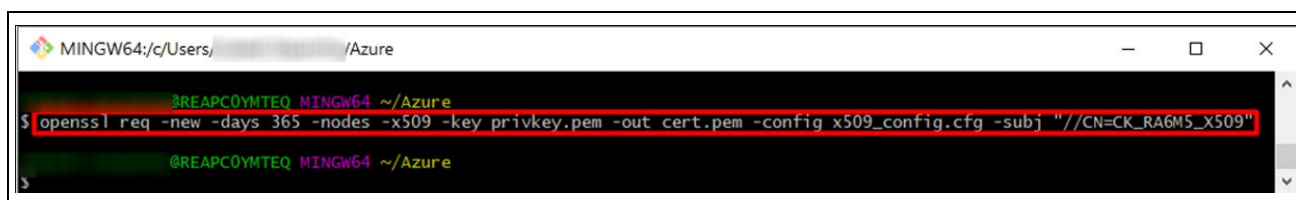Note: In this example, the device ID name “CK_RA6M5_X509” is used. Note down this Device ID. This will be used in the future steps. Use your own Device ID to make it unique across your system.




```
MINGW64:/c/Users/.../Azure
@REAPCOYMQTEQ MINGW64 ~/Azure
$ openssl req -new -days 365 -nodes -x509 -key privkey.pem -out cert.pem -config x509_config.cfg -subj "//CN=CK_RA6M5_X509"
```

Figure 18. Embed Device ID in Certificate

4. Run command to convert format of key from pem to der

```
openssl rsa -outform der -in privkey.pem -out privkey.der
```

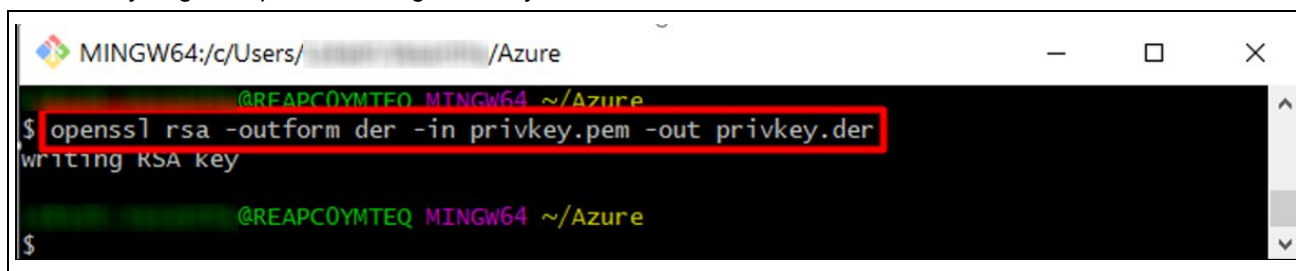Here you get response “writing RSA key”



```
MINGW64:/c/Users/.../Azure
@REAPCOYMQTEQ MINGW64 ~/Azure
$ openssl rsa -outform der -in privkey.pem -out privkey.der
writing RSA key
```

Figure 19. Convert Format from key to der

5. Run command to Convert the format of cert from pem to der

```
openssl x509 -outform der -in cert.pem -out cert.der
```

This command will not give you any response if successfully executed.



```
MINGW64:/c/Users/.../Azure
@REAPCOYMQTEQ MINGW64 ~/Azure
$ openssl x509 -outform der -in cert.pem -out cert.der
```

Figure 20. Convert Format of cert from pem to der

6. Convert der to hex array and set them in `sample_device_identity.c` file in the project.
For easier access, the command text is given below. Users can copy and paste text in the command line to create `sample_device_identity.c`.

```
echo "#include \"nx_api.h\"
/**
device cert (`openssl x509 -in cert.pem -fingerprint -noout | sed 's://g'`) :
`cat cert.pem`

device private key :
`cat privkey.pem`
*/
" > sample_device_identity.c
```

```
MINGW64:/c/Users/.../Azure
$ ls
cert.der  cert.pem  privkey.der  privkey.pem  x509_config.cfg

@REAPC0YMTEQ MINGW64 ~/Azure
$ echo "#include \"nx_api.h\"
/**
> device cert (`openssl x509 -in cert.pem -fingerprint -noout | sed 's://g'`) :
> `cat cert.pem`
>
> device private key :
> `cat privkey.pem`
> */
> " > sample_device_identity.c

@REAPC0YMTEQ MINGW64 ~/Azure
$ ls
cert.der  cert.pem  privkey.der  privkey.pem  sample_device_identity.c  x509_config.cfg

@REAPC0YMTEQ MINGW64 ~/Azure
$
```

Figure 21. Convert der to Hex Array and Set them in `sample_device_identity.c`

7. Run "ls" command to check whether `sample_device_identity.c` is created.
8. Run the following commands to produce `sample_device_cert_ptr` and `sample_device_private_key_ptr` array containing device certificate and private key equivalent hex values along with length.

```
"xxd -i cert.der | sed -E "s/(unsigned char) (\w+)/\1
sample_device_cert_ptr/g; s/(unsigned int) (\w+)_len/\1
sample_device_cert_len/g" >> sample_device_identity.c"

"xxd -i privkey.der | sed -E "s/(unsigned char) (\w+)/\1
sample_device_private_key_ptr/g; s/(unsigned int) (\w+)_len/\1
sample_device_private_key_len/g" >> sample_device_identity.c"
```

These commands will not give you any response if successfully executed.

```
MINGW64:/c/Users/.../Azure

@REAPC0YMTEQ MINGW64 ~/Azure
$ xxd -i cert.der | sed -E "s/(unsigned char) (\w+)/\1 sample_device_cert_ptr/g; s/(unsigned int) (\w+)_len/\1
sample_device_cert_len/g" >> sample_device_identity.c

@REAPC0YMTEQ MINGW64 ~/Azure
$ xxd -i privkey.der | sed -E "s/(unsigned char) (\w+)/\1 sample_device_private_key_ptr/g; s/(unsigned int) (\w+)_len/\1
sample_device_private_key_len/g" >> sample_device_identity.c

@REAPC0YMTEQ MINGW64 ~/Azure
```

Figure 22. Producing arrays containing hex values

Check the content of `sample_device_identity.c` with `cat` command. In this file you will get Device certificate along with SHA1 fingerprint, Device Private Key, `sample_device_cert_ptr` and `sample_device_private_key_ptr` array along with their length. You will also notice the Fingerprint; you need to use this fingerprint as “thumbprint” in device creation process using the IoT Explorer in later sections. Please note down this Fingerprint.

```

MINGW64:/c/Users/~/Azure
$ cat sample_device_identity.c
#include "nx_api.h"
/**
device cert (SHA1 Fingerprint=9FFAC12161BEAEAC9A7FCBAA4A70016CE03B44F5) :
-----BEGIN CERTIFICATE-----
MIICtzcCAZ8CFEvn2stjEtzeI1B/E8ttic54au7hMA0GCSqGSIb3DQEBCwUAMBgx
FjAUBgNVBAMMDUNLX1JBnk01X1g1MDkwHhcNMjMwMjI1MDAwNTQ0whcNMjQwMjI1
MDAwNTQ0wJAYMRYwFAYDVOQDDA1DS19SQTZNNV9YNTA5MII8IjANBgkqhkiG9w0B
AQEFAAOCAQ8AMIIBCgKCAQEAtRrTPHSXQDKjxx80Ac9P1PGIrgA40cDXlEncRu1J
xPW+81jy33KCrqFIoLXgPj3PAWKFeFdGh3B9VzfU6u70g8mMK+pfIL3qIDS+ndy5
pS362RmAvp9GwXqerBd284aR4ceqUeRix1mvvkZ2ftpZH1Z3b4izk1GoC2C13aLp
4o8eqvp100Du6Tk9NNGLy45hg2ILX6ot9wc82sWEdujan3iG8UxhwDgw6fyke07J
2xN4u+8jlcYPPQBYsK811FawHLAsc/9pFKSQQ1Hggk3gQq8Mow99U51TgVHUBDQx
yNh4KwcBt5Hh1DVUC+dYtvz4HjhaEmoxzrw18SSVkJZobWwIDAQABMA0GCSqGSIb3
DQEBCwUAA4IBAQAUNBFYCPuad1oUXXI2IfosyvG19kN3TS1N0eGEacbcQcuy8g6d
rj8QtnbTuv3Pj/gTC0NODFHPQMYZMLSKK1H2RALWYudTgo6YdrD4f3jxtm3Pj7x
+3c+ua4mBWL1bUmsYSwAZrVd4n9VoGSfi/MH07ins7b7VJnEvcYVFKCZtxt5BB01
524wov1yvGL629CBc+tdJ0z205k5MnCMsp1MaxBLK30p9PFatwDeU7ggcCBIBgye
tkD7ywdGGKzKQ/FNfeb/yNxx3ZYt7iupMwC0DbShi8CwjRZqaHUZBXv6jpaFAXNH
TeDjUVfkoUosRkuDXk029Y8P/v1+2tHhB36U
-----END CERTIFICATE-----

device private key :
-----BEGIN RSA PRIVATE KEY-----
MIIEogIBAAKCAQEAtRrTPHSXQDKjxx80Ac9P1PGIrgA40cDXlEncRu1JxPW+81jy
33KCrqFIoLXgPj3PAWKFeFdGh3B9VzfU6u70g8mMK+pfIL3qIDS+ndy5pS362RmA
vp9GwXqerBd284aR4ceqUeRix1mvvkZ2ftpZH1Z3b4izk1GoC2C13aLp4o8eqvpI

```

Figure 23. Check the Content of `sample_device_identity.c`

3.6 View Device Properties

You can use the Azure IoT Explorer (<https://learn.microsoft.com/en-us/azure/iot/howto-use-iot-explorer>) to view and manage the properties of your devices. In the following steps, you will add a connection to your IoT Hub in IoT Explorer. With the connection, you can view properties for devices associated with the IoT Hub.

Download and install the latest (above v0.15.6.0) Azure IoT Explorer from: <https://github.com/Azure/azure-iot-explorer/releases>.

Note: Click and install the downloaded MSI file `Azure.IoT.Explorer.Preview.0.15.6.msi` or a newer version of the downloaded file. The install shield guides you through the installation process.

3.7 Set IoT Hub

To add a connection to your IoT Hub:

1. In your Azure CLI console, run the `az iot hub connection-string show` command to get the connection string for your IoT Hub.

— `az iot hub connection-string show -n {YourIoTHubName}`

Note: See section 3.4, Create an IoT Hub for the IoT Hub Name.

```

Administrator: Windows PowerShell
PS C:\Users\~\AzureCLI> az iot hub connection-string show -n RACLOUDHUB
{
  "connectionString": "HostName=RACLOUDHUB.azure-devices.net;SharedAccessKeyName=iiohubowner;SharedAccessKey=US+...:zXCY="
}
PS C:\Users\~\AzureCLI>

```

Figure 24. Connection String

- Copy the connection string.
- Open the Azure IoT Explorer and select **IoT hubs** > **Add connection**.
- Paste the connection string into the **Connection string** box.
- Select **Save**.

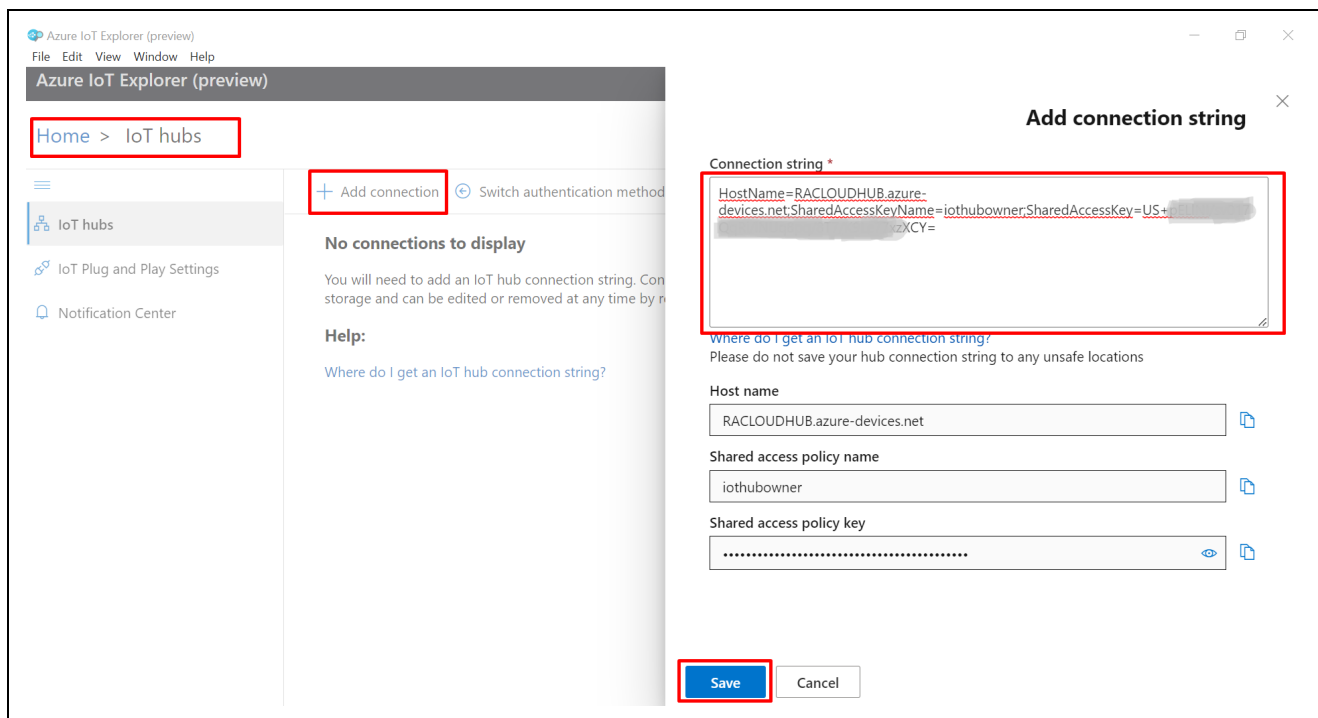


Figure 25. Adding Connection String

Note: In some cases, Azure IoT Explorer may report an error that the default port that IoT Explorer is trying to use is being used by another application. In order to overcome this error, you can add a different port number for the Azure IoT Explorer, as shown below.

Note: In some cases, Azure IoT Explorer may report an error that "Failed to retrieve device list: request to *https://rxxxxxx.azure-devices.net/devices%2Fquery?api-version=2020-09-30* failed, reason: unable to get local issuer certificate.". This error is due to the Zscaler tool running on your PC set by IT. In order to overcome this error, you try running the IOT Explorer on a PC without a Zscaler or Lab machine.

Reference: <https://github.com/Azure/azure-iot-explorer/issues/604>

On your PC, edit the system environmental variables as shown in the following screenshots.

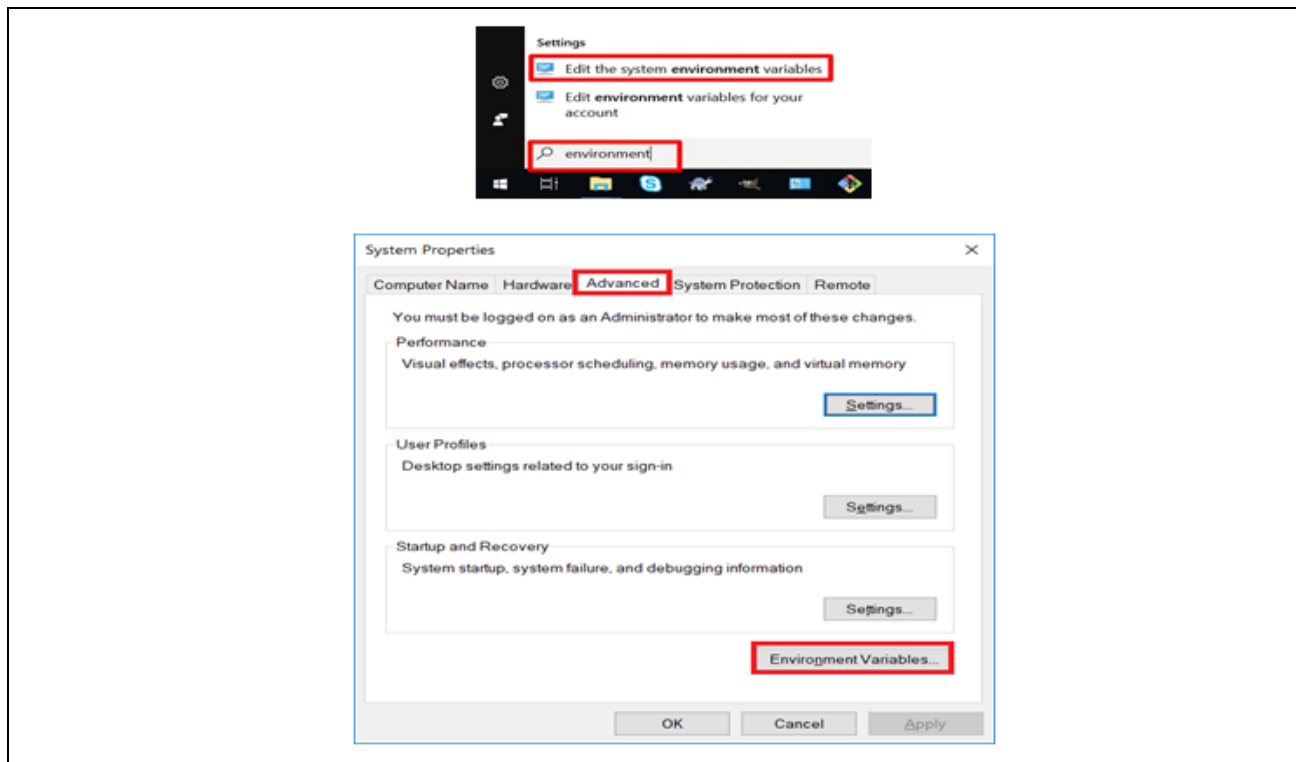


Figure 26. Editing System Environment Variable

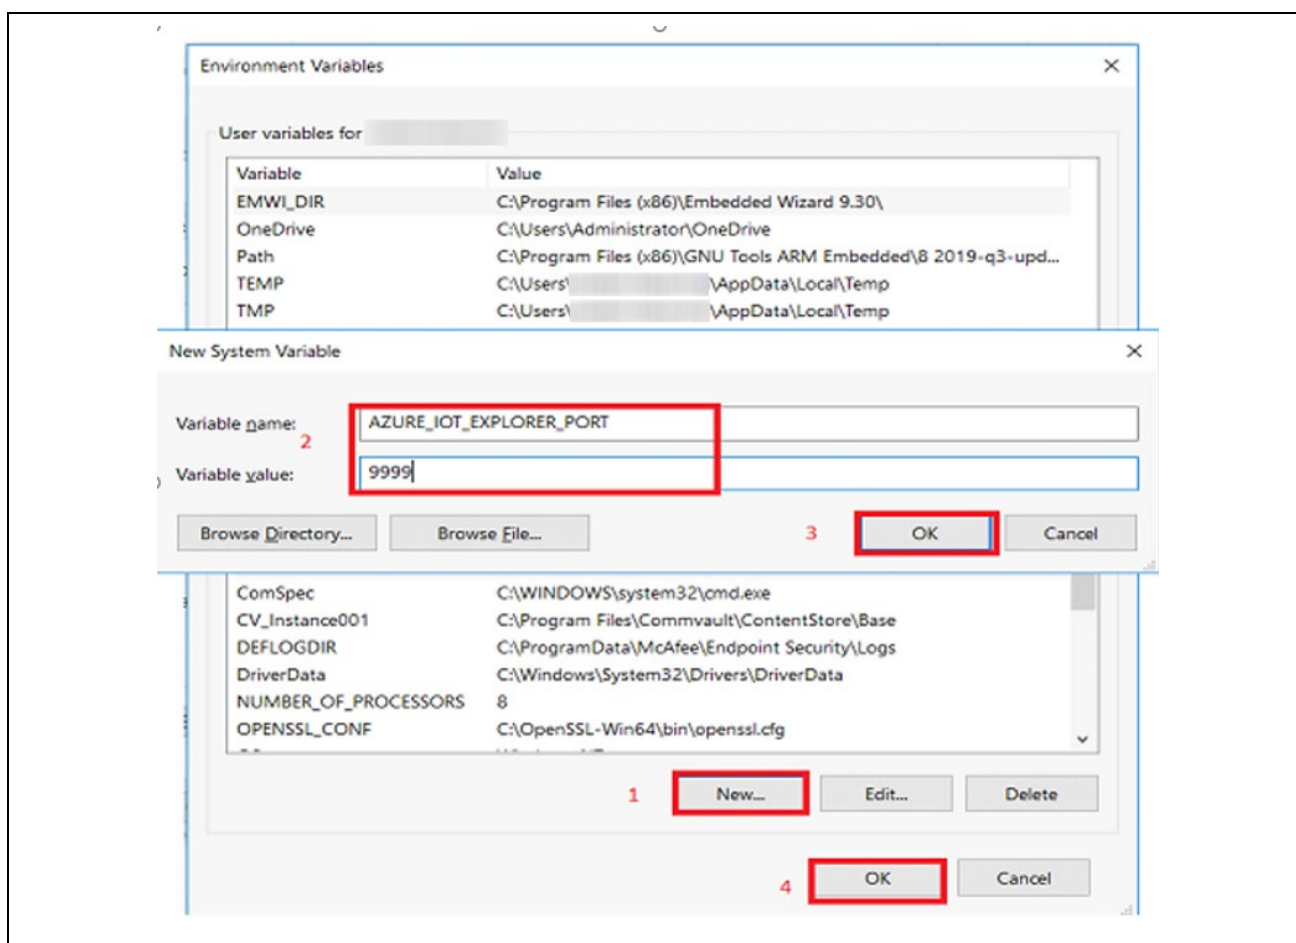


Figure 27. Adding System Environment Variable for Alternate Port - Azure IoT Explorer

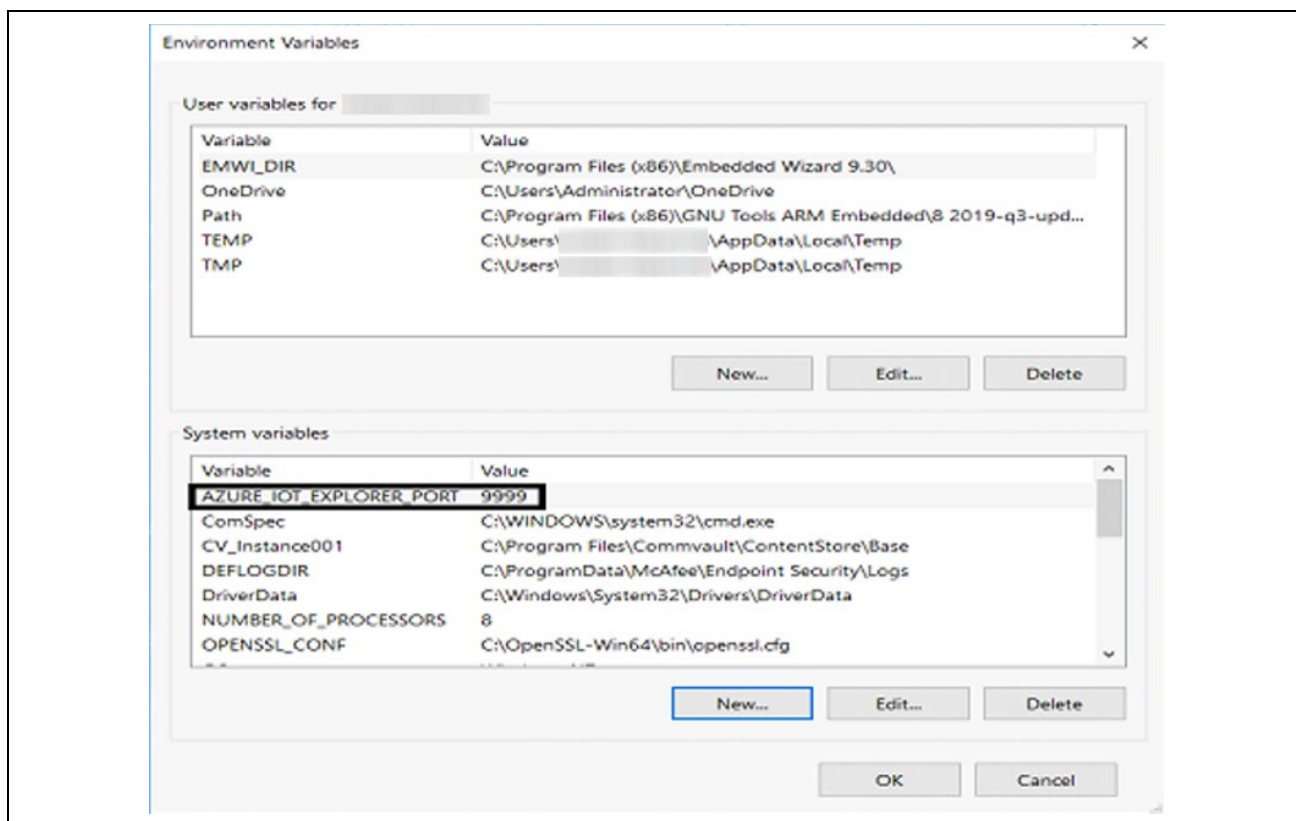


Figure 28. Added Alternate Port for Azure IoT Explorer

If the connection succeeds, the Azure IoT Explorer switches to a **Devices** view and lists your device.

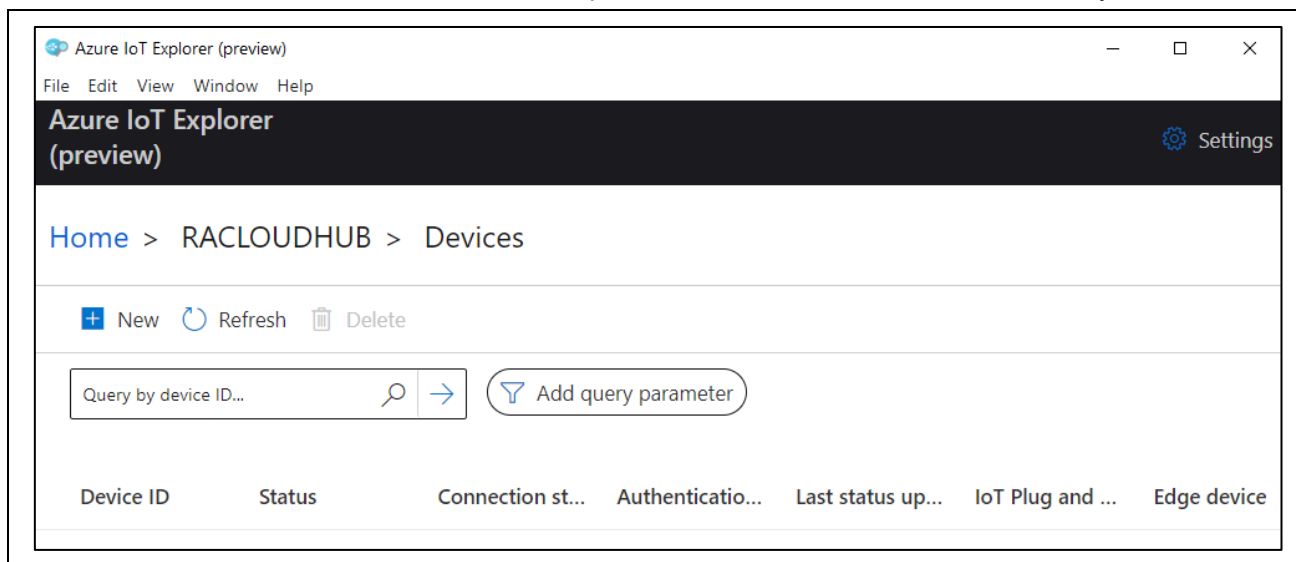


Figure 29. Listed Devices

3.8 Register an IoT Hub Device

In this section, you create a new device instance and register it with the IoT Hub you created. You will use the connection information for the newly registered device to connect your physical device securely in a later section.

To register a device:

1. You can Create Device with the help of Azure IoT Explorer, shown as follows:
Click on **New**.

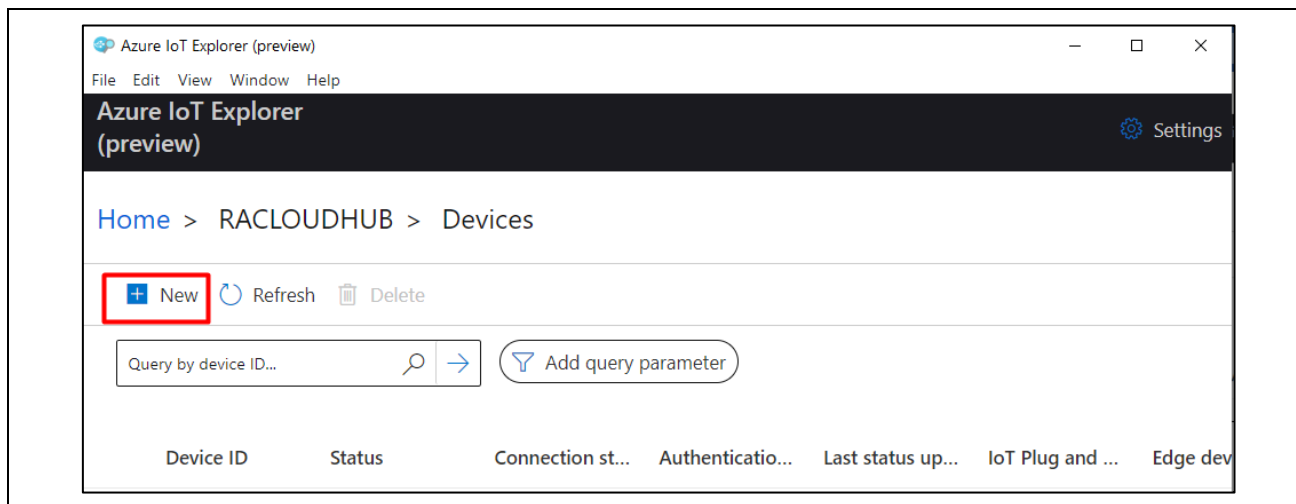


Figure 30. New Device Creation Process with Azure IoT Explorer

2. In this stage, you have to give Device ID, Authentication type, Primary thumbprint, and Secondary thumbprint, then click on Create. Use fingerprint generated in Figure 23 in section 3.5.Certificate Creation Process, for the primary and secondary thumbprints. Follow steps 1-5 in Figure 31, to create the device.

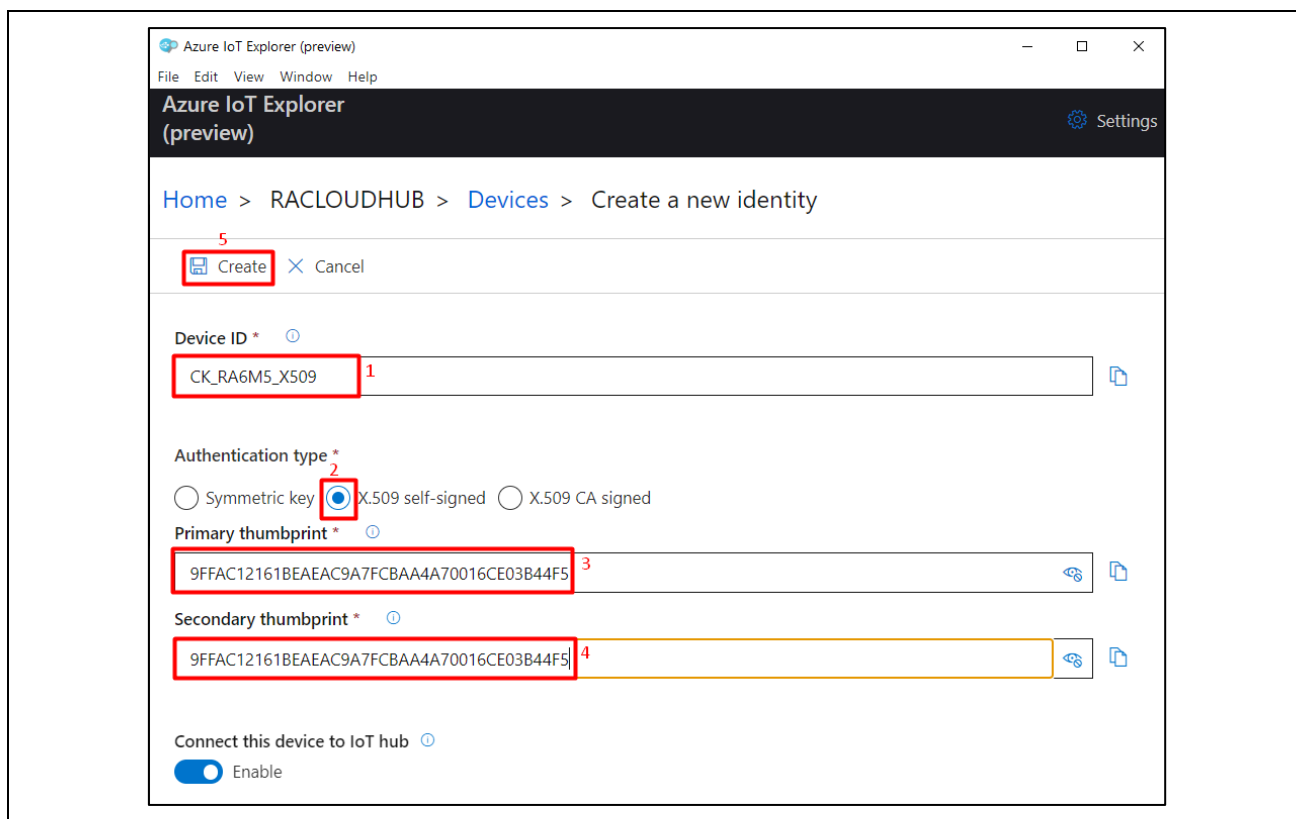


Figure 31. Naming, Authentication type and Thumbprints

3. You can see your created device in the Devices section of Azure IoT Explorer

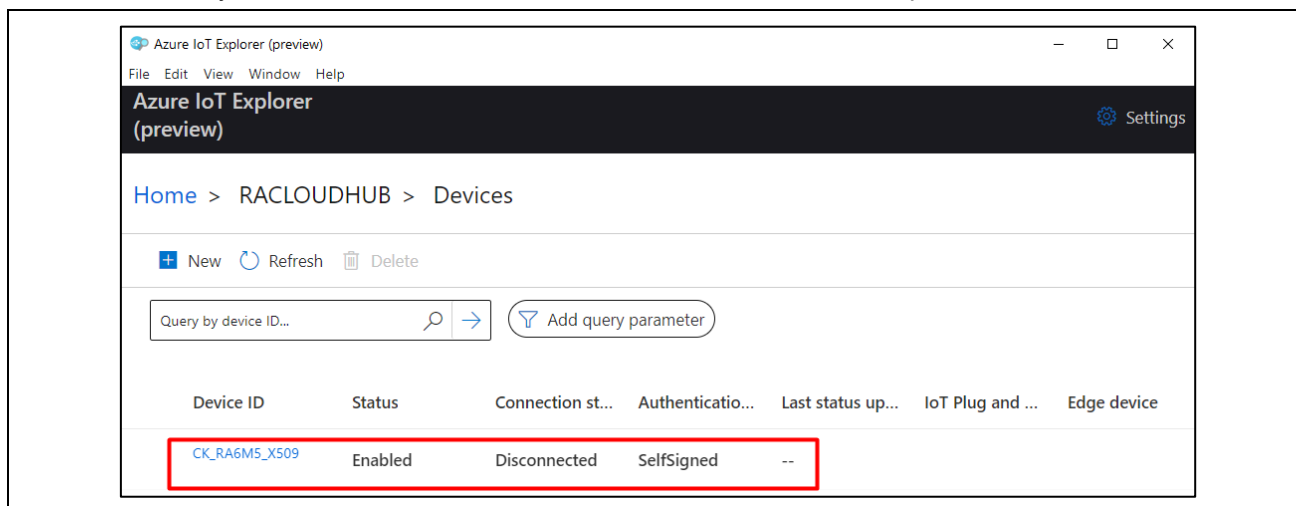


Figure 32. Newly Created Device

3.9 Prepare the Device

To connect the device to Azure, modify a configuration file for Azure IoT settings (of your Device ID and Hostname), and build and flash the image to the device.

Add configuration

1. Import the application project into an empty e² studio. Open `sample_config.h` and make the changes to the configuration as shown in the snapshot with the option `USE_DEVICE_CERTIFICATE`.

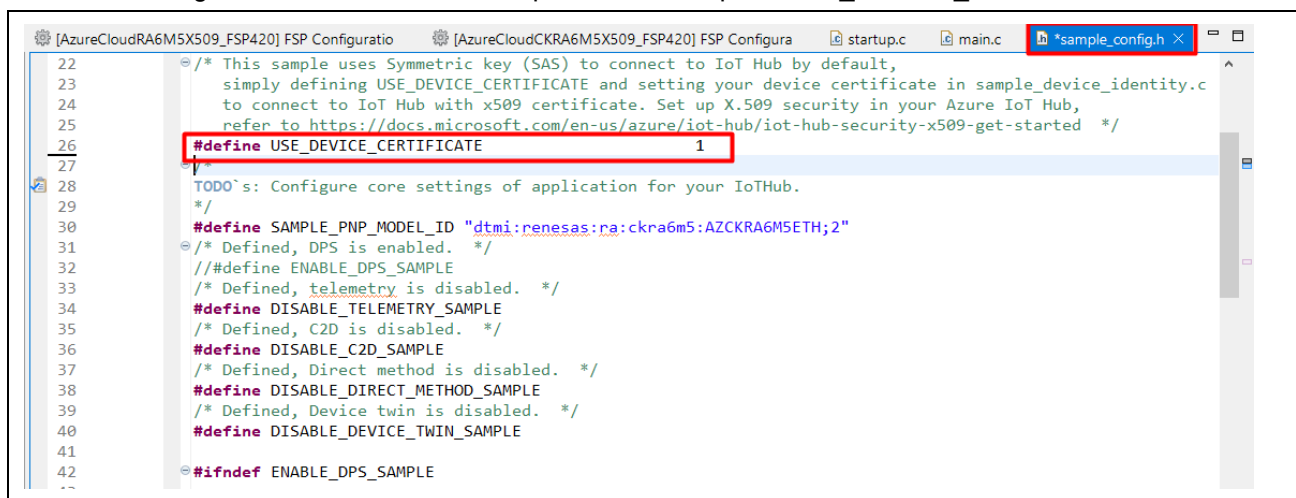


Figure 33. Configuration Changes to sample_config.h

Constant name	Value
USE_DEVICE_CERTIFICATE	1

2. Open `nx_azure_iot_cert.c` to check the root CA data following the Azure IoT Hub. This application is migrated to use root CA "DigiCert Global Root G2"

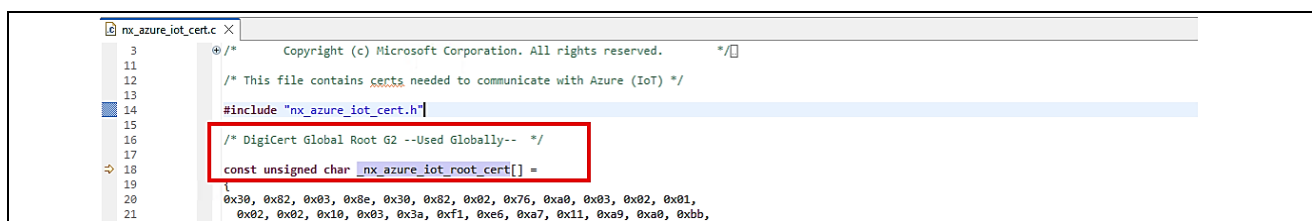


Figure 34. Root CA certificate in this project

Note: IoT Hub in Azure Cloud can change the root CA in the future. So please check and update the new root CA at [How to migrate hub root certificate - Azure IoT Hub | Microsoft Learn](#) if you cannot connect to Azure IoT Hub due to the expiration of the root CA issue.

You can download the root CA file at: [DigiCert Root Certificates - Download & Test | DigiCert.com](#)

Step to change the root CA data in this project:

1. Download the root CA.
2. Using command “\$xxd -i <file.cert> >> <output.c>” to convert file .pem to array in C.
3. Copy value into src/nx_azure_iot_cert.c

3.10 Building the Application

The project is now ready to be compiled. Press the **Build** (hammer icon) to start building the project.



Figure 35. Starting to Build the Project

The toolchain will report compilation and build status to the console pane in the lower-right corner of e² studio. When the build has been completed, confirm that there are zero errors and few warnings. Warnings, if any, may result from highly restrictive compilation warnings settings being applied by e² studio to third-party code.

```

CDT Build Console [azure_ck_ra6m5_v2_cellular_app]
Building file: ../ra/board/ra6m5_ck_v2/board_init.c
Building file: ../ra/board/ra6m5_ck_v2/board_leds.c
Building target: azure_ck_ra6m5_v2_cellular_app.elf
arm-none-eabi-objcopy -O ihex "azure_ck_ra6m5_v2_cellular_app.elf" "azure_ck_ra6m5_v2_cellular_app.hex"
arm-none-eabi-size --format=berkeley "azure_ck_ra6m5_v2_cellular_app.elf"
  text      data      bss      dec      hex filename
 430372    3308    438164    871844    d4da4 azure_ck_ra6m5_v2_cellular_app.elf
14:03:57 Build Finished. 0 errors, 100 warnings. (took 16m:32s.176ms)

```

Figure 36. Compilation and Build Status Report

3.11 Download and Run the Project

1. Connect the USB-C cable to the USB-C Power connector (J28) of the CK-RA6M5v2 Cloud Kit and the other end to the host computer.
2. Connect the micro-USB Cable to the USB Debug connector (J10) of the CK-RA6M5v2 board and the other end to the PC (This will be the Console Port for the application). Users are required to use the Command Line Interface (CLI) to configure and run the application.
3. Make sure the Cellular Module is connected to the PMOD2 of the board and the other end to the supplied antenna.
4. In e² studio, open the **Debug Configurations** dialog and launch the **azure_ck_ra6m5_v2_cellular_app.elf** debug configuration.

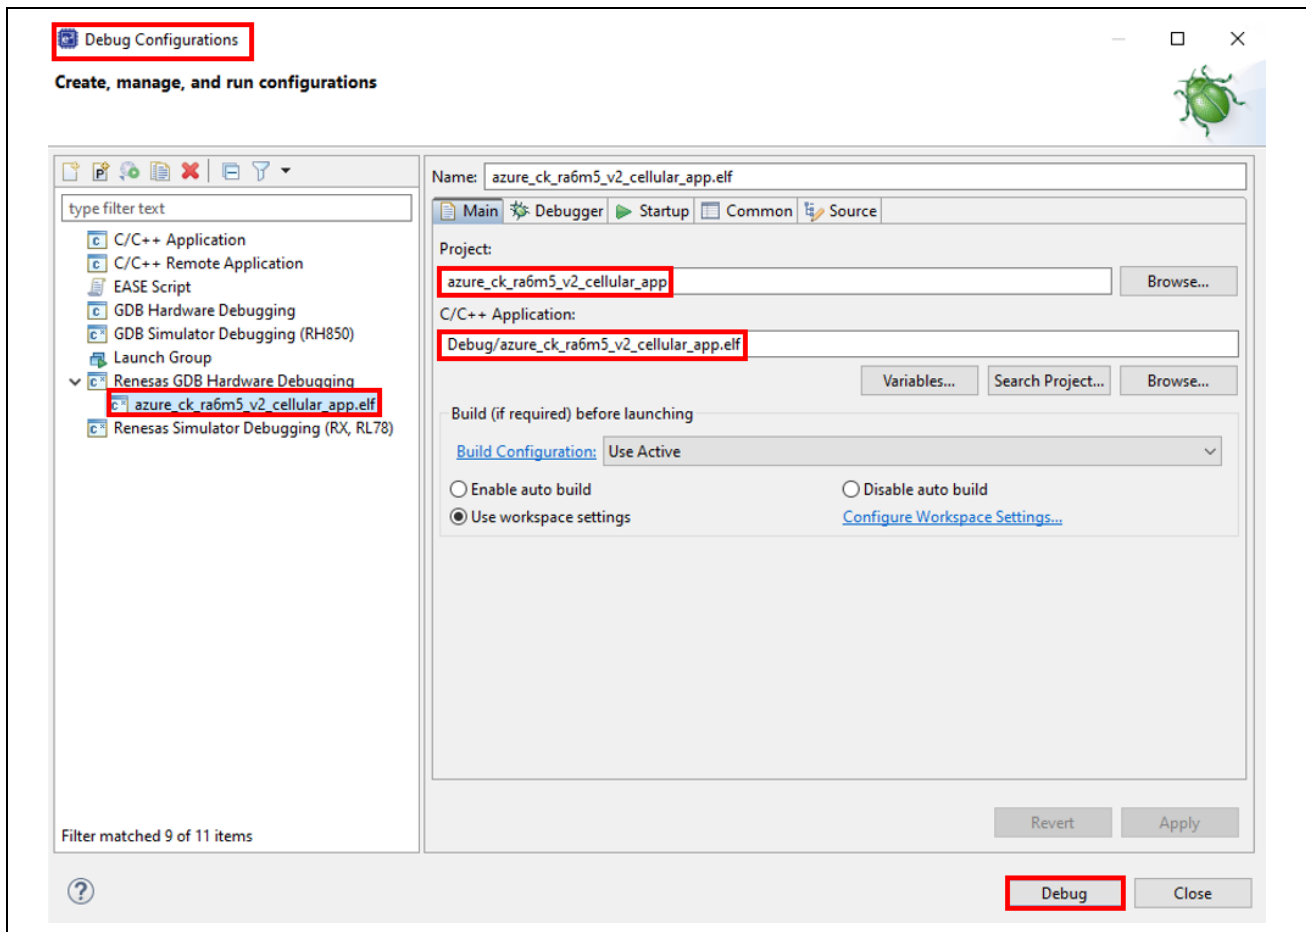


Figure 37. Start Debug

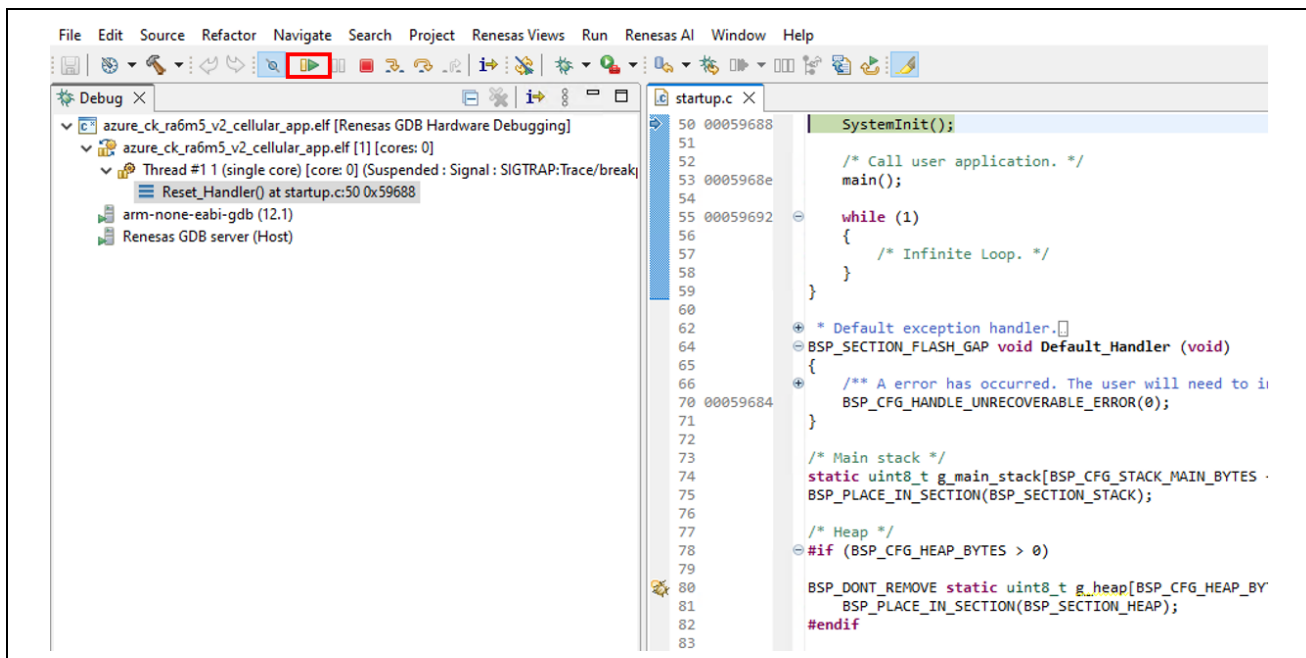


Figure 38. Resume the Debug

- To view output, you have to use a serial terminal like tera term. To know your COM port, On the host PC, open Windows Device Manager. Expand Ports (COM & LPT), locate JLink CDC UART Port (COMxx), and note the COM port number for reference in the next step.

Note: JLink CDC UART drivers are required to communicate between the CK-RA6M5v2 board and the terminal application on the host PC.

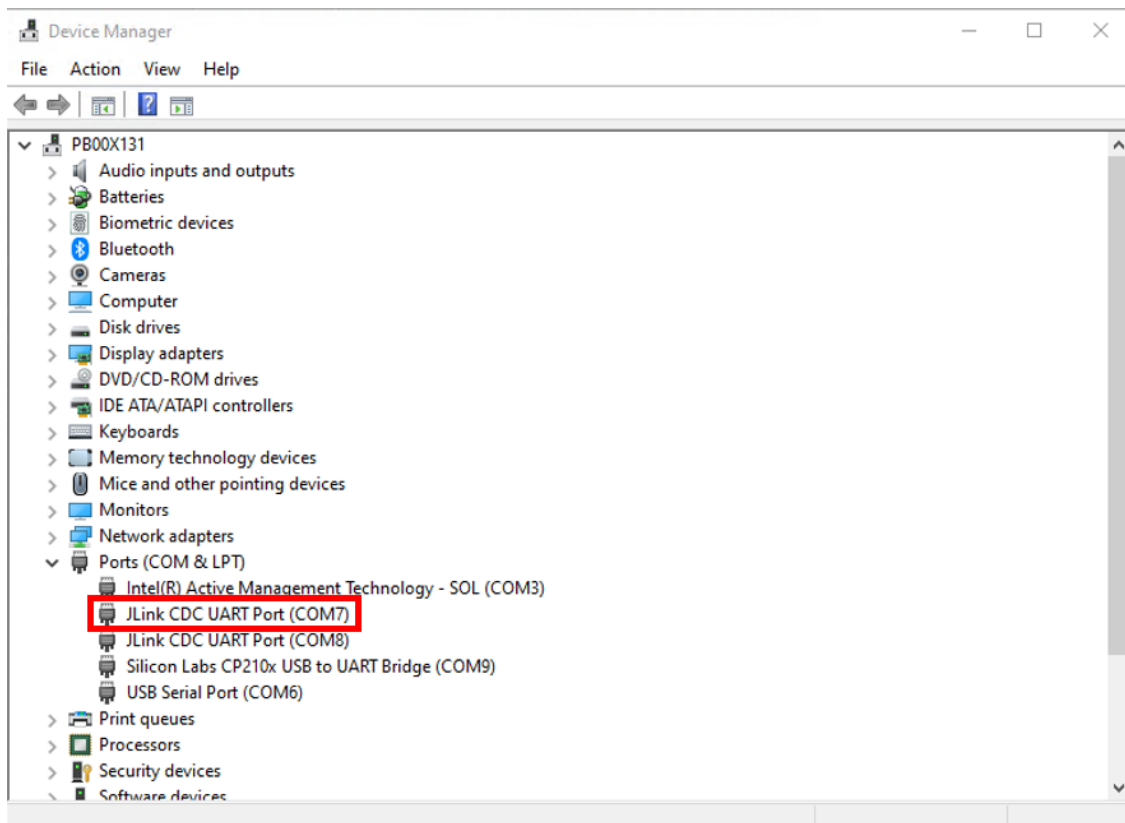


Figure 39. JLink CDC UART Port in Windows Device Manager

6. Open Tera Term select **New connection** and select **Serial** and **COMxx: JLink CDC UART Port (COMxx)** and click **OK**.

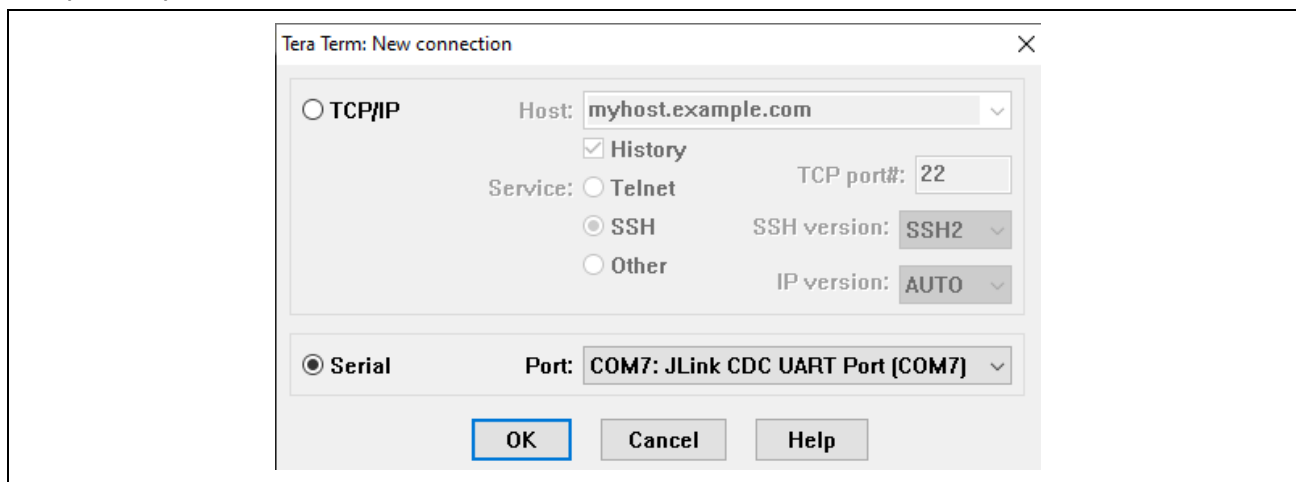


Figure 40. Selecting the UART Port on Tera Term

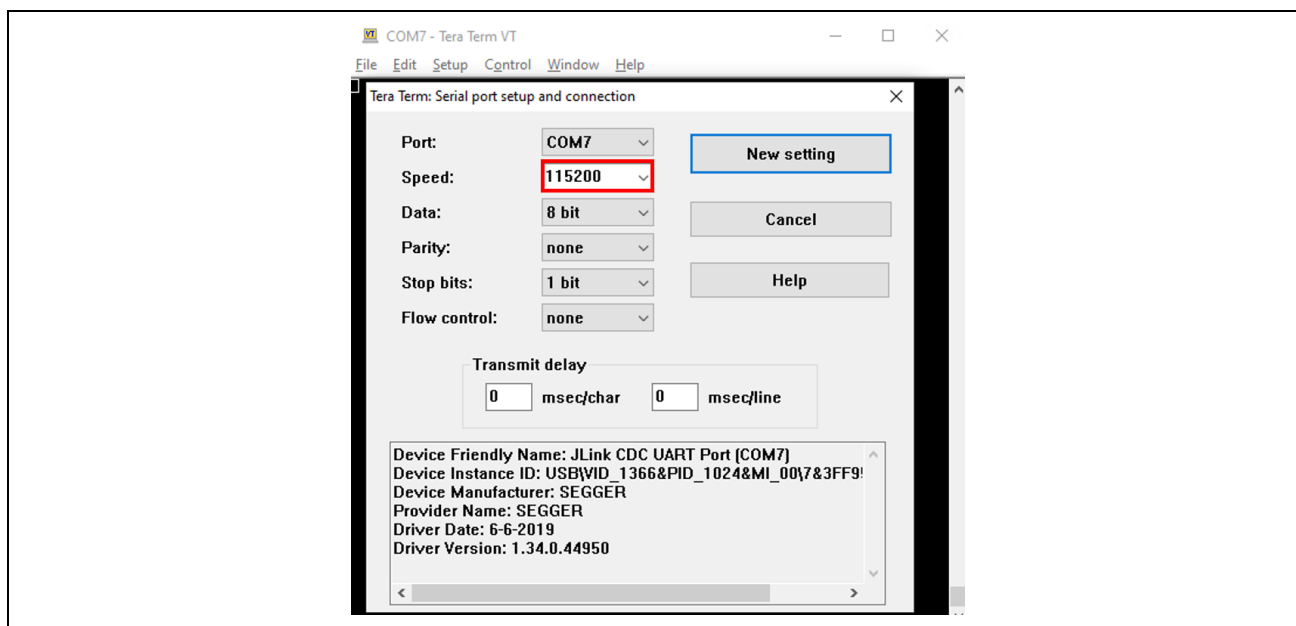


Figure 41. Select 115200 on the Speed Pulldown

7. Using the **Setup** menu pull-down, select **Serial port...** and ensure that the speed is set to **115200**, shown as follows.
8. Complete the connection. The Configuration CLI Menu will be displayed on the console as follows.
Note: Please reset the board by pressing the S1 user switch if the menu is not displayed.

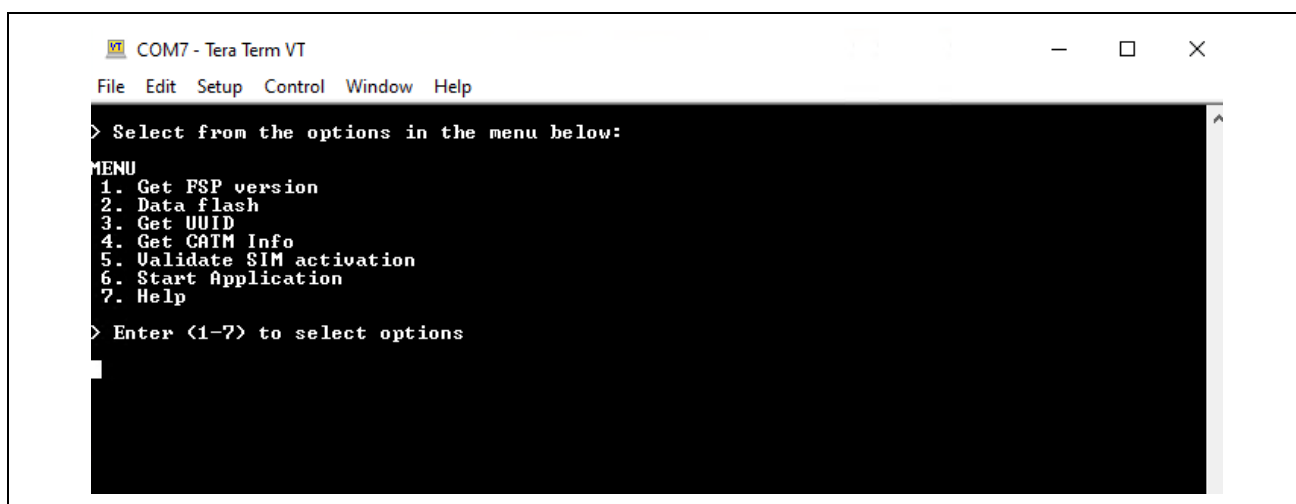


Figure 42. Main Menu

9. Here, you can select options from the MENU by pressing keys **1 to 7**. Press the spacebar to go to the previous menu.
10. Users can get FSP Version by pressing key **1**, and UUID by pressing key **3**, as follows.

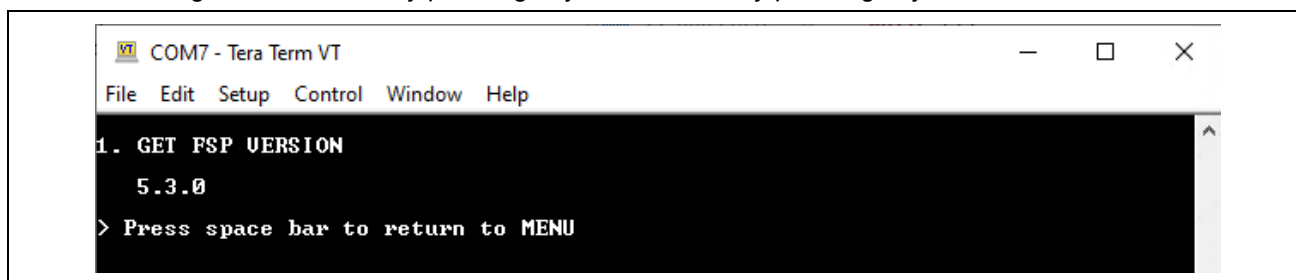


Figure 43. FSP Version Information



Figure 44. Getting Board UUID Information

11. Press **4** to display **CAT-M Information**. This menu will communicate with the RYZ014A PMOD module to obtain the ICCID value needed for activating the SIM card. Upon success, the IMEI and ICCID values will be displayed on the terminal screen. The program will continue to attempt to communicate with the RYZ014A PMOD module until it has successfully connected or timed out. After obtaining the ICCID value, go to Truphone <https://www.truphone.com/connectit/> to activate the SIM card (see section **3.12 Activating the SIM card**).

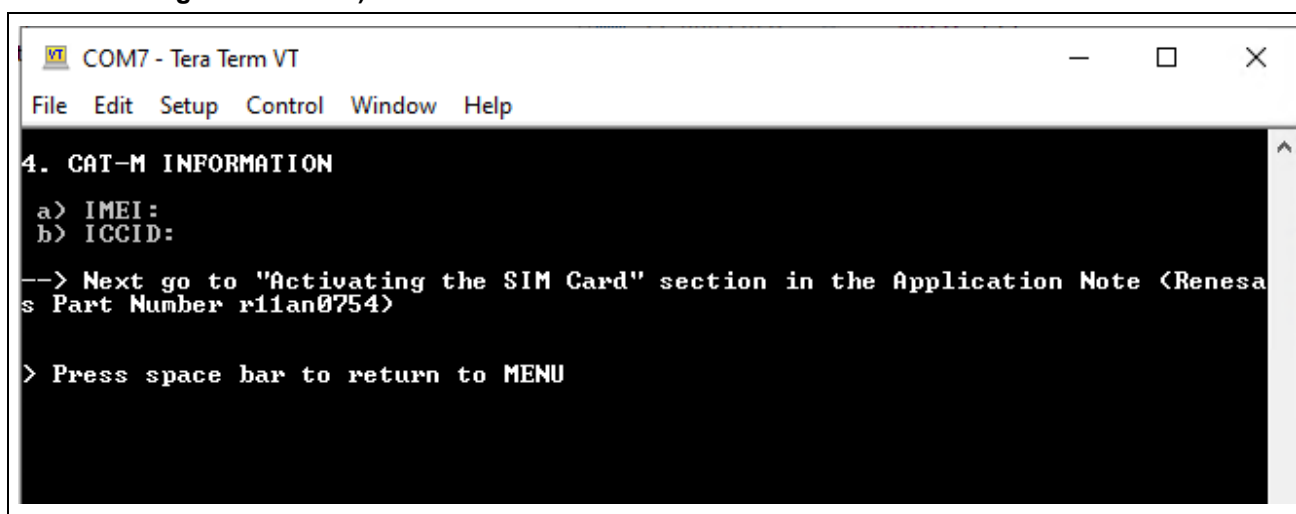


Figure 45. Getting CAT-M Information

3.12 Activating the SIM card

To activate the included SIM card, please visit the Truphone SIM Activation platform at [truphone.com/connectit](https://www.truphone.com/connectit/) and use the following steps:

1. On the Business page, click **Start activation** button under **IoT SIM Activation**.

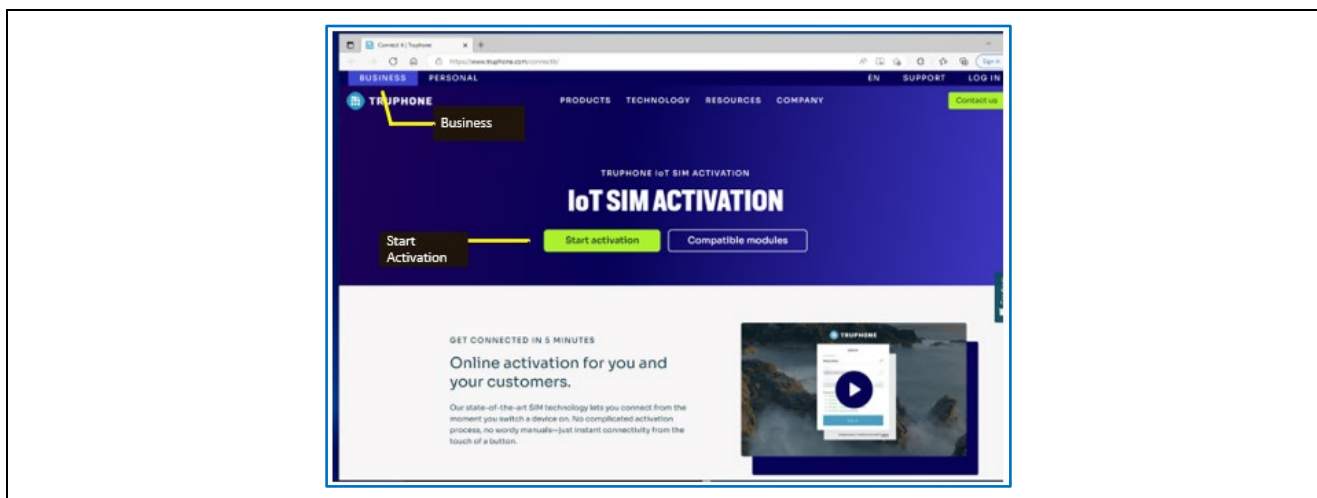


Figure 46. Activating the SIM card

2. Create a new Truphone Account by selecting **Sign up** (next to **Don't have an account yet?**) and fill in your full name, email, and password. Then Click **Sign up** to create a new account.
3. Select **Personal** as the account type.
4. Select **Get Started**.
5. Verify your email by entering the activation code sent to your email account.
6. Complete the **Profile information** form – then select **Create account**.
7. Select **Activate SIMS** to Activate your individual SIM by **ICCID** and **PUK** found on the SIM Card packaging.
8. Enter the **ICCID** value obtained from the **Download and Run the Project**. See the **ICCID** value in **Figure 45. Getting CAT-M Information**. Fill in other fields as needed.
9. You will receive an email confirmation when the SIM Card activation is complete.
10. Ensure the SIM card is inserted in the RYZ014A PMOD. From the Console **Main Menu 5, Validate SIM activation** to verify that the SIM card is activated.
The SIM card should be activated on the Truphone SIM Activation platform after 15 minutes and can be validated on the Tera Term terminal as shown in. The time for the SIM Card to be activated by Truphone can vary depending on their system demand. In most cases, if PING Response fails, wait a few more minutes and repeat **Menu 5 Validate SIM activation**.

Disclaimer

The activation steps above are provided by SIM Provider Truphone. They are the most current at the time of publishing this application note. If you need help activating your SIM Card, contact Truphone support iot.truphone.com or [Contact Support | Truphone](#).

If you have a SIM card from any other provider, then contact the technical support for that provider.

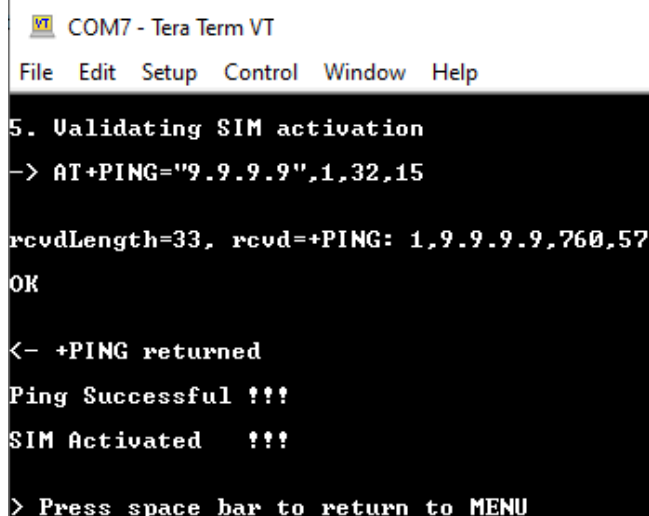
For any other issue that cannot be resolved, please contact Renesas Support at [Technical Support](#).

Note: The SIM card Provider for the Application project is Truphone. If you use any other SIM Card provider, you must change the Access Point Name required for the SIM Card Provider in your global region. Failure to do so could result in the RYZ014A not connecting to the Cellular network.

To set the Access Point Name (APN) for SIM Card provider other than Truphone

The APN is set in the Application project in `/src/cellular_setup.c`

See `#define CELLULAR_APN "iot.truphone.com" /* APN : Truphone SIM Card */`



```

COM7 - Tera Term VT
File Edit Setup Control Window Help

5. Validating SIM activation
-> AT+PING="9.9.9.9",1,32,15

rcvdLength=33, rcvd=+PING: 1,9.9.9.9,760,57
OK

<- +PING returned
Ping Successful !!!
SIM Activated !!!

> Press space bar to return to MENU
  
```

Figure 47. Validating SIM Activation – SIM Card Active

3.13 Storing Device Certificate, Host Name, Device ID

Reset the board by pressing the S1 user switch if the menu is not displayed.

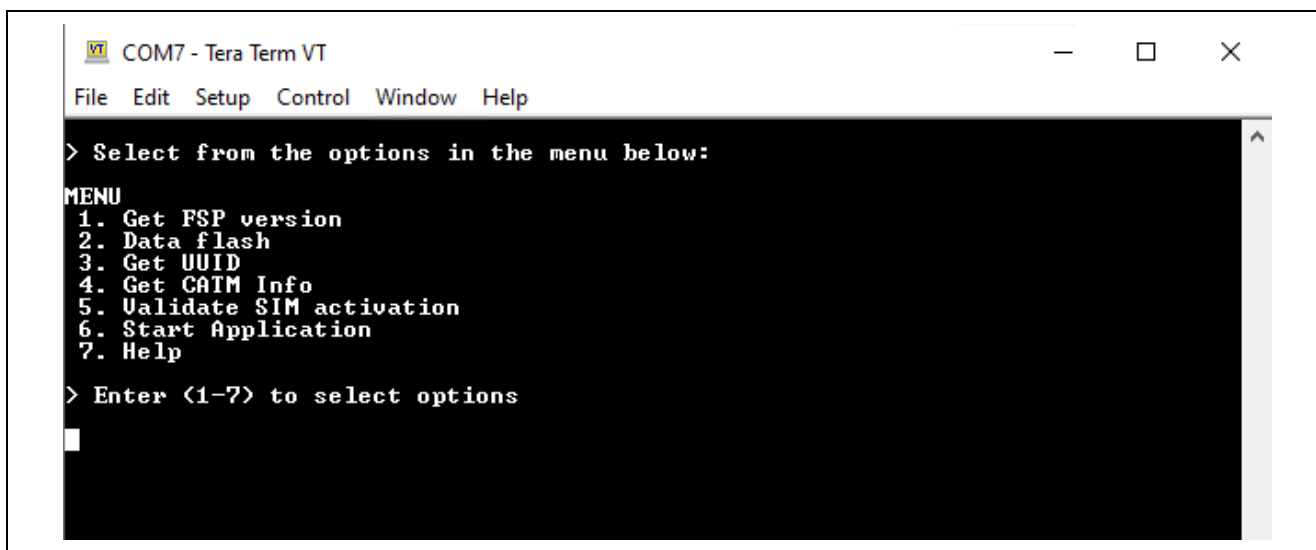


Figure 48. Main Menu

1. Press **2** on the Main Menu to display Data Flash related commands as shown in the following screenshots. This sub menu has commands to store, read, and validate the data.

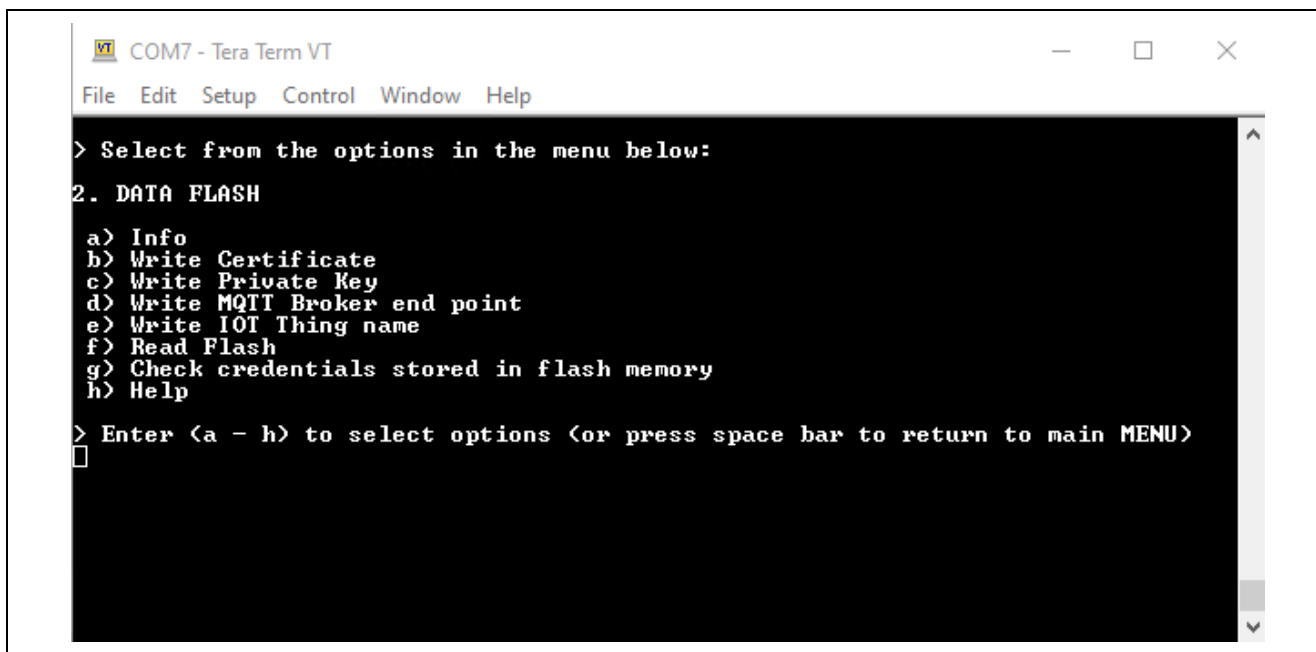


Figure 49. Data Flash Menu

2. Press **b** for Write Certificate.

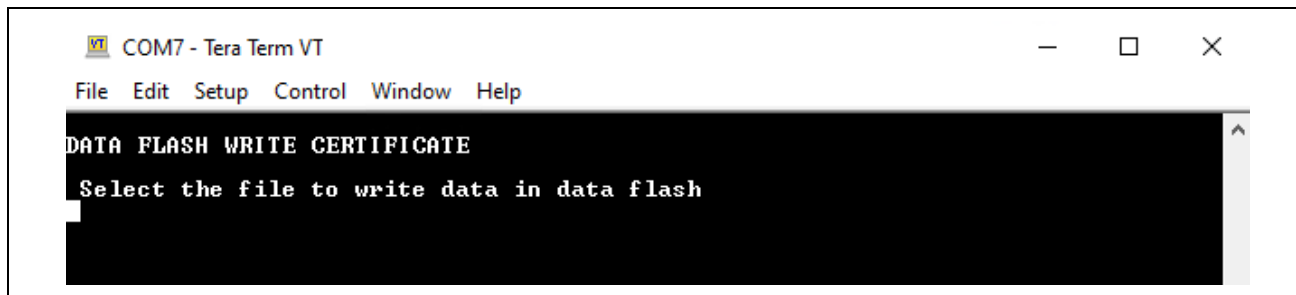


Figure 50. Select File to Write Data in Data Flash.


3. Go to **Tera Term** > **File** > **Send file**

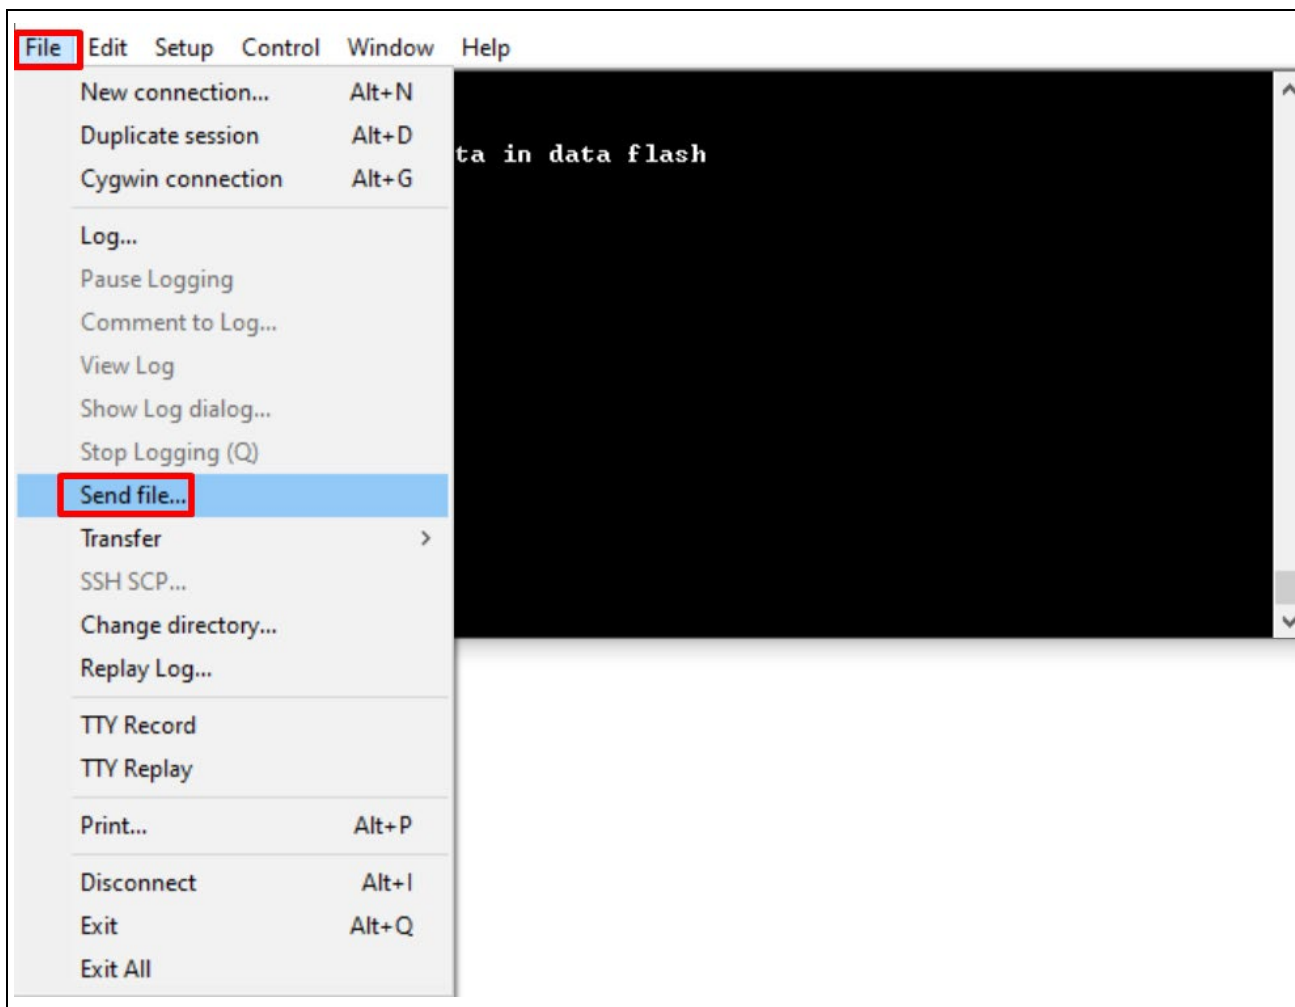Figure 51. Send File Option in File Menu

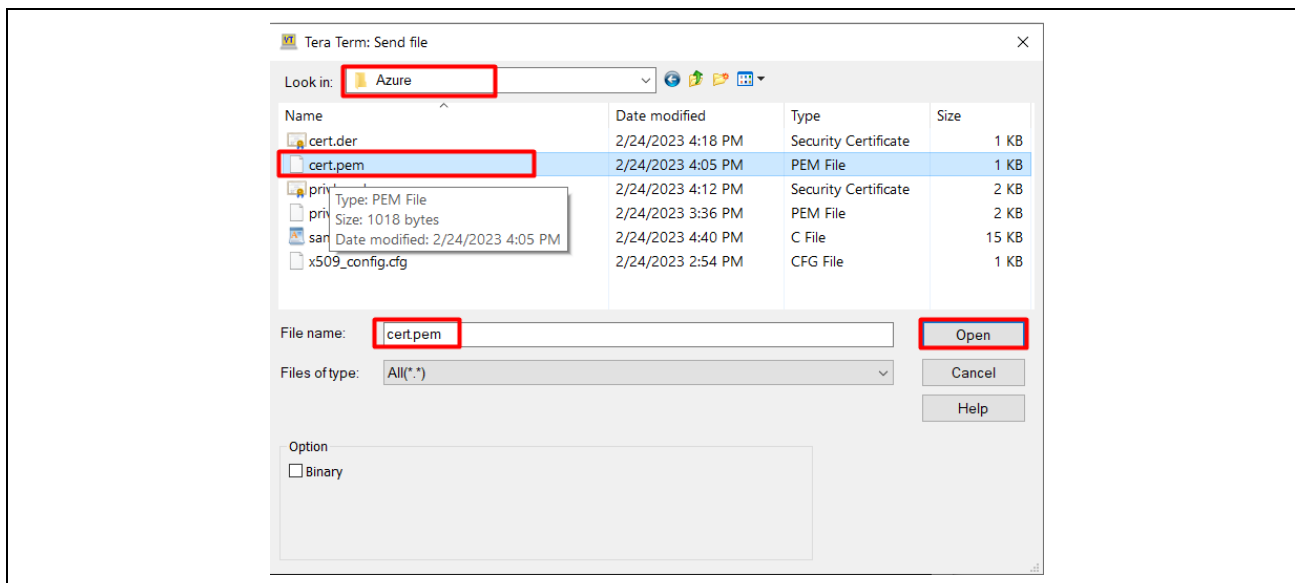
4. Browse to the folder where X509 certificates are generated as part of the section 3.5 Certificate Creation Process. Select **cert.pem**. Press **Open**.

Figure 52. Browse, Select and Open the File to be Written

5. Status of Device Certificate Downloading is as follows:

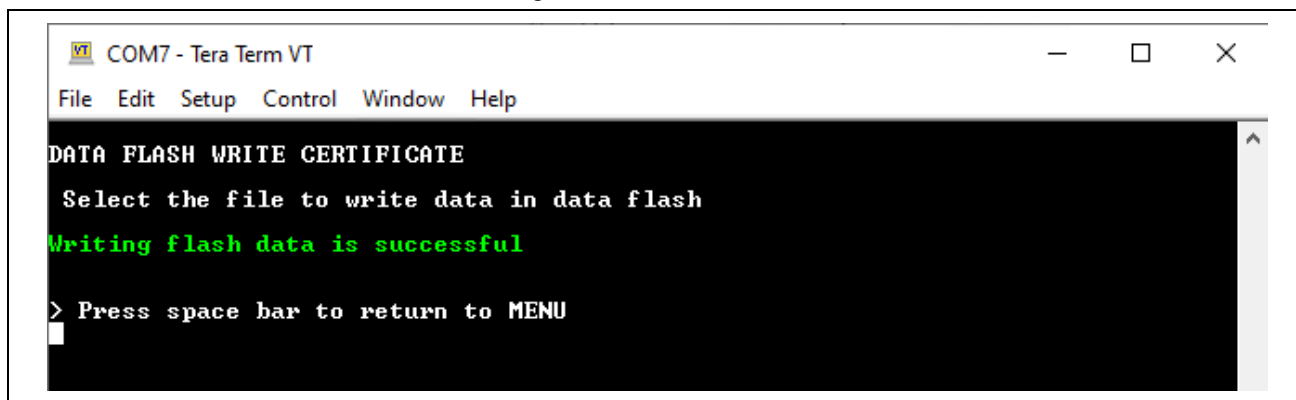


Figure 53. Status of File Writing Process

6. To store the device's private key, go back to the data flash menu by pressing the space bar key. **Press c** in **Data Flash** menu, go to **Tera Term > File > Send file** Select file **privkey.pem** from the folder where you have generated Certificates.
7. To store MQTT Broker Endpoint aka **Host Name**, first copy Host Name without double quotes then **press d** in **Data Flash** menu, go to **Tera Term > Edit > Paste<CR>**, you will get copied Host Name in the clipboard, please verify and confirm it and press **OK**

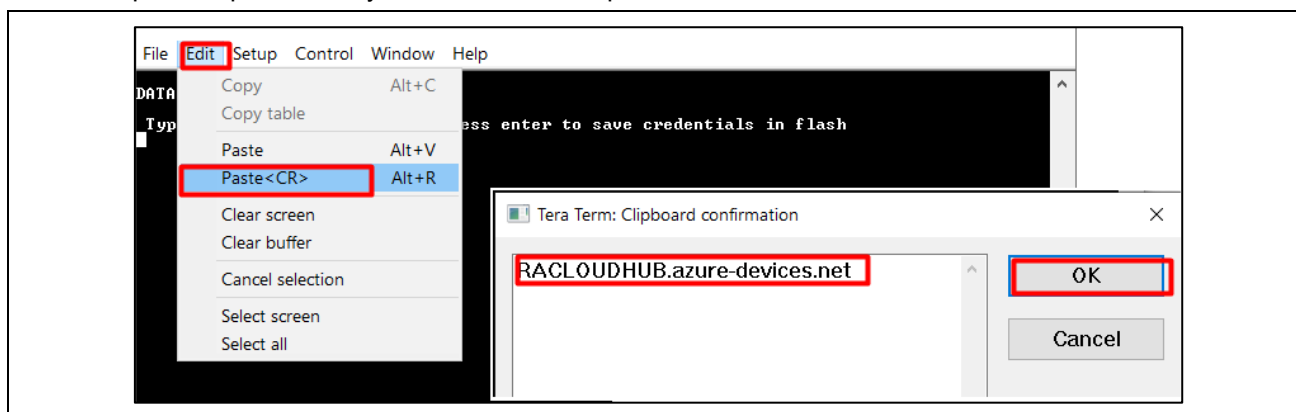


Figure 54. Input MQTT Broker End point aka Host Name

8. To store IoT Thing Name, that is, **DEVICE ID**, first copy DEVICE ID created without double quotes, **press e** in **Data Flash** Menu and follow the procedure in step 5.

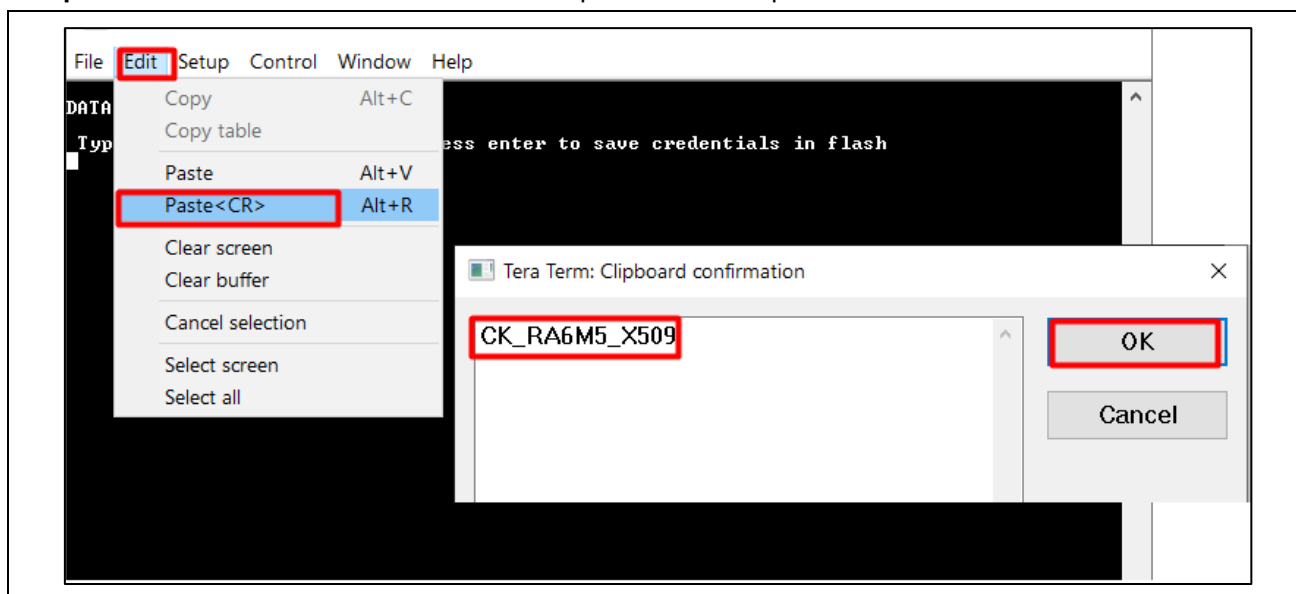


Figure 55. Input Device ID aka IoT Thing Name

9. To verify the data stored in Data Flash, **press f** in Data Flash menu, scroll down to see data.

```

COM7 - Tera Term VT
File Edit Setup Control Window Help
LJ/iDU0su0cgXnt9qaC6iUDWhz9wn0L/+aEM4bQCUnuL+s/IiQzjH/ECgYEAwF0S
Qh0AqhMZSMawJoTlSUPpW520+oyeUvCKwKFwMRUkp85nCc60vxK1AICyi/dpcDE
eULwQ3y96w6pY88qzgdSzgLnU4+D/odOZvme5DBUT8rA7wZImW0BudMAoI0dwIQA
LqSaMYhw31swFZWBEcu8bBC8UE6Ka0/dkNG31jMCgYBr118+3LB230Rdi7T6qOMu
OL07o1eHpWwar/kB04K12gXXvdgGGBqfDmQ7CKNQk8QMKWINUTIr15jr67MgNeM3
kUbtSJi0R987Ta0sGUpmBrnZ3fDILR1GhD61K06SV+FA9Xwfc+Uu5UWu2hxpjJ3q
LGOLCuAcN1BsSmbj9WQwYQKBgQC0TAe66vCjd/cw4QEG5XTksN5df4TreTUD48E4
iZdnBB2It7iUhad67YExLJ1UzHxgyUbdueD94ENZt4pI xHo1UZD1Co+u4BMFU+jG
U5z3n9zGUPF0110ggK0nch+h++gw8wgAr8LePlyc4yk0ccZgU73tQ9pdIuBWKksw
+3+pRQKBgA/YMLqgNAFC9Wh26fuDI1EsbgbwxFcU5Y9UwqkExLLASL0oSNrYTZA
aboJ3uZLwdgr1DtnEm14nFD4mP/jx16koEyMAs0NT99Q3xUK1jJk5r/m1ug2YYuS
dwzj47MrH1+ULigrUD4f/rDnp4SX511OT2N11RT+ZUR8z7tu+zIc
-----END RSA PRIVATE KEY-----

AZURE MQTT end point read successful
RUCTESTING.azure-devices.net

IOT thing name read successful
CK_RA6M5_X509

> Press space bar to return to MENU

```

Figure 56. Scroll Down and Verify the Data Stored in Data Flash

10. To check credentials stored in Data Flash, **press g**.
11. Press the spacebar to go to the previous menu or main menu.
12. Press **6** to start the application from the main menu.
13. Serial terminal output on the successful start of the application

```

COM7 - Tera Term VT
File Edit Setup Control Window Help

CHECK CREDENTIALS STORED IN DATA FLASH
Certificate saved in data flash is verified and successful
Private key saved in data flash is verified and successful
MQTT end point saved in data flash is verified and successful
IOT thing name saved in data flash is verified and successful

Starting AZURE Cellular Cloud Application....

*****
* Renesas FSP Application Project for Azure RTOS NetX Duo IoT Middleware *
* Application Project Version 1.0 *
* Flex Software Pack Version 5.3.0 *
*****
Refer to Application Note for more details on Application Project and
FSP User's Manual for more information about Azure RTOS NetX Duo IoT Middleware
*****

This Application project demonstrates the IOT functionalities of Azure IOT SDK
Client using Azure RTOS and NetX Duo with Cellular Interface Module running on
Renesas RA MCU's
*****


HAL Initialization
Waiting for the module to Power Reset!
Modem IP address: 100.111.227.67
Mask: 255.255.255.0
Gateway: 100.111.227.67
DNS Server address: 10.41.121.84
SNTP Time Sync...
SNTP Time Sync successfully.
IoTHub Host Name: RUCTESTING.azure-devices.net; Device ID: CK_RA6M5_X509.
Connected to IoTHub.

HS3001 sensor setup success
ZMOD4410 sensor setup success
ICP sensor setup success
ICP20100 Sensor Version B
ICM42605 sensor setup success
OB1203 sensor setup success

```

Figure 57. Device Connected to Azure IoT Hub

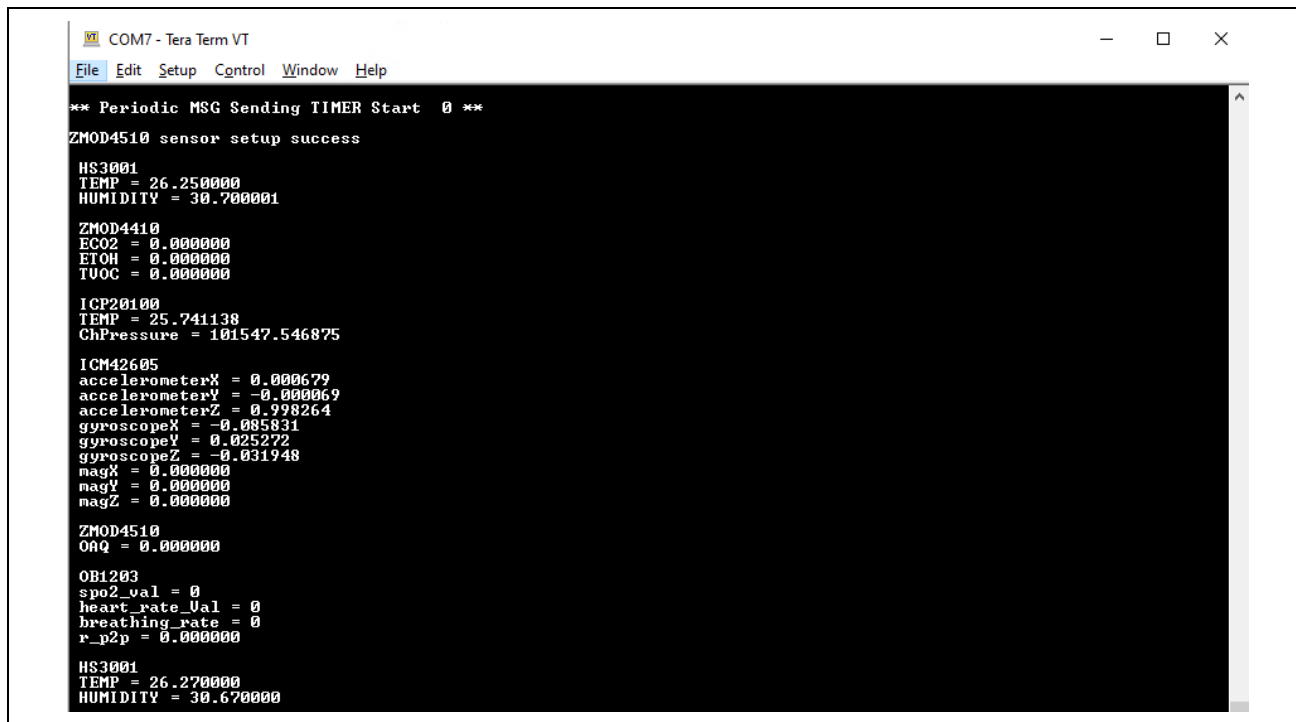14. Sensor Data Output on Serial Terminal.

A screenshot of a serial terminal window titled "COM7 - Tera Term VT". The window has a menu bar with "File", "Edit", "Setup", "Control", "Window", and "Help". The terminal displays the following text:

```
** Periodic MSG Sending TIMER Start 0 **  
ZMOD4510 sensor setup success  
  
HS3001  
TEMP = 26.250000  
HUMIDITY = 30.700001  
  
ZMOD4410  
ECO2 = 0.000000  
ETOH = 0.000000  
TVOC = 0.000000  
  
ICP20100  
TEMP = 25.741138  
ChPressure = 101547.546875  
  
ICM42605  
accelerometerX = 0.000679  
accelerometerY = -0.000069  
accelerometerZ = 0.998264  
gyroscopeX = -0.085831  
gyroscopeY = 0.025272  
gyroscopeZ = -0.031948  
magX = 0.000000  
magY = 0.000000  
magZ = 0.000000  
  
ZMOD4510  
OHQ = 0.000000  
  
OB1203  
spo2_val = 0  
heart_rate_val = 0  
breathing_rate = 0  
r_p2p = 0.000000  
  
HS3001  
TEMP = 26.270000  
HUMIDITY = 30.670000
```

Figure 58. Sensor Data on Serial Terminal

3.14 Send Device-to-Cloud Message

With Azure IoT Explorer, you can view the flow of telemetry from your device to the Cloud. To view telemetry in Azure IoT Explorer:

1. In IoT Explorer select your created IoT Hub and click on **view devices in this hub**, click on the created device (Device ID). Finally, select the **Telemetry (Home > RACLOUDHUB > Devices > CK_RA6M5_X509 > Telemetry)**. Confirm that **use built-in event hub** is set to **Yes**.
2. Select **Start**.
3. View the telemetry as the device sends messages to the Cloud.

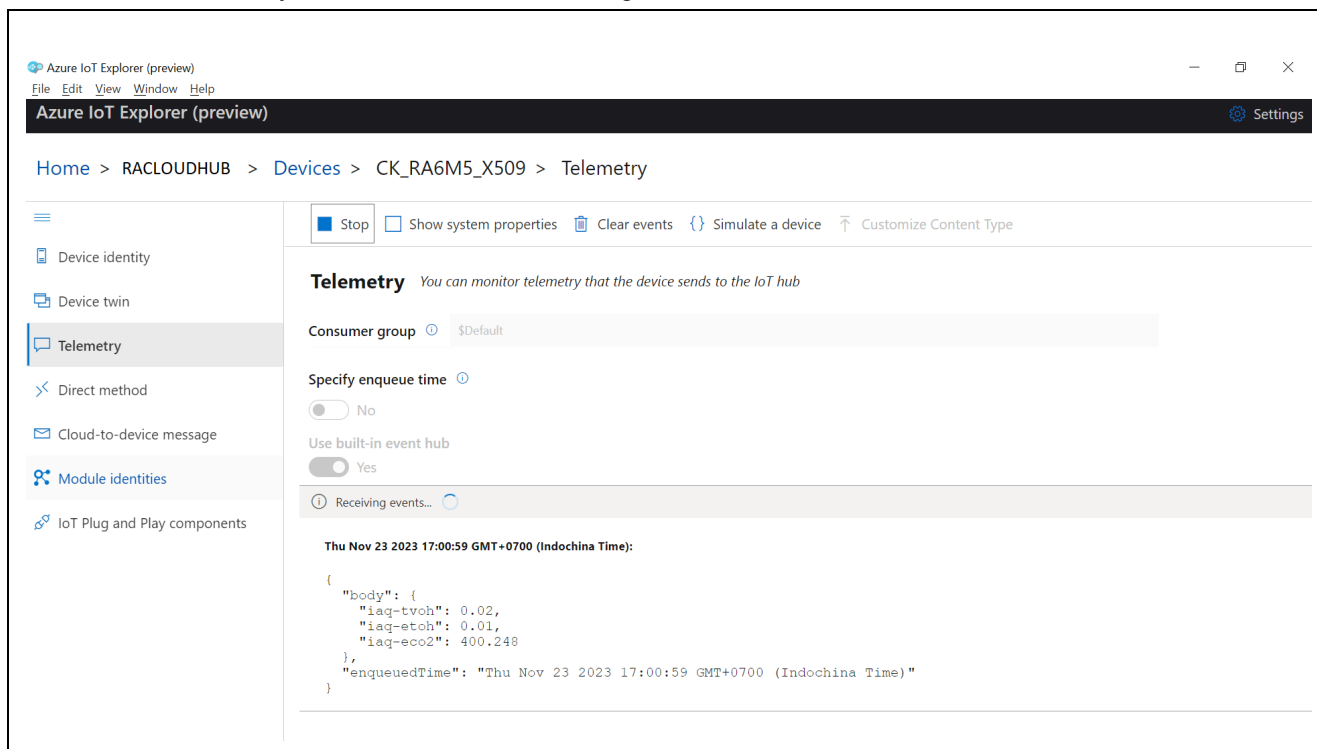


Figure 59. Device Telemetry Details

3.15 Send Cloud-to-Device Message

To send a Cloud-to-device message in Azure IoT Explorer:

1. In IoT Explorer, select **Cloud-to-device message**.
2. Enter the message in the **Message body = "LED"**, **Key = LED**, **Value = Given in Table**
3. **Check** Add timestamp to message body.
4. Select **Send message to device**.

LED On Board	Value
LED2 (Tri Color LED)	TC_GREEN_ON, TC_RED_ON, TC_BLUE_ON TC_GREEN_OFF, TC_RED_OFF, TC_BLUE_OFF
LED4 BLUE	BLUE_ON, BLUE_OFF

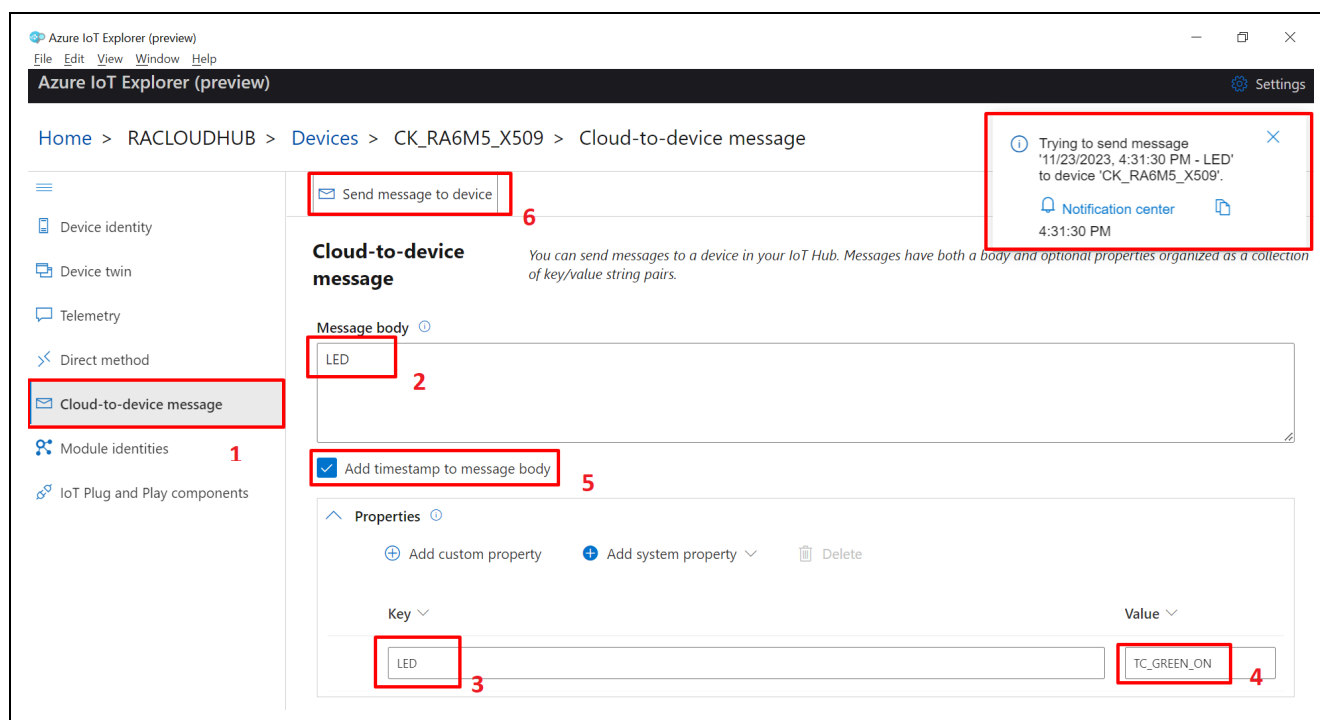


Figure 60. Device Telemetry Details

5. In the terminal window, you can see that the message is received by the IoT Device.

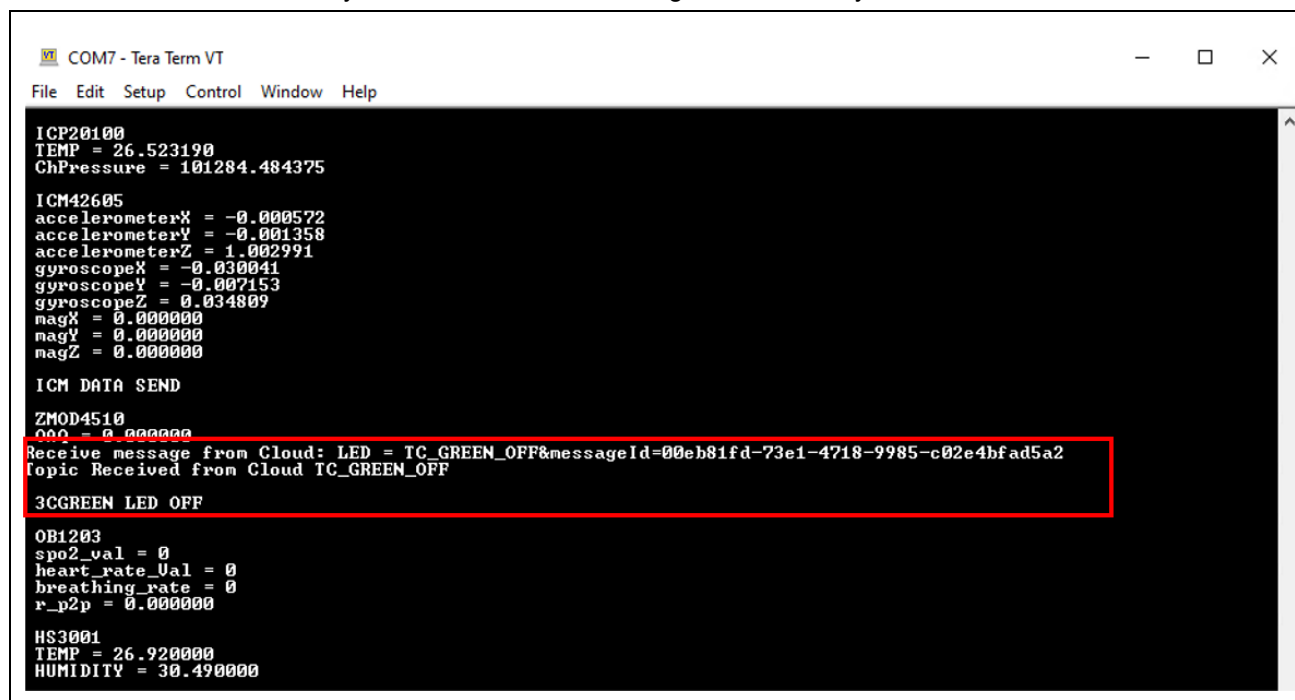


Figure 61. Serial Terminal Output

4. Importing, Building, and Loading the Project

For a quick validation of this application project, import and build the project. The following steps show how to import, build, and download the project.

Note: To run the application project successfully and to communicate with the cloud, follow the instructions for setting up the cloud interface as described in the section 3.3, which details making changes to the credentials and creating your own cloud devices, running and validating the application.

4.1 Importing

The application project bundled as part of this app note can be imported into e² studio using instructions provided in the *RA FSP User's Manual*. See Section *Starting Development > e² studio ISDE User Guide > Importing an Existing Project into e² studio ISDE*.

4.2 Building the Latest Executable Binary

Upon successfully importing and/or modifying the project into e² studio IDE, follow the instructions provided in the *RA FSP User's Manual* to build an executable binary/hex/mot/elf file. See Section *Starting Development*

> *e² studio ISDE User Guide > Tutorial: Your First RA MCU Project > Build the Blinky Project*.

4.3 Loading the Executable Binary into the Target MCU

The executable file may be programmed into the target MCU through any one of three means.

4.3.1 Using a Debugging Interface with e² studio

Instructions to program the executable binary are found in the latest *RA FSP User Manual* (www.renesas.com/RA/FSP). See Section *Starting Development > Tutorial: Your First RA MCU Project - Blinky > Debug the Blinky Project*.

This is the preferred method for programming as it allows for additional debugging functionality available through the on-chip debugger.

4.3.2 Using J-Link Tools

SEGGER J-Link Tools such as J-Flash, J-Flash Lite, and J-Link Commander can be used to program the executable binary into the target MCU. Refer to User Manuals UM08001 and UM08003 on www.segger.com.

4.3.3 Using Renesas Flash Programmer

The Renesas Flash Programmer (<https://www.renesas.com/us/en/software-tool/renesas-flash-programmer-programming-gui>) provides usable and functional support for programming the on-chip flash memory of Renesas microcontrollers in each phase of development and mass production. The software supports all RA MCUs, and the software user's manual is available on renesas.com.

5. Next Steps and References

- Refer to the following GitHub repository for various FSP modules example projects and application projects (<https://github.com/renesas/ra-fsp-examples/>)
- Refer to *Establishing and Protecting Device Identity using SCE7 and FAW* (R11AN0449) on (renesas.com).
- Refer to *Securing Data at Rest Utilizing the RA Security MPU* (R11AN0416) on renesas.com.
- Refer to the Azure GitHub link for more details on Azure SDK for Embedded C (<https://github.com/Azure/azure-sdk-for-c>)

6. MQTT/TLS References

- *FSP v5.3.0 User's Manual* (www.renesas.com/RA/FSP).
- Azure IoT documentation (<https://docs.microsoft.com/en-us/azure/iot-hub/>)

7. Known Issues and Limitations

1. Occasional outages in cloud connectivity may be noticed during the demonstration due to changes in the cloud server. Contact the Renesas support team for questions.
2. Currently, there is no support for direct device-to-device communications with Azure IoT Hub.
3. The device will reconnect after 65 minutes due to the SAS token refresh. Currently, it is under SDK control. Users need to know this when developing the application.
4. When running debug on e² studio, if the application is rerun multiple times, it might randomly occur issue with i2c communication of the OB1203 sensor. Users need to reconnect the USB cable (J10) and Power cable (J28) to reset the OB1203 sensor and run the application again.

7.1 SIM Card Activation Issues and Workarounds

- If the SIM activation fails, verify that the ICCID number and PUK numbers are correctly entered when activating the SIM card on Truphone IoT SIM activation platform truphone.com/connectit
- If **Menu 5 Validate SIM activation** PING response returns a Ping Failed condition, it can take up to 15 minutes or longer for the card to be activated after performing **Activating the SIM Card** to obtain LTE Network access. In this case, wait at least 15 minutes (or longer) and repeat **Menu 5 Validate SIM activation**.
- SIM cards cannot be activated more than once. To verify whether the SIM card has already been activated, please monitor and manage your SIMs on the Truphone IoT Connectivity Management Platform or contact Truphone support through iot.truphone.com by logging into your account.
- If **Menu 5 Validate SIM activation** PING response continues to return Ping Failed condition, first check the external antenna is connected securely to the RYZ014A PMOD and try again. The CSQ Network Signal Quality (RSSI) could be too low to connect. If the RSSI is 99 then check external antenna is connected. It may be possible that no Cell Network Signal could be detected in your area. An RSSI reading with RSSI = 15 or less indicates marginal or poor reception.

CSQ Network Signal Quality (RSSI) [99 = No Cell Signal] = 15, Marginal Signal Quality.

It may be necessary to move the CK-RA6M5v2 with PMOD to a different location to improve the Network Signal Quality (RSSI) to get an RSSI value in the range of 16 to 98.

- If **Menu 5 Validate SIM activation** continues to fail, verify that the APN is set for the Global Region where the RYZ014A PMOD is trying to connect. The APN setting and LTE Band List depend on your Global Region and the SIM card provider.

To set the Access Point Name (APN) for SIM Card provider other than Truphone

The APN is set in the Application project in `/src/cellular_setup.c`

See `#define CELLULAR_APN "iot.truphone.com" /* APN : Truphone SIM Card */`

- For all other SIM card issues that cannot be resolved with these troubleshooting steps, contact Truphone support through iot.truphone.com by logging into your account.

8. Website and Support

Visit the following URLs to learn about key elements of the RA family, download components and related documentation, and get support:

CK-RA6M5v2 Kit Information	renesas.com/ra/ck-ra6m5
RA Cloud Solutions	renesas.com/cloudsolutions
RA Product Information	renesas.com/ra
RA Product Support Forum	renesas.com/ra/forum
RA Flexible Software Package	renesas.com/FSP
Renesas Support	renesas.com/support

Revision History

Rev.	Date	Description	
		Page	Summary
1.00	Mar.31.23	—	Initial release
1.01	May.02.23		Added support for Truphone and updated to FSP v4.4.0
1.10	Dec.22.23		Updated to FSP v5.0.0
1.20	Sept.09.24		Updated to FSP v5.3.0

General Precautions in the Handling of Microprocessing Unit and Microcontroller Unit Products

The following usage notes are applicable to all Microprocessing unit and Microcontroller unit products from Renesas. For detailed usage notes on the products covered by this document, refer to the relevant sections of the document as well as any technical updates that have been issued for the products.

1. Precaution against Electrostatic Discharge (ESD)

A strong electrical field, when exposed to a CMOS device, can cause destruction of the gate oxide and ultimately degrade the device operation. Steps must be taken to stop the generation of static electricity as much as possible, and quickly dissipate it when it occurs. Environmental control must be adequate. When it is dry, a humidifier should be used. This is recommended to avoid using insulators that can easily build up static electricity.

Semiconductor devices must be stored and transported in an anti-static container, static shielding bag or conductive material. All test and measurement tools including work benches and floors must be grounded. The operator must also be grounded using a wrist strap. Semiconductor devices must not be touched with bare hands. Similar precautions must be taken for printed circuit boards with mounted semiconductor devices.

2. Processing at power-on

The state of the product is undefined at the time when power is supplied. The states of internal circuits in the LSI are indeterminate and the states of register settings and pins are undefined at the time when power is supplied. In a finished product where the reset signal is applied to the external reset pin, the states of pins are not guaranteed from the time when power is supplied until the reset process is completed. In a similar way, the states of pins in a product that is reset by an on-chip power-on reset function are not guaranteed from the time when power is supplied until the power reaches the level at which resetting is specified.

3. Input of signal during power-off state

Do not input signals or an I/O pull-up power supply while the device is powered off. The current injection that results from input of such a signal or I/O pull-up power supply may cause malfunction and the abnormal current that passes in the device at this time may cause degradation of internal elements. Follow the guideline for input signal during power-off state as described in your product documentation.

4. Handling of unused pins

Handle unused pins in accordance with the directions given under handling of unused pins in the manual. The input pins of CMOS products are generally in the high-impedance state. In operation with an unused pin in the open-circuit state, extra electromagnetic noise is induced in the vicinity of the LSI, an associated shoot-through current flows internally, and malfunctions occur due to the false recognition of the pin state as an input signal become possible.

5. Clock signals

After applying a reset, only release the reset line after the operating clock signal becomes stable. When switching the clock signal during program execution, wait until the target clock signal is stabilized. When the clock signal is generated with an external resonator or from an external oscillator during a reset, ensure that the reset line is only released after full stabilization of the clock signal. Additionally, when switching to a clock signal produced with an external resonator or by an external oscillator while program execution is in progress, wait until the target clock signal is stable.

6. Voltage application waveform at input pin

Waveform distortion due to input noise or a reflected wave may cause malfunction. If the input of the CMOS device stays in the area between V_{IL} (Max.) and V_{IH} (Min.) due to noise, for example, the device may malfunction. Take care to prevent chattering noise from entering the device when the input level is fixed, and also in the transition period when the input level passes through the area between V_{IL} (Max.) and V_{IH} (Min.).

7. Prohibition of access to reserved addresses

Access to reserved addresses is prohibited. The reserved addresses are provided for possible future expansion of functions. Do not access these addresses as the correct operation of the LSI is not guaranteed.

8. Differences between products

Before changing from one product to another, for example to a product with a different part number, confirm that the change will not lead to problems. The characteristics of a microprocessing unit or microcontroller unit products in the same group but having a different part number might differ in terms of internal memory capacity, layout pattern, and other factors, which can affect the ranges of electrical characteristics, such as characteristic values, operating margins, immunity to noise, and amount of radiated noise. When changing to a product with a different part number, implement a system-evaluation test for the given product.

Notice

1. Descriptions of circuits, software and other related information in this document are provided only to illustrate the operation of semiconductor products and application examples. You are fully responsible for the incorporation or any other use of the circuits, software, and information in the design of your product or system. Renesas Electronics disclaims any and all liability for any losses and damages incurred by you or third parties arising from the use of these circuits, software, or information.
2. Renesas Electronics hereby expressly disclaims any warranties against and liability for infringement or any other claims involving patents, copyrights, or other intellectual property rights of third parties, by or arising from the use of Renesas Electronics products or technical information described in this document, including but not limited to, the product data, drawings, charts, programs, algorithms, and application examples.
3. No license, express, implied or otherwise, is granted hereby under any patents, copyrights or other intellectual property rights of Renesas Electronics or others.
4. You shall be responsible for determining what licenses are required from any third parties, and obtaining such licenses for the lawful import, export, manufacture, sales, utilization, distribution or other disposal of any products incorporating Renesas Electronics products, if required.
5. You shall not alter, modify, copy, or reverse engineer any Renesas Electronics product, whether in whole or in part. Renesas Electronics disclaims any and all liability for any losses or damages incurred by you or third parties arising from such alteration, modification, copying or reverse engineering.
6. Renesas Electronics products are classified according to the following two quality grades: "Standard" and "High Quality". The intended applications for each Renesas Electronics product depends on the product's quality grade, as indicated below.

"Standard": Computers; office equipment; communications equipment; test and measurement equipment; audio and visual equipment; home electronic appliances; machine tools; personal electronic equipment; industrial robots; etc.

"High Quality": Transportation equipment (automobiles, trains, ships, etc.); traffic control (traffic lights); large-scale communication equipment; key financial terminal systems; safety control equipment; etc.

Unless expressly designated as a high reliability product or a product for harsh environments in a Renesas Electronics data sheet or other Renesas Electronics document, Renesas Electronics products are not intended or authorized for use in products or systems that may pose a direct threat to human life or bodily injury (artificial life support devices or systems; surgical implantations; etc.), or may cause serious property damage (space system; undersea repeaters; nuclear power control systems; aircraft control systems; key plant systems; military equipment; etc.). Renesas Electronics disclaims any and all liability for any damages or losses incurred by you or any third parties arising from the use of any Renesas Electronics product that is inconsistent with any Renesas Electronics data sheet, user's manual or other Renesas Electronics document.

7. No semiconductor product is absolutely secure. Notwithstanding any security measures or features that may be implemented in Renesas Electronics hardware or software products, Renesas Electronics shall have absolutely no liability arising out of any vulnerability or security breach, including but not limited to any unauthorized access to or use of a Renesas Electronics product or a system that uses a Renesas Electronics product. RENESAS ELECTRONICS DOES NOT WARRANT OR GUARANTEE THAT RENESAS ELECTRONICS PRODUCTS, OR ANY SYSTEMS CREATED USING RENESAS ELECTRONICS PRODUCTS WILL BE INVULNERABLE OR FREE FROM CORRUPTION, ATTACK, VIRUSES, INTERFERENCE, HACKING, DATA LOSS OR THEFT, OR OTHER SECURITY INTRUSION ("Vulnerability Issues"). RENESAS ELECTRONICS DISCLAIMS ANY AND ALL RESPONSIBILITY OR LIABILITY ARISING FROM OR RELATED TO ANY VULNERABILITY ISSUES. FURTHERMORE, TO THE EXTENT PERMITTED BY APPLICABLE LAW, RENESAS ELECTRONICS DISCLAIMS ANY AND ALL WARRANTIES, EXPRESS OR IMPLIED, WITH RESPECT TO THIS DOCUMENT AND ANY RELATED OR ACCOMPANYING SOFTWARE OR HARDWARE, INCLUDING BUT NOT LIMITED TO THE IMPLIED WARRANTIES OF MERCHANTABILITY, OR FITNESS FOR A PARTICULAR PURPOSE.
8. When using Renesas Electronics products, refer to the latest product information (data sheets, user's manuals, application notes, "General Notes for Handling and Using Semiconductor Devices" in the reliability handbook, etc.), and ensure that usage conditions are within the ranges specified by Renesas Electronics with respect to maximum ratings, operating power supply voltage range, heat dissipation characteristics, installation, etc. Renesas Electronics disclaims any and all liability for any malfunctions, failure or accident arising out of the use of Renesas Electronics products outside of such specified ranges.
9. Although Renesas Electronics endeavors to improve the quality and reliability of Renesas Electronics products, semiconductor products have specific characteristics, such as the occurrence of failure at a certain rate and malfunctions under certain use conditions. Unless designated as a high reliability product or a product for harsh environments in a Renesas Electronics data sheet or other Renesas Electronics document, Renesas Electronics products are not subject to radiation resistance design. You are responsible for implementing safety measures to guard against the possibility of bodily injury, injury or damage caused by fire, and/or danger to the public in the event of a failure or malfunction of Renesas Electronics products, such as safety design for hardware and software, including but not limited to redundancy, fire control and malfunction prevention, appropriate treatment for aging degradation or any other appropriate measures. Because the evaluation of microcomputer software alone is very difficult and impractical, you are responsible for evaluating the safety of the final products or systems manufactured by you.
10. Please contact a Renesas Electronics sales office for details as to environmental matters such as the environmental compatibility of each Renesas Electronics product. You are responsible for carefully and sufficiently investigating applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive, and using Renesas Electronics products in compliance with all these applicable laws and regulations. Renesas Electronics disclaims any and all liability for damages or losses occurring as a result of your noncompliance with applicable laws and regulations.
11. Renesas Electronics products and technologies shall not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable domestic or foreign laws or regulations. You shall comply with any applicable export control laws and regulations promulgated and administered by the governments of any countries asserting jurisdiction over the parties or transactions.
12. It is the responsibility of the buyer or distributor of Renesas Electronics products, or any other party who distributes, disposes of, or otherwise sells or transfers the product to a third party, to notify such third party in advance of the contents and conditions set forth in this document.
13. This document shall not be reprinted, reproduced or duplicated in any form, in whole or in part, without prior written consent of Renesas Electronics.
14. Please contact a Renesas Electronics sales office if you have any questions regarding the information contained in this document or Renesas Electronics products.

(Note1) "Renesas Electronics" as used in this document means Renesas Electronics Corporation and also includes its directly or indirectly controlled subsidiaries.

(Note2) "Renesas Electronics product(s)" means any product developed or manufactured by or for Renesas Electronics.

(Rev.5.0-1 October 2020)

Corporate Headquarters

TOYOSU FORESIA, 3-2-24 Toyosu,
Koto-ku, Tokyo 135-0061, Japan
www.renesas.com

Trademarks

Renesas and the Renesas logo are trademarks of Renesas Electronics Corporation. All trademarks and registered trademarks are the property of their respective owners.

Contact information

For further information on a product, technology, the most up-to-date version of a document, or your nearest sales office, please visit:
www.renesas.com/contact/.