

RL78/G10

R01AN4791EJ0100

Rev.1.00

July 4, 2019

Wi-Fi module (ESP-WROOM-02) control sample software for TCP/IP Slave Transmission/Reception

Introduction

This application note describes how to use the software for controlling the Wi-Fi module ESP-WROOM-02 through the RL78/G10 and its sample application program.

The ESP-WROOM-02 supports AT commands. The RL78/G10 sends AT commands through UART communication to control the ESP-WROOM-02.

Using this control software enables TCP/IP client transmission and reception of data.

Target Device

ESP-WROOM-02 (ESP8266EX) manufactured by ESPRESSIF SYSTEMS CO., LTD.

When applying the sample program covered in this application note to another microcomputer, modify the program according to the specifications for the target microcomputer and conduct an extensive evaluation of the modified program.

RL78/G10 Wi-Fi module (ESP-WROOM-02) control sample software for TCP/IP Slave Transmission/Reception

Contents

1. Specifications	4
1.1 Overview of Wi-Fi Module ESP-WROOM-02 (ESP8266EX) Operation	5
1.1.1 Boot Mode	5
1.1.2 Control Method	5
1.1.3 Operation Mode	5
2. Conditions of Operation Confirmation Test	6
3. Hardware	7
3.1 Example of Hardware Configuration	7
3.2 Used Pins	7
4. Software Explanation	8
4.1 Example of Software Configuration	8
4.2 Required memory size (CC-RL V1.07.00)	9
4.3 Option Byte Settings	9
4.4 Folder Configuration	10
4.5 Return Value	11
4.6 Constants	11
4.7 Structures	11
4.8 API Functions List	12
4.9 API Function Specification	13
4.9.1 Initializing the Wi-Fi Module	13
4.9.2 Sending an AT Command to the Wi-Fi Module	14
4.9.3 Starting Data Reception from the Wi-Fi Module	15
4.9.4 Waiting for Result Code Reception from the Wi-Fi Module	16
4.9.5 Connecting to an Access Point	17
4.9.6 Disconnecting from the Current Access Point	18
4.9.7 Establishing a TCP Connection	19
4.9.8 Terminating the Current TCP Connection	20
4.9.9 Getting the IP address of the Wi-Fi Module	21
4.9.10 Getting the MAC Address of the Wi-Fi Module	22
4.9.11 Sending Data to the Network	23
4.9.12 Waiting for Data Reception from the Network	24
4.9.13 Getting Data from the Network	25
4.9.14 Waiting for the Specified Milliseconds	26
4.9.15 Waiting for One Millisecond	27
4.9.16 Searching for a Specified Pattern in a String	28
4.10 List of Driver Interface Functions	29
4.11 Driver Interface Function Specifications	29

RL78/G10 Wi-Fi module (ESP-WROOM-02) control sample software for TCP/IP Slave Transmission/Reception

4.11.1	Starting UART Transmission Processing.....	29
4.11.2	Starting UART Reception Processing	30
4.11.3	Getting the Length of Data Received through UART	30
4.11.4	Starting UART Processing	31
4.11.5	Stopping UART Processing.....	31
4.12	Device Driver	32
4.12.1	Generating the Driver Code	32
5.	Application Example	34
5.1	Overview of the Sample Application Program.....	34
5.2	Flowchart of Application Example	35
5.2.1	Main processing	35
5.2.2	Starting UART Transmission Processing.....	35
5.2.3	Application sample function.....	36
6.	Sample Code.....	37

RL78/G10 Wi-Fi module (ESP-WROOM-02) control sample software for TCP/IP Slave Transmission/Reception

1. Specifications

The RL78/G10 controls the Wi-Fi module ESP-WROOM-02 through UART communication.

The sample program provided together with this application note connects the Wi-Fi module to a server as a TCP/IP client and transmits and receives data.

Table 1.1 gives an outline of the system functions and Figure 1.1 shows an example of system configuration.

Table 1.1 Outline of System Functions

Wi-Fi module Specification	Wireless LAN standard IEEE 802.11 b/g/n (2.4GHz Wi-Fi)
	Supported protocols IPv4 TCP Security: WPA/WPA2 Encryption: AES
Connection between Wi-Fi module and MCU	Communication method Master: RL78/G10 from Renesas Electronics Slave: ESP-WROOM-02 (ESP8266EX) from Espressif Systems Communication mode: UART at 115200 bps Module control Control through AT commands (UART communication) Used in the Station mode Connection and disconnection with an access point Data translation and reception through the network as a client of TCP communication

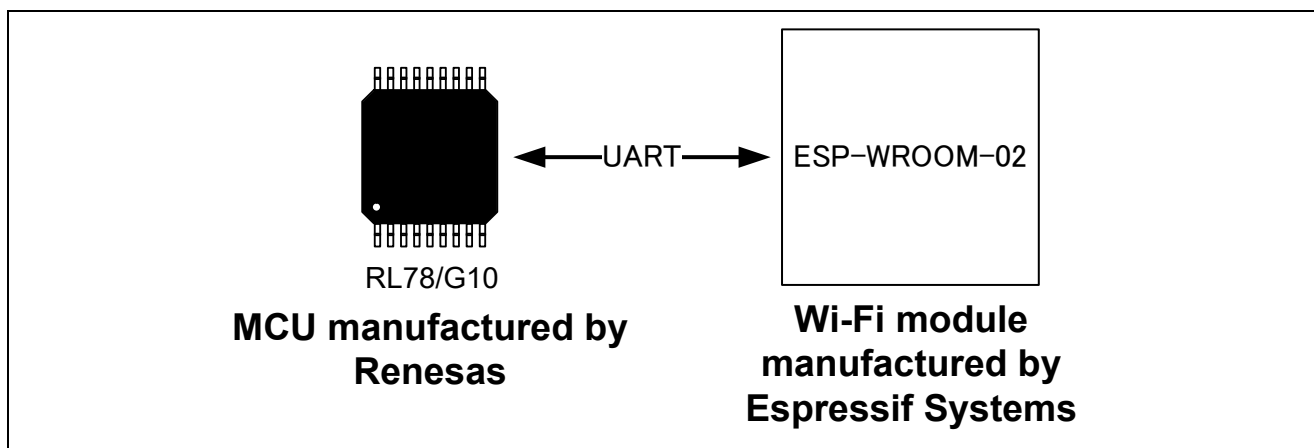


Figure 1.1 Example of System Configuration

RL78/G10 Wi-Fi module (ESP-WROOM-02) control sample software for TCP/IP Slave Transmission/Reception

1.1 Overview of Wi-Fi Module ESP-WROOM-02 (ESP8266EX) Operation

1.1.1 Boot Mode

The ESP-WROOM-02 provides two boot modes: Flash Boot Mode for executing a program stored in the flash memory and UART Download Mode for writing a program to the flash memory.

The example in this application note only uses the Flash Boot Mode to execute the official firmware stored in advance in the flash memory. The boot mode is selected by pin setting when the Wi-Fi module is reset. In the example in this application note, set up the pins as shown in Table 1.2.

Table 1.2 Boot Mode Selection

Boot Mode	GPIO15	GPIO2	GPIO0
Flash Boot Mode	L	H	H

1.1.2 Control Method

The ESP-WROOM-02 is controlled by AT commands through UART communication. Executing API functions of the provided control software enables transmission of AT commands to the Wi-Fi module and reception of result codes.

The formats of AT commands (instructions to be sent to the module) and result codes (responses from the module) in the ESP-WROOM-02 (ESP8266EX) are shown below.

AT Command:

A	T	Command	Parameters	CR	LF
---	---	---------	------------	----	----

Result Code:

CR	LF	Result Code	CR	LF
----	----	-------------	----	----

Note: For details of the AT commands for the ESP-WROOM-02, refer to the ESP8266EX AT Instruction Set.

1.1.3 Operation Mode

The ESP-WROOM-02 provides three operating modes: Station, SoftAP, and SoftAP + Station Modes.

In the Station mode, the Wi-Fi module works as a wireless client, which is usually connected to an access point. In the SoftAP mode, the Wi-Fi module works as an access point (base station).

This application note assumes that the Wi-Fi module is connected to an access point and describes the Station mode only.

RL78/G10 Wi-Fi module (ESP-WROOM-02) control sample software for TCP/IP Slave Transmission/Reception

2. Conditions of Operation Confirmation Test

The sample code with this application note runs properly under the conditions below.

Table 2.1 Operation Confirmation Conditions

Items	Contents
Wi-Fi Module	ESP-WROOM-02 (ESP8266EX) manufactured by Espressif Systems AT version:1.3.0.0 SDK version: 2.0.0
MCU	RL78/G10 (R5F10Y47) ROM: 4 KB, RAM: 512 B
Operating frequencies	High-speed on-chip oscillator clock (fIH): 20 MHz CPU/peripheral hardware clock: 20 MHz
Operating voltage	3.3 V
Integrated development environment	CS+ for CC V7.00.00 from Renesas Electronics Corp. e2 studio v7.1.0 from Renesas Electronics Corp. Embedded Workbench for Renesas RL78 v4.10.1 from IAR Systems ^{NOTE 1}
C compiler	CC-RL V1.07.00 from Renesas Electronics Corp. IAR C/C++ Compiler for Renesas RL78 v4.10.1.2197 from IAR Systems

Note 1: Before building the project for R5F10Y47 on IAR Embedded Workbench, rewrite the linker configuration file partly as below.

Target configuration file:

```
{IAR Embedded Workbench installation directory}\rl78\config\lnkr5f10y47.icf
```

Details of change:

Setting of RAM address area

From:

```
define region RAM_near = mem:[from 0xFFCE0 to 0xFFE1F];  
define region RAM_far = mem:[from 0xFFCE0 to 0xFFE1F];  
define region RAM_huge = mem:[from 0xFFCE0 to 0xFFE1F];
```

To:

```
define region RAM_near = mem:[from 0xFFCE0 to 0xFFEDF];  
define region RAM_far = mem:[from 0xFFCE0 to 0xFFEDF];  
define region RAM_huge = mem:[from 0xFFCE0 to 0xFFEDF];
```

RL78/G10 Wi-Fi module (ESP-WROOM-02) control sample software for TCP/IP Slave Transmission/Reception

3. Hardware

3.1 Example of Hardware Configuration

Figure 3.1 shows an example of the hardware configuration used in this application note.

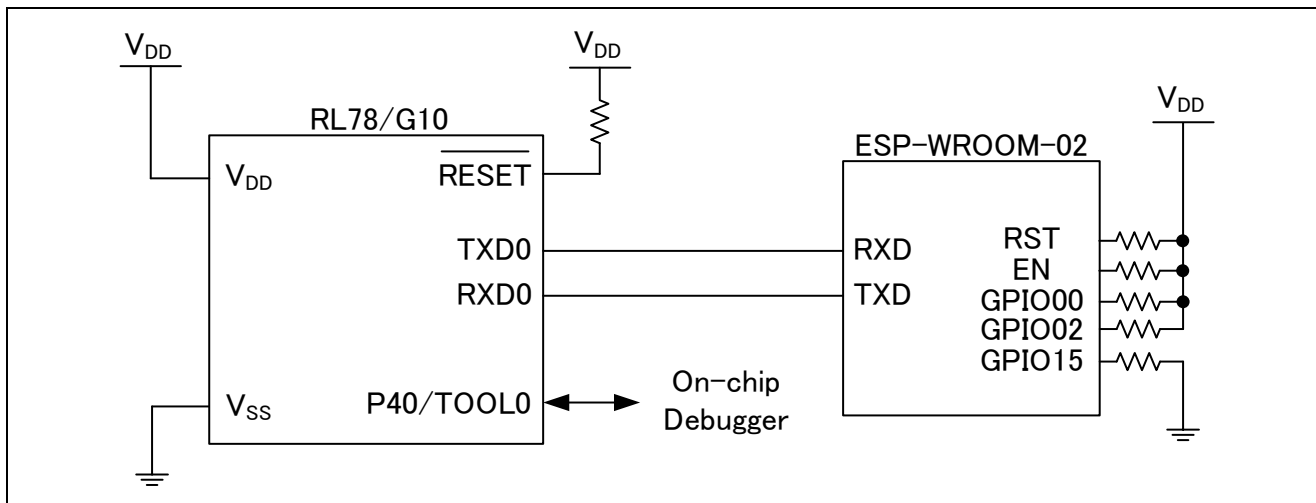


Figure 3.1 Hardware Configuration

Note 1: This simplified circuit diagram was created to show an overview of connections only.

When actually designing your circuit, make sure the design includes sufficient pin processing and meets electrical characteristic requirements. (Connect each input-only port to V_{DD} or V_{SS} through a resistor.)

3.2 Used Pins

Table 3.1 shows list of used Pins and assigned functions.

Table 3.1 List of Pins and Functions

Pin Name	Input/Output	Function
TXD0	Output	Serial Data Transmission (UART)
RXD0	Input	Serial Data Reception (UART)

4. Software Explanation

4.1 Example of Software Configuration

Figure 4.1 shows an example of software configuration using the control software.

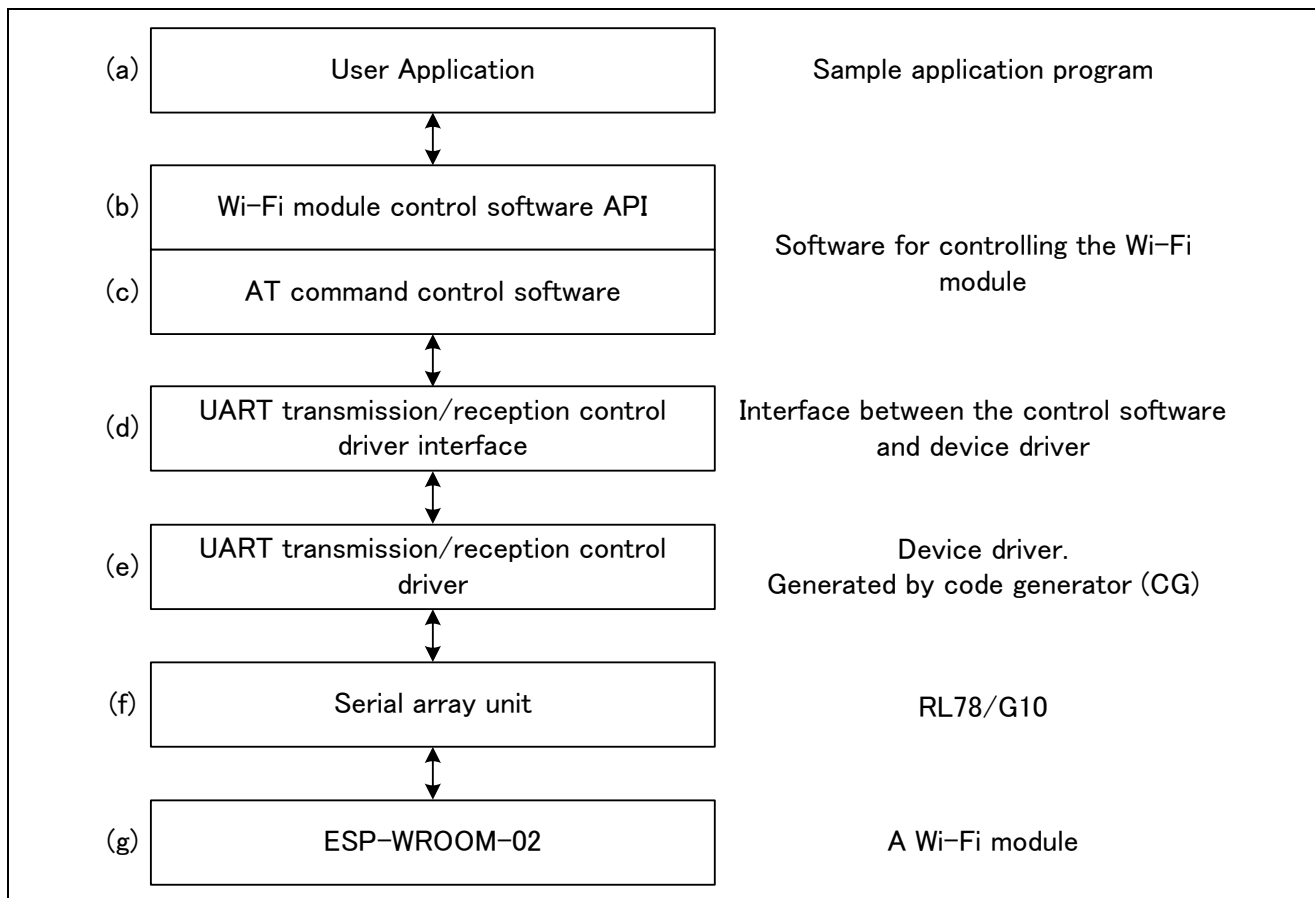


Figure 4.1 Example of Software Configuration

(a) User application

An application program that calls API functions of the control software. A sample application program is provided together with the control software.

(b) Wi-Fi module control software API

API of the control software.

(c) AT command control software

Software for controlling UART transmission and reception between RL78/G10 and the Wi-Fi module.

(d) UART transmission/reception control driver interface

Interface between the control software and driver. Modify the settings in accordance with the target device and the UART configuration.

(e) UART transmission/reception control driver

Software for controlling UART communication. The code generator provided as a tool in the Renesas integrated development environment is used to generate this software for the RL78/G10.

Generate an appropriate code for the target device.

(f) Serial array unit

The serial array unit (SAU) is used in the UART transmission/reception mode.

(g) ESP-WROOM-02

A Wi-Fi module.

RL78/G10 Wi-Fi module (ESP-WROOM-02) control sample software for TCP/IP Slave Transmission/Reception

4.2 Required memory size (CC-RL V1.07.00)

Required memory size	Size [Byte]
ROM	2820
RAM	185
Stack size	124

Note: The required memory size depends on the version of the C compiler and the compile option settings. The above values include those for the sample application program.

4.3 Option Byte Settings

Table 4.1 lists the option byte settings.

Table 4.1 Option Byte Settings

Address	Setting Value	Contents
000C0H	11101111B	Operation of Watchdog timer is stopped (counting is stopped after reset.)
000C1H	11110111B	SPOR detection voltage Rising edge: TYP. 2.90 V (2.76 to 2.87 V) Falling edge: TYP. 2.84 V (2.70to 2.81 V)
000C2H	11111001B	High-speed on-chip oscillator clock: 20 MHz
000C3H	10000101B	On-chip debugging enabled

RL78/G10 Wi-Fi module (ESP-WROOM-02) control sample software for TCP/IP Slave Transmission/Reception

4.4 Folder Configuration

Table 4.2 shows a folder configuration of this Application Note.

Table 4.2 Folder configuration

Folder configuration	Outline	Corresponding item in figure 4
¥an-r01an4791xx0100-rl78g10-communication <DIR>	Root folder of this Application Note	-
r01an4791ej0100-rl78g10.pdf	PDF file of this Application Note	-
¥workspace¥{IDE}¥src <DIR>	Folder for program source	-
¥sample <DIR>	Folder for Application sample program	-
testmain.c	Application sample program	(a)
¥r_esp_wroom_02 <DIR>	Folder for Wi-Fi module control program	-
r_esp.c	Wi-Fi module control program	(b), (c)
r_esp.h	Header file of Wi-Fi module control program	(b), (c)
¥cg_src <DIR>	Folder for MCU drivers	-
r_cg_cgc.c ^{Note}	CGC module	(a)
r_cg_cgc.h ^{Note}	Header file of CGC module	(a)
r_cg_cgc_user.c ^{Note}	CGC module	(a)
r_cg_macrodriver.h ^{Note}	Header file of driver macros	(a)
r_cg_main.c ^{Note}	Main processing module	(a)
r_cg_sau.c ^{Note}	SAU module	(e)
r_cg_sau.h ^{Note}	Header file of SAU module	(e)
r_cg_sau_user.c ^{Note}	SAU module	(e)
r_cg_systeminit.c ^{Note}	System initialization module	(a)
r_cg_userdefine.h ^{Note}	Header file of user's definitions	(a)
r_esp_hw.c ^{Note}	Driver interface module	(d)
r_esp_hw.h ^{Note}	Header file of driver interface module	(d)

Note: Generate appropriate modules for the target device by using the code generator. When integrating generated modules into an existing project, confirm that they do not conflict with existing software.

RL78/G10 Wi-Fi module (ESP-WROOM-02) control sample software for TCP/IP Slave Transmission/Reception

4.5 Return Value

Table 4.3 lists return value of Wi-Fi module controlling API functions.

Table 4.3 Return Value of API Functions

Label	Contents
ESP_OK	Wi-Fi module responded "OK"
ESP_ERROR	Wi-Fi module responded "ERROR"
ESP_ALREADY_CONNECT	Wi-Fi module responded "ALREADY CONNECT"
ESP_TIMEOUT	Timeout
ESP_OVERFLOW	Buffer overflow happen
ESP_OTHERS	Other Errors

4.6 Constants

Table 4.4 lists the constants used in Wi-Fi module controlling API functions.

Table 4.4 Constants in the Sample Program

Constant Name	Value	Contents
FCLK_MHZ	20	CPU clock frequency (fCLK) [MHz]
ESP_RECV_BUFSIZE	128	Size of UART receive buffer [B]
ESP_LOOPNUM_1MS	FCLK_MHZ * 143	Loop count for 1 ms wait

4.7 Structures

Table 4.5 lists the structures used in Wi-Fi module controlling API functions.

Table 4.5 Structures in the Sample Program

[Structure Name]	esp_params_t	
Outline	Structure for storing Wi-Fi module control parameters	
Variables	uint8_t * const ssid	SSID of Access Point
	uint8_t * const pwd	Password of Access Point
	uint16_t timeout_ms	Timeout value to wait response from Wi-Fi module [ms]
	uint8_t ip_address[15]	Buffer to store IP Address of Wi-Fi module
	uint8_t mac_address[17]	Buffer to store MAC Address of Wi-Fi module
	uint8_t * const ip_address_target	IP address of TCP server
	uint8_t * const port_target	Port number of TCP server

4.8 API Functions List

Table 4.6 lists functions of Wi-Fi module control API.

Table 4.6 List of API Functions

Function Name	Outline
R_ESP_Init	Initializes the Wi-Fi module.
R_ESP_SendCommandToESP	Sends an AT command to the Wi-Fi module.
R_ESP_Receive	Starts reception.
R_ESP_WaitResultFromESP	Waits for result code reception from the Wi-Fi module.
R_ESP_ConnectToAP	Connects to an access point.
R_ESP_DisconnectFromAP	Disconnects from the current access point.
R_ESP_TCP_Open	Establishes a TCP connection.
R_ESP_TCP_Close	Terminates the current TCP connection.
R_ESP_GetIPAddress	Gets the IP address of the Wi-Fi module.
R_ESP_GetMACAddress	Gets the MAC address of the Wi-Fi module.
R_ESP_SendDataToNetwork	Sends data to the network.
R_ESP_WaitDataFromNetwork	Waits for data reception from the network.
R_ESP_GetDataFromNetwork	Gets data from the network.
R_WaitMilliseconds	Waits for the specified milliseconds.
R_Wait1MilliSecond	Waits for one millisecond.
R_strstr_WithTail	Searches for a specified pattern in a string.

RL78/G10 Wi-Fi module (ESP-WROOM-02) control sample software for TCP/IP Slave Transmission/Reception

4.9 API Function Specification

The following describes detailed specifications of the API functions for controlling the Wi-Fi module.

4.9.1 Initializing the Wi-Fi Module

[Function Name]	R_ESP_Init
Outline	Initializes the Wi-Fi module.
Header	r_esp.h
Declaration	esp_err_t R_ESP_Init(esp_params_t* params);
Description	Initializes the Wi-Fi module AT Commands Echoing: off Wi-Fi mode: Station mode Call once at system starting up.
Arguments	esp_params_t* params Wi-Fi module control parameters
Return value	Response from Wi-Fi module ESP_OK Wi-Fi module responded "OK" ESP_ERROR Wi-Fi module responded "ERROR" ESP_TIMEOUT Timeout
Remarks	None

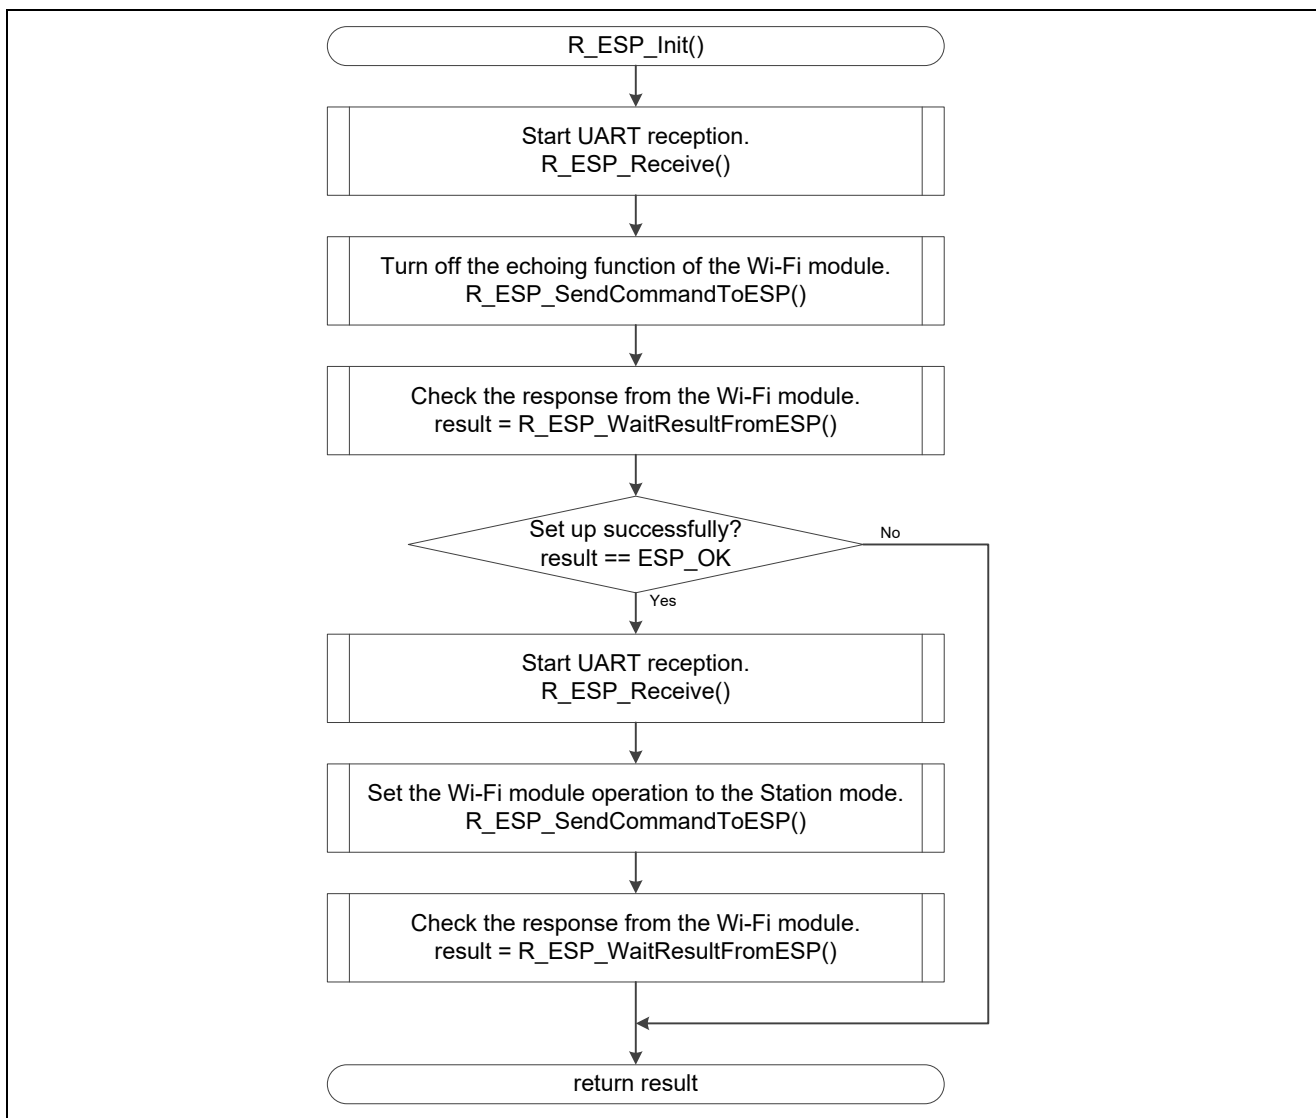


Figure 4.2 Initializing the Wi-Fi Module

RL78/G10 Wi-Fi module (ESP-WROOM-02) control sample software for TCP/IP Slave Transmission/Reception

4.9.2 Sending an AT Command to the Wi-Fi Module

[Function Name]	R_ESP_SendCommandToESP
Outline	Sends an AT command to the Wi-Fi module.
Header	r_esp.h
Declaration	esp_err_t R_ESP_SendCommandToESP(uint8_t * const buf_command);
Description	Send AT command passed as an argument to Wi-Fi module Please add CR, LF, and null character ('\0') at the end of the command
Arguments	uint8_t * const Address of send command buffer buf_command
Return value	ESP_OK
Remarks	Call the following functions in this order to send an AT command to the Wi-Fi module and to receive a result code. R_ESP_Receive() R_ESP_SendCommandToESP() R_ESP_WaitResultFromESP()

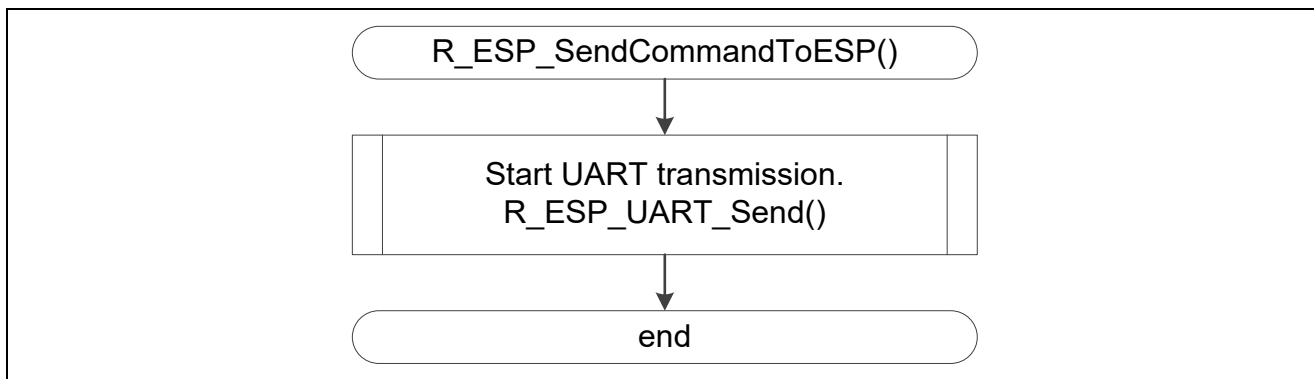


Figure 4.3 Sending an AT Command to the Wi-Fi Module

RL78/G10 Wi-Fi module (ESP-WROOM-02) control sample software for TCP/IP Slave Transmission/Reception

4.9.3 Starting Data Reception from the Wi-Fi Module

[Function Name] R_ESP_Receive

Outline	Starts data reception from the Wi-Fi module.
Header	r_esp.h
Declaration	esp_err_t R_ESP_Receive(esp_params_t* params);
Description	Clear receive buffer, and call UART driver to start UART receiving
Arguments	esp_params_t* params Wi-Fi module control parameters
Return value	ESP_OK
Remarks	None

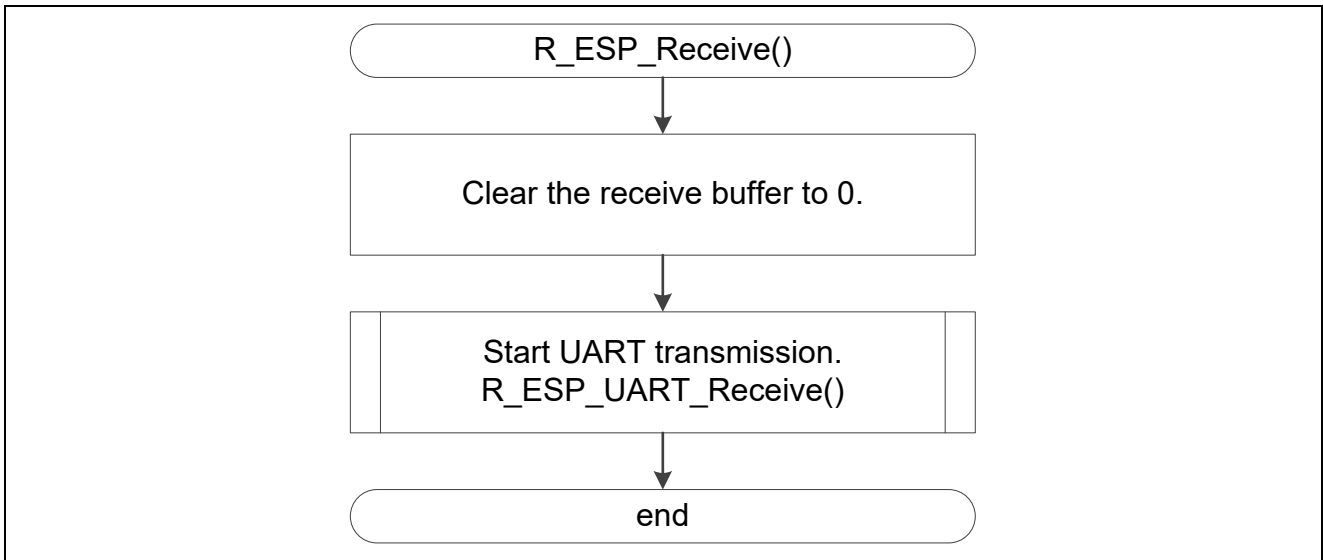


Figure 4.4 Starting Data Reception from the Wi-Fi Module

RL78/G10 Wi-Fi module (ESP-WROOM-02) control sample software for TCP/IP Slave Transmission/Reception

4.9.4 Waiting for Result Code Reception from the Wi-Fi Module

[Function Name]	R_ESP_WaitResultFromESP
Outline	Waits for result code reception from the Wi-Fi module.
Header	r_esp.h
Declaration	esp_err_t R_ESP_WaitResultFromESP(esp_params_t* params);
Description	Scan receive buffer and wait until timeout or until receive "OK", "ERROR", or "ALREADY CONNECTED"
Arguments	esp_params_t* params Wi-Fi module control parameters
Return value	Response from Wi-Fi module ESP_OK Wi-Fi module responded "OK" ESP_ERROR Wi-Fi module responded "ERROR" ESP_ALREADY_CONN Wi-Fi module responded "ALREADY_CONNECT" ECT ESP_TIMEOUT Timeout
Remarks	Call the following function in this order to send an AT command to the Wi-Fi module and to receive a result code. R_ESP_Receive() R_ESP_SendCommandToESP() R_ESP_WaitResultFromESP()

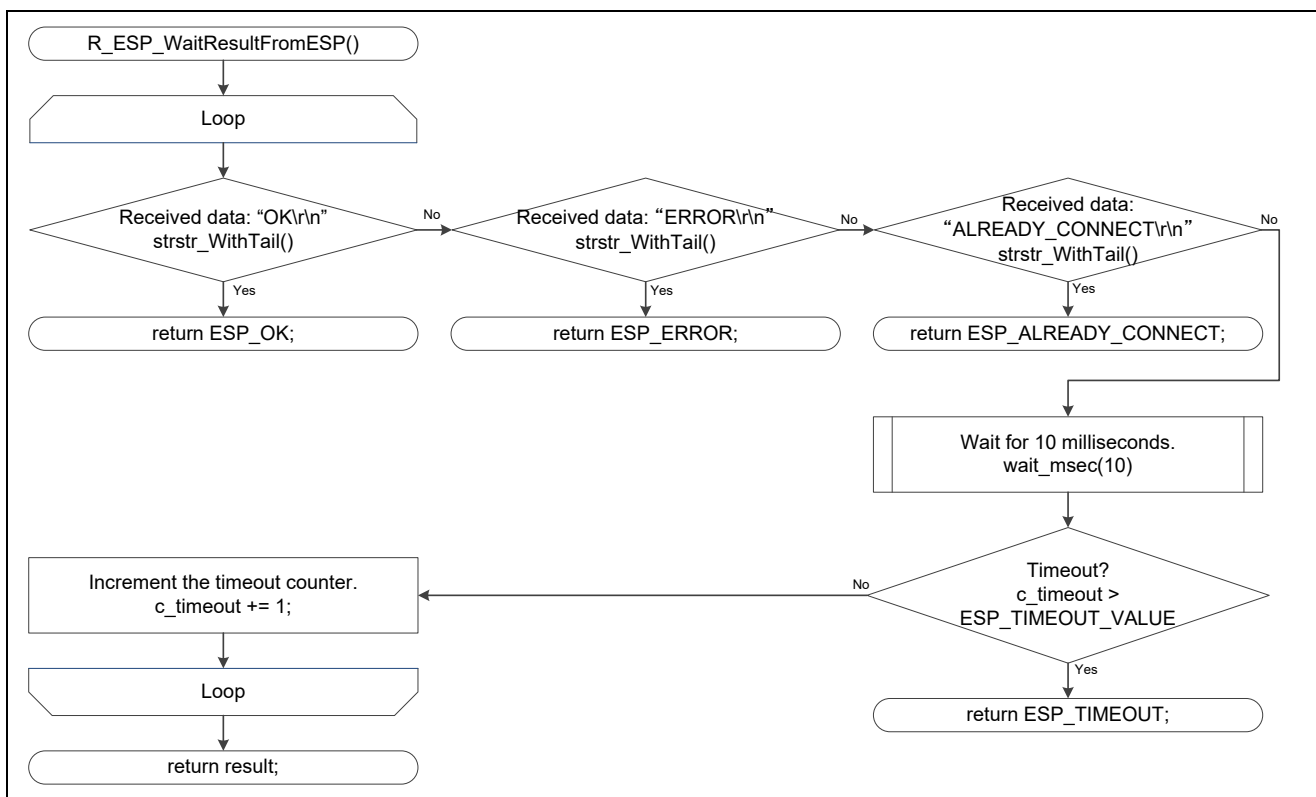


Figure 4.5 Waiting for Result Code Reception from the Wi-Fi Module

RL78/G10 Wi-Fi module (ESP-WROOM-02) control sample software for TCP/IP Slave Transmission/Reception

4.9.5 Connecting to an Access Point

[Function Name]	R_ESP_ConnectToAP
Outline	Connects to an access point.
Header	r_esp.h
Declaration	esp_err_t R_ESP_ConnectToAP(esp_params_t* params);
Description	Connects the Wi-Fi module to an access point.
Arguments	esp_params_t* params Wi-Fi module control parameters
Return value	Returns the result of connection to the access point. ESP_OK Wi-Fi module responded "OK" ESP_ERROR Wi-Fi module responded "ERROR" ESP_TIMEOUT Timeout
Remarks	None

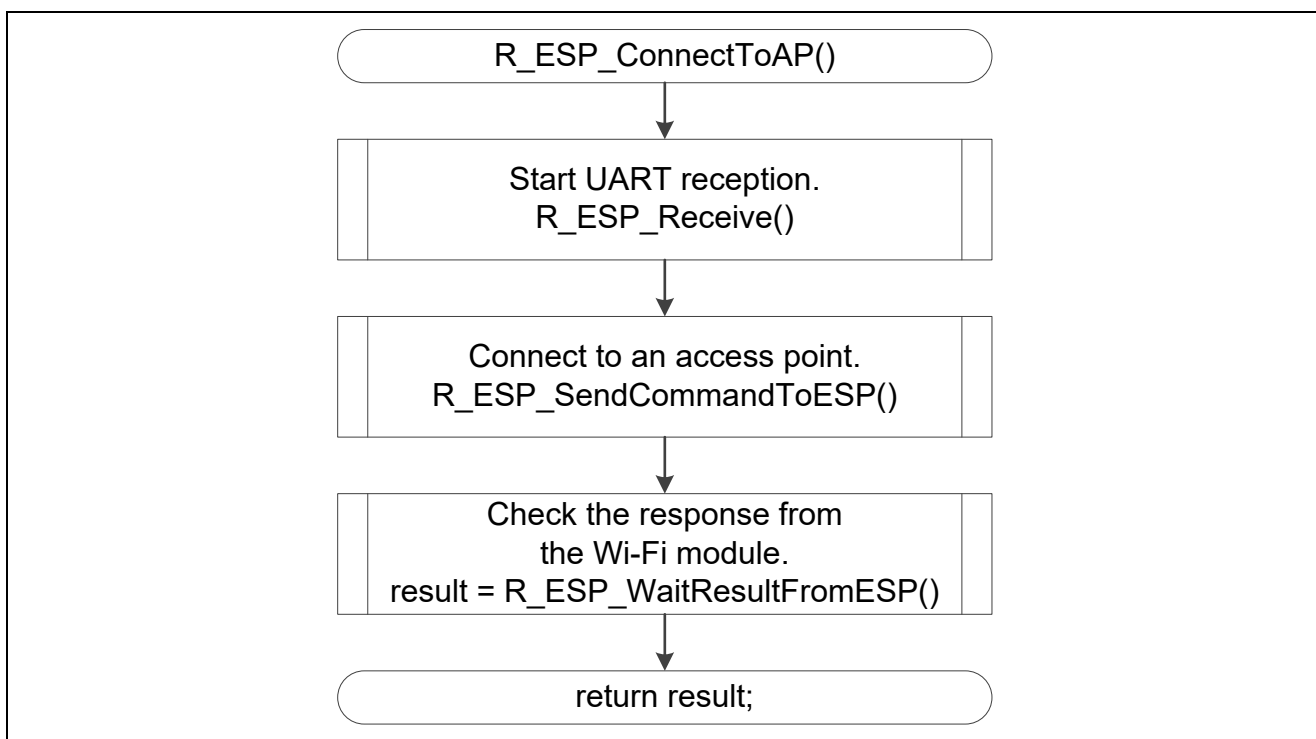


Figure 4.6 Connecting to an Access Point

RL78/G10 Wi-Fi module (ESP-WROOM-02) control sample software for TCP/IP Slave Transmission/Reception

4.9.6 Disconnecting from the Current Access Point

[Function Name]	R_ESP_DisconnectFromAP
Outline	Disconnects from the current access point.
Header	r_esp.h
Declaration	esp_err_t R_ESP_DisconnectFromAP(esp_params_t* params);
Description	Disconnects the Wi-Fi module from the current access point connected.
Arguments	esp_params_t* params Wi-Fi module control parameters
Return value	Returns the result of disconnection from the access point. ESP_OK Wi-Fi module responded "OK" ESP_TIMEOUT Timeout
Remarks	None

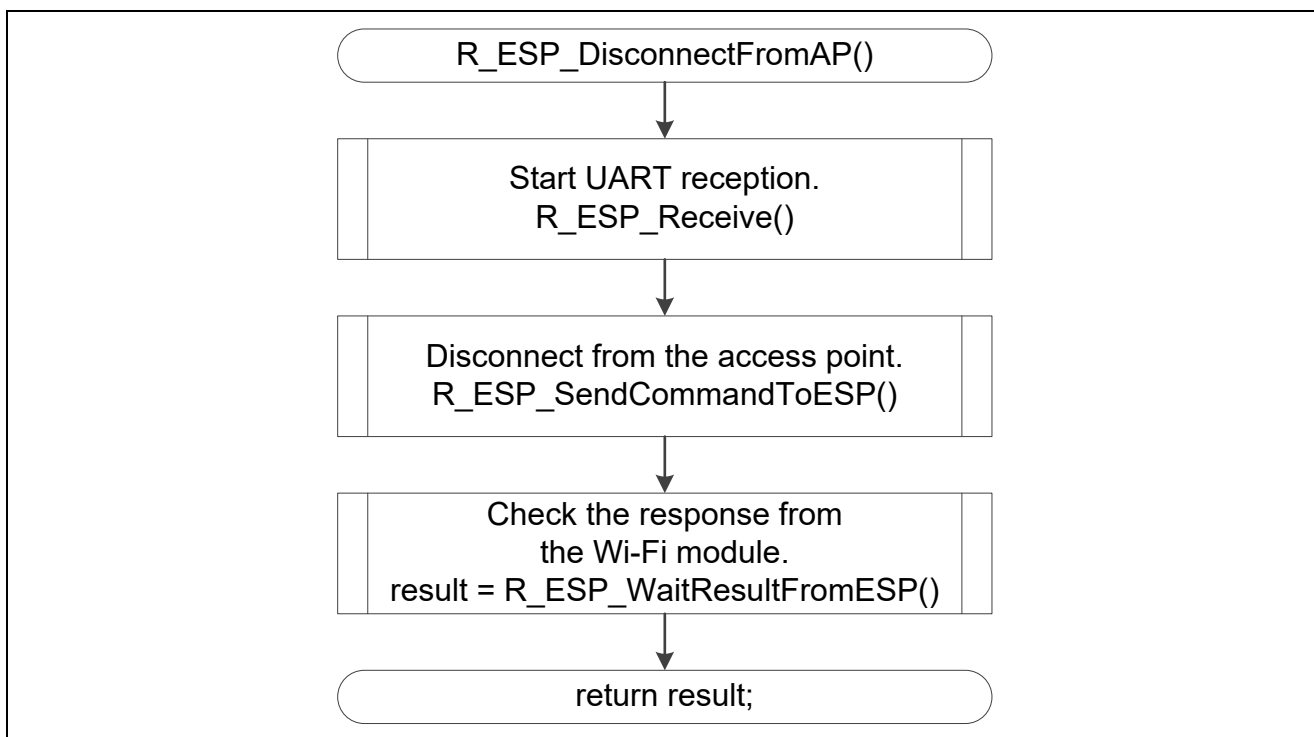


Figure 4.7 Disconnecting from the Current Access Point

RL78/G10 Wi-Fi module (ESP-WROOM-02) control sample software for TCP/IP Slave Transmission/Reception

4.9.7 Establishing a TCP Connection

[Function Name]	R_ESP_TCP_Open
Outline	Establishes a TCP connection.
Header	r_esp.h
Declaration	esp_err_t R_ESP_TCP_Open(esp_params_t* params);
Description	Connects to a server as a TCP client and establishes a connection.
Arguments	esp_params_t* params Wi-Fi module control parameters
Return value	Returns the result of establishing a TCP connection. ESP_OK Wi-Fi module responded "OK" ESP_ERROR Wi-Fi module responded "ERROR" ESP_ALREADY_CONN Wi-Fi module responded "ALREADY CONNECT" ECT ESP_TIMEOUT Timeout
Remarks	None

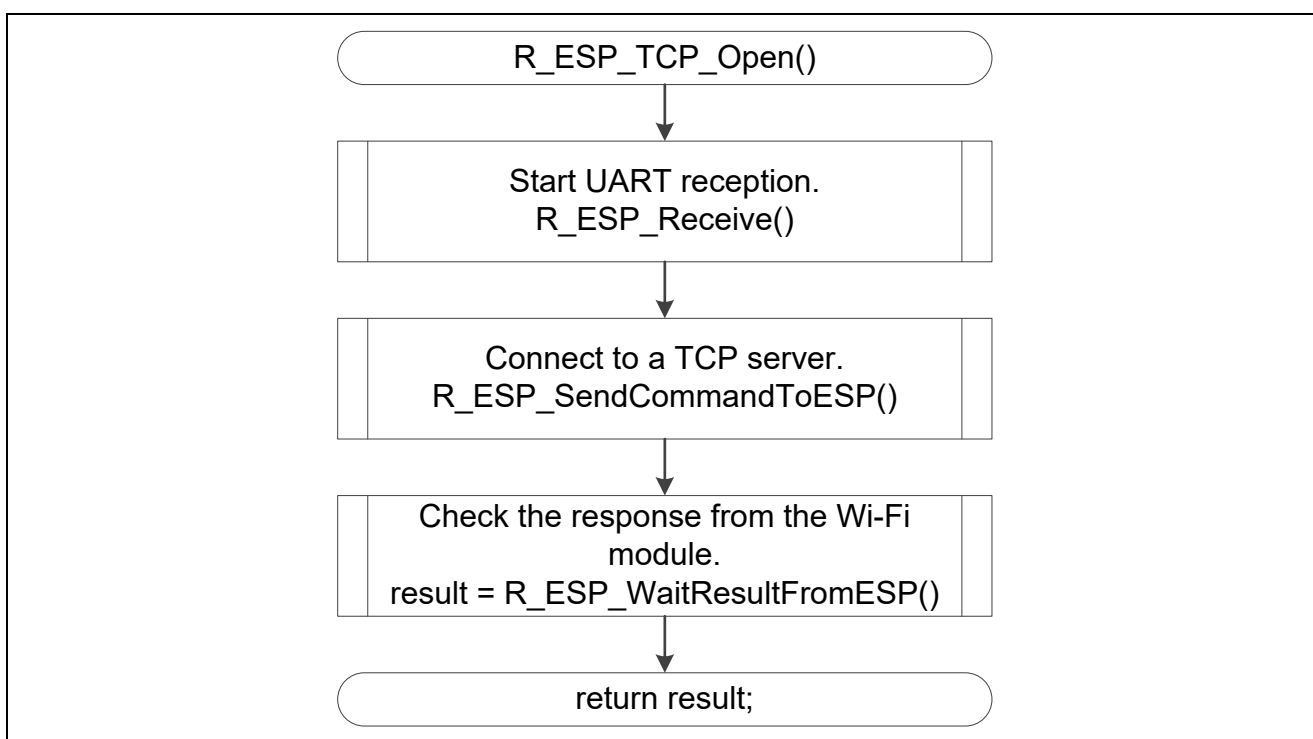


Figure 4.8 Establishing a TCP Connection

RL78/G10 Wi-Fi module (ESP-WROOM-02) control sample software for TCP/IP Slave Transmission/Reception

4.9.8 Terminating the Current TCP Connection

[Function Name]	R_ESP_TCP_Close
Outline	Disconnects from the TCP server.
Header	r_esp.h
Declaration	esp_err_t R_ESP_TCP_Close(esp_params_t* params);
Description	Terminates the current TCP connection.
Arguments	esp_params_t* params Wi-Fi module control parameters
Return value	Returns the result of terminating the TCP connection. ESP_OK Wi-Fi module responded "OK" ESP_TIMEOUT Timeout
Remarks	None

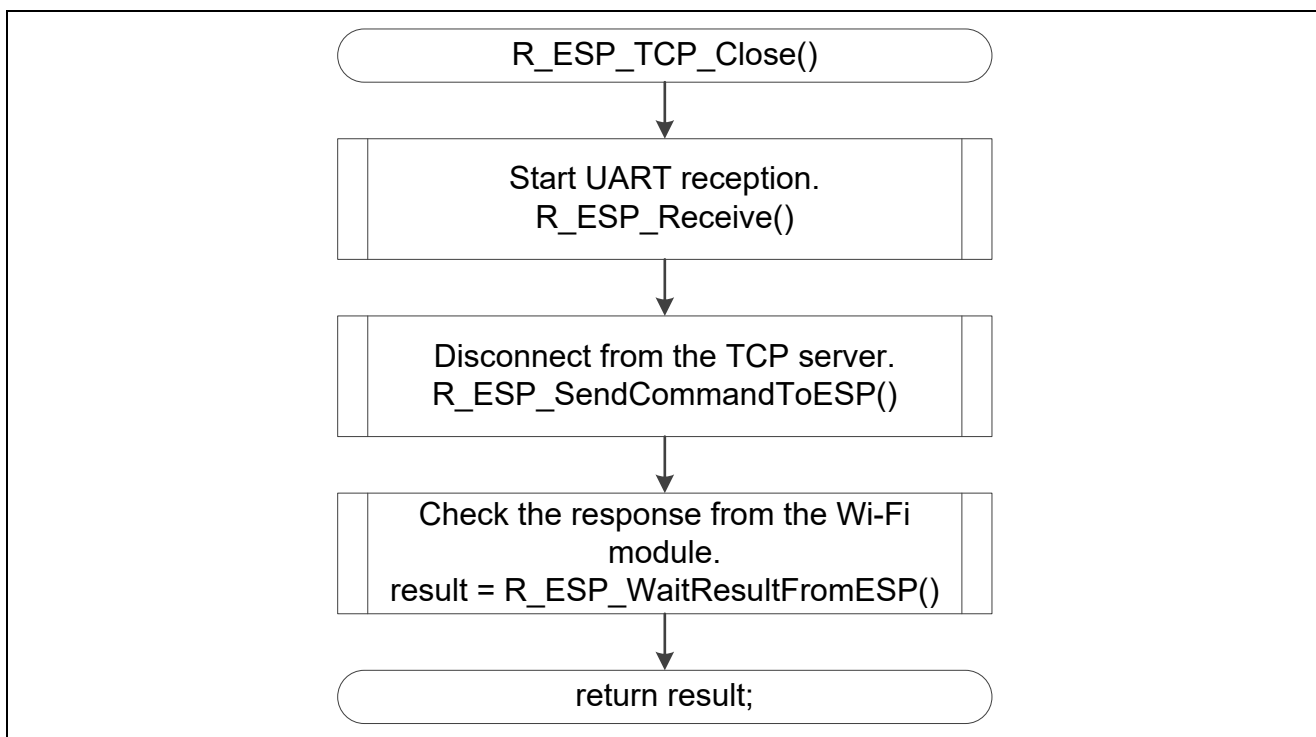


Figure 4.9 Terminating the Current TCP Connection

RL78/G10 Wi-Fi module (ESP-WROOM-02) control sample software for TCP/IP Slave Transmission/Reception

4.9.9 Getting the IP address of the Wi-Fi Module

[Function Name]	R_ESP_GetIPAddress
Outline	Gets the IP address of the Wi-Fi module.
Header	r_esp.h
Declaration	esp_err_t R_ESP_GetIPAddress(esp_params_t* params);
Description	Obtains the IP address assigned to the Wi-Fi module. An IP address is a string of up to 15 characters separated by commas.
Arguments	esp_params_t* params Wi-Fi module control parameters
Return value	Returns the result of getting the IP address. ESP_OK Wi-Fi module responded "OK" ESP_ERROR Wi-Fi module responded "ERROR" ESP_TIMEOUT Timeout
Remarks	None

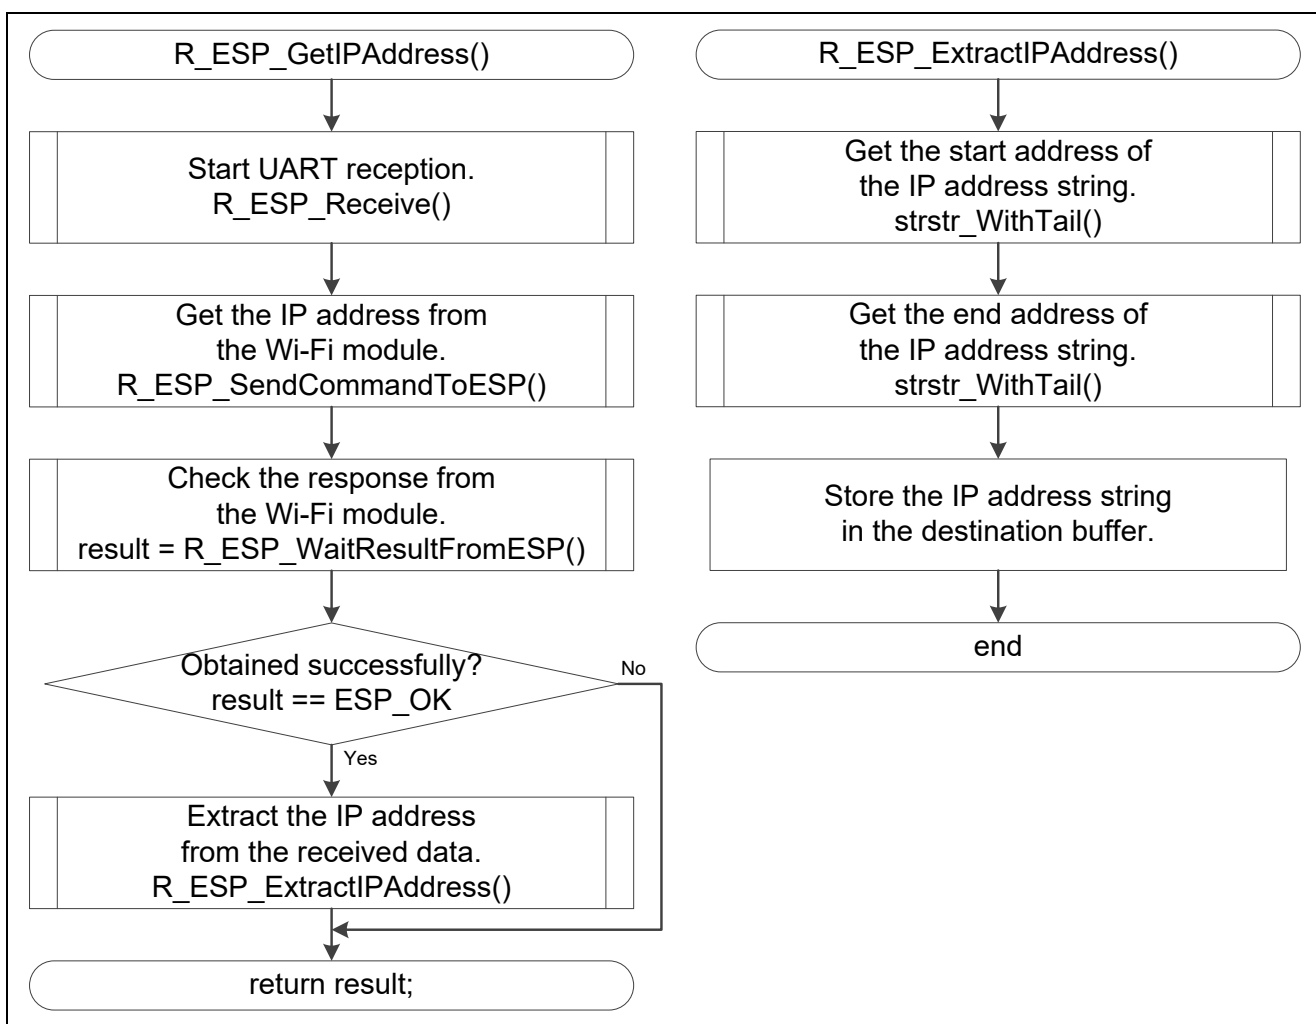


Figure 4.10 Getting the IP address of the Wi-Fi Module

RL78/G10 Wi-Fi module (ESP-WROOM-02) control sample software for TCP/IP Slave Transmission/Reception

4.9.10 Getting the MAC Address of the Wi-Fi Module

[Function Name]	R_ESP_GetMACAddress
Outline	Gets the MAC address of the Wi-Fi module.
Header	r_esp.h
Declaration	esp_err_t R_ESP_GetMACAddress(esp_params_t* params);
Description	Gets the MAC address of the Wi-Fi module. A MAC address is a string of up to 17 characters separated by semicolons.
Arguments	esp_params_t* params Wi-Fi module control parameters
Return value	Returns the result of getting the MAC address. ESP_OK Wi-Fi module responded "OK" ESP_ERROR Wi-Fi module responded "ERROR" ESP_TIMEOUT Timeout
Remarks	None

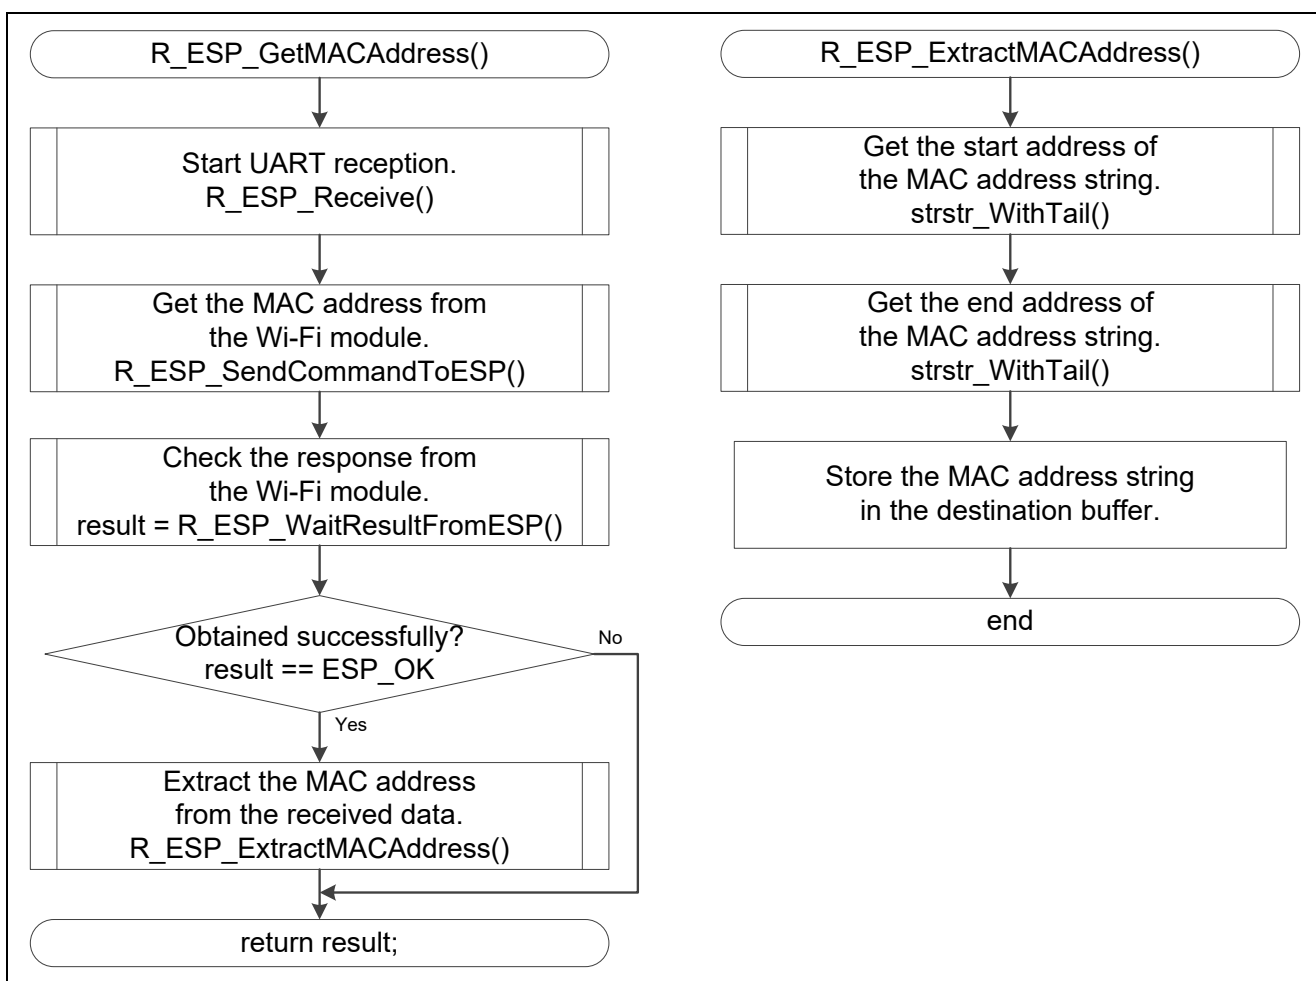


Figure 4.11 Getting the MAC Address of the Wi-Fi Module

RL78/G10 Wi-Fi module (ESP-WROOM-02) control sample software for TCP/IP Slave Transmission/Reception

4.9.11 Sending Data to the Network

[Function Name]	R_ESP_SendDataToNetwork	
Outline	Sends data to the network.	
Header	r_esp.h	
Declaration	esp_err_t R_ESP_SendDataToNetwork(esp_params_t* params, uint8_t * const buf_senddata);	
Description	Sends data to the connected IP address.	
Arguments	esp_params_t* params	Wi-Fi module control parameters
	uint8_t * const	Start address of the area where data to be sent is stored
	buf_senddata	
Return value	Returns the result of data transmission.	
	ESP_OK	Wi-Fi module responded "OK"
	ESP_ERROR	Wi-Fi module responded "ERROR"
	ESP_TIMEOUT	Timeout
Remarks	Maximum length of transmit data: 2048 bytes	

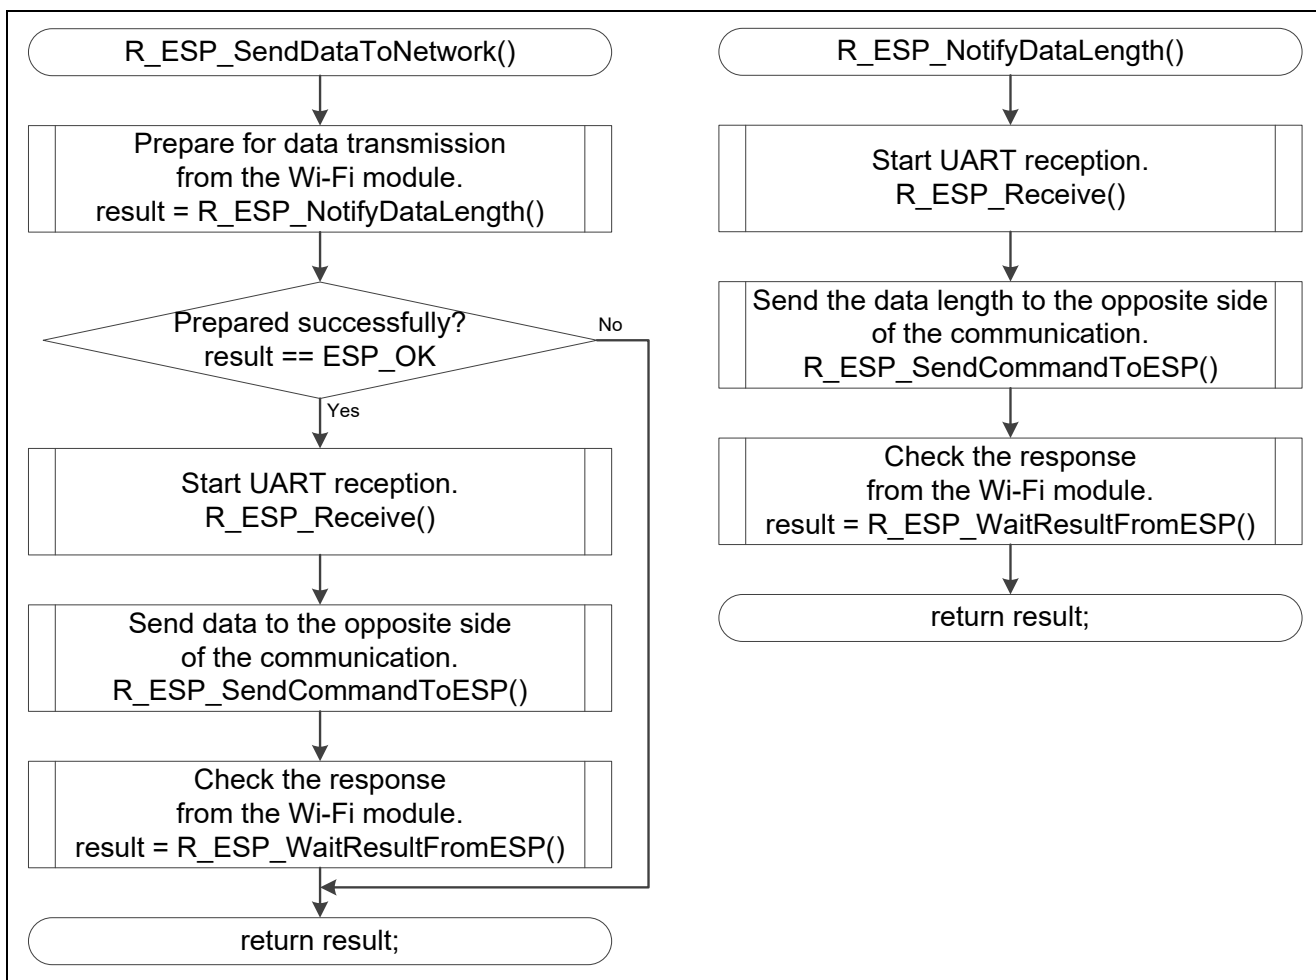


Figure 4.12 Sending Data to the Network

RL78/G10 Wi-Fi module (ESP-WROOM-02) control sample software for TCP/IP Slave Transmission/Reception

4.9.12 Waiting for Data Reception from the Network

[Function Name R_ESP_WaitDataFromNetwork

Outline	Waits for data reception from the network.	
Header	r_esp.h	
Declaration	esp_err_t R_ESP_WaitDataFromNetwork(esp_params_t* params);	
Description	Monitors the UART receive buffer and waits until the pattern "+IPD:" is found in the received data of the timeout period has elapsed.	
Arguments	esp_params_t* params	Wi-Fi module control parameters
Return value	Returns the result of waiting for data reception.	
	ESP_OK	Wi-Fi module responded "OK"
	ESP_TIMEOUT	Timeout
Remarks	None	

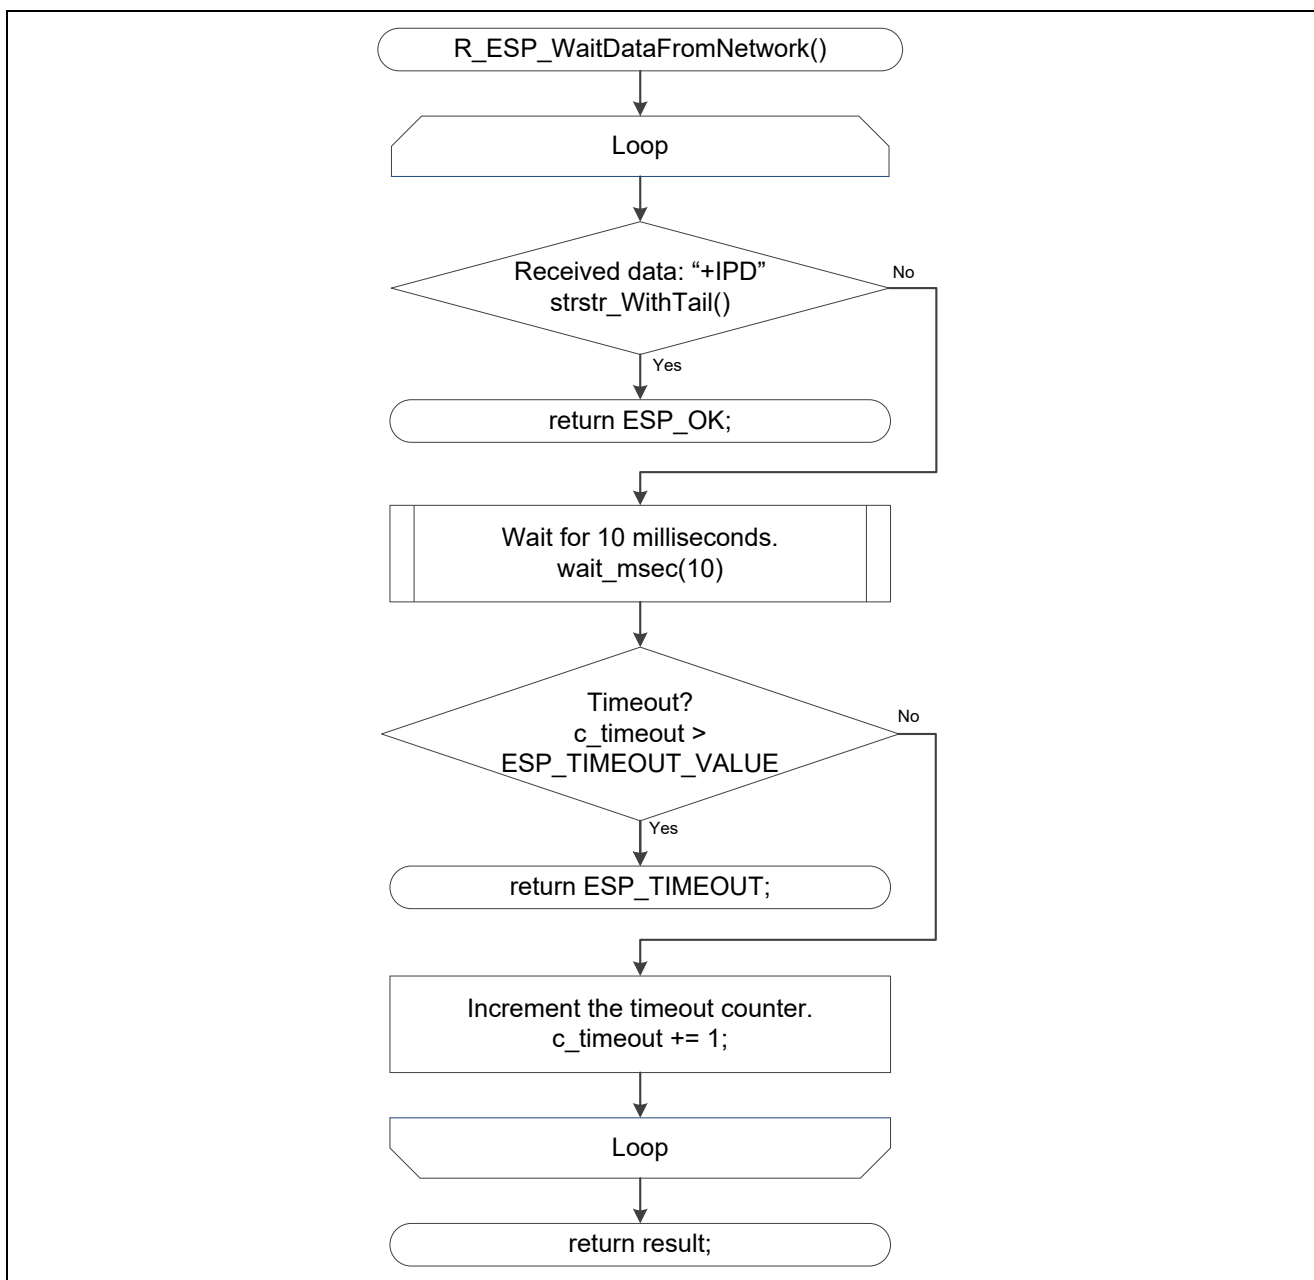


Figure 4.13 Waiting for Data Reception from the Network

RL78/G10 Wi-Fi module (ESP-WROOM-02) control sample software for TCP/IP Slave Transmission/Reception

4.9.13 Getting Data from the Network

[Function Name]	R_ESP_GetDataFromNetwork	
Outline	Gets data from the network	
Header	r_esp.h	
Declaration	esp_err_t R_ESP_GetDataFromNetwork(uint8_t *buf_dest, uint8_t buf_length);	
Description	Extracts network data from the result code stored in the receive buffer.	
Arguments	uint8_t *buf_dest	Destination buffer for storing the extracted data.
	uint8_t buf_length	Size of the destination buffer.
Return value	Returns the result of getting data.	
	ESP_OK	Wi-Fi module responded "OK"
	ESP_TIMEOUT	Timeout
Remarks	None	

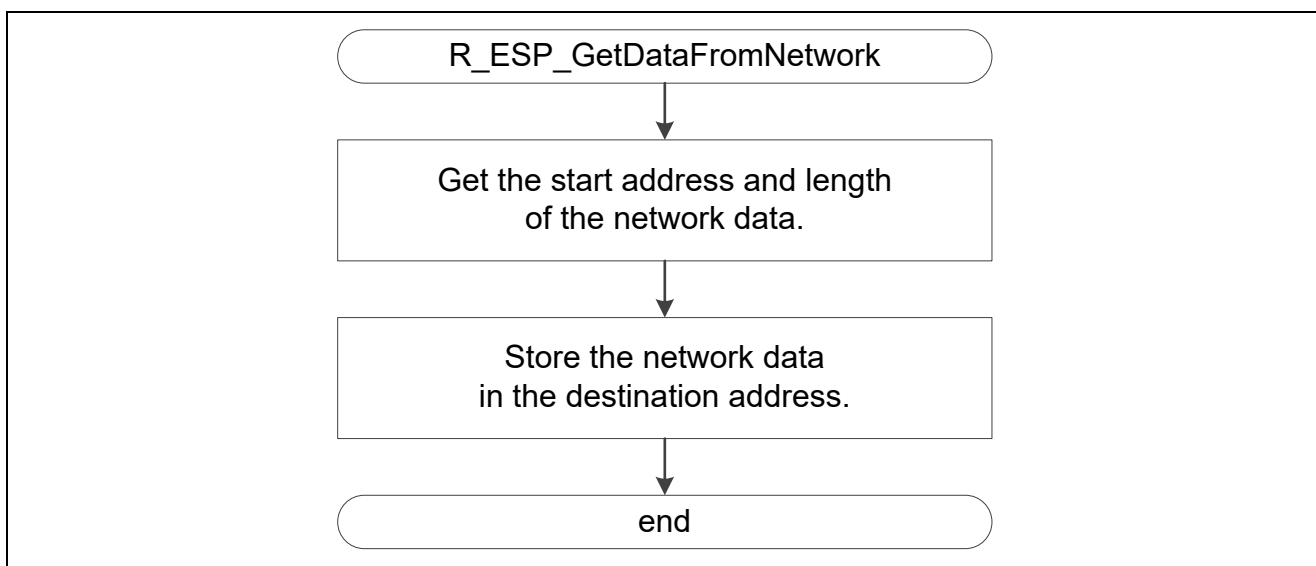


Figure 4.14 Getting Data from the Network

RL78/G10 Wi-Fi module (ESP-WROOM-02) control sample software for TCP/IP Slave Transmission/Reception

4.9.14 Waiting for the Specified Milliseconds

[Function Name]	R_WaitMilliseconds	
Outline	Waits for the specified milliseconds.	
Header	r_esp.h	
Declaration	void R_WaitMilliseconds(uint16_t msec);	
Description	Calls the R_Wait1MilliSeconds function repeatedly for the number of milliseconds specified in the argument.	
Arguments	uint16_t msec	Number of milliseconds to wait.
Return value	None	
Remarks	None	

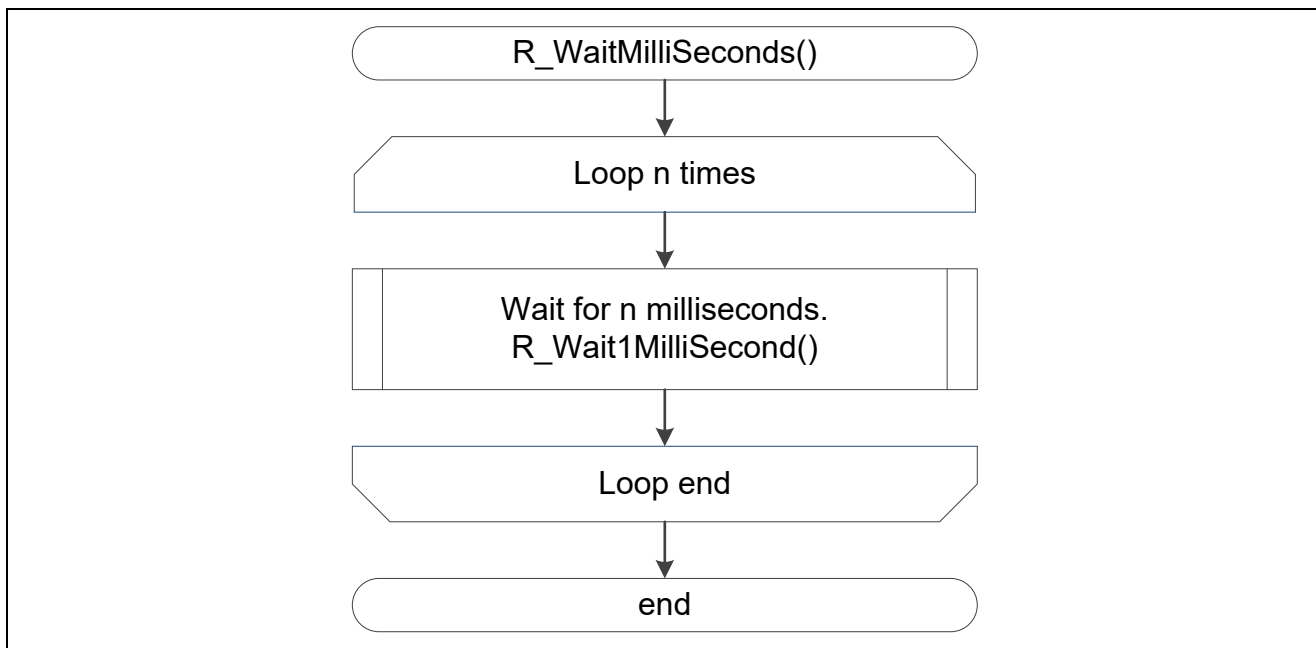


Figure 4.15 Waiting for the Specified Milliseconds

RL78/G10 Wi-Fi module (ESP-WROOM-02) control sample software for TCP/IP Slave Transmission/Reception

4.9.15 Waiting for One Millisecond

[Function Name] R_Wait1MilliSecond

Outline	Waits for one millisecond.
Header	r_esp.h
Declaration	void R_Wait1MilliSecond(void);
Description	Waits for one millisecond by instruction execution in the CPU.
Arguments	None
Return value	None
Remarks	None

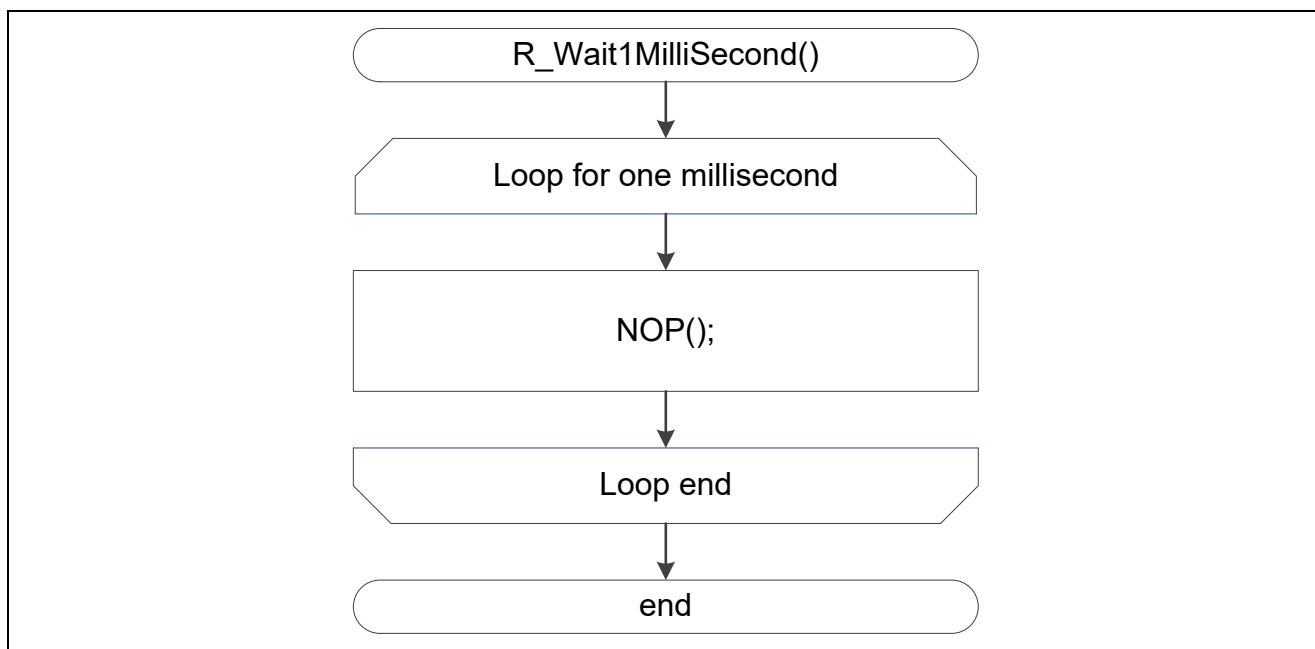


Figure 4.16 Waiting for One Millisecond

4.9.16 Searching for a Specified Pattern in a String

[Function Name]	R_strstr_WithTail	
Outline	Searches for a specified pattern in a string.	
Header	r_esp.h	
Declaration	uint8_t* R_strstr_WithTail(uint8_t *str_head, uint8_t *str_tail, uint8_t *key);	
Description	Searching for a specified pattern in a character string and returns the first address where the pattern is found.	
Arguments	uint8_t *str_head	Start address of the target string of the search
	uint8_t *str_tail	End address of the target string of the search
	uint8_t *key	Pattern to be searched for
Return value	Returns the result of searching for a pattern.	
	\0	The pattern was not found.
	Othres	First address where the pattern was found.
Remarks	None	

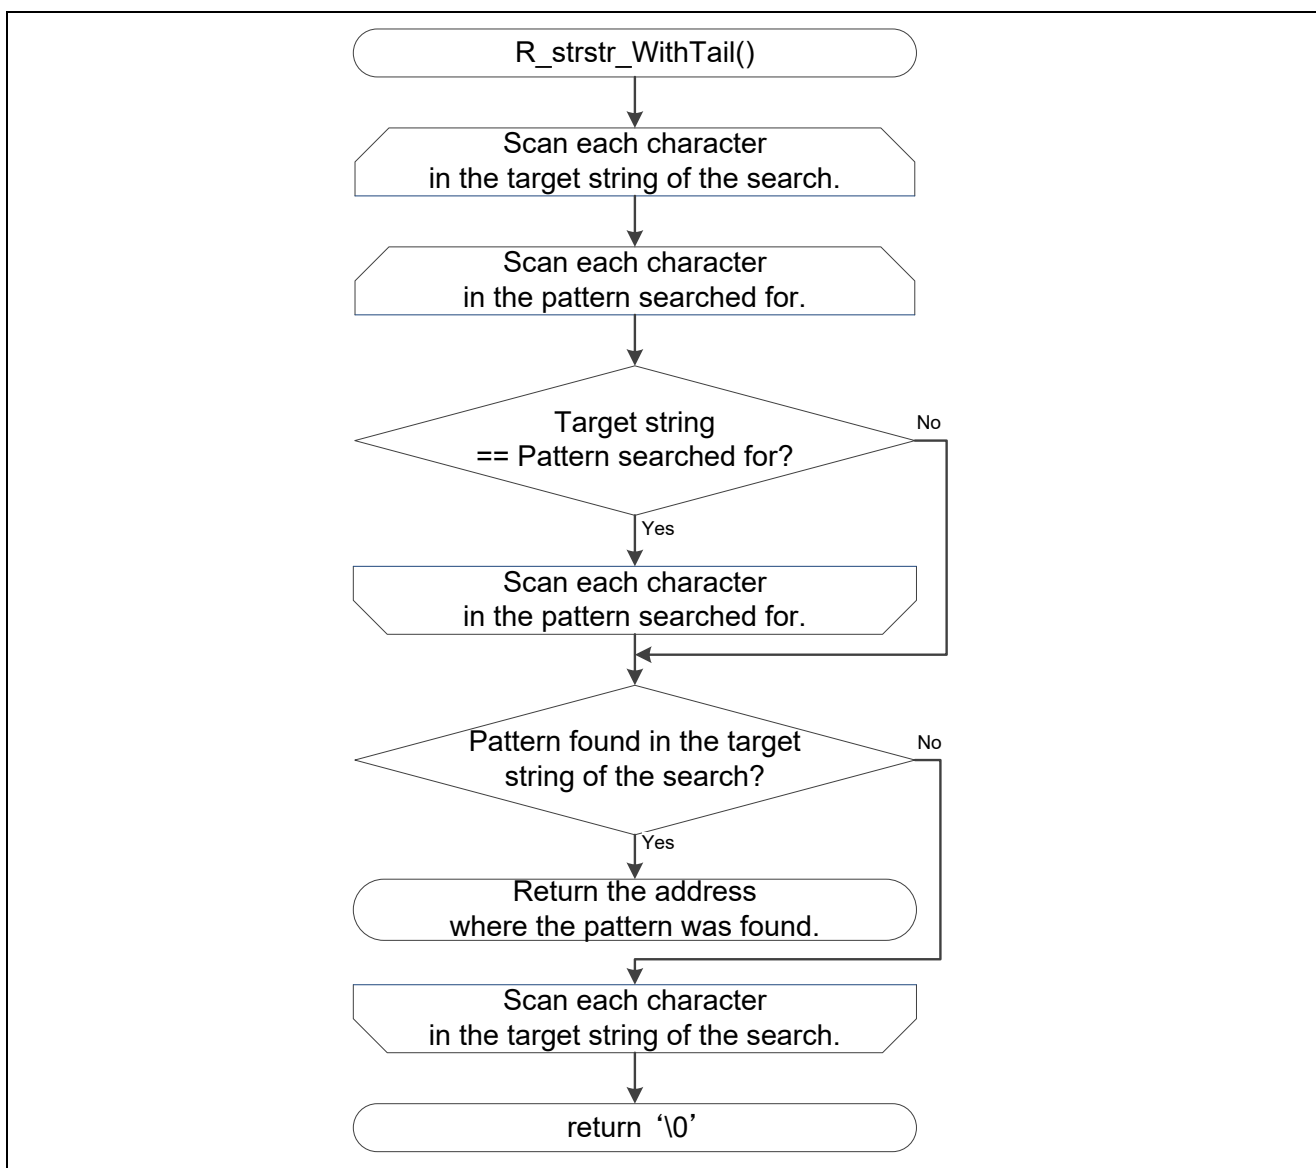


Figure 4.17 Searching for a Specified Pattern in a String

RL78/G10 Wi-Fi module (ESP-WROOM-02) control sample software for TCP/IP Slave Transmission/Reception

4.10 List of Driver Interface Functions

Table 4.7 lists the driver interface functions

Table 4.7 List of Driver Interface Functions

Function Name	Outline
R_ESP_UART_Send	Starts ART transmission
R_ESP_UART_Receive	Starts ART reception
R_ESP_UART_GetRxCount	Gets the number of bytes received.
R_ESP_UART_Start	Starts UART processing
R_ESP_UART_Stop	Stops UART processing

4.11 Driver Interface Function Specifications

The following describes the specifications of the driver interface functions of the Wi-Fi module control software. The interface functions are set up to call the UART0 driver. Modify the settings in accordance with the SAU configuration.

4.11.1 Starting UART Transmission Processing

[Function Name]	R_ESP_UART_Send	
Outline	Starts UART transmission.	
Header	r_esp_hw.h	
Declaration	void R_ESP_UART_Send(uint8_t * const tx_buf, uint16_t tx_num);	
Description	Starts the UART transmission processing. In this sample program, this function calls R_UART0_Send().	
Arguments	uint8_t * const tx_buf	Start address of the area where data to be sent is stored
	uint16_t tx_num	Length of data to be sent
Return value	None	
Remarks	None	

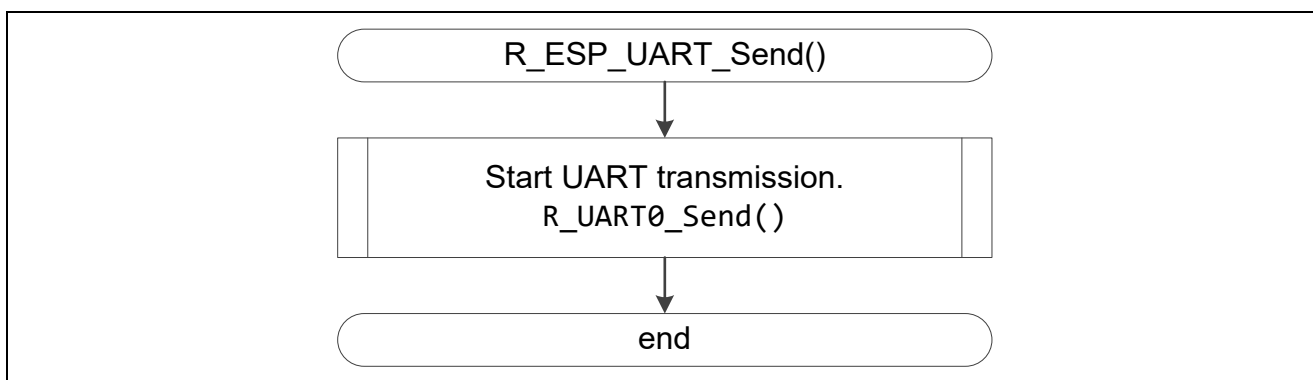


Figure 4.18 Starting UART Transmission Processing

RL78/G10 Wi-Fi module (ESP-WROOM-02) control sample software for TCP/IP Slave Transmission/Reception

4.11.2 Starting UART Reception Processing

[Function Name]	R_ESP_UART_Receive	
Outline	Starts UART reception.	
Header	r_esp_hw.h	
Declaration	void R_ESP_UART_Receive(uint8_t * const rx_buf, uint16_t rx_num);	
Description	Starts the UART reception processing. In this sample program, this function calls R_UART0_Receive().	
Arguments	uint8_t * const rx_buf	Start address of the area for storing the received data
	uint16_t rx_num	Length of data to be received
Return value	None	
Remarks	None	

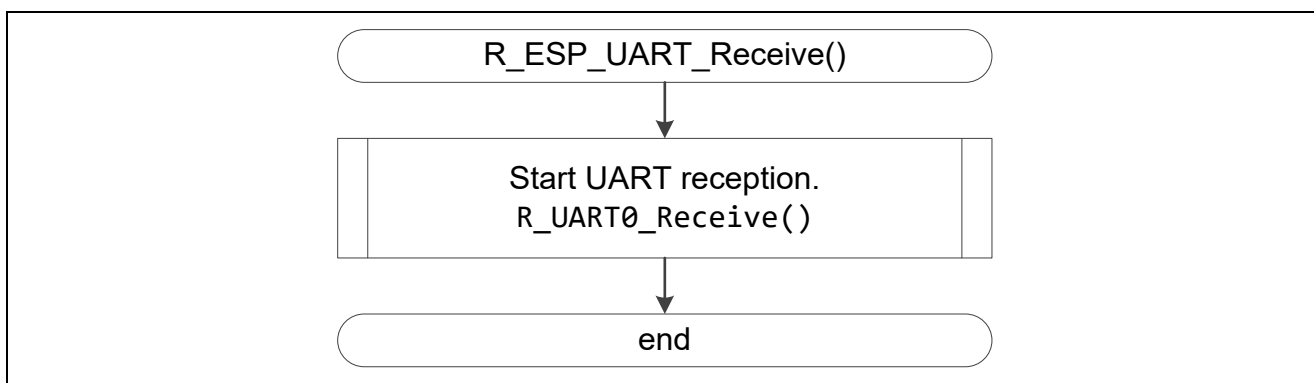


Figure 4.19 Starting UART Reception Processing

4.11.3 Getting the Length of Data Received through UART

[Function Name]	R_ESP_UART_GetRxCount	
Outline	Gets the length of data received through UART	
Header	r_esp_hw.h	
Declaration	uint16_t R_ESP_UART_GetRxCount(void);	
Description	Gets the value of the UART received data counter. In this sample program, this function gets the value of <code>g_uart0_rx_count</code> .	
Arguments	None	
Return value	Value of the UART received data counter.	
Remarks	None	

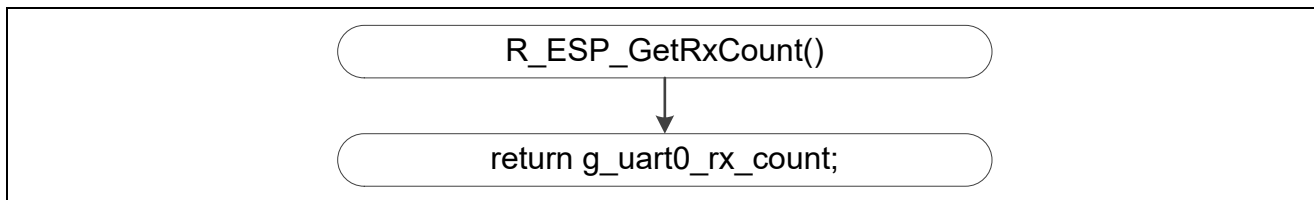


Figure 4.20 Getting the Length of Data Received through UART

RL78/G10 Wi-Fi module (ESP-WROOM-02) control sample software for TCP/IP Slave Transmission/Reception

4.11.4 Starting UART Processing

[Function Name]	R_ESP_UART_Start
Outline	Starts UART transmission.
Header	r_esp_hw.h
Declaration	void R_ESP_UART_Start(void);
Description	Start UART processing
Arguments	None
Return value	None
Remarks	None

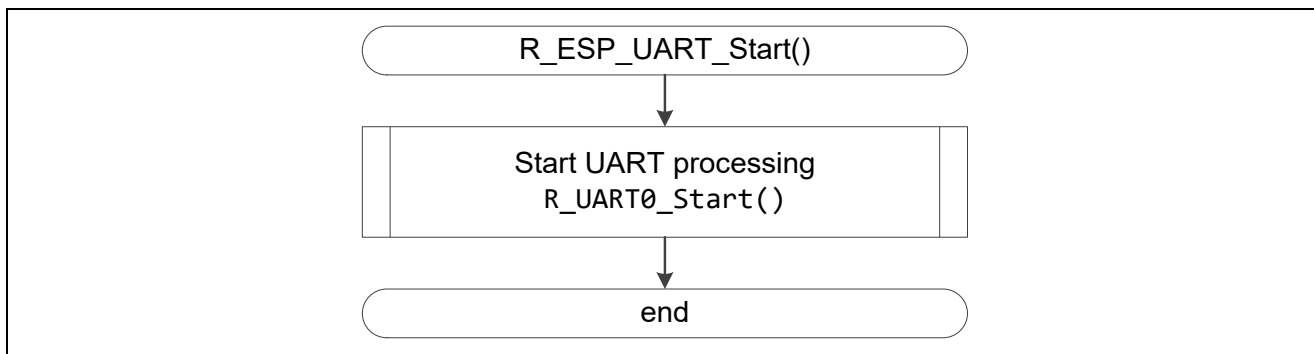


Figure 4.21 Starting UART Processing

4.11.5 Stopping UART Processing

[Function Name]	R_ESP_UART_Stop
Outline	Stops UART transmission.
Header	r_esp_hw.h
Declaration	void R_ESP_UART_Stop(void);
Description	Stop UART processing
Arguments	None
Return value	None
Remarks	None

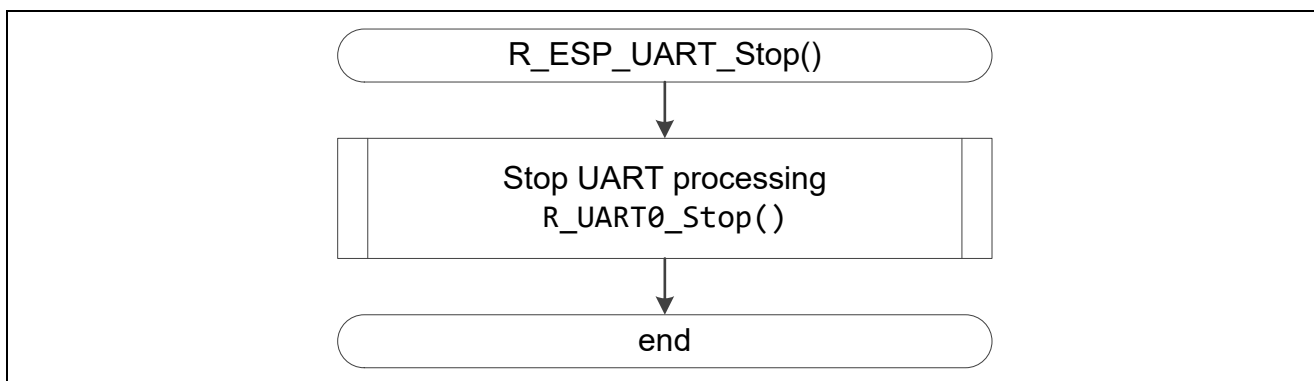


Figure 4.22 Stopping UART Processing

RL78/G10 Wi-Fi module (ESP-WROOM-02) control sample software for TCP/IP Slave Transmission/Reception

4.12 Device Driver

4.12.1 Generating the Driver Code

The device driver in this application note is generated by using the code generator (CG). For the CG settings, refer to Figure 4.23, Figure 4.24, and Figure 4.25.

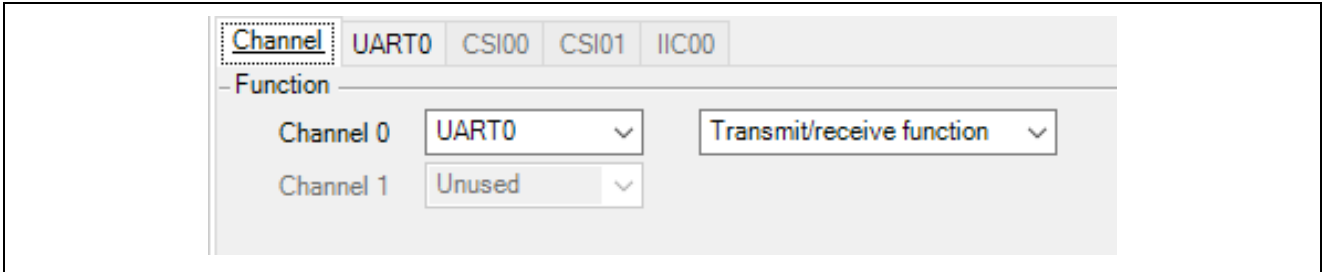


Figure 4.23 SAU CG Configuration (1/3)

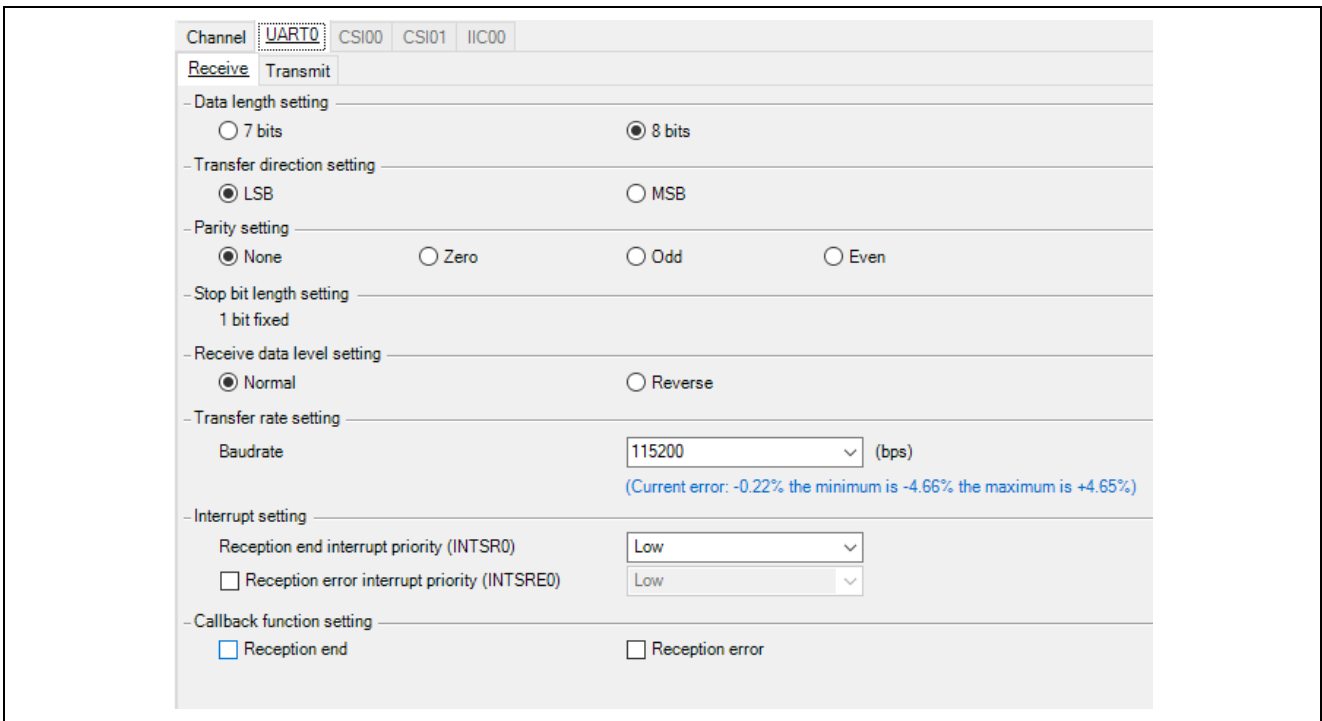


Figure 4.24 SAU CG Configuration (2/3)

RL78/G10 Wi-Fi module (ESP-WROOM-02) control sample software for TCP/IP Slave Transmission/Reception

Channel	<u>UART0</u>	CSI00	CSI01	IIC00
Receive	<u>Transmit</u>			
- Transfer mode setting				
<input checked="" type="radio"/> Single transfer mode		<input type="radio"/> Continuous transfer mode		
- Data length setting				
<input type="radio"/> 7 bits		<input checked="" type="radio"/> 8 bits		
- Transfer direction setting				
<input checked="" type="radio"/> LSB		<input type="radio"/> MSB		
- Parity setting				
<input checked="" type="radio"/> None		<input type="radio"/> Zero	<input type="radio"/> Odd	<input type="radio"/> Even
- Stop bit length setting				
<input checked="" type="radio"/> 1 bit		<input type="radio"/> 2 bits		
- Transmit data level setting				
<input checked="" type="radio"/> Normal		<input type="radio"/> Reverse		
- Transfer rate setting				
Baudrate		<input type="text" value="115200"/>	(bps)	(Current error: -0.22%)
- Interrupt setting				
Transmit end interrupt priority (INTST0)		<input type="text" value="Low"/>		
- Callback function setting				
<input type="checkbox"/> Transmission end				

Figure 4.25 SAU CG Configuration (3/3)

RL78/G10 Wi-Fi module (ESP-WROOM-02) control sample software for TCP/IP Slave Transmission/Reception

5. Application Example

A sample application program, testmain.c, is stored in the "sample" folder (see Table 4.2).

This sample application program accesses an access point and sends and receives data to and from a TCP server as a sample usage of the control software. Figure 5.1 shows an example of system configuration for the sample application program.

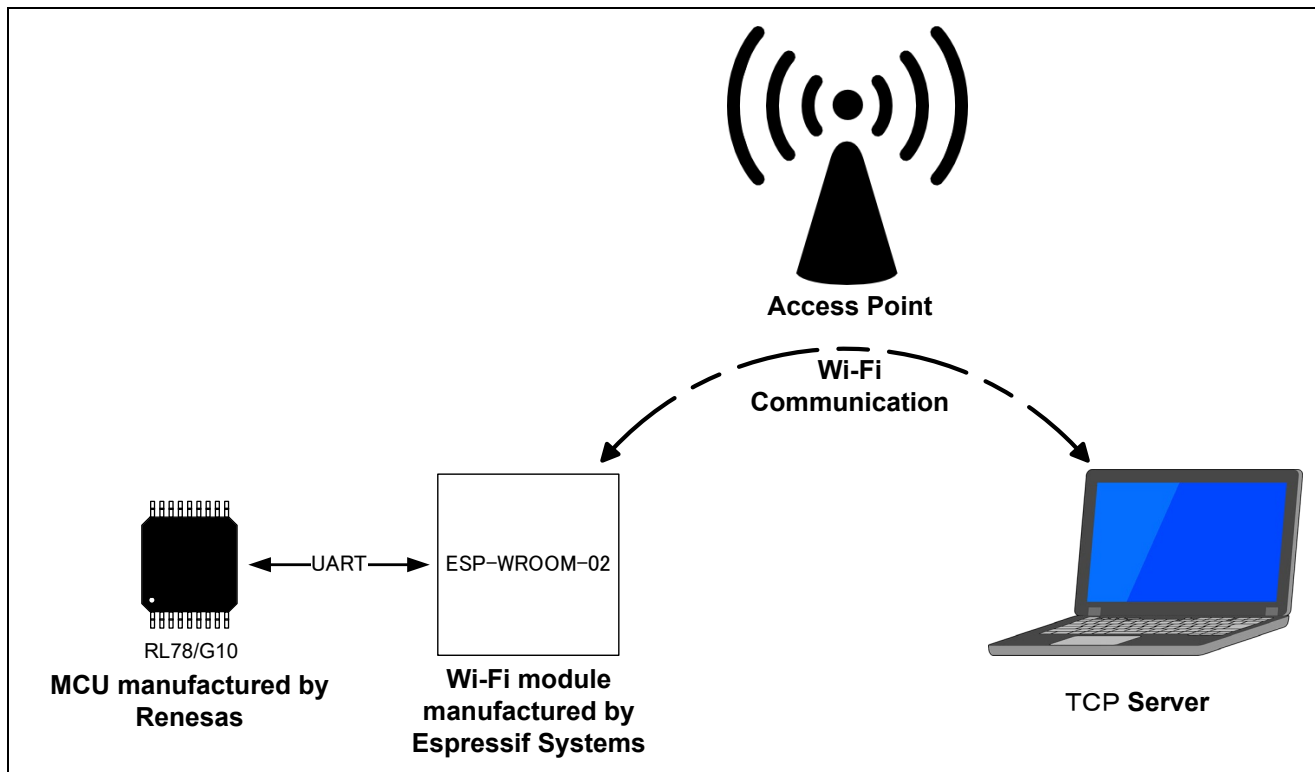


Figure 5.1 Example of System Configuration for the Sample Application Program

5.1 Overview of the Sample Application Program

An overview of the sample application program is given below.

- (1) The RL78/G10 makes initial settings of the Wi-Fi module through UART communication.
- (2) The RL78/G10 connects the Wi-Fi module to an access point.
- (3) The RL78/G10 gets the IP address from the Wi-Fi module.
- (4) The RL78/G10 gets the MAC address from the Wi-Fi module.
- (5) The RL78/G10 connects the Wi-Fi module to a TCP server.
- (6) The RL78/G10 sends data to the TCP server.
- (7) The RL78/G10 waits for a response from the TCP server.
- (8) The RL78/G10 stores the received data in a buffer (on-chip RAM).
- (9) The RL78/G10 waits for one second by using software.
- (10) Steps (6) to (9) are repeated.


RL78/G10 Wi-Fi module (ESP-WROOM-02) control sample software for TCP/IP Slave Transmission/Reception

5.2 Flowchart of Application Example

Function specifications and flowcharts of the sample application program provided together with this application note are shown in this section.


5.2.1 Main processing

[Function Name]	main
Outline	Main processing
Header	None
Declaration	void main(void);
Description	After calling R_MAIN_UserInit(), start application sample program
Arguments	None
Return value	None
Remarks	None

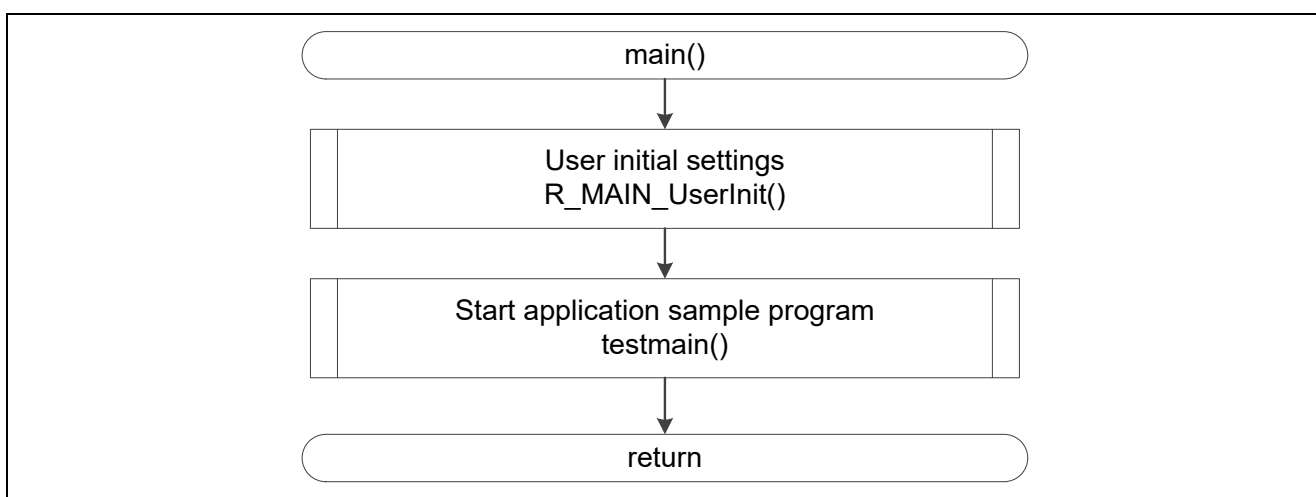

5.2.2 Starting UART Transmission Processing

[Function Name]	R_MAIN_UserInit
Outline	User initial setting
Header	None
Declaration	static void R_MAIN_UserInit(void);
Description	Enable interrupt processing by the EI instruction
Arguments	None
Return value	None
Remarks	None

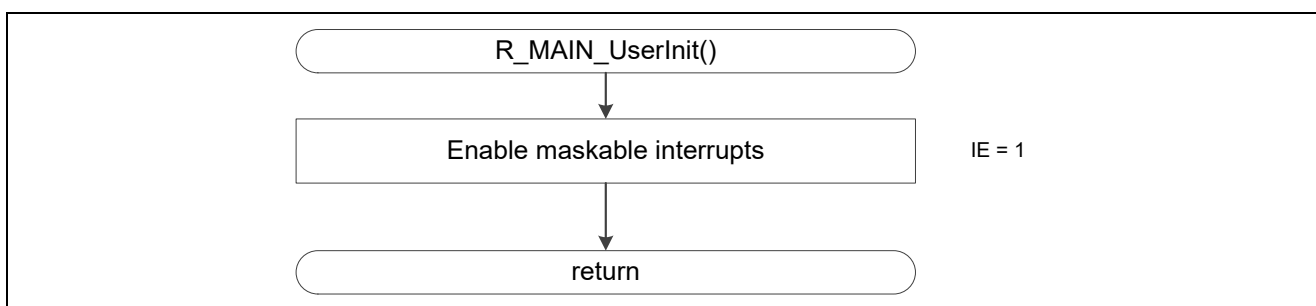

RL78/G10 Wi-Fi module (ESP-WROOM-02) control sample software for TCP/IP Slave Transmission/Reception

5.2.3 Application sample function

[Function Name]	testmain
Outline	Application sample program
Header	None
Declaration	void testmain(void);
Description	Initialize the Wi-Fi module, then execute TCP transmission and reception
Arguments	None
Return value	None
Remarks	None

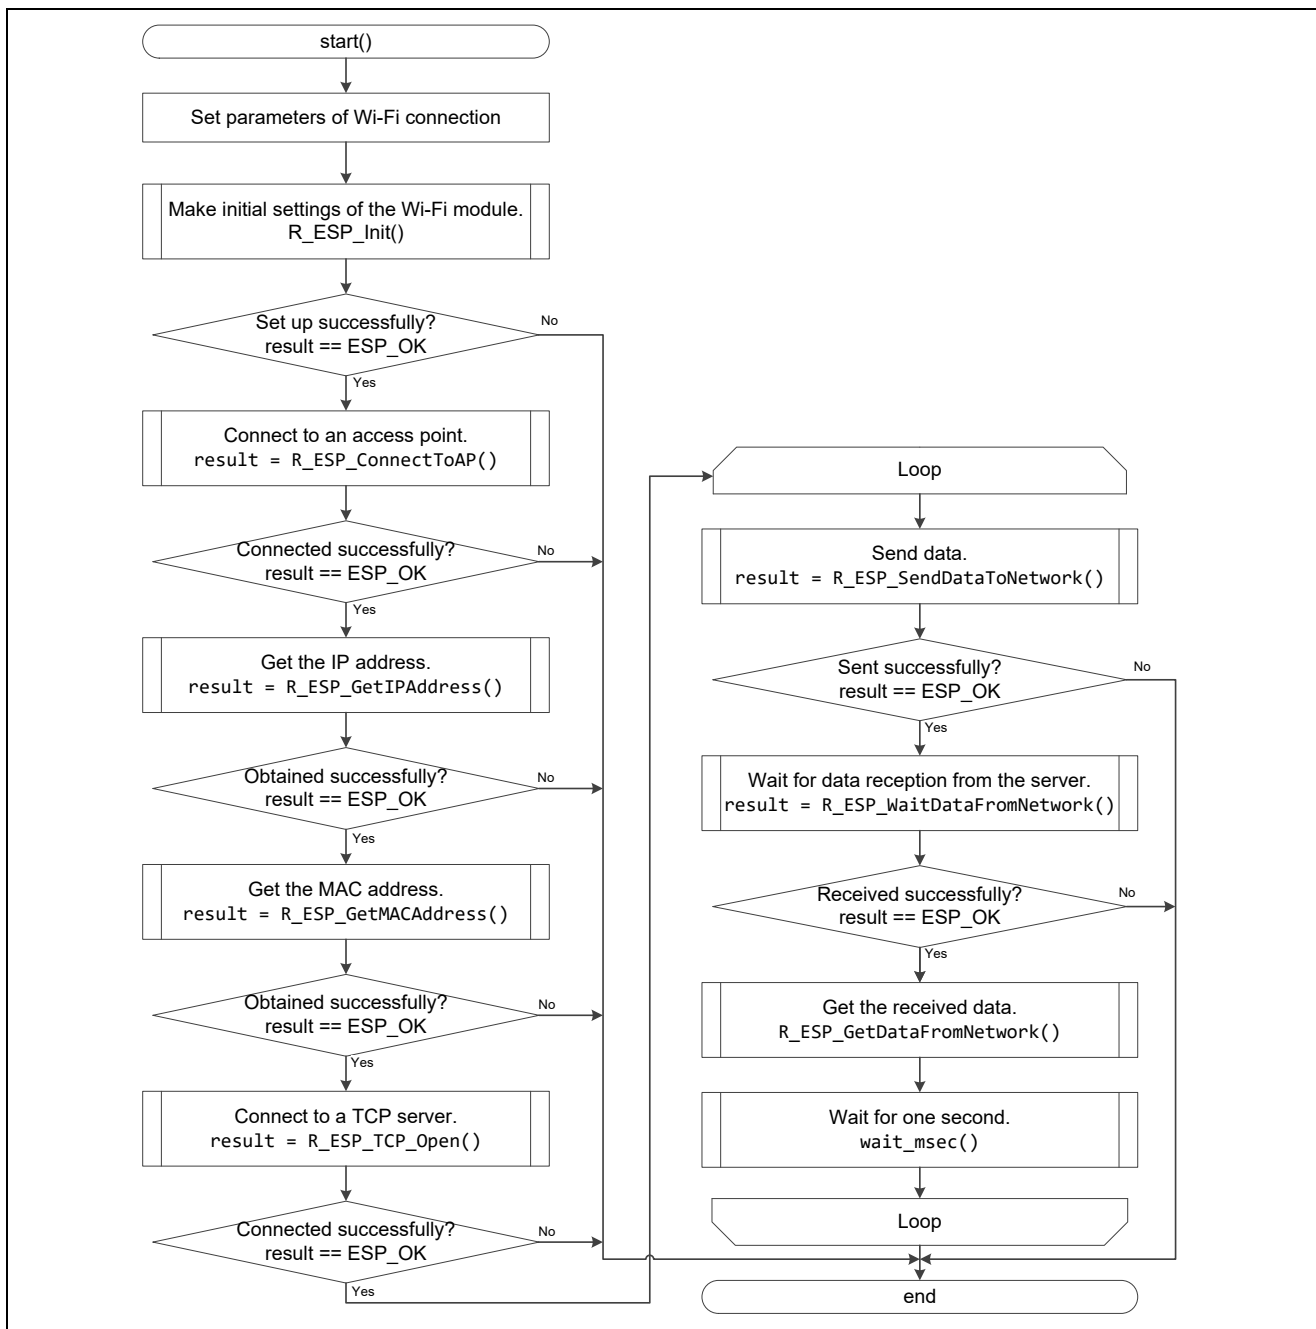


Figure 5.2 Flowchart of Sample Application Program

6. Sample Code

Sample code can be downloaded from the Renesas Electronics website.

Website and Support

Renesas Electronics Website

<http://www.renesas.com/>

Inquiries

<http://www.renesas.com/contact/>

All trademarks and registered trademarks are the property of their respective owners.

RL78/G10 Wi-Fi module (ESP-WROOM-02) control sample software for TCP/IP Slave Transmission/Reception

Revision History

Rev.	Date	Description	
		Page	Summary
1.00	July 4, 2019	-	First edition

General Precautions in the Handling of Microprocessing Unit and Microcontroller Unit Products

The following usage notes are applicable to all Microprocessing unit and Microcontroller unit products from Renesas. For detailed usage notes on the products covered by this document, refer to the relevant sections of the document as well as any technical updates that have been issued for the products.

1. Precaution against Electrostatic Discharge (ESD)

A strong electrical field, when exposed to a CMOS device, can cause destruction of the gate oxide and ultimately degrade the device operation. Steps must be taken to stop the generation of static electricity as much as possible, and quickly dissipate it when it occurs. Environmental control must be adequate. When it is dry, a humidifier should be used. This is recommended to avoid using insulators that can easily build up static electricity.

Semiconductor devices must be stored and transported in an anti-static container, static shielding bag or conductive material. All test and measurement tools including work benches and floors must be grounded. The operator must also be grounded using a wrist strap. Semiconductor devices must not be touched with bare hands. Similar precautions must be taken for printed circuit boards with mounted semiconductor devices.

2. Processing at power-on

The state of the product is undefined at the time when power is supplied. The states of internal circuits in the LSI are indeterminate and the states of register settings and pins are undefined at the time when power is supplied. In a finished product where the reset signal is applied to the external reset pin, the states of pins are not guaranteed from the time when power is supplied until the reset process is completed. In a similar way, the states of pins in a product that is reset by an on-chip power-on reset function are not guaranteed from the time when power is supplied until the power reaches the level at which resetting is specified.

3. Input of signal during power-off state

Do not input signals or an I/O pull-up power supply while the device is powered off. The current injection that results from input of such a signal or I/O pull-up power supply may cause malfunction and the abnormal current that passes in the device at this time may cause degradation of internal elements. Follow the guideline for input signal during power-off state as described in your product documentation.

4. Handling of unused pins

Handle unused pins in accordance with the directions given under handling of unused pins in the manual. The input pins of CMOS products are generally in the high-impedance state. In operation with an unused pin in the open-circuit state, extra electromagnetic noise is induced in the vicinity of the LSI, an associated shoot-through current flows internally, and malfunctions occur due to the false recognition of the pin state as an input signal become possible.

5. Clock signals

After applying a reset, only release the reset line after the operating clock signal becomes stable. When switching the clock signal during program execution, wait until the target clock signal is stabilized. When the clock signal is generated with an external resonator or from an external oscillator during a reset, ensure that the reset line is only released after full stabilization of the clock signal. Additionally, when switching to a clock signal produced with an external resonator or by an external oscillator while program execution is in progress, wait until the target clock signal is stable.

6. Voltage application waveform at input pin

Waveform distortion due to input noise or a reflected wave may cause malfunction. If the input of the CMOS device stays in the area between V_{IL} (Max.) and V_{IH} (Min.) due to noise, for example, the device may malfunction. Take care to prevent chattering noise from entering the device when the input level is fixed, and also in the transition period when the input level passes through the area between V_{IL} (Max.) and V_{IH} (Min.).

7. Prohibition of access to reserved addresses

Access to reserved addresses is prohibited. The reserved addresses are provided for possible future expansion of functions. Do not access these addresses as the correct operation of the LSI is not guaranteed.

8. Differences between products

Before changing from one product to another, for example to a product with a different part number, confirm that the change will not lead to problems. The characteristics of a microprocessing unit or microcontroller unit products in the same group but having a different part number might differ in terms of internal memory capacity, layout pattern, and other factors, which can affect the ranges of electrical characteristics, such as characteristic values, operating margins, immunity to noise, and amount of radiated noise. When changing to a product with a different part number, implement a system-evaluation test for the given product.

Notice

1. Descriptions of circuits, software and other related information in this document are provided only to illustrate the operation of semiconductor products and application examples. You are fully responsible for the incorporation or any other use of the circuits, software, and information in the design of your product or system. Renesas Electronics disclaims any and all liability for any losses and damages incurred by you or third parties arising from the use of these circuits, software, or information.
 2. Renesas Electronics hereby expressly disclaims any warranties against and liability for infringement or any other claims involving patents, copyrights, or other intellectual property rights of third parties, by or arising from the use of Renesas Electronics products or technical information described in this document, including but not limited to, the product data, drawings, charts, programs, algorithms, and application examples.
 3. No license, express, implied or otherwise, is granted hereby under any patents, copyrights or other intellectual property rights of Renesas Electronics or others.
 4. You shall not alter, modify, copy, or reverse engineer any Renesas Electronics product, whether in whole or in part. Renesas Electronics disclaims any and all liability for any losses or damages incurred by you or third parties arising from such alteration, modification, copying or reverse engineering.
 5. Renesas Electronics products are classified according to the following two quality grades: "Standard" and "High Quality". The intended applications for each Renesas Electronics product depends on the product's quality grade, as indicated below.
 - "Standard": Computers; office equipment; communications equipment; test and measurement equipment; audio and visual equipment; home electronic appliances; machine tools; personal electronic equipment; industrial robots; etc.
 - "High Quality": Transportation equipment (automobiles, trains, ships, etc.); traffic control (traffic lights); large-scale communication equipment; key financial terminal systems; safety control equipment; etc.
- Unless expressly designated as a high reliability product or a product for harsh environments in a Renesas Electronics data sheet or other Renesas Electronics document, Renesas Electronics products are not intended or authorized for use in products or systems that may pose a direct threat to human life or bodily injury (artificial life support devices or systems; surgical implantations; etc.), or may cause serious property damage (space system; undersea repeaters; nuclear power control systems; aircraft control systems; key plant systems; military equipment; etc.). Renesas Electronics disclaims any and all liability for any damages or losses incurred by you or any third parties arising from the use of any Renesas Electronics product that is inconsistent with any Renesas Electronics data sheet, user's manual or other Renesas Electronics document.
6. When using Renesas Electronics products, refer to the latest product information (data sheets, user's manuals, application notes, "General Notes for Handling and Using Semiconductor Devices" in the reliability handbook, etc.), and ensure that usage conditions are within the ranges specified by Renesas Electronics with respect to maximum ratings, operating power supply voltage range, heat dissipation characteristics, installation, etc. Renesas Electronics disclaims any and all liability for any malfunctions, failure or accident arising out of the use of Renesas Electronics products outside of such specified ranges.
 7. Although Renesas Electronics endeavors to improve the quality and reliability of Renesas Electronics products, semiconductor products have specific characteristics, such as the occurrence of failure at a certain rate and malfunctions under certain use conditions. Unless designated as a high reliability product or a product for harsh environments in a Renesas Electronics data sheet or other Renesas Electronics document, Renesas Electronics products are not subject to radiation resistance design. You are responsible for implementing safety measures to guard against the possibility of bodily injury, injury or damage caused by fire, and/or danger to the public in the event of a failure or malfunction of Renesas Electronics products, such as safety design for hardware and software, including but not limited to redundancy, fire control and malfunction prevention, appropriate treatment for aging degradation or any other appropriate measures. Because the evaluation of microcomputer software alone is very difficult and impractical, you are responsible for evaluating the safety of the final products or systems manufactured by you.
 8. Please contact a Renesas Electronics sales office for details as to environmental matters such as the environmental compatibility of each Renesas Electronics product. You are responsible for carefully and sufficiently investigating applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive, and using Renesas Electronics products in compliance with all these applicable laws and regulations. Renesas Electronics disclaims any and all liability for damages or losses occurring as a result of your noncompliance with applicable laws and regulations.
 9. Renesas Electronics products and technologies shall not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable domestic or foreign laws or regulations. You shall comply with any applicable export control laws and regulations promulgated and administered by the governments of any countries asserting jurisdiction over the parties or transactions.
 10. It is the responsibility of the buyer or distributor of Renesas Electronics products, or any other party who distributes, disposes of, or otherwise sells or transfers the product to a third party, to notify such third party in advance of the contents and conditions set forth in this document.
 11. This document shall not be reprinted, reproduced or duplicated in any form, in whole or in part, without prior written consent of Renesas Electronics.
 12. Please contact a Renesas Electronics sales office if you have any questions regarding the information contained in this document or Renesas Electronics products.

(Note1) "Renesas Electronics" as used in this document means Renesas Electronics Corporation and also includes its directly or indirectly controlled subsidiaries.

(Note2) "Renesas Electronics product(s)" means any product developed or manufactured by or for Renesas Electronics.

(Rev.4.0-1 November 2017)

Corporate Headquarters

TOYOSU FORESIA, 3-2-24 Toyosu,
Koto-ku, Tokyo 135-0061, Japan
www.renesas.com

Trademarks

Renesas and the Renesas logo are trademarks of Renesas Electronics Corporation. All trademarks and registered trademarks are the property of their respective owners.

Contact information

For further information on a product, technology, the most up-to-date version of a document, or your nearest sales office, please visit:
www.renesas.com/contact/