

MICROCONTROLLER DEVELOPMENT TOOL

NEC ELECTRONICS AMERICA


MINICUBE2 (QB-MINI2)

“All-in-One” Flash Programmer and On-Chip Debugger

The MINICUBE2 on-chip debugger and flash programmer can be used to debug and program NEC Electronics' existing and future 8-, 16- and 32-bit all-flash microcontrollers throughout development and production.

Features

- › On-chip debugging capability
- › Flash memory programming
- › USB-powered connection
- › Self-testing function
- › Pocket size

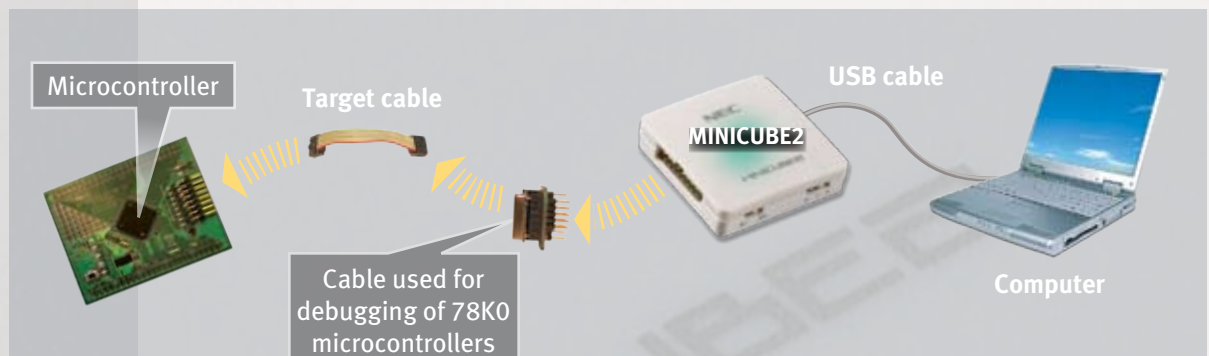

Debugging Functions

Target interface	<ul style="list-style-type: none"> › V850™ devices: CSI-H/S or UART › 78K0 devices: X1/X2 or OCD1A/OCD1B › 78K0S devices: X1/X2, INTP
Operating frequency	Same as target device
Security function	10-byte ID code authentication (not supported in 78K0S microcontrollers)
Program download	Available
Program execution	<ul style="list-style-type: none"> › Continuously › Re-execute from cursor point › Re-execute to cursor point › Execute with step
Forced break	Available (with some limitations in V850 devices)
Hardware breakpoints	<ul style="list-style-type: none"> › V850 devices: two breakpoints, program execution or access (some devices unavailable at present) › 78K0 devices: two breakpoints, program execution and access › 78K0S devices: none
Software breakpoints	2,000

MINICUBE2 (QB-MINI2) "All-in-One" Flash Programmer and On-Chip Debugger

TERMINAL MASK	RESET TERMINAL ONLY
Foreground monitor area size	V850 devices: 2 KB ROM, 16-byte RAM (maximum)
	78K0 devices: 257-byte ROM (minimum), 7-byte RAM (minimum)
	78K0S devices: 304-byte ROM, 5-byte RAM (used for stack)

Flash Programming Functions

Target interface	<ul style="list-style-type: none"> › V850 devices: CSI-H/S or UART › 78K0 devices: UART › 78K0S devices: X1/X2
Clock supply	16, 8, 4 MHz clock that can be supplied to the target system
Power supply	3V or 5V (maximum 100 mA)
Parameter function	Parameter file that is the same as the PG-FP4's
Security setting	Available
Standalone operation	No (host computer needed for operation)

Supported Devices

78K0R devices	78K0R/Kx3
78K0 devices	78K0/Kx2, 78K0/Lx2
78K0S devices	78K0S/Kx1+
V850 devices	V850ES/Hx2™, V850ES/Jx2™, V850ES/Kx2™, V850ES/lx2™

NEC Electronics America, Inc.
Santa Clara, California USA
1-800-366-9782 and
1-408-588-6000
www.am.necel.com

NEC Electronics Corporation
Kawasaki, Japan
044-435-5111
www.necel.com

NEC Electronics (Europe) GmbH
Duesseldorf, Germany
+49 (0) 211 65 03 01
www.ee.nec.de

NEC Electronics Hong Kong Ltd.
Hong Kong
(+852) 28869318
www.necel.com.hk

NEC Electronics Singapore Pte. Ltd.
Singapore
(65) 6253 831
www.nec.com.sg

Visit <http://www.necel.com/micro/en/development/asia/minicube2/minicube2.html>
to get information about future devices that will be supported.

V850, V850ES/Hx2, V850ES/Jx2, V850ES/Kx2, and V850ES/lx2 are trademarks or registered trademarks of NEC Electronics Corporation in the United States and other countries.

The information in this document is current as of September 2006. The information is subject to change without notice. For actual design-in, refer to the latest publications of NEC Electronics data sheets or data books, etc., for the most up-to-date specifications of NEC Electronics products. Not all products and/or types are available in every country. Please check with an NEC sales representative for availability and additional information. No part of this document may be copied or reproduced in any form or by any means without prior written consent of NEC Electronics. NEC Electronics assumes no responsibility for any errors that may appear in this document. NEC Electronics does not assume any liability for infringement of patents, copyrights or other intellectual property rights of third parties by or arising from the use of NEC Electronics products listed in this document or any other liability arising from the use of such NEC Electronics products. No license, express, implied or otherwise, is granted under any patents, copyrights or other intellectual property rights of NEC Electronics or others. Descriptions of circuits, software and other related information in this document are provided for illustrative purposes in semiconductor product operation and application examples. The incorporation of these circuits, software and information in the design of customer's equipment shall be done under the full responsibility of customer. NEC Electronics no responsibility for any losses incurred by customers or third parties arising from the use of these circuits, software and information. While NEC Electronics endeavors to enhance the quality, reliability and safety of NEC Electronics products, customers agree and acknowledge that the possibility of defects thereof cannot be eliminated entirely. To minimize risks of damage to property or injury (including death) to persons arising from defects in NEC Electronics products, customers must incorporate sufficient safety measures in their design, such as redundancy, fire-containment and anti-failure features. NEC Electronics products are classified into the following three quality grades: "Standard", "Special" and "Specific". The "Specific" quality grade applies only to NEC Electronics products developed based on a customer-designated "quality assurance program" for a specific application. The recommended applications of NEC Electronics product depend on its quality grade, as indicated below. Customers must check the quality grade of each NEC Electronics product before using it in a particular application. "Standard": Computers, office equipment, communications equipment, test and measurement equipment, audio and visual equipment, home electronic appliances, machine tools, personal electronic equipment and industrial robots. "Special": Transportation equipment (automobiles, trains, ships, etc.), traffic control systems, anti-disaster systems, anti-crime systems, safety equipment and medical equipment (not specifically designed for life support). "Specific": Aircraft, aerospace equipment, submersible repeaters, nuclear reactor control systems, life support systems and medical equipment for life support, etc. The quality grade of NEC Electronics products is "Standard" unless otherwise expressly specified in NEC Electronics data sheets or data books, etc. If customers wish to use NEC Electronics products in applications not intended by NEC Electronics, they must contact NEC Electronics sales representative in advance to determine NEC Electronics's willingness to support a given application.

Note: (1) "NEC Electronics" as used in this statement means NEC Electronics Corporation and also includes its majority-owned subsidiaries. (2) "NEC Electronics products" means any product developed or manufactured by or for NEC Electronics (as defined above).

© September 2006 NEC Electronics America, Inc.
All rights reserved.

Printed in U.S.A. on recycled paper using soy ink.

Document No. U18383EU1V0PB00