

20Mbit Quad-Search Content-Addressable Memory

360-MSPS TCAM maximizes multi-layer packet processing in routers and switches

Switches and routers must deliver bandwidth-hungry services such as Voice-over-IP, IPTV, Video-on-Demand (VOD), and wireless 3G/4G with the appropriate Quality-of-Service (QoS) levels.

To create the platforms necessary to optimally manage large amounts of network traffic quickly and effectively, system designers are increasingly relying on advanced Ternary Content Addressable Memory (TCAM) devices for performing ultra-fast data packet searches.

The new Renesas R8A20410BG Quad-Search TCAM has been developed to address the stringent requirements of high data throughput combined with Deep Packet Inspection (DPI) for multi-service routers and switches. This 20Mbit device can make deterministic packet searches at speeds up to 360 Mega Searches Per Second (MSPS)/table — the industry's highest packet look-up performance.

Allows 40G+ rates

Operating at 360MHz, the Quad-Search TCAM chip enables data transfer rates of 40Gbps and higher. Search bit lengths can be set to 40, 80, 160, 320, 480, or 640 bits. The device also has a multi-bank architecture with four parallel, independently operating search engines, which significantly boost look-up performance while supporting a wide range of network applications.

To accommodate very large routing tables, the R8A20410BG allows expansions up to 40Mbit density through cascade connections. Incorporating a full-custom configurable CAM array with an easy-to-use interface, the Quad-Search TCAM redefines the state of the art in network search technology. The chip is interoperable with Marvell's HX family of network processors.



Features & Benefits


- 20Mbit density
 - Supports large routing tables and enables low-cost, low-power, more reliable system designs
- 360 Million Searches per Second (MSPS) per table
 - Delivers the industry's highest packet look-up performance for 40G applications and beyond
- 40-, 80-, 160-, 320-, 480-, or 640-bit search key-width support
 - Provides flexible search conditions that support multiple search-key configurations
- Multi-device cascading
 - Allows the TCAM array capacity to effectively be doubled to 40Mb by connecting two identical Quad-Search TCAMs together using the cascade interface signals
- Sub-core pre-charge technology
 - Uses patented design techniques to greatly reduce power consumption, even during high-speed operation
- Compact package
 - 576 FC-BGA (27mm x 27mm, flip-chip type)

Applications

- Enterprise Switches and Routers
- Metro Switches and Routers
- Core Switches and Routers
- Edge Switches and Routers
- 3G/4G Mobile Access Platforms
- IPv4 / IPv6 Packet Forwarding
- Layer-4 to layer-7 Deep Packet Inspection
- Internet Protocol Security (IPsec)

Typical Application

The 20Mbit, 360MHz device can make deterministic packet searches at 360 MSPS/Table rates, for data transfer rates of 40Gbps and higher. Renesas also provides a full portfolio of high-performance QDRII+ and DDRII+ SRAMs.

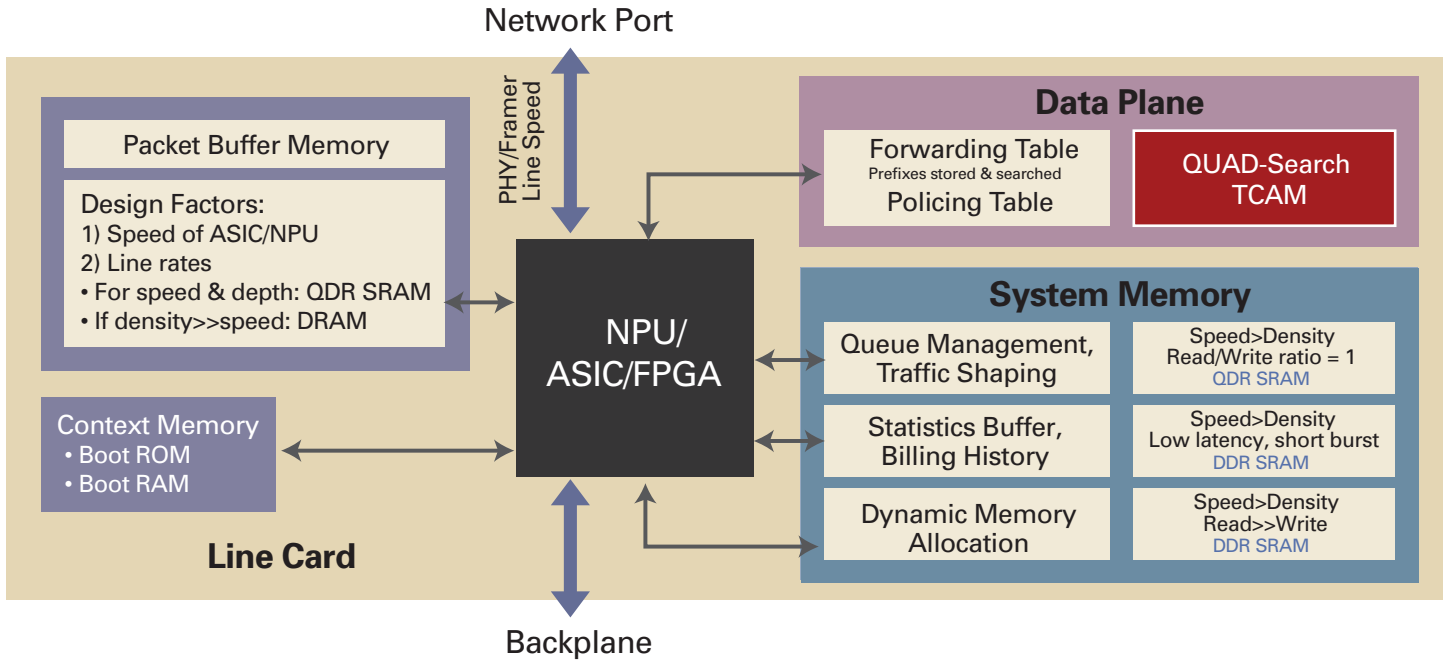

Item	R8A20410BG
Memory capacity	20Mbits
Max. clock operating frequency	360MHz
Search speed	350 MSPS/table max. at 80/160/320 bits
Search key	40L/H, 80 / 160 / 320 / 480, or 640 bits
General-purpose NPU connectivity	Connectivity includes Marvell HX network processors and Altera FPGAs.
Package	576-pin FCBGA Pb-Free (27mm x 27mm, 1.0mm ball pitch)

Why Choose Renesas?

- Global network memory supplier, worldwide support
- Extremely fast memory cell performance
- Proven First-in-Class quality and reliability

For more information, please contact your local sales rep. or visit am.renesas.com



Renesas Electronics America Inc. | www.renesas.com
2801 Scott Boulevard, Santa Clara, CA 95050 | Phone: 1 (408) 588-6000

© 2015 Renesas Electronics America Inc. (REA). All rights reserved. All trademarks are the property of their respective owners. REA believes the information herein was accurate when given but assumes no risk as to its quality or use. All information is provided as-is without warranties of any kind, whether express, implied, statutory, or arising from course of dealing, usage, or trade practice, including without limitation as to merchantability, fitness for a particular purpose, or non-infringement. REA shall not be liable for any direct, indirect, special, consequential, incidental, or other damages whatsoever, arising from use of or reliance on the information herein, even if advised of the possibility of such damages. REA reserves the right, without notice, to discontinue products or make changes to the design or specifications of its products or other information herein. All contents are protected by U.S. and international copyright laws. Except as specifically permitted herein, no portion of this material may be reproduced in any form, or by any means, without prior written permission from Renesas Electronics America Inc. Visitors or users are not permitted to modify, distribute, publish, transmit or create derivative works of any of this material for any public or commercial purposes.