

Introduction

People are often mesmerized by beautiful displays such as fireplaces, water flowing, etc. With this LED indicator effect, it actually becomes fun to “watch the water boil” in a teapot.

The bottom of this teapot has an added transparent box with LEDs mounted in it. After the teapot is switched on, the LED's go around and shine blue, which is associated with cold water. (See Appendix 3). As the water temperature rises, the LEDs color smoothly changes from 100% blue to 100% red (which is associated with hot water) and the visual “spinning” speed increases as well. All this is accomplished with a single 20-I/O GreenPAK IC, controlling 32 2-color LEDs with smooth color and spin speed changes.

Design Configuration

First, let's consider temperature to voltage conversion (schematic is shown in Appendix 2). As we can see, there is an external voltage divider, which consists of a resistor and thermistor. The voltage applied to the 150k resistor is 5.1V. At a temperature equal to 25C on the thermistor (22k) we will get approximately 0.65V on the divider output. At 100C, the thermistor resistance will decrease down to 1.68k and voltage on the divider output will be 56mV. Resistance changing linearity provides a divider output voltage changing linearly within the mentioned temperature range.

Looking at configuring the GreenPAK IC circuitry, voltage from the divider output is applied to the PGA input, and from there to ADC, where the voltage value will be converted into an 8-bit code (see Figure 1). After that, the 8-bit code is compared with PWM0 register, which is equal to CNT8 current counter data (see Figure 2). This is how PWM for blue LEDs is made. So the conversion process is: low temperature – high divider voltage – big duty cycle (high brightness) and vice versa. Red LEDs are connected to the same outputs as blue LEDs with the only difference being opposite polarity. So for the remaining LEDs everything will be reversed: low temperature – low brightness and so on.

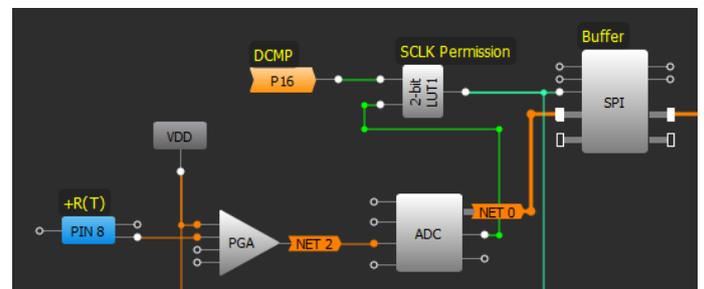


Figure 1. ADC circuit

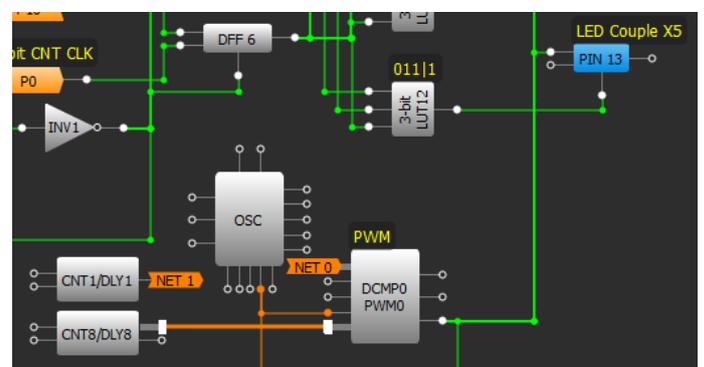


Figure 2. PWM machine

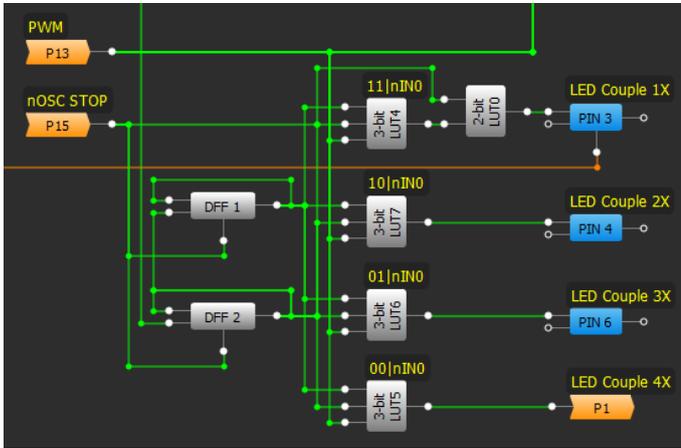


Figure 3. 2-bit counter

The next part of the effect concerns “light motion”. Its essence lies in switching PWM signal between 32 LEDs one by one. Because of the limited number of IC outputs, LEDs were connected in a 4x8 matrix. For matrix control two counters, made of DFF’s were created: one 2-bit for 4 columns control (see figure 3) and one 3-bit for 8 rows control (see figure 4). LEDs are located at the crossing of columns and rows as mentioned in Appendix2.

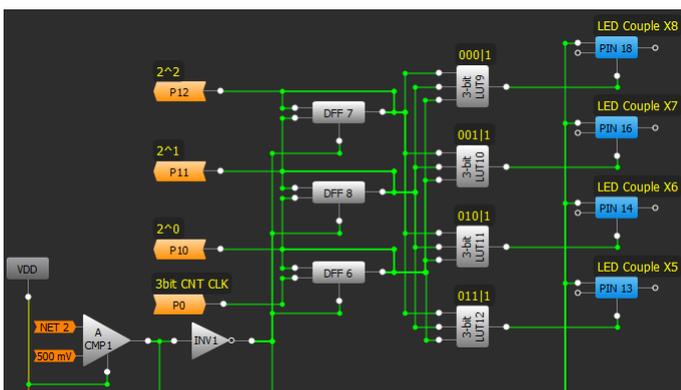


Figure 4. 3-bit counter

The switching process is as follows: 2-bit counter generates 4 2-bit combinations which are monitored by 3-bit LUT4 – LUT7, which outputs are connected to appropriate columns.

Each LUT is configured in the way to output an inverted PWM signal for one 2-bit counter combination. For other combinations, it outputs a non-inverted PWM signal. So we get an inverted PWM for 4 columns one by one, when at the same time on the other 3 columns we get non-inverted PWM.

The non-inverted PWM signal is output on 8 LEDs rows, but thanks to 3-bit LUTs all these outputs except for one, which is controlled by the LUT with combination, which corresponds with 3-bit counter code, stay in Hi-z mode. So we get 8 rows in Hi-Z state, and non-inverted PWM signal is supplied to each row one by one.

For the FSM never to store “00000000₂” value, SPI in buffer mode between ADC and FSM is used, CLK input of which becomes disconnected when DCMP detects that ADC digital code becomes equal to “00000001₂”. Thanks to that “00000000₂” code can’t be transmitted through the SPI buffer and light motion effect doesn’t stop (see Figure 5).

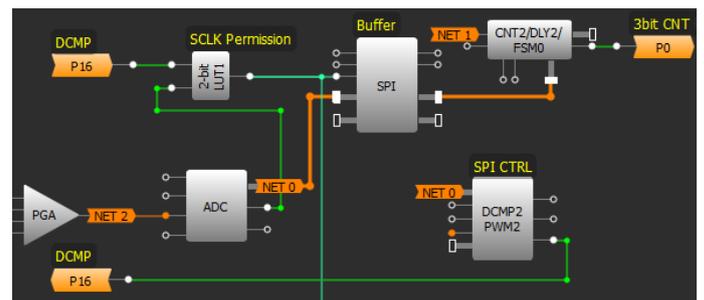


Figure 5. SPI buffer

Using this method we get alternate illumination of each LED (red + blue) pair, switching speed dependent on the water temperature inside the teapot. The pair of LEDs which are at the crossing of the column with inverted PWM signal and the row with non-inverted PWM signal will be active (see

Figure 6), while all other LEDs will be inactive at this moment. The bigger PWM duty cycle is, the less bright blue LED is and the more bright red LED is. So while temperature and consequently PWM duty cycle changes, backlight color of the teapot changes.

Conclusion

This boiling teapot effect indicator design vividly demonstrates some of the capability of GreenPAK programmable mixed-signal ASIC's. This project can be adapted to various designs where many LEDs are used. Thanks to the GreenPAK flexibility, it is possible to create different LED effects with many LEDs based on this design method.


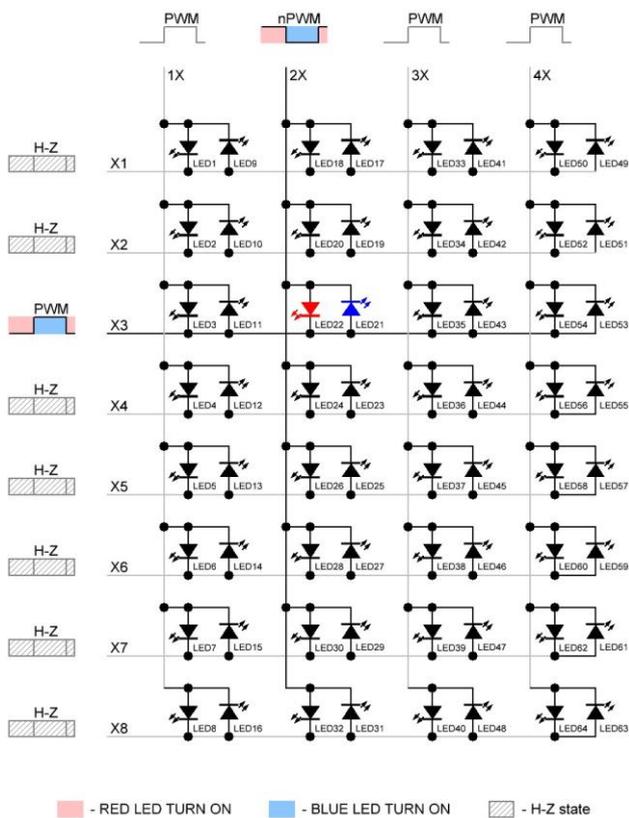


Figure 6. Bicolor LED matrix

Detailed design configuration can be found in Appendix 1.

Appendix 1


Block Diagram for Design

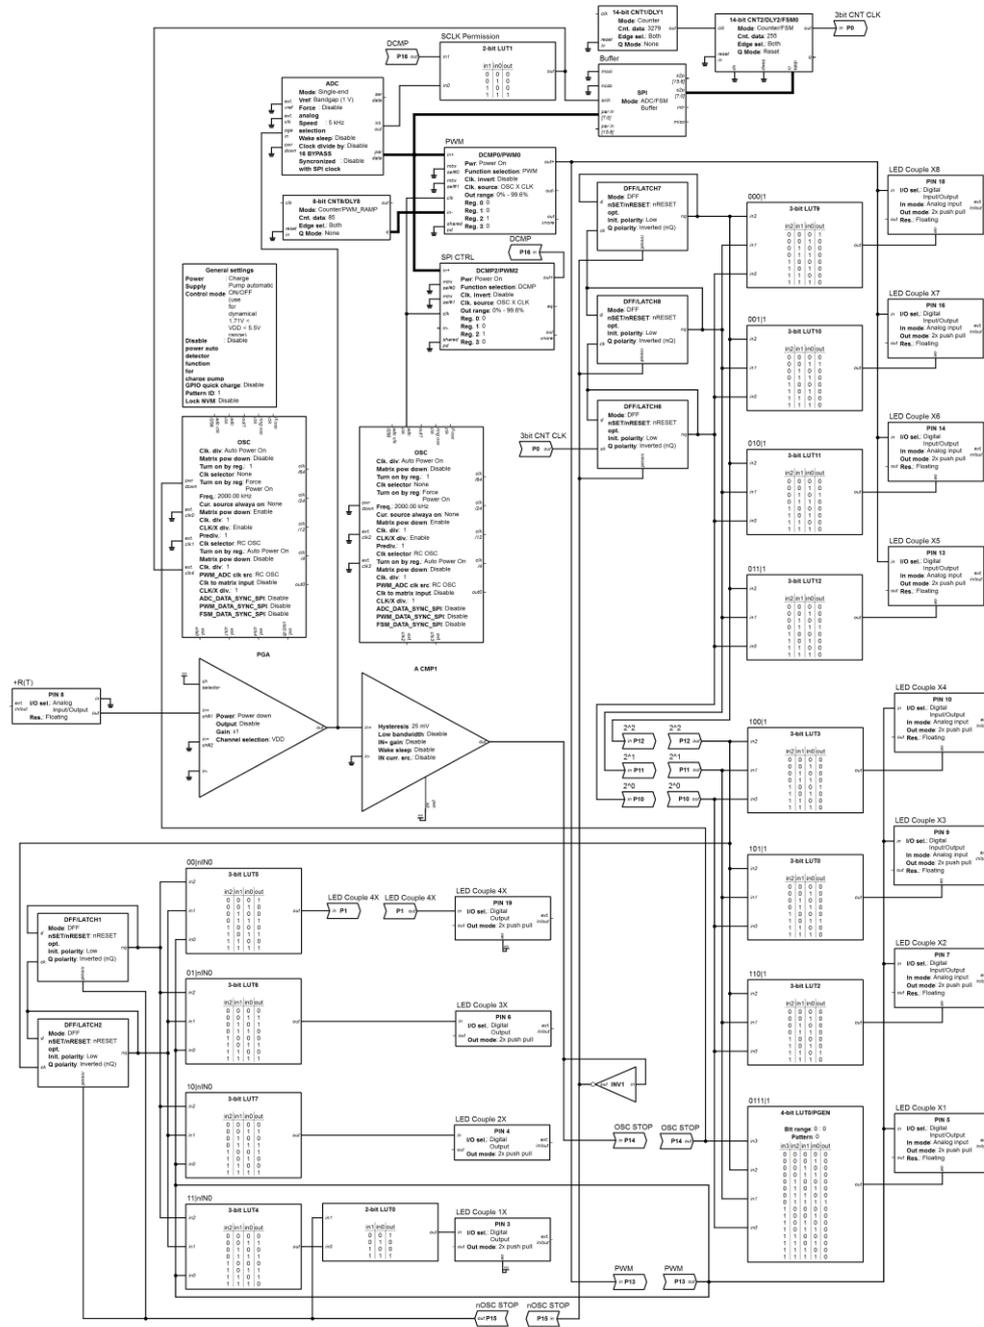



Appendix 2

Schematic

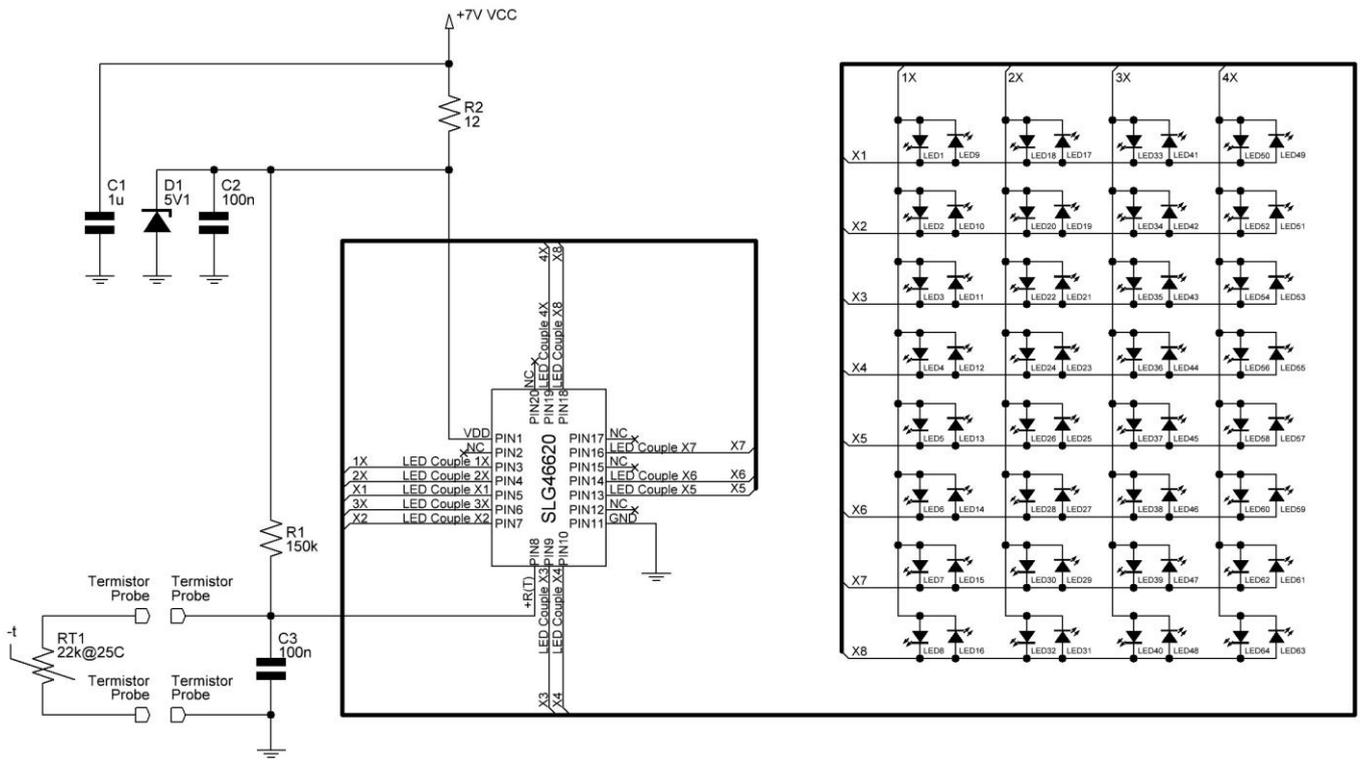



PCB pictures

1. LED Top Layer






PCB pictures

2. LED Bottom Layer



3. Master PCB

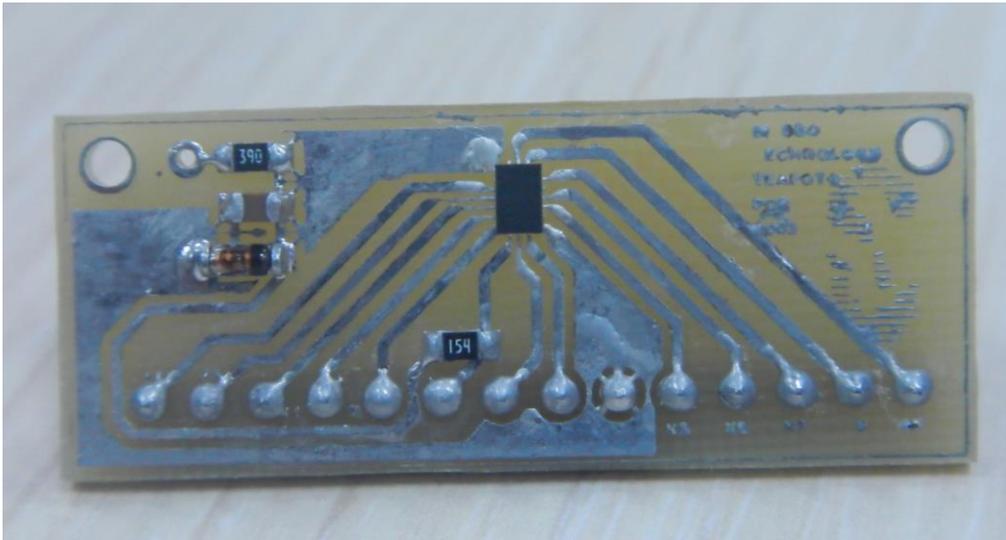



SILEGO
TECHNOLOGY

**GreenPAK boiling teapot
effect LED's indicator**

Appendix 3

Device pictures

1. General view






2. LED PCB installation in progress



3. Master PCB installation in progress

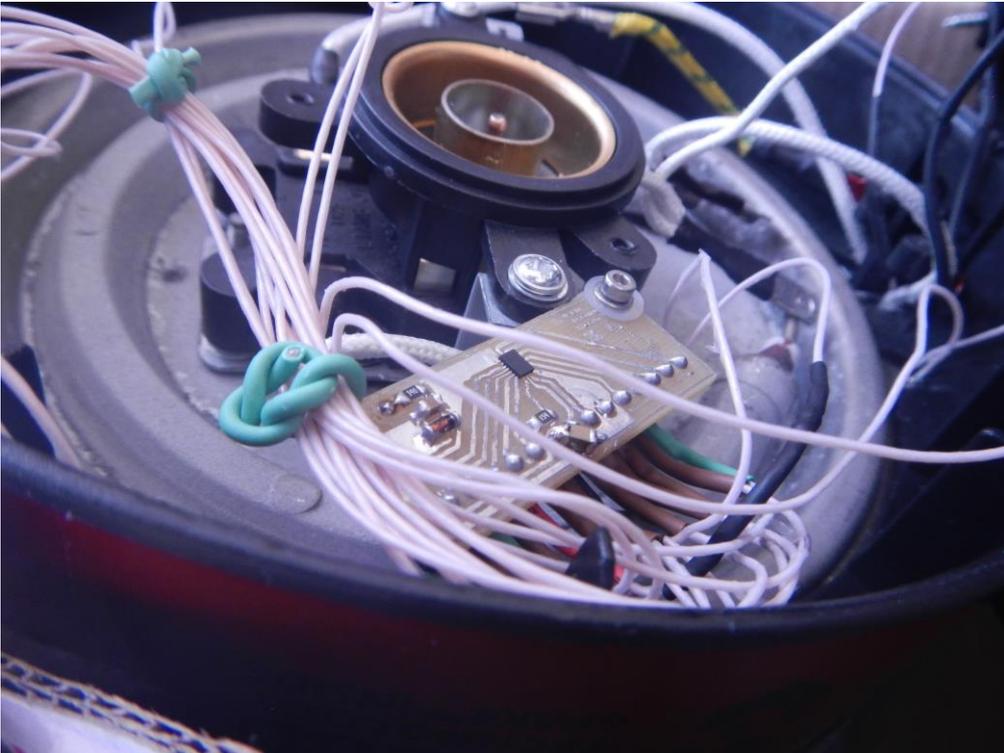



SILEGO
TECHNOLOGY

GreenPAK boiling teapot effect LED's indicator

4. LED effect at 29°C¹ 5. LED effect
at 45°C¹ 6. LED effect at 54°C¹




7. LED effect at 67°C¹

8. LED effect

9. LED effect at 93°C¹



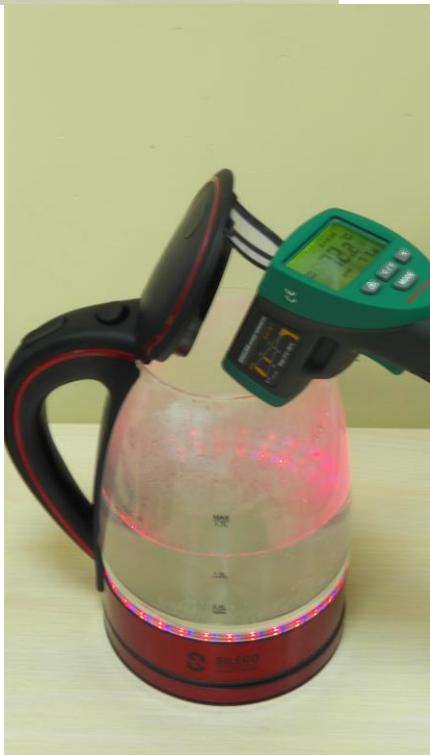

¹Thermometer Accuracy is $\pm 2.5^{\circ}\text{C}$

IMPORTANT NOTICE AND DISCLAIMER

RENESAS ELECTRONICS CORPORATION AND ITS SUBSIDIARIES (“RENESAS”) PROVIDES TECHNICAL SPECIFICATIONS AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES “AS IS” AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT OF THIRD-PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for developers who are designing with Renesas products. You are solely responsible for (1) selecting the appropriate products for your application, (2) designing, validating, and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements. These resources are subject to change without notice. Renesas grants you permission to use these resources only to develop an application that uses Renesas products. Other reproduction or use of these resources is strictly prohibited. No license is granted to any other Renesas intellectual property or to any third-party intellectual property. Renesas disclaims responsibility for, and you will fully indemnify Renesas and its representatives against, any claims, damages, costs, losses, or liabilities arising from your use of these resources. Renesas' products are provided only subject to Renesas' Terms and Conditions of Sale or other applicable terms agreed to in writing. No use of any Renesas resources expands or otherwise alters any applicable warranties or warranty disclaimers for these products.

(Disclaimer Rev.1.01 Jan 2024)

Corporate Headquarters

TOYOSU FORESIA, 3-2-24 Toyosu,
Koto-ku, Tokyo 135-0061, Japan
www.renesas.com

Trademarks

Renesas and the Renesas logo are trademarks of Renesas Electronics Corporation. All trademarks and registered trademarks are the property of their respective owners.

Contact Information

For further information on a product, technology, the most up-to-date version of a document, or your nearest sales office, please visit www.renesas.com/contact-us/.