

# 32-BIT MCU FAMILY RENESAS RA4W1 GROUP

## 48MHz Bluetooth® 5.0 Low Energy Single Chip MCU from RA4 Series

The Renesas RA4W1 is the first Bluetooth 5.0 Low Energy fully compliant with 2Mbit High-Throughput (HT) and Long Range (LR) support in a single chip MCU of Renesas RA4 product series for IoT applications that require a high-performance Arm® Cortex®-M4 core at a very attractive price point. The RA4W1 is built on a highly efficient low power process and is supported by an open and flexible ecosystem concept, called Flexible Software Package (FSP), using FreeRTOS as base. RA4W1 is geared towards IoT application requiring Security, large embedded RAM and low power consumption.

<b>RA4W1</b>	48MHz, Arm® Cortex®-M4 512kB Flash, 96kB RAM QFN56, Bluetooth 5.0 USB, CAN, Security LCD Controller and Touch
<b>RA4M1</b>	48MHz, Arm® Cortex®-M4 256kB Flash, 32kB RAM 40-100pin, USB, CAN, Security LCD Controller and Touch


### Target Applications

- Security (Fire Detection, Burglar Detection, Panel control)
- Metering (Electricity, Automated Meter Reading)
- Industry (Robotics, Door Openers, Sewing Machines, Vending machines, UPS)
- Health and Wearables Body Sensors
- Smart Home and Remote Control Toys

### Key Features

- 48MHz Arm® Cortex®-M4
- 512kB Flash Memory and 96kB SRAM
- 8kB DataFlash to store data as in EEPROM
- 7x7mm QFN 56 pin package.
- Capacitive Touch Sensing Unit
- Segment LCD Controller
- USBFS 2.0 Full Speed (Host/Device)
- CAN 2.0B
- SCI (UART, Simple SPI, Simple I2C)
- SPI/ I2C Multimaster Interface
- 2.4 GHz radio with Bluetooth 5.0 Low Energy
- Advertising Extension and Long Range support
- Secure Crypto Engine (AES128 / 256, GHASH, TRNG)

### Block Diagram

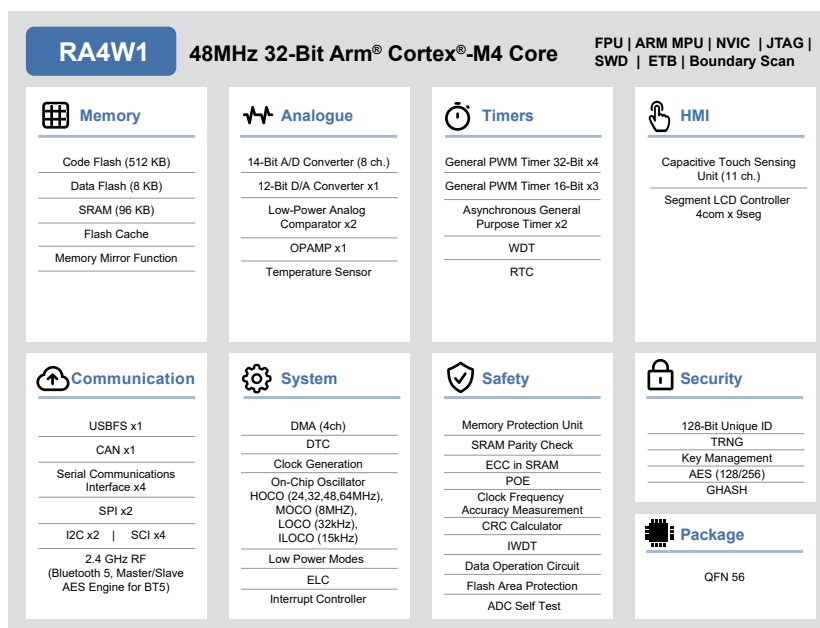


# RENESAS RA4W1 GROUP

## Benefits

- Full functionality of Bluetooth 5.0 Low Energy along with the high-performance processing and superior power efficiency.
  - High Throughput and Long Range support
- Integrated Secure Crypto Engine with several cryptography accelerators and Key management.
- Large 96kB embedded SRAM suitable for handling communication stacks.


## Tools and Support

IDE	Renesas e <sup>2</sup> studio	Keil MDK	IAR EWARM
Compiler	<ul style="list-style-type: none"> <li>■ GCC</li> <li>■ Arm Compiler</li> </ul>	<ul style="list-style-type: none"> <li>■ Arm Compiler</li> </ul>	<ul style="list-style-type: none"> <li>■ IAR Arm Compiler</li> </ul>
Debugger	<ul style="list-style-type: none"> <li>■ Renesas E2/E2 Lite</li> <li>■ SEGGER J-Link</li> </ul>	<ul style="list-style-type: none"> <li>■ SEGGER J-Link</li> </ul>	<ul style="list-style-type: none"> <li>■ IAR I-Jet</li> <li>■ SEGGER J-Link</li> </ul>
Programmer		<ul style="list-style-type: none"> <li>■ Renesas PG-FP6</li> <li>■ SEGGER J-Flash</li> <li>■ Third party solutions</li> </ul>	

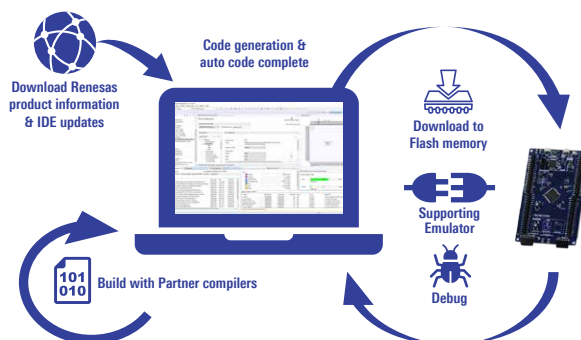

## Evaluation Kit

- Full MCU evaluation including On-Chip debugger
- Part name: RTK7EKA4W1S00000BJ

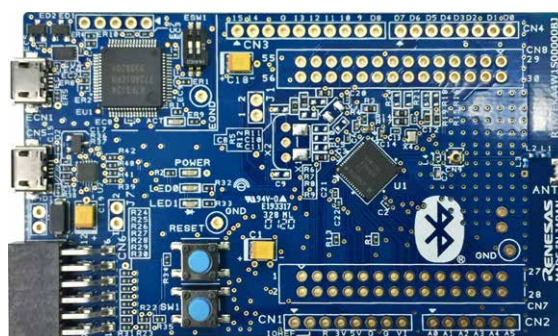

Evaluation Kit: RTK7EKA4W1S00000BJ

## Ordering References

Part name	Flash	RAM	DataFlash	Operating Temperature	Package	Package dimensions	Pin Pitch
R7FA4W1AD2CNG	512kB	96kB	8kB	-40 to +85°C	QFN 56pin	7x7mm	0.5mm

For more details, please visit [www.renesas.com/RA](http://www.renesas.com/RA)

**renesas.com**

Corporate Headquarters  
 TOYOSU FORESIA, 3-2-24 Toyosu, Koto-ku, Tokyo 135-0061, Japan  
[www.renesas.com](http://www.renesas.com)

Document No.: R01PM0076EU0100

**Trademarks**  
 Arm® and Cortex® are registered trademarks of Arm Limited. The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. Renesas and the Renesas logo are trademarks of Renesas Electronics Corporation. All trademarks and registered trademarks are the property of their respective owners.

**Contact information**  
 For further information on a product, technology, the most up-to-date version of a document, or your nearest sales office, please visit:  
[www.renesas.com/contact/](http://www.renesas.com/contact/)

© 2020 Renesas Electronics Corporation. All rights reserved.