

## RapidCharge™ AC/DC Primary-Side Digital Quasi-Resonant Flyback Controller for Secondary-Side Regulation

### 1 Description

The iW9809 is a high-performance AC/DC primary-side digital flyback controller with adaptive multi-mode-control (MMC) working with secondary-side regulation (SSR) for applications requiring high resolution in output voltage/current setting. The device can support rapid charge applications such as travel adapters (TA) of 25W (5V/3A, 9V/2.77A, etc.). It operates in quasi-resonant switching mode and supports optional continuous conduction mode (CCM) for low line voltage and it uses multi-mode control (MMC) including PWM, PFM and burst mode to achieve less power loss and low EMI. It also provides a number of key built-in protection features. The iW9809 is optimized to work with Dialog's secondary-side controller, the iW70x, for SSR, synchronous rectifier (SR) control and USB PD 3.0 w/PPS protocol support. The iW9809/iW70x chipset can achieve tight multi-level constant voltage (CV) and multi-level constant current (CC) regulation in very fine steps for rapid charge applications. With SSR digital compensation, the chipset eliminates the need for external loop compensation components while maintaining stability under all operating conditions.

The iW9809 and iW70x chipset can support USB PD to achieve fast and smooth CV/CC transitions upon request by mobile devices (MD). The iW9809 and iW70x chipset can meet no-load power consumption of less than 20mW for a typical 25W design when output USB cable is detached.

Dialog's innovative proprietary technology ensures that power supplies designed with the iW9809 and iW70x chipset can achieve high efficiency, high accuracy voltage/current control and fast dynamic load response.


### 2 Features

- Supports Rapid Charge adapters applications of typical 25W and other power profiles
- Supports constant-voltage (CV) and constant-current (CC) regulation in fine steps using secondary-side regulation (SSR) control
- Proprietary constant-frequency switching with quasi-resonant (QR) operation achieves best size, efficiency and common mode noise
- Adaptive QR mode and optional continuous conduction mode (CCM) operation at low line voltage
- Adaptive multi-mode control (MMC) using PWM/ PFM/Burst modes based on input voltage and output voltage/current improves efficiency and eliminates audible noise
- Built-in single-point fault protections against AC line voltage brown-out, output short-circuit, output over-voltage, and optocoupler failure
- User programable internal OTP threshold for various thermal requirement
- < 20mW no load standby power with ample margin at 230V<sub>AC</sub> when output USB cable is detached.
- 8-lead SOIC package

### 3 Applications

- Rapid-charging AC/DC adapters for smart phones, tablets and other portable devices

**RapidCharge™ AC/DC Primary-Side Digital Quasi-Resonant Flyback Controller for Secondary-Side Regulation**

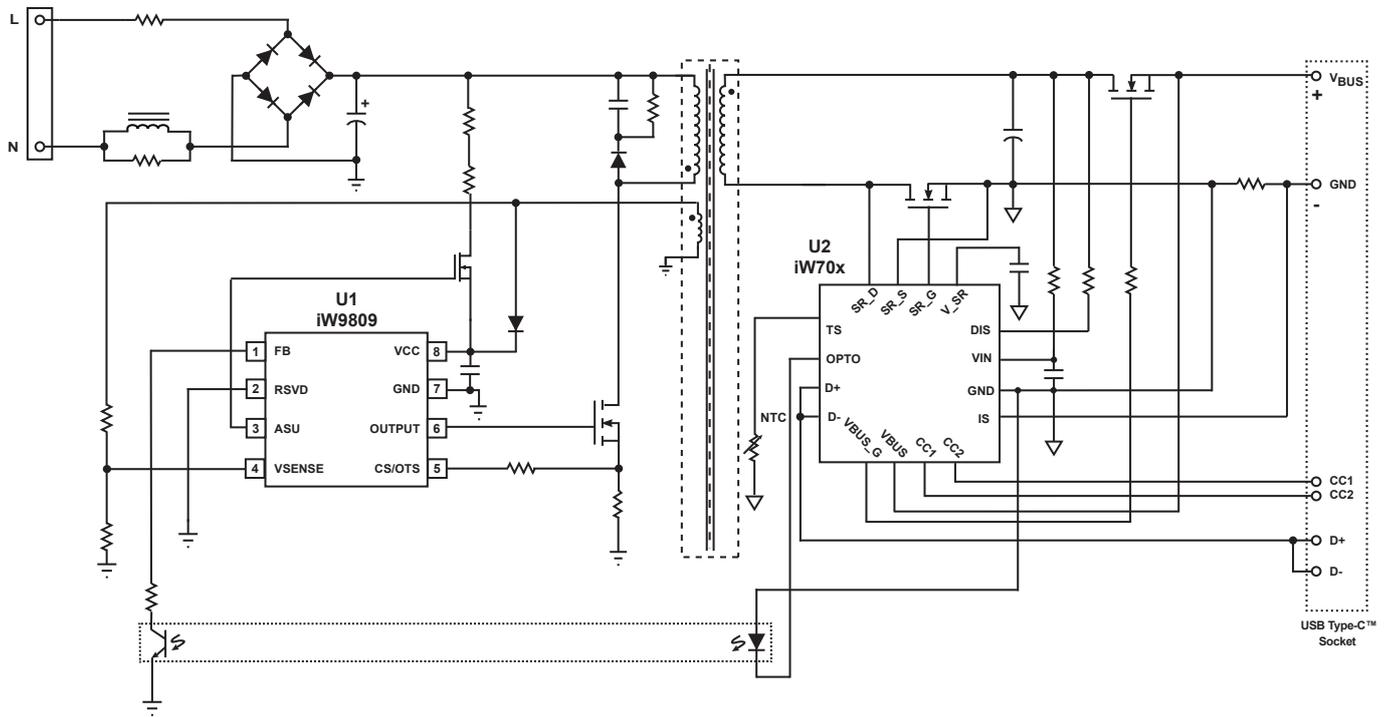

**Figure 3.1 : iW9809 Typical Application Circuit with Active Start-up Circuit (Using iW70x as Secondary-Side Controller. Achieving Multi-Level CV/CC Regulation)**

## RapidCharge™ AC/DC Primary-Side Digital Quasi-Resonant Flyback Controller for Secondary-Side Regulation

### 4 Pinout Description

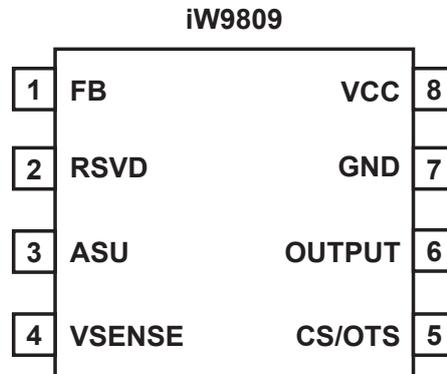


Figure 4.1 : 8-Lead SOIC Package

Pin Number	Pin Name	Type	Pin Description
1	FB	Analog Input	Feedback voltage. Used for determining multi-mode control and cycle-by-cycle peak current control.
2	RSVD	Reserved	Reserved. It is recommended that this pin be connected to GND.
3	ASU	Analog Output	Control Signal. Used for active start-up device (BJT or depletion mode N-FET).
4	VSENSE	Analog Input	Voltage sensing. Used output voltage sensing and auxiliary winding ringing voltage sensing.
5	CS/OTS	Analog Input	Current sensing. Used for cycle-by-cycle peak-current control and limit. During configuration stage, it can be used to configure certain parameters, such as internal over-temperature protection setting.
6	OUTPUT	Analog Output	Gate drive for power MOSFET.
7	GND	Ground	Ground.
8	VCC	Power Input	IC power supply.

## RapidCharge™ AC/DC Primary-Side Digital Quasi-Resonant Flyback Controller for Secondary-Side Regulation

### 5 Absolute Maximum Ratings

Absolute maximum ratings are the parameter values or ranges which can cause permanent damage if exceeded.


Parameter	Symbol	Value	Units
DC supply voltage range	$V_{VCC}$	-0.3 to 45	V
Continuous DC supply current at VCC pin ( $V_{VCC} = 15V$ )	$I_{VCC}$	20	mA
VSENSE input ( $I_{VSENSE} \leq 10mA$ )		-0.7 to 10	V
FB voltage		-0.3 to 5.0	V
ASU voltage		-0.3 to 45	V
CS/OTS voltage		-0.3 to 5.5	V
OUTPUT voltage		-0.3 to 20	V
Maximum junction temperature	$T_{JMAX}$	150	°C
Operating junction temperature	$T_{JOPT}$	-40 to 150	°C
Storage temperature	$T_{STO}$	-65 to 150	°C
Thermal Resistance Junction-to-Ambient	$\theta_{JA}$	160	°C/W
ESD rating per JEDEC JS-001-2017		±2,000	V
Latch-up test per JESD78E		±100	mA

#### Notes:

- Note 1. Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. These are stress ratings only, so functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specification are not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

**RapidCharge™ AC/DC Primary-Side Digital Quasi-Resonant Flyback Controller for Secondary-Side Regulation**

**6 Physical Dimensions**

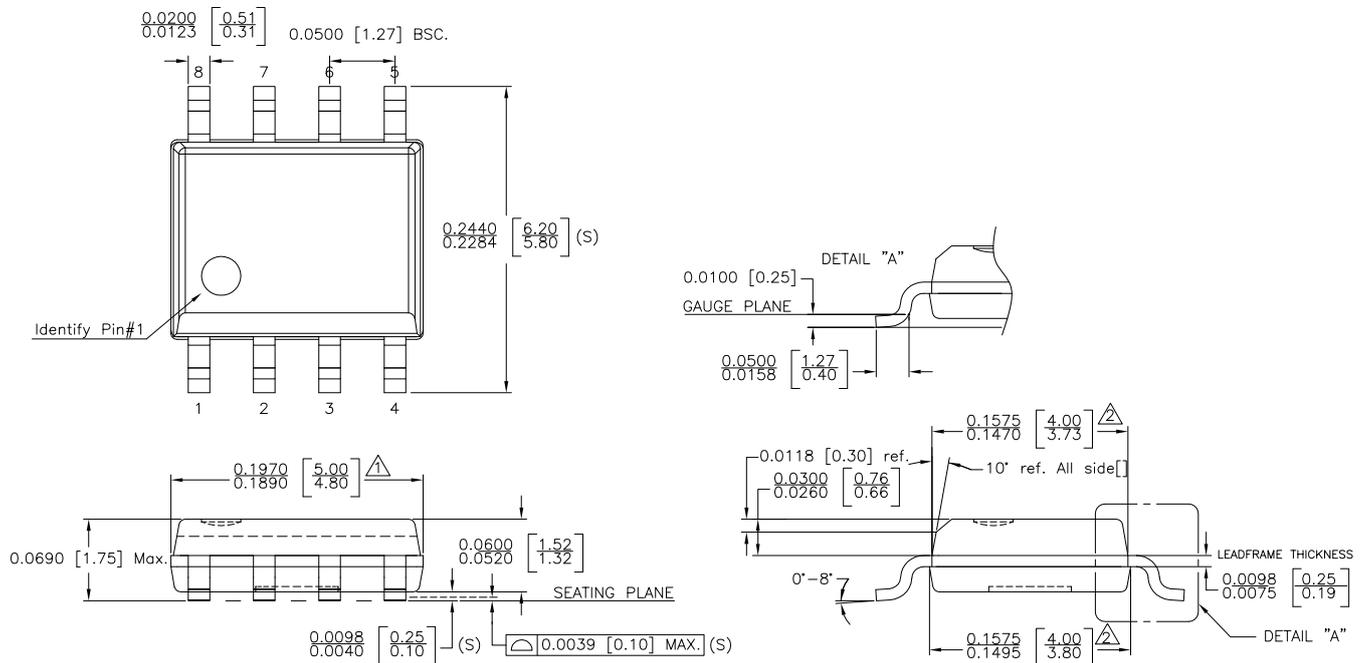

STATUS: RELEASED		SCALE: DO NOT SCALE
TERMINAL FINISH: 100% Sn or NiPdAu (PPF)		
TITLE: 8 SOIC PACKAGE OUTLINE		
REV: D	REVISION NOTE: EJECTOR CHANGED TO DASHED LINE	DATE: 18-JUN-2020

**Figure 6.1 : 8-Lead SOIC package outline drawing**


**7 Ordering Information**

Part no.	Options					Package	Description
	V <sub>BUS</sub> range	CCM	F <sub>SW(MAX)</sub> at low line	F <sub>SW(MAX)</sub> at high line	V <sub>BUS</sub> /V <sub>SENSE</sub>		
iW9809-00	3.3V to 11V	Yes	70kHz	75kHz	5:1	SOIC-8	Tape & Reel <sup>1</sup>
iW9809-02	3.3V to 21V	Yes	90kHz	95kHz	5:0.7	SOIC-8	Tape & Reel <sup>1</sup>

**Note 1:** Tape & Reel packing quantity is 2,500/reel. Minimum packing quantity is 2,500.

**RapidCharge™ AC/DC Primary-Side Digital Quasi-Resonant Flyback Controller for Secondary-Side Regulation**

**8 Top Marking**

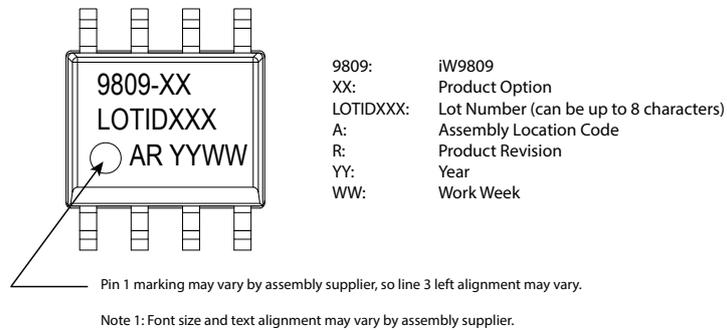

**Figure 8.1 : Top Marking for the iW9809**

## RapidCharge™ AC/DC Primary-Side Digital Quasi-Resonant Flyback Controller for Secondary-Side Regulation

### IMPORTANT NOTICE AND DISCLAIMER

RENESAS ELECTRONICS CORPORATION AND ITS SUBSIDIARIES (“RENESAS”) PROVIDES TECHNICAL SPECIFICATIONS AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES “AS IS” AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for developers skilled in the art designing with Renesas products. You are solely responsible for (1) selecting the appropriate products for your application, (2) designing, validating, and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements. These resources are subject to change without notice. Renesas grants you permission to use these resources only for development of an application that uses Renesas products. Other reproduction or use of these resources is strictly prohibited. No license is granted to any other Renesas intellectual property or to any third party intellectual property. Renesas disclaims responsibility for, and you will fully indemnify Renesas and its representatives against, any claims, damages, costs, losses, or liabilities arising out of your use of these resources. Renesas' products are provided only subject to Renesas' Terms and Conditions of Sale or other applicable terms agreed to in writing. No use of any Renesas resources expands or otherwise alters any applicable warranties or warranty disclaimers for these products.

© 2022 Renesas Electronics Corporation. All rights reserved.

### RoHS Compliance

Dialog Semiconductor's suppliers certify that its products are in compliance with the requirements of Directive 2011/65/EU of the European Parliament on the restriction of the use of certain hazardous substances in electrical and electronic equipment. RoHS certificates from our suppliers are available on request.

(Rev.1.0 Mar 2020)

### Corporate Headquarters

TOYOSU FORESIA, 3-2-24 Toyosu  
Koto-ku, Tokyo 135-0061, Japan  
[www.renesas.com](http://www.renesas.com)

### Contact Information

For further information on a product, technology, the most up-to-date version of a document, or your nearest sales office, please visit:  
[www.renesas.com/contact/](http://www.renesas.com/contact/)

### Trademarks

Renesas and the Renesas logo are trademarks of Renesas Electronics Corporation. All trademarks and registered trademarks are the property of their respective owners.