

ISL74422ARH

Neutron Test Report

TR064
Rev.0.00
Mar 27, 2018

Introduction

This report summarizes results of 1MeV equivalent neutron testing of the [ISL74422ARH](#) power MOSFET driver. The test was conducted to determine the sensitivity of the part to displacement damage (DD) caused by neutron or proton environments. Neutron fluences ranged from $5 \times 10^{11} \text{n/cm}^2$ to $1 \times 10^{14} \text{n/cm}^2$. This project was carried out in collaboration with Honeywell Aerospace (Clearwater, FL) and their support is gratefully acknowledged.

Product Description

The ISL74422ARH is a non-inverting, monolithic high-speed MOSFET driver designed to convert a CMOS level input signal into a high current output at voltages up to 18V. Its fast rise times and high current output allow control of even the largest power MOSFET devices in high frequency applications. The input of the ISL74422ARH can be directly driven by the Renesas HS-1825ARH and IS-1845ASRH PWM devices. The 9A high current output minimizes power losses in MOSFET devices by rapidly charging and discharging high gate capacitances.

The part is fabricated using the Renesas dielectrically isolated Radiation Hardened Silicon Gate (RSG) BiCMOS process. It is resistant to single event latch-up and provides highly reliable performance in harsh radiation environments.

Specifications for radiation hardened QML devices are controlled by the Defense Logistics Agency, Land and Maritime, in Columbus, OH. Detailed electrical specifications for the ISL74422ARH are contained in the SMD.

Related Literature

For a full list of related documents, visit our website

- [ISL74422ARH](#) product page
- MIL-STD-883 test method 1017
- DSCC Standard Microcircuit Drawing (SMD) 5962-03248

1. Test Description

1.1 Irradiation Facility

Neutron fluence irradiations were performed on the test samples on June 25, 2015, at the WSMR Fast Burst Reactor (FBR) which provides a controlled 1MeV equivalent neutron flux. The tests were carried out per MIL-STD-883G, Method 1017.2, with each part unpowered during irradiation and all leads shorted. Because neutron irradiation activates many of the heavier elements found in a packaged integrated circuit, the parts exposed at the higher neutron levels required (as expected) some cool-down time before being shipped back to Renesas (Palm Bay, FL) for electrical testing.

1.2 Test Fixturing

No formal irradiation test fixturing is involved. These DD tests are bag tests, meaning that the parts are irradiated with all leads shorted together.

1.3 Characterization Equipment and Procedures

Electrical testing was performed before and after irradiation using the Renesas production Automated Test Equipment (ATE). All electrical testing was performed at room temperature.

1.4 Experimental Matrix

Testing proceeded in general accordance with the guidelines of MIL-STD-883 Test Method 1017. The experimental matrix consisted of five samples irradiated at $5 \times 10^{11} \text{ n/cm}^2$, five samples irradiated at $2 \times 10^{12} \text{ n/cm}^2$, five samples irradiated at $1 \times 10^{13} \text{ n/cm}^2$, and five samples irradiated at $1 \times 10^{14} \text{ n/cm}^2$. Two control units were used to ensure repeatability. ISL74422ARH samples were drawn from production inventory.

2. Results

ISL74422ARH neutron test results are reported in this report. Each neutron irradiation was performed on a different set of samples; this is *not* total dose testing, in which the damage is cumulative.

2.1 Attributes Data

Table 1. Attributes Data

Fluence, (n/cm ²)	Sample Size	Pass (Note 1)	Fail	Notes
5×10^{11}	5	5	0	All passed
2×10^{12}	5	5	0	All passed
1×10^{13}	5	5	0	All passed
1×10^{14}	5	5	5	All failed parametrically, LOW output ON-resistance; all samples were functional

Note:

1. "Pass" indicates a sample that passes all SMD limits.

2.2 Variables Data Plots

The plots in [Figures 1](#) through [6](#) show data plots for key parameters before and after irradiation to each level. The plots show the mean of each parameter as a function of neutron irradiation. The plots also include error bars at each datapoint, representing the minimum and maximum measured values of the samples, although in some plots the error bars might not be visible due to their values compared to the scale of the graph. Although the applicable electrical limits taken from the SMD are also shown, note that these limits are provided for guidance only because the ISL74422ARH is not specified for the neutron environment.

All samples passed the post-irradiation SMD limits after all exposures up to and including $1 \times 10^{13} \text{ n/cm}^2$, but failed the SMD post-irradiation limit for low output ON-resistance (R_{ONL}) after $1 \times 10^{14} \text{ n/cm}^2$.

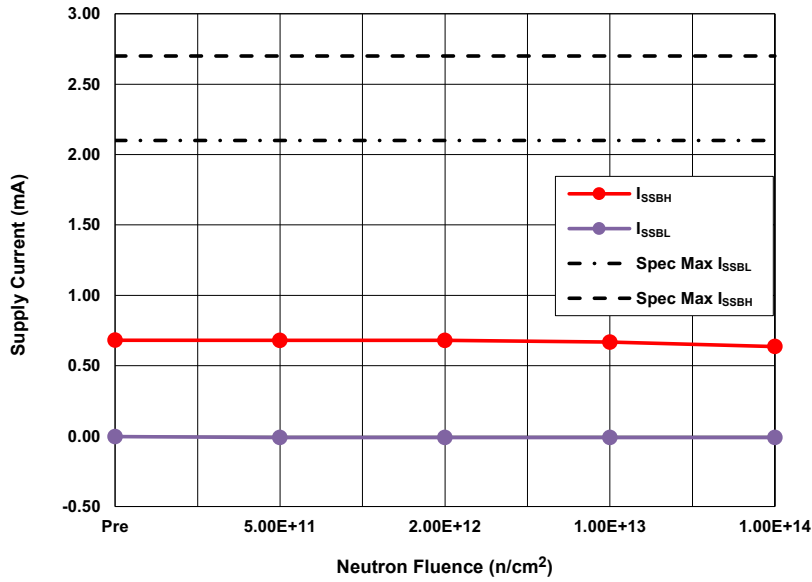


Figure 1. ISL74422ARH low (I_{SSBL}) and high (I_{SSBH}) power supply current following irradiation to each level with $V_S = 18V$; $V_{IN} = 0.8V$ (I_{SSBL}) and $V_{IN} = 10.0V$ (I_{SSBH}). The error bars represent the minimum and maximum measured values. The SMD limits are 2.1mA maximum (I_{SSBL}) and 2.7mA maximum (I_{SSBH}).

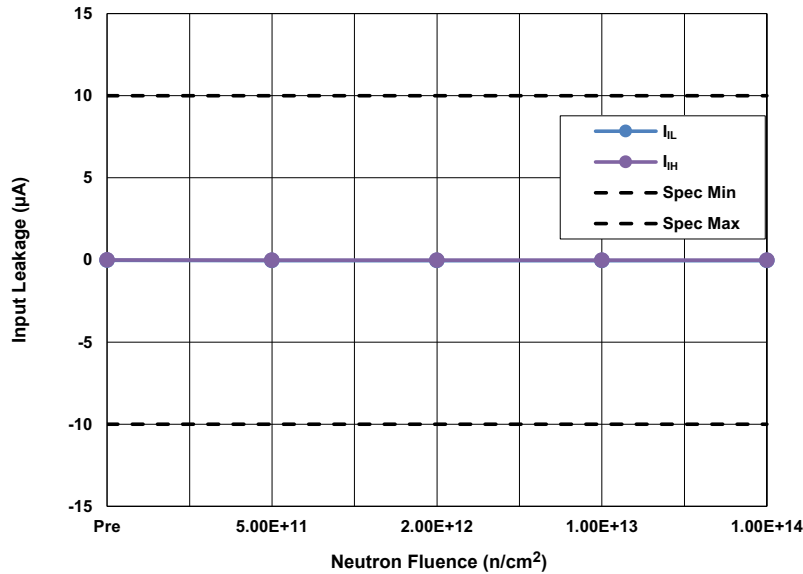


Figure 2. ISL74422ARH low (I_{IL}) and high (I_{IH}) input leakage current following irradiation to each level with $V_S = 18V$; $V_{IN} = 0V$ (I_{IL}) and $V_{IN} = 18V$ (I_{IH}). The error bars represent the minimum and maximum measured values. The SMD limits are -10µA minimum and +10µA maximum for both parameters.

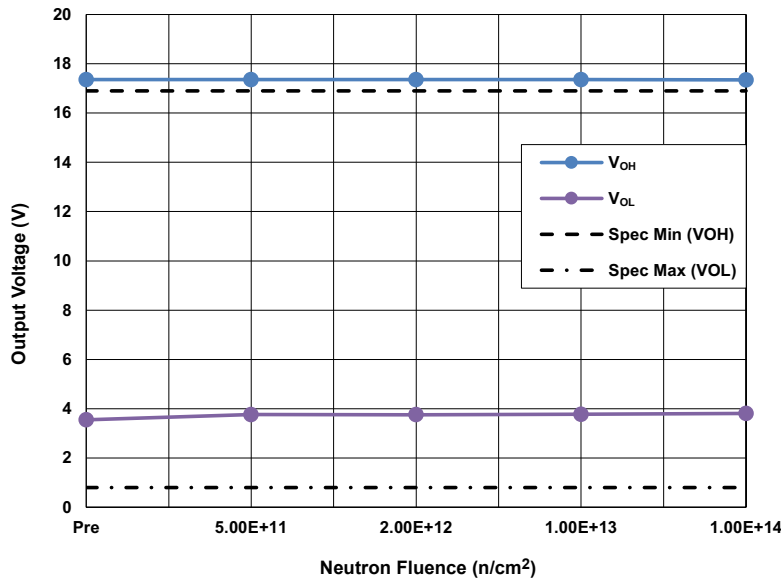


Figure 3. ISL74422ARH low (V_{OL}) and high (V_{OH}) output voltage following irradiation to each level with $V_S = 18V$; $V_{IN} = 0.8V$ (V_{OL}) and $V_{IN} = 10.0V$ (V_{OH}). The error bars represent the minimum and maximum measured values. The SMD limits are 16.9V minimum (V_{OH}) and 0.8V maximum (V_{OL}).

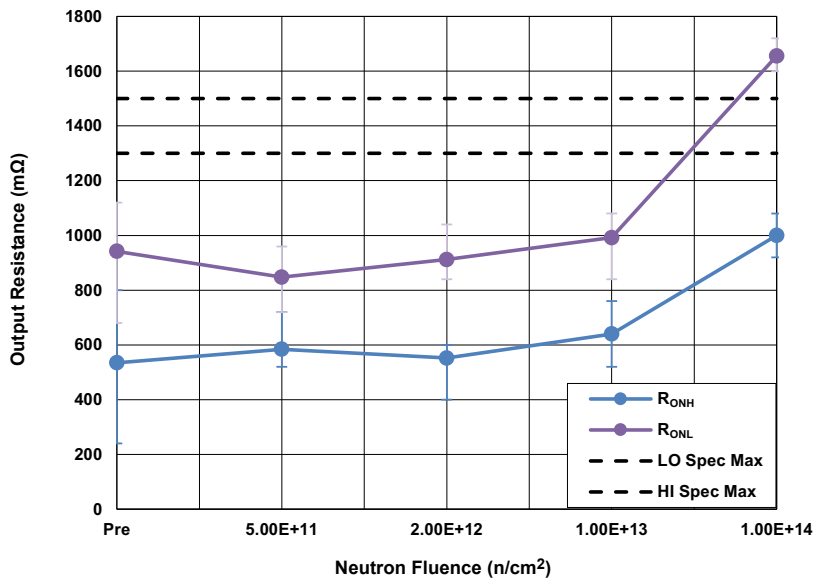


Figure 4. ISL74422ARH low (R_{ONL}) and high (R_{ONH}) output ON-resistance following irradiation to each level with $V_S = 18V$; $V_{IN} = 0.8V$ (R_{ONL}) and $V_{IN} = 5.0V$ (R_{ONH}). The error bars represent the minimum and maximum measured values. The SMD limits are 1500mΩ maximum (R_{ONL}) and 1300mΩ maximum (R_{ONH}).

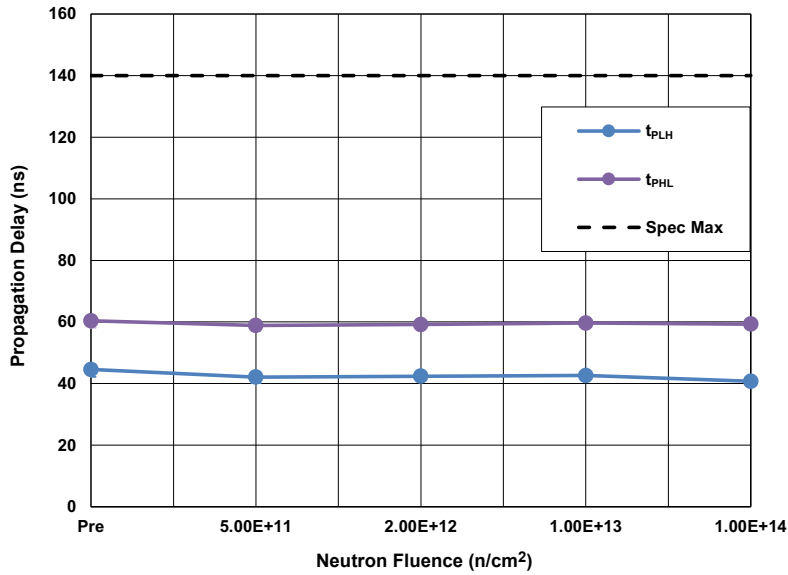


Figure 5. ISL74422ARH low to high (t_{PLH}) and high to low (t_{PHL}) propagation delay following irradiation to each level with V_S = 18V, C_L = 10nF. The error bars represent the minimum and maximum measured values. The SMD limit is 140ns maximum for both parameters.

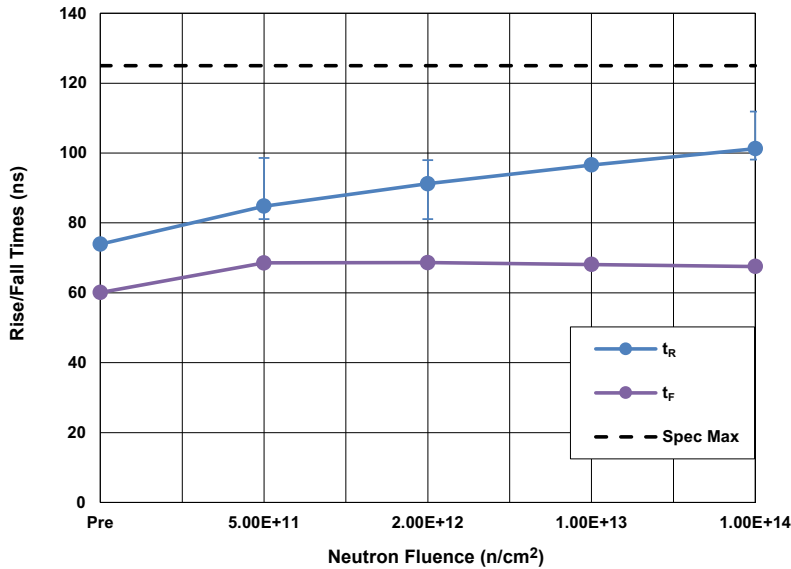


Figure 6. ISL74422ARH rise (t_R) and fall (t_F) time following irradiation to each level with V_S = 15V, C_L = 10nF. The error bars represent the minimum and maximum measured values. The SMD limit is 125ns maximum for both parameters.

3. Discussion and Conclusion

This document reports the results of neutron testing of the ISL74422ARH power MOSFET driver. Samples were irradiated to fluences of $5 \times 10^{11} \text{ n/cm}^2$, $2 \times 10^{12} \text{ n/cm}^2$, $1 \times 10^{13} \text{ n/cm}^2$ and $1 \times 10^{14} \text{ n/cm}^2$. Each neutron irradiation was performed on a different set of samples, in contrast to total dose testing, in which a single set of samples is used and the damage is cumulative. ATE characterization testing was performed before and after the irradiations, and two control units were used to ensure repeatable data. Variables data for monitored parameters is presented in [Figures 1](#) through [6](#).

The ISL74422ARH is not formally designed, specified, or guaranteed for neutron hardness. The part is built in a dielectrically-isolated BiCMOS process; the bipolar transistors were expected to be sensitive to Displacement Damage (DD) at the higher neutron levels. The following sections analyze the results on a parameter by parameter basis and draw conclusions.

3.1 Reported Parameters

Figure	Parameter	Limit, Low	Limit, High	Units	Notes
1	Supply current	-	2.1	mA	Output LOW
	Supply current	-	2.7	mA	Output HIGH
2	Input current	-10	+10	μA	Output LOW
	Input current	-10	+10	μA	Output HIGH
3	Output voltage	-	0.8	V	Output LOW
	Output voltage	16.9	-	V	Output HIGH
4	Output ON-resistance	-	1300	$\text{m}\Omega$	Output HIGH
	Output ON-resistance	-	1500	$\text{m}\Omega$	Output LOW
5	Propagation delay	-	140	ns	LOW to HIGH
	Propagation delay	-	140	ns	HIGH to LOW
6	Rise time	-	125	ns	LOW to HIGH
	Fall time	-	125	ns	HIGH to LOW

The low and high output supply current ([Figure 1](#)), low and high input current ([Figure 2](#)) and low and high output voltage ([Figure 3](#)) showed good stability after all neutron levels.

The low and high output ON-resistance ([Figure 4](#)) showed a gradual increase through the $1 \times 10^{13} \text{ n/cm}^2$ level and a marked increase at the $1 \times 10^{14} \text{ n/cm}^2$ level. At the $1 \times 10^{14} \text{ n/cm}^2$ level the high ON-resistance remained within the SMD limits but the low ON-resistance was out of specification.

The low to high and high to low propagation delay ([Figure 5](#)) and rise and fall time ([Figure 6](#)) showed good stability after all neutron levels.

We conclude that the ISL74422ARH remained within the post total dose SMD limits following the $5 \times 10^{11} \text{ n/cm}^2$, $2 \times 10^{12} \text{ n/cm}^2$ and $1 \times 10^{13} \text{ n/cm}^2$ neutron irradiations. The part failed parametrically following $1 \times 10^{14} \text{ n/cm}^2$ irradiation, with the low state ON-resistance out of specification but with the high state ON-resistance remaining within the SMD limits.

4. Revision History

Date	Rev.	Description
Mar 27, 2018	0.00	Initial release.

Notice

1. Descriptions of circuits, software and other related information in this document are provided only to illustrate the operation of semiconductor products and application examples. You are fully responsible for the incorporation or any other use of the circuits, software, and information in the design of your product or system. Renesas Electronics disclaims any and all liability for any losses and damages incurred by you or third parties arising from the use of these circuits, software, or information.
2. Renesas Electronics hereby expressly disclaims any warranties against and liability for infringement or any other claims involving patents, copyrights, or other intellectual property rights of third parties, by or arising from the use of Renesas Electronics products or technical information described in this document, including but not limited to, the product data, drawings, charts, programs, algorithms, and application examples.
3. No license, express, implied or otherwise, is granted hereby under any patents, copyrights or other intellectual property rights of Renesas Electronics or others.
4. You shall not alter, modify, copy, or reverse engineer any Renesas Electronics product, whether in whole or in part. Renesas Electronics disclaims any and all liability for any losses or damages incurred by you or third parties arising from such alteration, modification, copying or reverse engineering.
5. Renesas Electronics products are classified according to the following two quality grades: "Standard" and "High Quality". The intended applications for each Renesas Electronics product depends on the product's quality grade, as indicated below.
"Standard": Computers; office equipment; communications equipment; test and measurement equipment; audio and visual equipment; home electronic appliances; machine tools; personal electronic equipment; industrial robots; etc.
"High Quality": Transportation equipment (automobiles, trains, ships, etc.); traffic control (traffic lights); large-scale communication equipment; key financial terminal systems; safety control equipment; etc.
Unless expressly designated as a high reliability product or a product for harsh environments in a Renesas Electronics data sheet or other Renesas Electronics document, Renesas Electronics products are not intended or authorized for use in products or systems that may pose a direct threat to human life or bodily injury (artificial life support devices or systems; surgical implantations; etc.), or may cause serious property damage (space system; undersea repeaters; nuclear power control systems; aircraft control systems; key plant systems; military equipment; etc.). Renesas Electronics disclaims any and all liability for any damages or losses incurred by you or any third parties arising from the use of any Renesas Electronics product that is inconsistent with any Renesas Electronics data sheet, user's manual or other Renesas Electronics document.
6. When using Renesas Electronics products, refer to the latest product information (data sheets, user's manuals, application notes, "General Notes for Handling and Using Semiconductor Devices" in the reliability handbook, etc.), and ensure that usage conditions are within the ranges specified by Renesas Electronics with respect to maximum ratings, operating power supply voltage range, heat dissipation characteristics, installation, etc. Renesas Electronics disclaims any and all liability for any malfunctions, failure or accident arising out of the use of Renesas Electronics products outside of such specified ranges.
7. Although Renesas Electronics endeavors to improve the quality and reliability of Renesas Electronics products, semiconductor products have specific characteristics, such as the occurrence of failure at a certain rate and malfunctions under certain use conditions. Unless designated as a high reliability product or a product for harsh environments in a Renesas Electronics data sheet or other Renesas Electronics document, Renesas Electronics products are not subject to radiation resistance design. You are responsible for implementing safety measures to guard against the possibility of bodily injury, injury or damage caused by fire, and/or danger to the public in the event of a failure or malfunction of Renesas Electronics products, such as safety design for hardware and software, including but not limited to redundancy, fire control and malfunction prevention, appropriate treatment for aging degradation or any other appropriate measures. Because the evaluation of microcomputer software alone is very difficult and impractical, you are responsible for evaluating the safety of the final products or systems manufactured by you.
8. Please contact a Renesas Electronics sales office for details as to environmental matters such as the environmental compatibility of each Renesas Electronics product. You are responsible for carefully and sufficiently investigating applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive, and using Renesas Electronics products in compliance with all these applicable laws and regulations. Renesas Electronics disclaims any and all liability for damages or losses occurring as a result of your noncompliance with applicable laws and regulations.
9. Renesas Electronics products and technologies shall not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable domestic or foreign laws or regulations. You shall comply with any applicable export control laws and regulations promulgated and administered by the governments of any countries asserting jurisdiction over the parties or transactions.
10. It is the responsibility of the buyer or distributor of Renesas Electronics products, or any other party who distributes, disposes of, or otherwise sells or transfers the product to a third party, to notify such third party in advance of the contents and conditions set forth in this document.
11. This document shall not be reprinted, reproduced or duplicated in any form, in whole or in part, without prior written consent of Renesas Electronics.
12. Please contact a Renesas Electronics sales office if you have any questions regarding the information contained in this document or Renesas Electronics products.
(Note 1) "Renesas Electronics" as used in this document means Renesas Electronics Corporation and also includes its directly or indirectly controlled subsidiaries.
(Note 2) "Renesas Electronics product(s)" means any product developed or manufactured by or for Renesas Electronics.

(Rev.4.0-1 November 2017)



SALES OFFICES

Renesas Electronics Corporation

<http://www.renesas.com>

Refer to "<http://www.renesas.com/>" for the latest and detailed information.

Renesas Electronics America Inc.

1001 Murphy Ranch Road, Milpitas, CA 95035, U.S.A.
Tel: +1-408-432-8888, Fax: +1-408-434-5351

Renesas Electronics Canada Limited

9251 Yonge Street, Suite 8309 Richmond Hill, Ontario Canada L4C 9T3
Tel: +1-905-237-2004

Renesas Electronics Europe Limited

Dukes Meadow, Millboard Road, Bourne End, Buckinghamshire, SL8 5FH, U.K
Tel: +44-1628-651-700, Fax: +44-1628-651-804

Renesas Electronics Europe GmbH

Arcadiastrasse 10, 40472 Düsseldorf, Germany
Tel: +49-211-6503-0, Fax: +49-211-6503-1327

Renesas Electronics (China) Co., Ltd.

Room 1709 Quantum Plaza, No.27 ZhichunLu, Haidian District, Beijing, 100191 P. R. China
Tel: +86-10-8235-1155, Fax: +86-10-8235-7679

Renesas Electronics (Shanghai) Co., Ltd.

Unit 301, Tower A, Central Towers, 555 Langao Road, Putuo District, Shanghai, 200333 P. R. China
Tel: +86-21-2226-0888, Fax: +86-21-2226-0999

Renesas Electronics Hong Kong Limited

Unit 1601-1611, 16/F., Tower 2, Grand Century Place, 193 Prince Edward Road West, Mongkok, Kowloon, Hong Kong
Tel: +852-2265-6688, Fax: +852 2886-9022

Renesas Electronics Taiwan Co., Ltd.

13F, No. 363, Fu Shing North Road, Taipei 10543, Taiwan
Tel: +886-2-8175-9600, Fax: +886 2-8175-9670

Renesas Electronics Singapore Pte. Ltd.

80 Bendemeer Road, Unit #06-02 Hyflux Innovation Centre, Singapore 339949
Tel: +65-6213-0200, Fax: +65-6213-0300

Renesas Electronics Malaysia Sdn.Bhd.

Unit 1207, Block B, Menara Amcorp, Amcorp Trade Centre, No. 18, Jln Persiaran Barat, 46050 Petaling Jaya, Selangor Darul Ehsan, Malaysia
Tel: +60-3-7955-9390, Fax: +60-3-7955-9510

Renesas Electronics India Pvt. Ltd.

No.777C, 100 Feet Road, HAL 2nd Stage, Indiranagar, Bangalore 560 038, India
Tel: +91-80-67208700, Fax: +91-80-67208777

Renesas Electronics Korea Co., Ltd.

17F, KAMCO Yangjae Tower, 262, Gangnam-daero, Gangnam-gu, Seoul, 06265 Korea
Tel: +82-2-558-3737, Fax: +82-2-558-5338