
IDD VS VDD(25°C/5MHz)




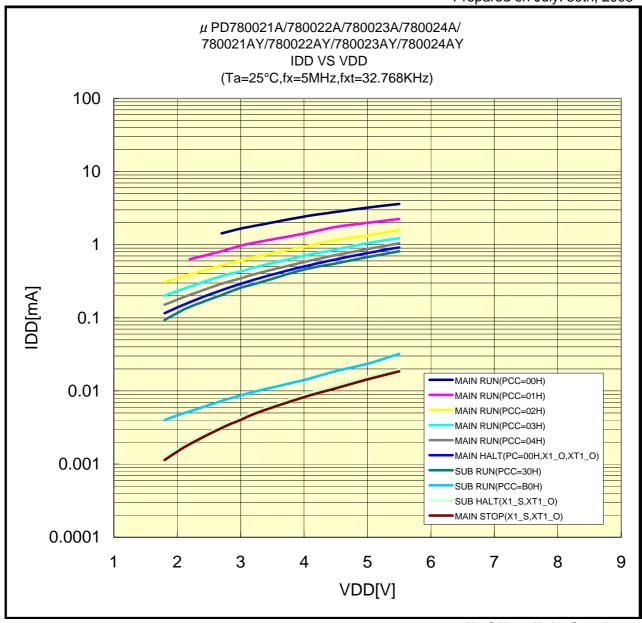

X1_O:X1 oscillation Operating X1_S:X1 oscillation Stop XT1_O:XT1 oscillation Operating

The above mentioned value is only for your reference. The value was measured under certain conditions and does not guarantee the product's characteristics.

IDD VS VDD(25°C/8.38MHz)

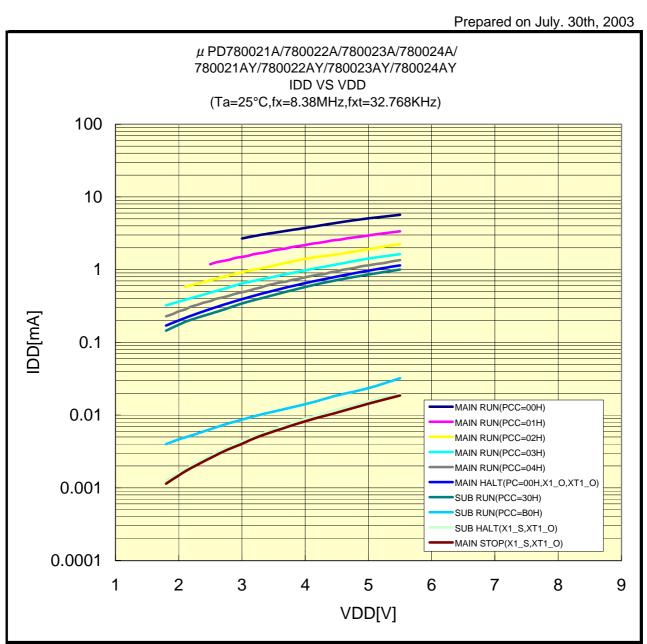


X1_O:X1 oscillation Operating X1_S:X1 oscillation Stop XT1_O:XT1 oscillation Operating

The above mentioned value is only for your reference. The value was measured under certain conditions and does not guarantee the product's characteristics.

IDD VS VDD(25°C/12MHz)



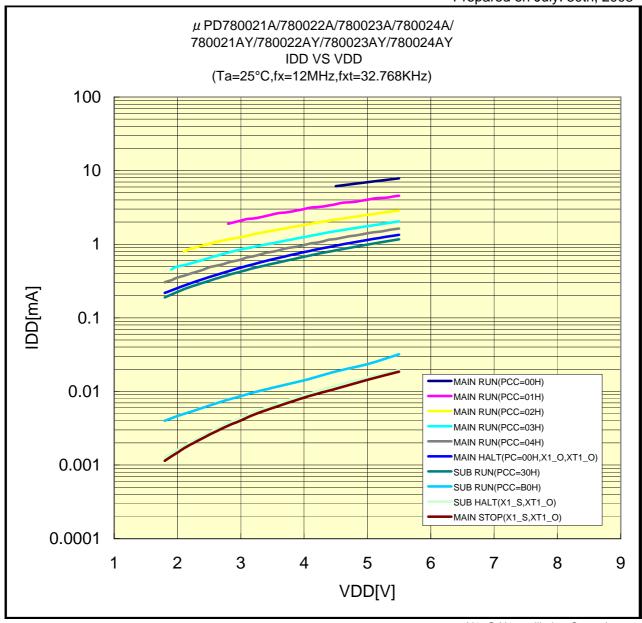

X1_O:X1 oscillation Operating X1_S:X1 oscillation Stop XT1_O:XT1 oscillation Operating

The above mentioned value is only for your reference. The value was measured under certain conditions and does not guarantee the product's characteristics.