

# I<sub>cc</sub> vs V<sub>cc</sub> (Low-speed clock mode)

Prepared on Oct. 20, 2006

R5F21248SNFP (Topr=-20 to 85degrees C)

R5F21248SDFP (Topr=-40 to 85degrees C)

XIN clock off

High-speed on-chip oscillator off

Low-speed on-chip oscillator off


XCIN clock oscillator on = 32 kHz

FMR47 = 1

— 85degreesC

— 25degreesC

— -40degreesC

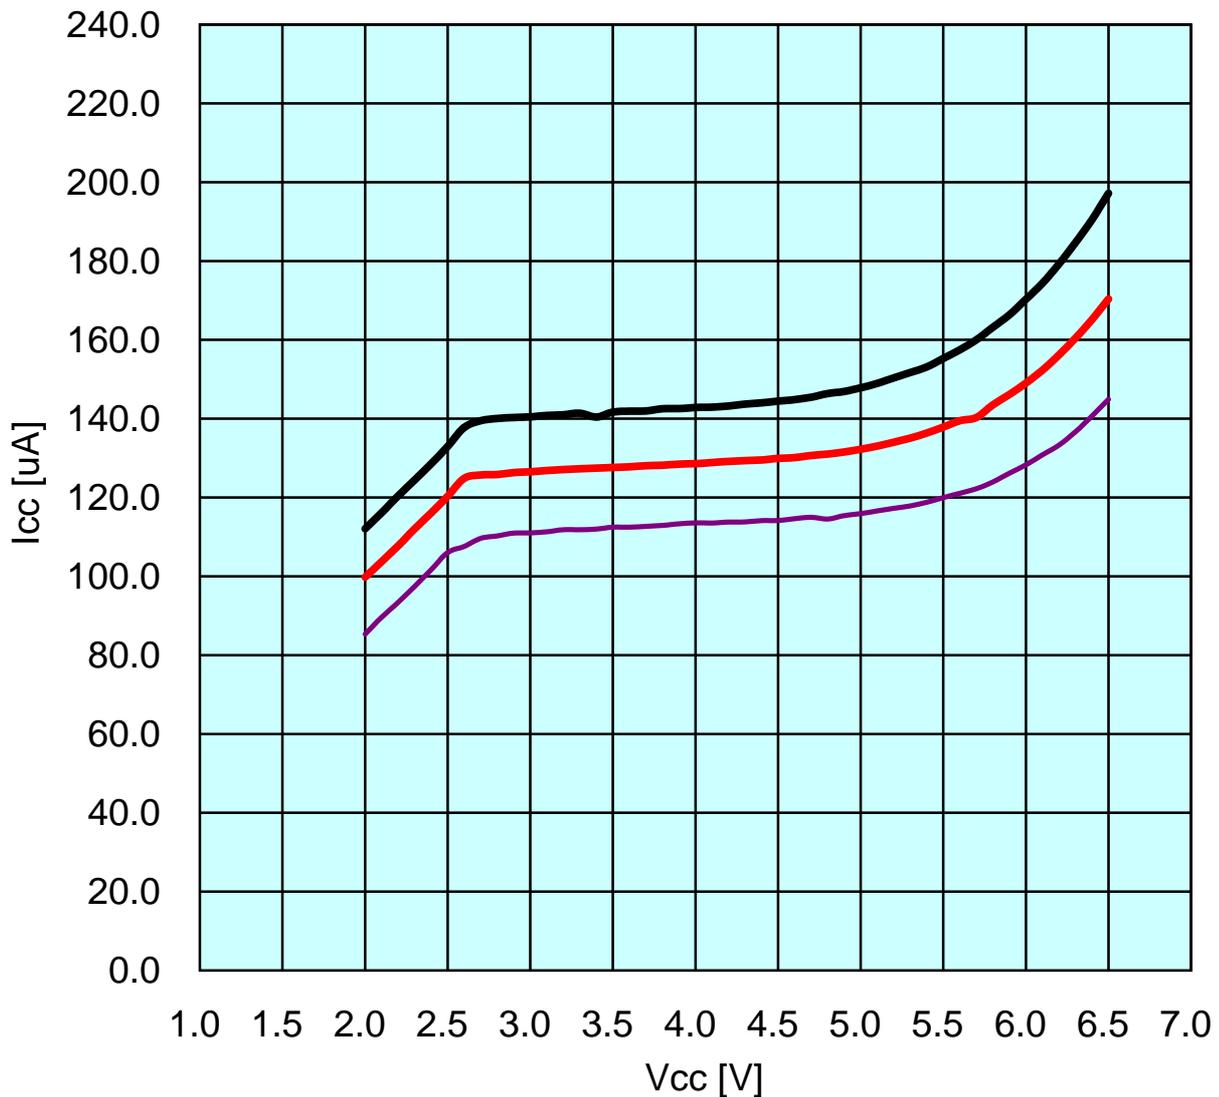

The mentioned value is only for your reference. The value is for the arbitrary samples and does not guarantee the product's characteristics.