

RELATIVE HUMIDITY SENSOR FAMILY



Renesas' humidity sensors offer high accuracy with the fastest measurement response time of comparable devices currently on the market.

The HS300x family of relative humidity sensors feature a $\pm 1.5\%$ RH accuracy and four-second response time (rated 20% to 80% RH range in still air and does not require airflow). Since humidity sensors consume the most power when they are taking a measurement, the fast response time to a stable measurement reduces the amount of sampling needed.

This is especially important for battery-powered applications where lower power consumption equates to longer battery life. In addition to high-accuracy and fast response times, the HS300x family features excellent long term stability of 0.1% RH per year as a result of a robust silicon carbide construction and an innovative design. This improves useful lifetime and lowers effective cost.

Features

- Silicon carbide structure
- $\pm 1.5\%$ RH accuracy (HS3001)
- Fast RH response time (typical 4 seconds)
- 0.1% RH per year drift
- 14-bit resolution: 0.01% RH (typical)
- Low power consumption: 1.0 μ A average
- Digital/Analog output
- Extended supply voltage: 1.8 to 5.5 V

Applications

- Measurement of water vapor content in medical oxygen
- Humidity measurement in home appliances
- Monitor humidity in the air in industrial processes, climate control systems (HVAC), weather stations and portable personal health devices

HUMIDITY SENSORS PRODUCT DETAILS

Benefits

- Integrated temperature and humidity sensing solution
- Small form factor solution with lower system cost
- Low power consumption saves battery
- 14-bit high resolution provides extremely tight accuracy
- Insensitive to environmental contaminants like dirt and dust
- Small solution size saves space and BOM for compact designs
- On-board calibration reduces time to market
- Wide supply voltage range eliminates the need for LDO/DC-DC
- Fast RH response time (typical 4 seconds)


High-Performance Relative Humidity and Temperature Sensors

Part Number	Relative Humidity Accuracy Typ ($\pm\%$ RH)
HS3001	1.5
HS3002	1.8
HS3003	2.5
HS3004	3.5

To request samples, download documentation or learn more, visit:

idt.com/humidity

High Relative Humidity Accuracy and Long Term Stability You Can Depend On

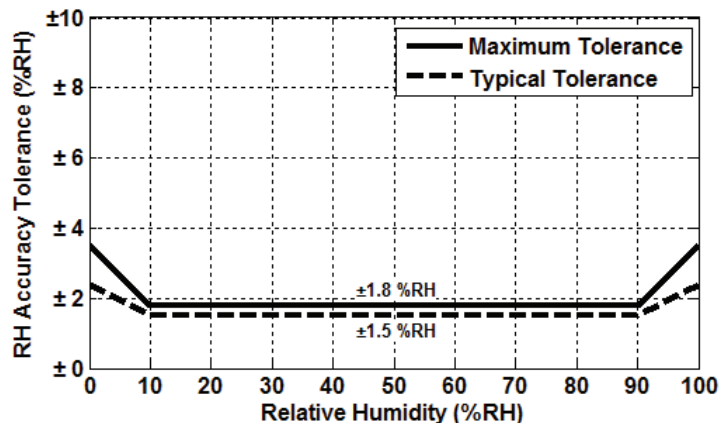

HS3001 RH Accuracy Tolerance at 25°C



Renesas Electronics America Inc. | renesas.com
 1001 Murphy Ranch Road, Milpitas, CA 95035 | Phone: 1-888-468-3774

© 2020 Renesas Electronics America Inc. (REA). All rights reserved. All trademarks are the property of their respective owners. REA believes the information herein was accurate when given but assumes no risk as to its quality or use. All information is provided as-is without warranties of any kind, whether express, implied, statutory, or arising from course of dealing, usage, or trade practice, including without limitation as to merchantability, fitness for a particular purpose, or non-infringement. REA shall not be liable for any direct, indirect, special, consequential, incidental, or other damages whatsoever, arising from use of or reliance on the information herein, if advised of the possibility of such damages. REA reserves the right, without notice, to discontinue products or make changes to the design or specifications of its products or other information herein. All contents are protected by U.S. and international copyright laws. Except as specifically permitted herein, no portion of this material may be reproduced in any form, or by any means, without prior written permission from Renesas Electronics America Inc. Visitors or users are not permitted to modify, distribute, publish, transmit or create derivative works of any of this material for any public or commercial purposes.