

Transitioning from the DS1339 to the ISL1208 RTC Device

TB467
Rev 0.00
February 14, 2007

Introduction

The ISL1208 Real Time Clock (RTC) device shares much of the functionality of the DS1339 device, and in some instances may be desirable as a replacement for that device. This Tech Brief will describe the differences between the devices and give guidelines on any changes in hardware or software that are required to drop the ISL1208 into the DS1339 socket.

Hardware compatibility

Packaging

Only the MSOP package for the ISL1208 is compatible (drop-in) with the DS1339 device. The main connections to the ISL1208 are the same as the DS1339: $V_{DD}(V_{CC})$, X1, X2, GND, SCL, SDA are all identical. The V_{BAT} pin is the same as the V_{BACKUP} pin, and $\overline{IRQ}/F_{OUT}$ replaces the SQW/INTB pin. We'll discuss these two pins and functions.

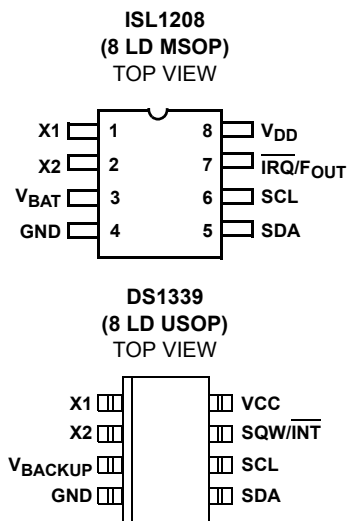


FIGURE 1. PACKAGE PINOUTS

The DS1339 has two alarms and the ISL1208 has one alarm. Both devices have a clock output pin which doubles as a hardware interrupt for the alarm function. If both alarms are used on the DS1339 (no clock output), then one alarm would need to be dropped when using the ISL1208.

V_{BAT} Pin

The two devices share the same pin for the battery input, pin 3. The ISL1208 has a wider range for V_{bat} , however, from 1.8V to 5.5V (vs. 1.3V to 3.7V for the M41T00). Also, battery switchover is normally at 2.2V (typ) for the ISL1208 vs. 2.85V for the M41T00. A separate mode can be programmed for the ISL1208 so that it switches over at $V_{DD} = V_{BAT}$ ("Low Power Mode"), if the designer requires that functionality (see ISL1208 data sheet).

BATTERY BACKUP

Both the DS1339 and the ISL1208 are volatile devices and will lose their register contents when fully powered down. Both devices have a battery input pin which will accept a battery or supercap and allow active switchover (this enables RTC continuous operation and RAM memory retention). The DS1339 device also contains trickle charge resistor/diode combinations which are not in the ISL1208 device. No trickle charging control is available with the ISL1208.

Oscillator Output

The DS1339 has 4 distinct frequencies for clock output at pin 7: 1.0Hz, 4.096kHz, 8.192kHz, 32.768kHz. The ISL1208 has 15 frequencies available from 1/32Hz to 32.768kHz. The duty cycle is fixed for both devices at 50%.

Crystal Requirements

Both devices require a standard 32.768kHz crystal. The DS1339 requires a C_L spec (load capacitance) of 6pF, while the ISL1208 requires 12pF. Although the ISL1208 will operate with the $C_L = 6pF$, a crystal with $C_L = 12pF$ will provide better accuracy and adjustment range with the ISL1208.

Frequency Adjustment

The ISL1208 provides two methods of adjusting the clock frequency, an analog trimming register(ATR) and a digital trimming register(DTR). The DS1339 has neither of these adjustments, so this is additional functionality that can be used if the customer so desires.

Register Compatibility

The registers for the two devices are set up very differently, See Table 1. The only common registers are registers 00h to 02h which are the RTC timekeeping registers for the Seconds, Minutes, and Hours, in that order. There is a difference in register 02h whereby the 12/24 hr bit is set up differently. All of the other registers either have differing addresses, bits or functionality. The RTC date, day of week, and Year registers are identical bit setup, but different addresses (this is noted by the color shading of those registers). Software will definitely need to be changed to write to and read from the ISL1208.

Alarm Registers

The Alarm register for the ISL1208 is set up similar to Alarm1 for the DS1339, but the control bit for enabling the alarm is set up different. Both devices can be set up for a periodic (repeatable) interrupt using the alarm time set, but the register programming is different. See the ISL1208 data sheet to make sure the device is programmed correctly.

TABLE 1. REGISTER COMPARISONS

ADDR.	DS1339 CONTENTS	ISL1208 CONTENTS	COMMENTS
00h	RTC seconds, BCD	RTC seconds, BCD	Identical contents
01h	RTC minutes, BCD	RTC minutes, BCD	Identical contents
02h	RTC Hours, BCD	RTC hours, BCD	Contents are similar, but the 12/24hr bit is different
03h	RTC Day of Week, BCD	RTC Date, BCD	DS1339 Register 03h is identical to ISL1208 Register 06h
04h	RTC Date, BCD	RTC Month, BCD	DS1339 Register 04h is identical to ISL1208 Register 03h
05h	RTC Month, Century, BCD	RTC Year, BCD	DS1339 Register 05h is similar to ISL1208 Register 04h, but adds a bit for Century
06h	RTC Year, BCD	RTC Day of Week, BCD	DS1339 Register 06h is identical to ISL1208 Register 05h
07h	Alarm 1, seconds	Status (see text)	Alarm 1 Seconds register is similar to ISL1208 Alarm Seconds, but the control bit is different.
08h	Alarm 1, minutes	Control (see text)	Alarm 1 Minutes register is similar to ISL1208 Alarm Minutes, but the control bit is different.
09h	Alarm 1, Hours	N/A	Alarm 1 Hours register is similar to ISL1208 Alarm Hours, but the 12/24 bit and control bit is different.
0Ah	Alarm 1 Day/Date	ATR control	Alarm 1 Day/Date register combines the ISL1208 Day and Date alarm register functions
0Bh	Alarm 2, minutes	DTR control	Alarm 2 Minutes register is similar to ISL1208 Alarm Minutes, but the control bit is different.
0Ch	Alarm 2, Hours	Alarm, seconds	Alarm 2 Hours register is similar to ISL1208 Alarm Hours, but the 12/24 bit and control bit is different.
0Dh	Alarm 2 Day/Date	Alarm, minutes	Alarm 2 Day/Date register combines the ISL1208 Day and Date alarm register functions
0Eh	Control (see text)	Alarm, Hours	
0Fh	Status (see text)	Alarm, Date	
10h	Trickle Charger	Alarm, Month	ISL1208 does not control trickle charge
11h	N/A	Alarm, Day of Week	
12h	N/A	General purpose memory	No GPM in the DS1339
13h	N/A	General purpose memory	No GPM in the DS1339

N/A - Indicates Register not available for access

Status Register

The DS1339 status register (addr 0Fh) has a bit for oscillator fail and one bit each for the Alarms to indicate alarm has been detected. The ISL1208 Status register (addr 07h) includes a clock fail bit and one alarm bit (only one alarm in the ISL1208). The clock fail bit is different from the DS1339 oscillator fail bit, as it denotes the total loss of power to the device and therefore the RTC registers are no longer valid. The Status register for the ISL1208 also provides control bits as well as other status bits, including battery backup indication, write protection, oscillator on/off control and automatic reset of status bits after a read.

Control Registers

The control registers for the two devices are set up very differently. The DS1339 has one control register (addr 0Eh) with the following bits:

TABLE 2.

7	6	5	4	3	2	1	0
EOSC-	0	0	RS2	RS1	INTCN	A2IE	AQIE

The EOSC- bit turns the oscillator ON or OFF. This is the same function as the XTOSCB bit in the ISL1208 status register (addr 07h) with the same polarity.

RS1 and RS2 control the clock output frequency in four steps, 1Hz, 4.096kHz, 8.192kHz, 32.768kHz. The ISL1208 has 16 different steps including those four options, and is controlled from addr 08h (Interrupt control) with 4 bits.

INTCN controls the alarms and interrupt outputs. Since the ISL1208 only has one alarm and one output there is no similar control bit.

A2IE, A1IE enable the alarms independently. The ISL1208 has a single alarm and one enable in the Interrupt control register (addr 08h).

The ISL1208 also has control register for analog and digital trimming of the RTC clock which are not available in the DS1339.

I²C Interface: Communicating with the ISL1208 versus the DS1339

There are two major differences between the DS1339 and the ISL1208 when using the I²C bus:

1. The first 7 bits of the slave address for the ISL1208 are 1101111, and for the DS1339 are 1101000. So a software change would need to be made to change the last 3 bits of the slave address.
2. The ISL1208 requires that the WRTC bit (addr 07h, bit 4) be set before writing to the RTC clock registers. This is to protect them from inadvertent writes. This will require a software change as well since two I²C writes will be required for changing the RTC registers.

The proper order for writing to the ISL1208 RTC registers is:

1. Write to addr 07h data 08h (set WRTC bit)
2. Write RTC time to any or all addr 00h through 06h.

Other RTC Devices

The ISL1209 device provides the same functionality as the ISL1208, but includes an event detector function in the 10 Ld MSOP package, so a board change is needed for that device. The event detector takes a logic "event" input and uses it to either stop the RTC counter to store the event time, or trigger an interrupt to a microcontroller.

Notice

1. Descriptions of circuits, software and other related information in this document are provided only to illustrate the operation of semiconductor products and application examples. You are fully responsible for the incorporation or any other use of the circuits, software, and information in the design of your product or system. Renesas Electronics disclaims any and all liability for any losses and damages incurred by you or third parties arising from the use of these circuits, software, or information.
 2. Renesas Electronics hereby expressly disclaims any warranties against and liability for infringement or any other claims involving patents, copyrights, or other intellectual property rights of third parties, by or arising from the use of Renesas Electronics products or technical information described in this document, including but not limited to, the product data, drawings, charts, programs, algorithms, and application examples.
 3. No license, express, implied or otherwise, is granted hereby under any patents, copyrights or other intellectual property rights of Renesas Electronics or others.
 4. You shall not alter, modify, copy, or reverse engineer any Renesas Electronics product, whether in whole or in part. Renesas Electronics disclaims any and all liability for any losses or damages incurred by you or third parties arising from such alteration, modification, copying or reverse engineering.
 5. Renesas Electronics products are classified according to the following two quality grades: "Standard" and "High Quality". The intended applications for each Renesas Electronics product depends on the product's quality grade, as indicated below.

"Standard": Computers; office equipment; communications equipment; test and measurement equipment; audio and visual equipment; home electronic appliances; machine tools; personal electronic equipment; industrial robots; etc.

"High Quality": Transportation equipment (automobiles, trains, ships, etc.); traffic control (traffic lights); large-scale communication equipment; key financial terminal systems; safety control equipment; etc.

Unless expressly designated as a high reliability product or a product for harsh environments in a Renesas Electronics data sheet or other Renesas Electronics document, Renesas Electronics products are not intended or authorized for use in products or systems that may pose a direct threat to human life or bodily injury (artificial life support devices or systems; surgical implantations; etc.), or may cause serious property damage (space system; undersea repeaters; nuclear power control systems; aircraft control systems; key plant systems; military equipment; etc.). Renesas Electronics disclaims any and all liability for any damages or losses incurred by you or any third parties arising from the use of any Renesas Electronics product that is inconsistent with any Renesas Electronics data sheet, user's manual or other Renesas Electronics document.
 6. When using Renesas Electronics products, refer to the latest product information (data sheets, user's manuals, application notes, "General Notes for Handling and Using Semiconductor Devices" in the reliability handbook, etc.), and ensure that usage conditions are within the ranges specified by Renesas Electronics with respect to maximum ratings, operating power supply voltage range, heat dissipation characteristics, installation, etc. Renesas Electronics disclaims any and all liability for any malfunctions, failure or accident arising out of the use of Renesas Electronics products outside of such specified ranges.
 7. Although Renesas Electronics endeavors to improve the quality and reliability of Renesas Electronics products, semiconductor products have specific characteristics, such as the occurrence of failure at a certain rate and malfunctions under certain use conditions. Unless designated as a high reliability product or a product for harsh environments in a Renesas Electronics data sheet or other Renesas Electronics document, Renesas Electronics products are not subject to radiation resistance design. You are responsible for implementing safety measures to guard against the possibility of bodily injury, injury or damage caused by fire, and/or danger to the public in the event of a failure or malfunction of Renesas Electronics products, such as safety design for hardware and software, including but not limited to redundancy, fire control and malfunction prevention, appropriate treatment for aging degradation or any other appropriate measures. Because the evaluation of microcomputer software alone is very difficult and impractical, you are responsible for evaluating the safety of the final products or systems manufactured by you.
 8. Please contact a Renesas Electronics sales office for details as to environmental matters such as the environmental compatibility of each Renesas Electronics product. You are responsible for carefully and sufficiently investigating applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive, and using Renesas Electronics products in compliance with all these applicable laws and regulations. Renesas Electronics disclaims any and all liability for damages or losses occurring as a result of your noncompliance with applicable laws and regulations.
 9. Renesas Electronics products and technologies shall not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable domestic or foreign laws or regulations. You shall comply with any applicable export control laws and regulations promulgated and administered by the governments of any countries asserting jurisdiction over the parties or transactions.
 10. It is the responsibility of the buyer or distributor of Renesas Electronics products, or any other party who distributes, disposes of, or otherwise sells or transfers the product to a third party, to notify such third party in advance of the contents and conditions set forth in this document.
 11. This document shall not be reprinted, reproduced or duplicated in any form, in whole or in part, without prior written consent of Renesas Electronics.
 12. Please contact a Renesas Electronics sales office if you have any questions regarding the information contained in this document or Renesas Electronics products.
- (Note 1) "Renesas Electronics" as used in this document means Renesas Electronics Corporation and also includes its directly or indirectly controlled subsidiaries.
- (Note 2) "Renesas Electronics product(s)" means any product developed or manufactured by or for Renesas Electronics.

(Rev.4.0-1 November 2017)



SALES OFFICES

Renesas Electronics Corporation

<http://www.renesas.com>

Refer to "<http://www.renesas.com/>" for the latest and detailed information.

Renesas Electronics America Inc.
1001 Murphy Ranch Road, Milpitas, CA 95035, U.S.A.
Tel: +1-408-432-8888, Fax: +1-408-434-5351

Renesas Electronics Canada Limited
9251 Yonge Street, Suite 8309 Richmond Hill, Ontario Canada L4C 9T3
Tel: +1-905-237-2004

Renesas Electronics Europe Limited
Dukes Meadow, Millboard Road, Bourne End, Buckinghamshire, SL8 5FH, U.K
Tel: +44-1628-651-700, Fax: +44-1628-651-804

Renesas Electronics Europe GmbH
Arcadiastrasse 10, 40472 Düsseldorf, Germany
Tel: +49-211-6503-0, Fax: +49-211-6503-1327

Renesas Electronics (China) Co., Ltd.
Room 1709 Quantum Plaza, No.27 ZhichunLu, Haidian District, Beijing, 100191 P. R. China
Tel: +86-10-8235-1155, Fax: +86-10-8235-7679

Renesas Electronics (Shanghai) Co., Ltd.
Unit 301, Tower A, Central Towers, 555 Langao Road, Putuo District, Shanghai, 200333 P. R. China
Tel: +86-21-2226-0888, Fax: +86-21-2226-0999

Renesas Electronics Hong Kong Limited
Unit 1601-1611, 16/F., Tower 2, Grand Century Place, 193 Prince Edward Road West, Mongkok, Kowloon, Hong Kong
Tel: +852-2265-6688, Fax: +852-2886-9022

Renesas Electronics Taiwan Co., Ltd.
13F, No. 363, Fu Shing North Road, Taipei 10543, Taiwan
Tel: +886-2-8175-9600, Fax: +886-2-8175-9670

Renesas Electronics Singapore Pte. Ltd.
80 Bendemeer Road, Unit #06-02 Hyflux Innovation Centre, Singapore 339949
Tel: +65-6213-0200, Fax: +65-6213-0300

Renesas Electronics Malaysia Sdn.Bhd.
Unit 1207, Block B, Menara Amcorp, Amcorp Trade Centre, No. 18, Jln Persiaran Barat, 46050 Petaling Jaya, Selangor Darul Ehsan, Malaysia
Tel: +60-3-7955-9390, Fax: +60-3-7955-9510

Renesas Electronics India Pvt. Ltd.
No.777C, 100 Feet Road, HAL 2nd Stage, Indiranagar, Bangalore 560 038, India
Tel: +91-80-67208700, Fax: +91-80-67208777

Renesas Electronics Korea Co., Ltd.
17F, KAMCO Yangjae Tower, 262, Gangnam-daero, Gangnam-gu, Seoul, 06265 Korea
Tel: +82-2-558-3737, Fax: +82-2-558-5338