

Single-Chip 5V Wireless Power Transmitter IC for TX-A5 and A11

POWER MANAGEMENT | ANALOG & RE | INTERPACE & CONNECTIVITY | CLOCKS & TIMING | MEMORY & LOGIC | TOUCH & USER INTERPACE

IDT 5V Wireless Power Transmitter IC

FEATURES

- Conforms with WPC Specification version 1.1
- Operates from 5V (±5%) supplies
- Multi-mode (multi-protocol) capability with dynamic switching
- Uses Full-Bridge Inverter for optimal coil drive (integrated half-bridge plus external half-bridge)
- Demodulates and Decodes communication packets from WPC-compliant Receivers
- Implements closed-loop power transfer control
- Optional 2-way communication security and encryption to 64-bit
- Master/Slave I²C Interface
- Compact 6mm x 6mm 48-lead TQFN package

SAFETY FEATURES


- Over-Current and Over-Temperature Protection
- Programmable Foreign Object Detection (FOD)
- Power Good and Fault Condition Detection with LED Indicator outputs

TARGET WIRELESS POWER APPS

- · Charging mats or pads
- Public Facilities Shops, Libraries, Airports, Schools
- Office Furniture
- Personal Computer Docks
- Portable Instruments
- Medical Devices


VALUE ADDED BEYOND WPC "QI"

- Delivers industry-leading power to receiver (5W to WPC-compliant receivers, more when using IDTP9020 Receiver)
- Optional, proprietary Back-Channel Communication provides additional levels of encryption and security
- Manages Power Transfer Fault conditions automatically and controls Status indicator LEDs

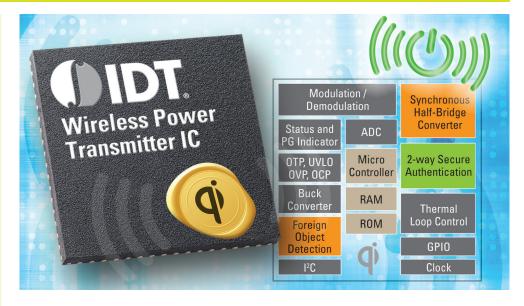

The IDTP9035 is a highly-integrated WPC-compliant wireless power transmitter IC for power transmitter design A5 and A11. The device operates with a 5V (±5%) adaptor, and utilizes an external half-bridge in addition to its integrated half-bridge inverter to provide a highly-integrated 5V transmitter solution for A5/A11 applications. The device controls the transferred power by modulating the switching frequency of the full-bridge inverter from 110kHz to 205kHz at a fixed 50% duty cycle specified by the WPC specification for an A5/A11 transmitter. It contains logic circuits required to demodulate and decode WPC-compliant message packets sent by the mobile device to adjust the transferred power.

Utilizing the IDTP9020 WPC-compliant Receiver, power transfer greater than 5W can be achieved. In addition to implementing the WPC-specified device identification communication sequence, the IDTP9035 features a proprietary back-channel communication mode compatible with other IDT Wireless Power products which provides additional secure authentication capabilities.

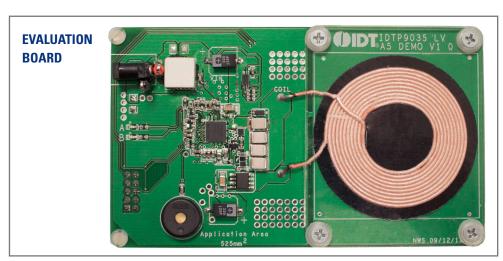

DSCLAMER Integrated Device Technology, Inc. (IDI) and its subsidiaries reserve the right to modify the products and/or specifications described herein at any time and at IDT's sole discretion. All information in this document, including descriptions or product features and performance, is subject to change without notice. Performance specifications and the operating parameters of the described product sear determined in the independent state and are not guaranteed to perform the same way whe installed in customer products. The information contained herein is provided without representation or warranty of any kind, whether express or implied, including, but not limited to, the suitability of IDTs products for any particular purpose, an implied verarinty of merchantability, or one-infringement of the ineliablectual property rights of IDT or any products are not intended for use in life support systems or similar devices where the failure or malfunction of an IDT product can be reasonably expected to significantly affect the health or safety of users. Anyone using an IDT product in such a manner does so at the own risk, abeart and express, written agreement by IDT.

tegrated Device Technology, IDT and the IDT logo are registered trademarks of IDT. Other trademarks and service marks used herein, including protected names, logos and designs, are the property of IDT or their respective third party owners.

PB IDTP9035 REVA1212



WWW.WIRELESSPOWERBYIDT.COM

