

**ISL73141SEHMF7**

Total Dose Test Report

**Introduction**

This report documents the results of Low Dose Rate (LDR) total dose testing and subsequent high temperature biased annealing of the ISL73141SEHMF7 5V, 14-Bit, 1Msps Successive Approximation Register (SAR) Analog-to-Digital Converter. The tests were conducted to provide an assessment of the total dose hardness of the part and to provide an estimate of bias or anneal sensitivity. Parts were irradiated biased and unbiased at LDR (0.01rad(Si)/s) to 100krad(Si), followed by a 168-hour high temperature anneal at 100°C under bias. The ISL73141SEHMF7 is rated to 75krad(Si) at LDR.

**Product Description**


The ISL73141SEHMF7 is a radiation hardened high precision 14-bit, 1Msps SAR Analog-to-Digital Converter (ADC) that features Signal-to-Noise Ratio (SNR) of 82.1dBFS and dissipates only 60mW when operating from a 5V supply.

The ISL73141SEHMF7 features 1Msps throughput at 5V with no data latency and features excellent linearity and dynamic accuracy. It also provides a high-speed SPI-compatible serial interface that supports logic ranging from 2.2V to 3.6V using a separate digital I/O supply pin.

The ISL73141SEHMF7 provides a separate power-down pin that reduces power dissipation to <50µW. The analog input signal range is determined by an external reference.

The ISL73141SEHMF7 operates across the military temperature range from -55°C to +125°C and is available in a 14 Ld hermetically sealed Ceramic Dual Flat-Pack (CDFP) package.

The block diagram for the ISL73141SEHMF7 is shown in [Figure 1](#).

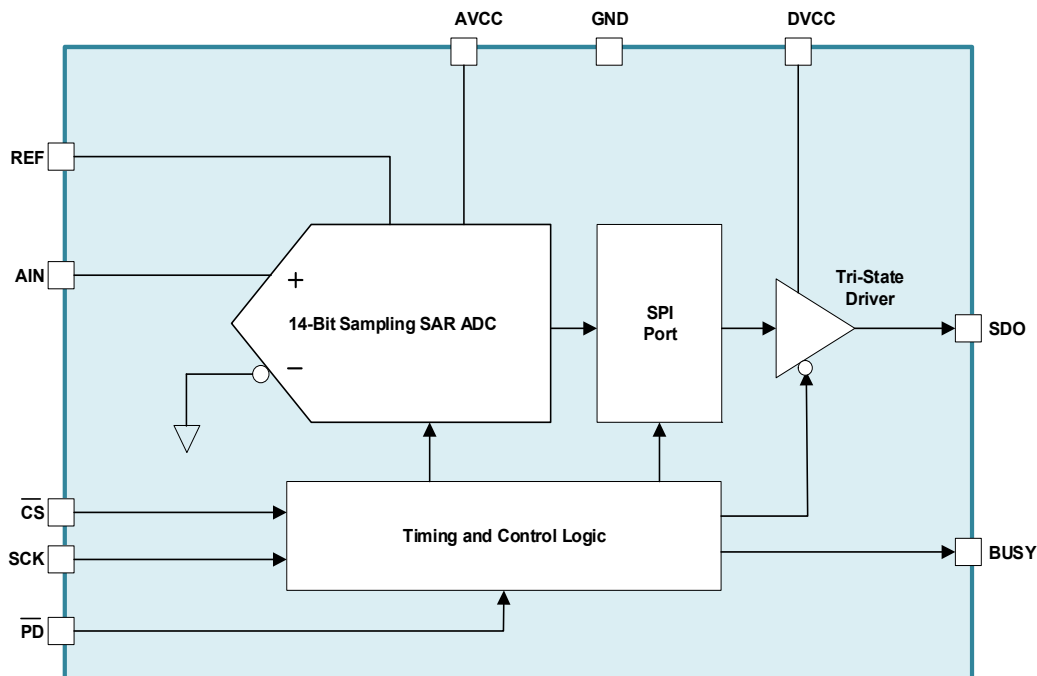


**Figure 1. ISL73141SEHMF7 Block Diagram**

**Related Literature**

For a full list of related documents, visit our website:

- [ISL73141SEH](#) device page
- MIL-STD-883 Test Method 1019

The pin configuration for the ISL73141SEHMF7 is shown in [Figure 2](#) with the pin descriptions shown in [Table 1](#).

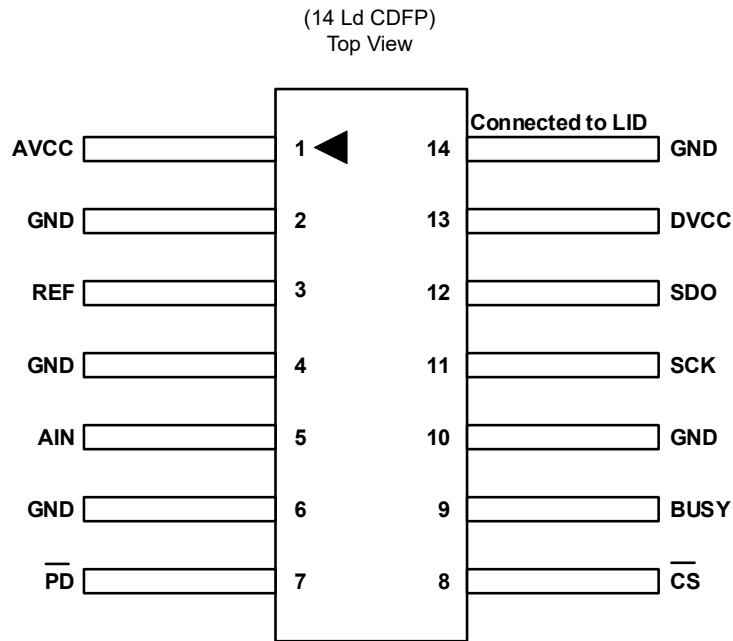

Note: The ESD triangular mark is indicative of Pin #1. It is a part of the device marking and is placed on the lid in the quadrant where Pin #1 is located.

**Figure 2. ISL73141SEHMF7 Package and Pin Configurations**

**Table 1. ISL73141SEHMF7 Pin Descriptions**

Pin Number	Pin Name	Description
1	AVCC	Analog supply. The supply range is 4.5V to 5.5V. Bypass this pin to GND with a 10 $\mu$ F ceramic capacitor.
2, 4, 6, 10, 14	GND	Analog and digital supply ground. Connect these pins directly to the PCB GND plane. Pin 14 (GND pin) is electrically connected to the package seal ring and lid.
3	REF	Reference input. The input range of REF is 3.9V to 4.2V. The voltage at the REF pin ( $V_{REF}$ ) defines the input range of the analog input as 0V to $V_{REF}$ . Bypass REF to GND with a low ESR 10 $\mu$ F ceramic capacitor.
5	AIN	Analog input. AIN supports an input voltage range of 0V to $V_{REF}$ .
8	$\overline{\text{CS}}$	Convert Start Low input. A falling edge on this input starts a new conversion. The conversion is timed using an internal oscillator. The device automatically powers down following the conversion process. The logic state of the $\overline{\text{CS}}$ pin controls the state of the SDO pin. A logic high on the $\overline{\text{CS}}$ pin disables the SDO pin driver and the SDO pin impedance is Hi-Z. A logic low on the $\overline{\text{CS}}$ pin enables the SDO driver (unless PD is low) and allows data to be read out following a conversion.
7	$\overline{\text{PD}}$	Power-down low input. When this pin is brought low the ADC enters power-down mode. If this occurs during a conversion, the conversion is halted and the SDO pin is placed in Hi-Z. Logic levels are determined by $DV_{CC}$ .
9	BUSY	Busy output. A logic high indicates a conversion is in progress. The BUSY indicator returns low following the completion of a conversion. Logic levels are determined by $DV_{CC}$ .
11	SCK	Serial data clock input. When $\overline{\text{CS}}$ is low and the BUSY indicator is low, the conversion result is shifted out on SDO on the rising edges of SCK, Most Significant Bit (MSB) first to Least Significant Bit (LSB) last. Logic levels are determined by $DV_{CC}$ . SCK should be held low when it is not being asserted.
12	SDO	Serial data output. The current conversion result is serially shifted out on this pin on the rising edges of SCK, MSB first to LSB last. The data stream is composed of 14 bits of conversion data followed by trailing zeros. Logic Levels are determined by $DV_{CC}$ .
13	DVCC	Digital I/O supply. Voltage range on this pin is 2.2V to 3.6V. $DV_{CC}$ is nominally set to the same supply voltage as the host interface (2.5V or 3.3V). Bypass $DV_{CC}$ to GND with 0.1 $\mu$ F capacitor.
LID	N/A	Package Lid is internally connected to GND through Pin 14.


## 1. Test Description

### 1.1 Irradiation Facilities

The irradiation was performed at 0.01rad(Si)/s using the Intersil Palm Bay Hopewell Designs N40 panoramic commercial irradiator. This irradiator uses PbAl spectrum hardening filters to shield the test board and devices under test against low energy secondary gamma radiation. Biased irradiation and annealing were performed on all samples following irradiation, at 100°C for 168 hours in a small temperature chamber.

### 1.2 Test Fixturing

[Figure 3](#) shows the configuration used for biased irradiation.

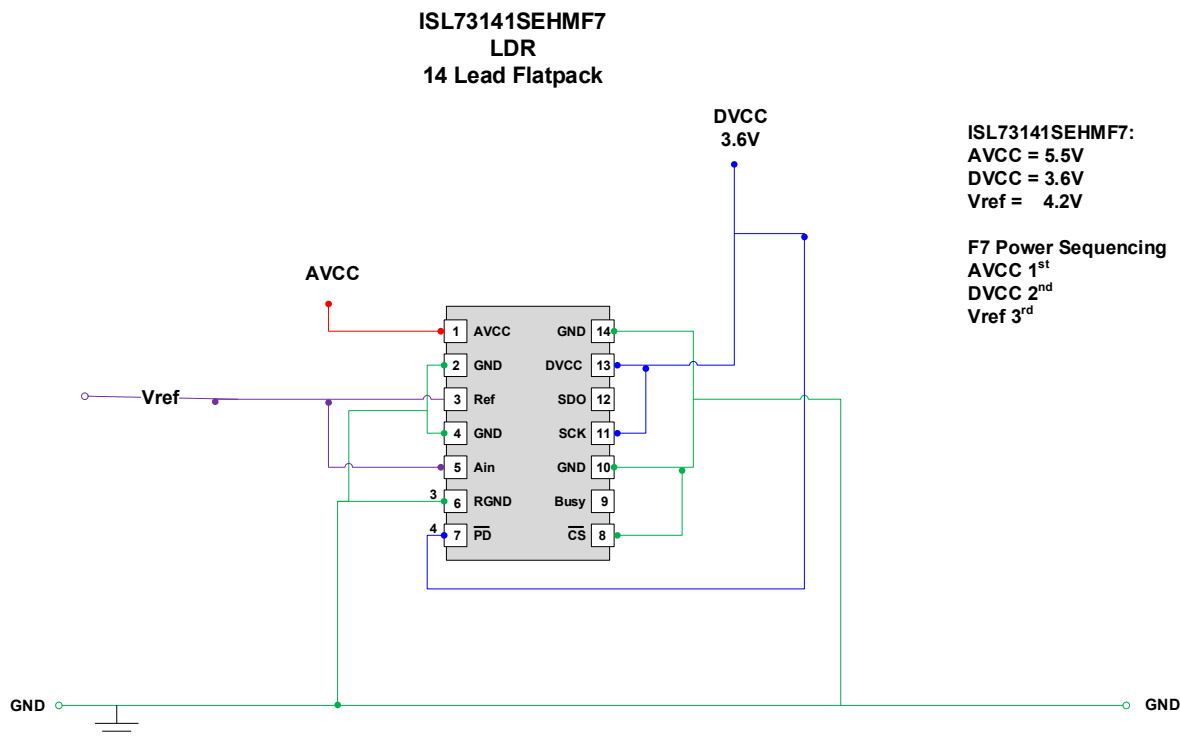

**Figure 3. ISL73141SEHMF7 TID Bias Schematic**

### 1.3 Characterization Equipment and Procedures

All electrical testing was performed at room temperature outside the irradiator, using production Automated Test Equipment (ATE) with data logging at each downpoint.

### 1.4 Experimental Matrix

Irradiation was performed in accordance with the guidelines of MIL-STD-883 Test Method 1019. The experimental matrix consisted of 15 samples irradiated under bias and 12 samples irradiated with all pins grounded. At anneal all 24 samples were biased. Because of the board limitations only 9 samples from the grounded bias group could be put on anneal.

The ISL73141SEHMF7 samples were drawn from wafer lots V6C498, V6C565, and V6C566. All samples were packaged in the standard 14 Ld SDFP package.

### 1.5 Downpoints

Downpoints for the tests were 0, 10, 30, 50, 75, and 100krad(Si), followed by a 168-hour high temperature anneal at 100°C under bias, as described in [Experimental Matrix](#).

## 2. Test Results

### 2.1 Attributes Data

Total dose testing of the ISL73141SEHMF7 is complete. All tested parameters passed the datasheet limits. [Table 2](#) summarizes the results.

**Table 2. ISL73141SEHMF7 Total Dose Test Attributes Data**

Dose Rate (rad(Si)/s)	Condition	Sample Size	Downpoint	Pass ( <a href="#">Note 1</a> )	Fail
0.01	Biased ( <a href="#">Figure 3</a> )	15	Pre-irradiation	15	
			10krad(Si)	15	0
			30krad(Si)	15	0
			50krad(Si)	15	0
			75krad(Si)	15	0
			100krad(Si)	15	0
			Anneal	15	0
0.01	GND	12	Pre-irradiation	12	
			10krad(Si)	12	0
			30krad(Si)	12	0
			50krad(Si)	12	0
			75krad(Si)	12	0
			100krad(Si)	12	0
			Anneal	9	0

**Note:**

1. A pass indicates a sample that passes all post-irradiation datasheet limits.

### 2.2 Key Parameter Variables Data

The plots in [Figure 4](#) through [Figure 32](#) illustrate the TID response of selected parameters as shown in [Table 3](#) in the Appendix. The plots show the average tested values of the key parameters as a function of total dose for both conditions, biased and grounded, and post anneal (PA). The plots also include error bars at each downpoint, representing the minimum and maximum measured values of the samples, although in some plots the error bars are not visible because of their values compared to the scale of the graph.

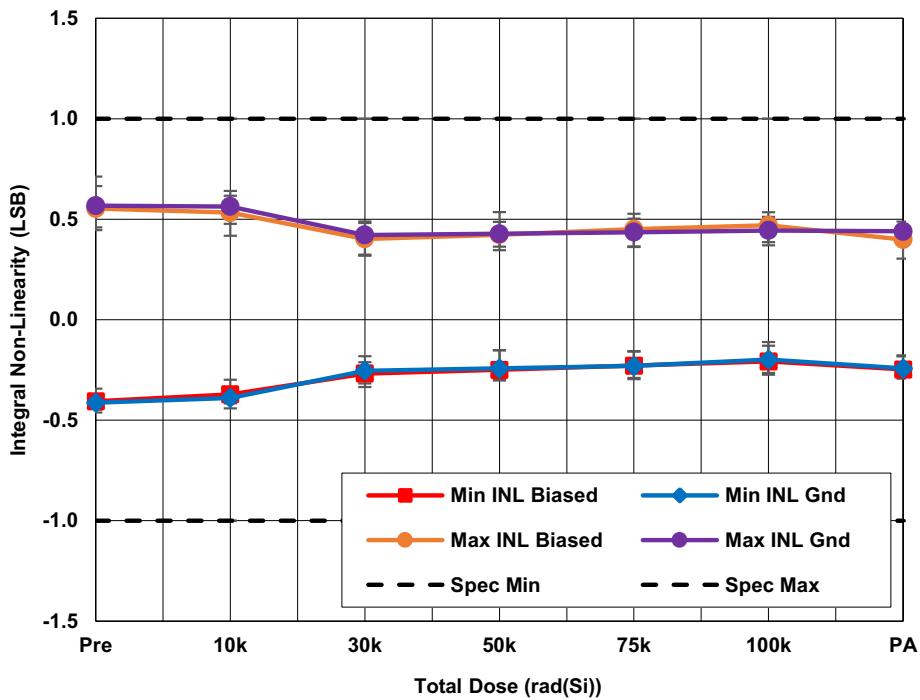


Figure 4. ISL73141SEHMF7 average minimum and maximum integral non-linearity (INL) with  $AV_{CC} = 5V$ ,  $DV_{CC} = 2.5V$ ,  $REF = 4.096V$ ,  $f_{SAMP} = 1Mps$ , and  $A_{IN} =$  full-scale sine wave as a function of LDR irradiation and anneal. The error bars represent the minimum and maximum measured values. The datasheet limits are -1 LSB minimum and 1 LSB maximum.

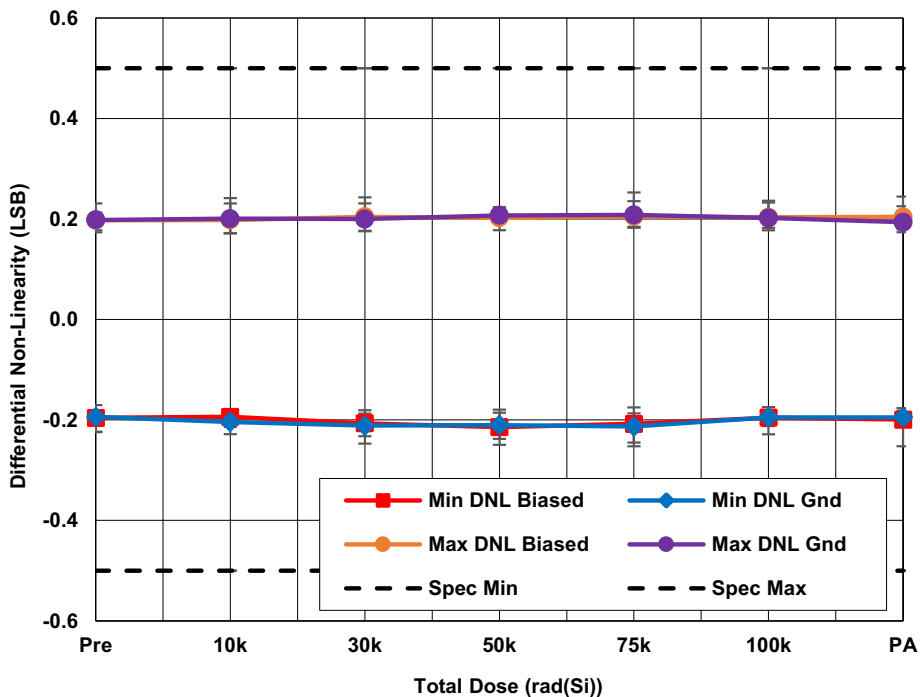


Figure 5. ISL73141SEHMF7 average minimum and maximum differential non-linearity (DNL) with  $AV_{CC} = 5V$ ,  $DV_{CC} = 2.5V$ ,  $REF = 4.096V$ ,  $f_{SAMP} = 1Mps$ , and  $A_{IN} =$  full-scale sine wave as a function of LDR irradiation and anneal. The error bars represent the minimum and maximum measured values. The datasheet limits are -0.5 LSB minimum and 0.5 LSB maximum.

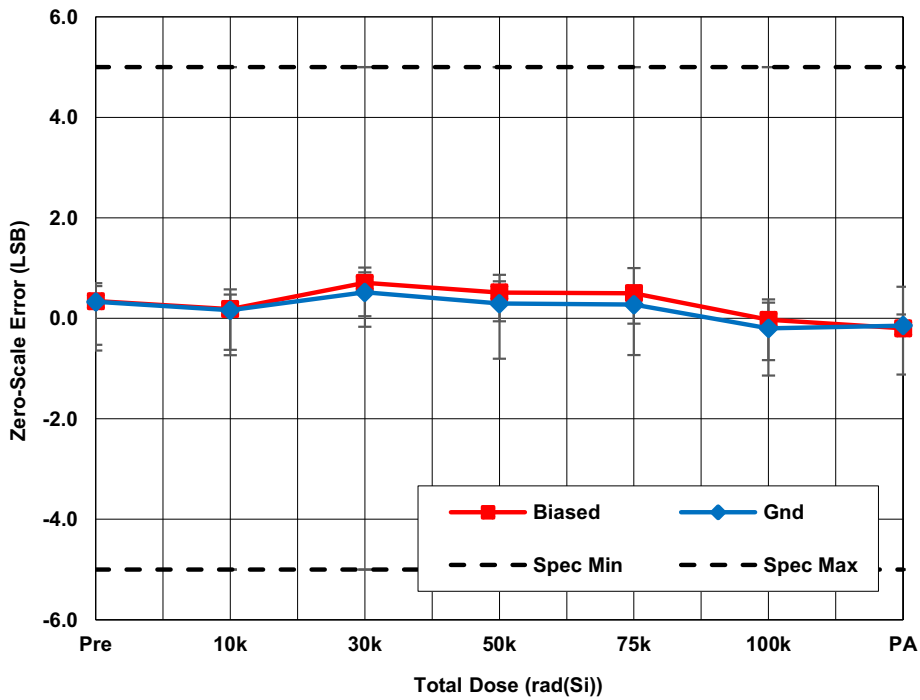


Figure 6. ISL73141SEHMF7 average zero-scale error (VOFF) with  $AV_{CC} = 5V$ ,  $DV_{CC} = 2.5V$ ,  $REF = 4.096V$ ,  $f_{SAMP} = 1Mps$ , and  $A_{IN} = GND$  as a function of LDR irradiation and anneal. The error bars represent the minimum and maximum measured values. The datasheet limits are -5 LSB minimum and 5 LSB maximum.

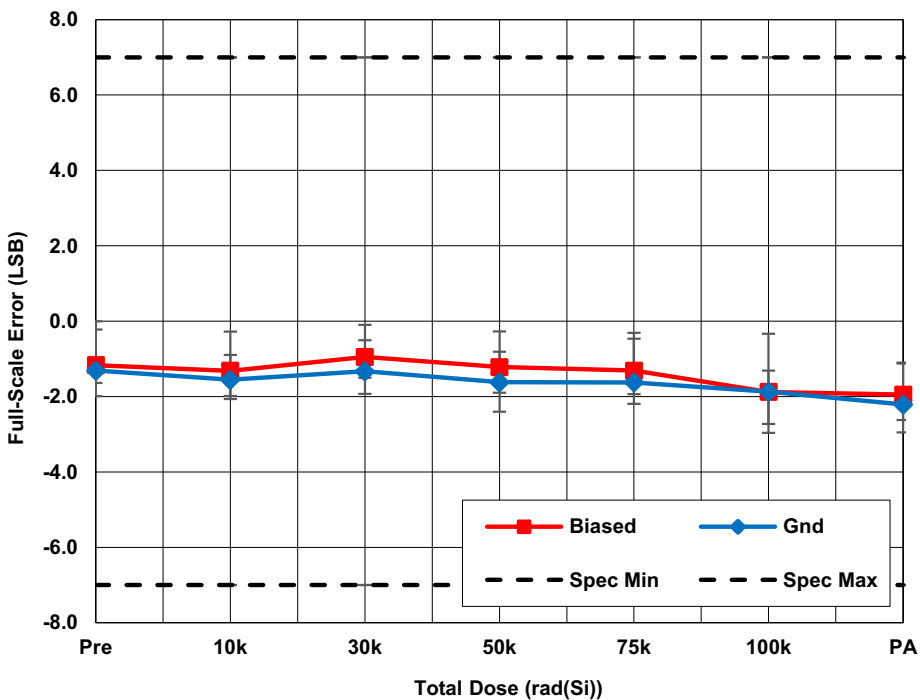


Figure 7. ISL73141SEHMF7 average full-scale error (FSE) with  $AV_{CC} = 5.0V$ ,  $DV_{CC} = 2.5V$ ,  $REF = 4.096V$ ,  $f_{SAMP} = 1Mps$ , and  $A_{IN} = VREF$  as a function of LDR irradiation and anneal. The error bars represent the minimum and maximum measured values. The datasheet limits are -7 LSB minimum and 7 LSB maximum.

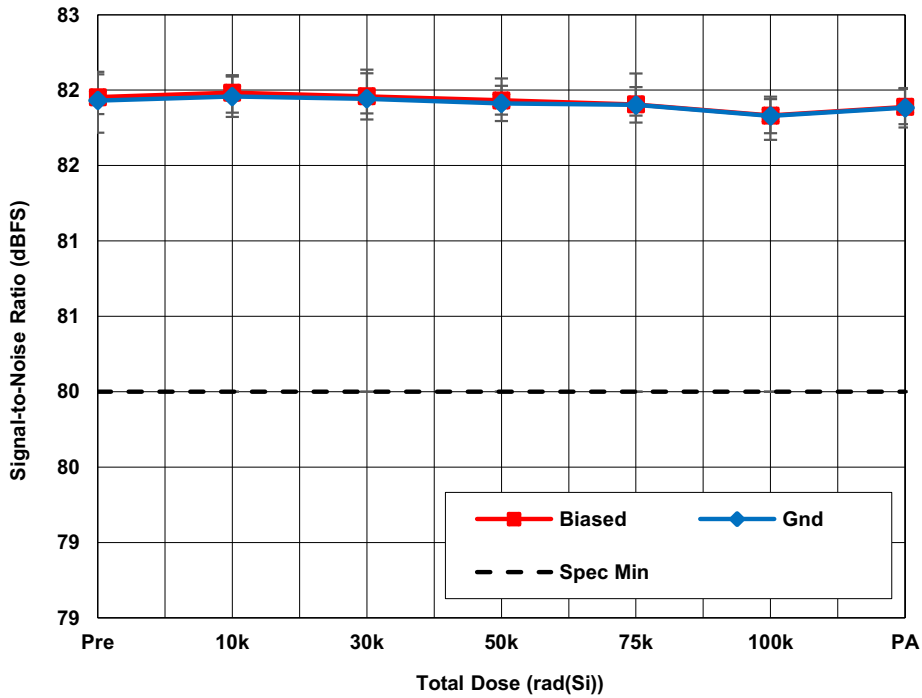


Figure 8. iSL73141SEHMF7 average signal-to-noise ratio (SNR) with  $AV_{CC} = 5.0V$ ,  $DV_{CC} = 2.5V$ ,  $REF = 4.096V$ ,  $f_{SAMP} = 105ksps$  and  $A_{IN} = -1dBFS$  as a function of LDR irradiation and anneal. The error bars represent the minimum and maximum measured values. The datasheet limit is 80dB minimum.

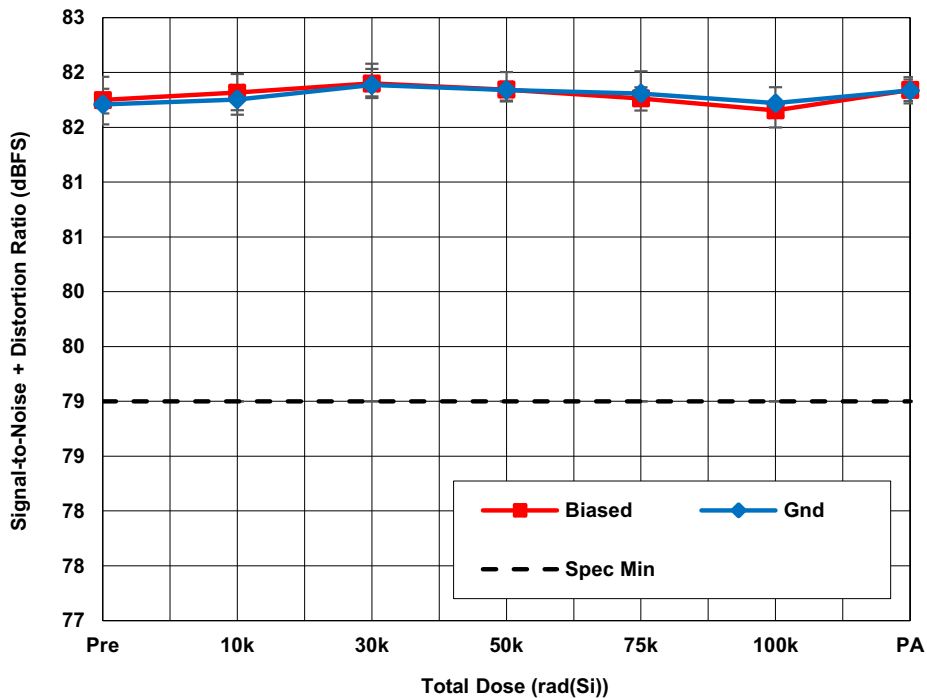


Figure 9. ISL73141SEHMF7 average signal-to-noise + distortion ratio (SINAD) with  $AV_{CC} = 5.0V$ ,  $DV_{CC} = 2.5V$ ,  $REF = 4.096V$ ,  $f_{SAMP} = 105ksps$ , and  $A_{IN} = -1dBFS$  as a function of LDR irradiation and anneal. The error bars represent the minimum and maximum measured values. The datasheet limit is 79dB minimum.

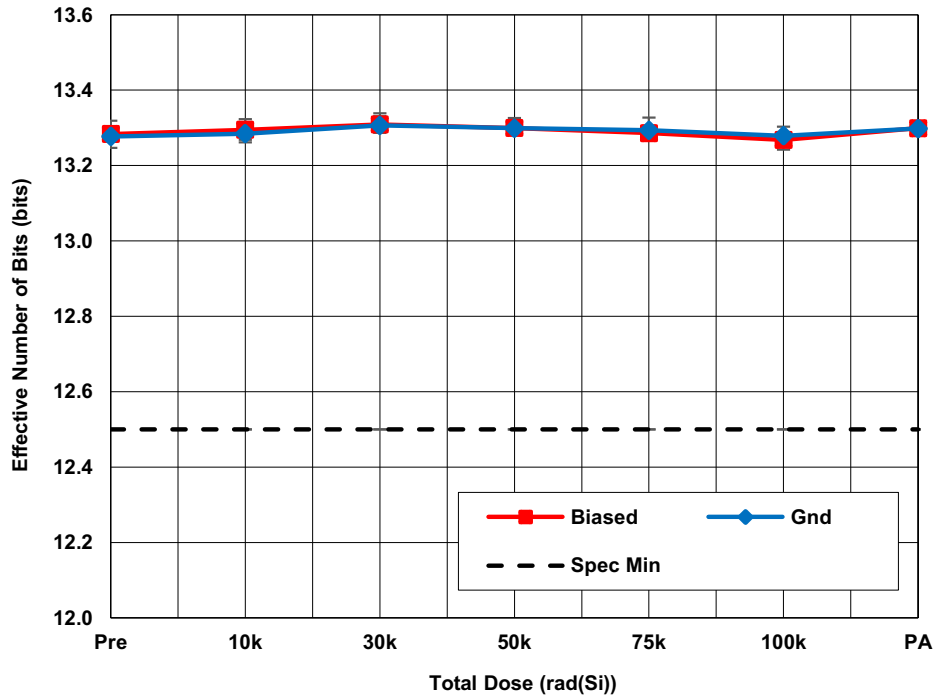


Figure 10. ISL73141SEHMF7 average effective number of bits (ENOB) with  $AV_{CC} = 5.0V$ ,  $DV_{CC} = 2.5V$ ,  $REF = 4.096V$ ,  $f_{SAMP} = 105ksps$ , and  $A_{IN} = -1dBFS$  as a function of LDR irradiation and anneal. The error bars represent the minimum and maximum measured values. The datasheet limit is 12.5 bits minimum.

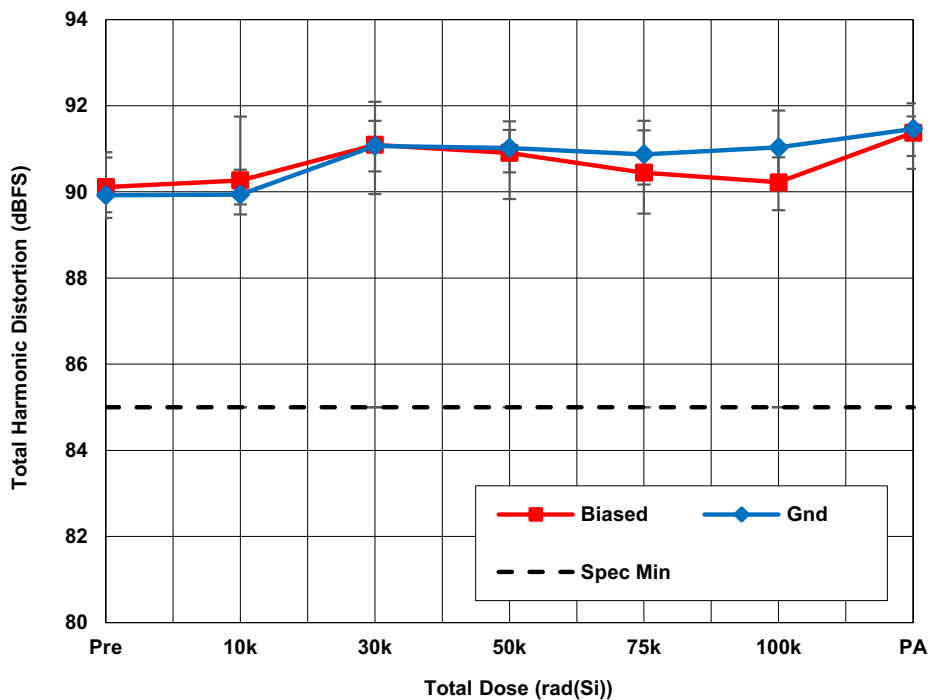


Figure 11. ISL73141SEHMF7 average total harmonic distortion (THD) with  $AV_{CC} = 5.0V$ ,  $DV_{CC} = 2.5V$ ,  $REF = 4.096V$ ,  $f_{SAMP} = 105ksps$  (first five harmonics), and  $A_{IN} = -1dBFS$  as a function of LDR irradiation and anneal. The error bars represent the minimum and maximum measured values. The datasheet limit is 85dB minimum.



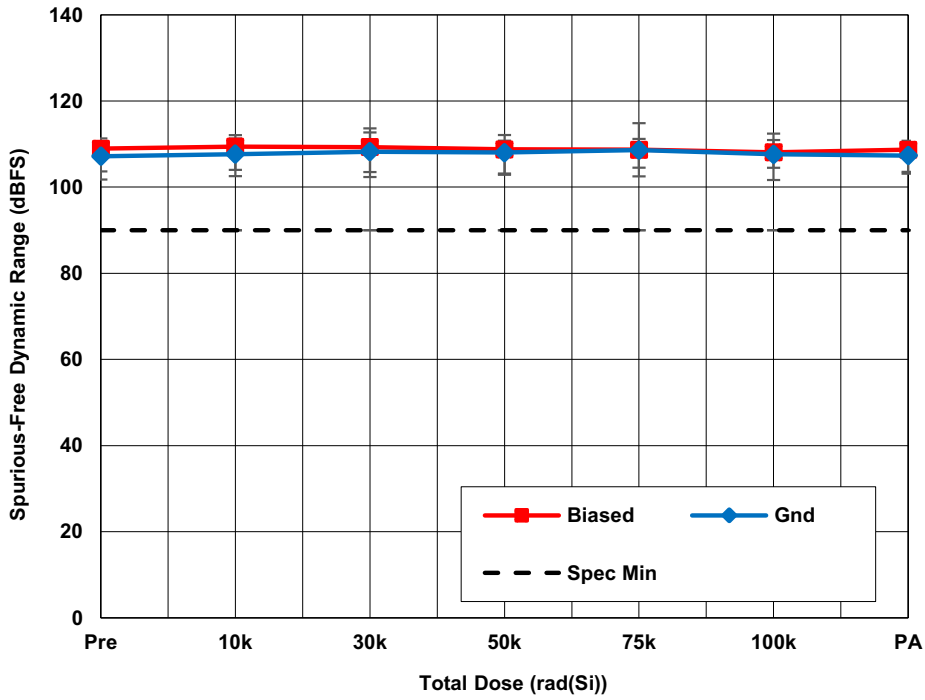


Figure 12. ISL73141SEHMF7 average spurious-free dynamic range (SFDR) with  $AV_{CC} = 5V$ ,  $DV_{CC} = 2.5V$ ,  $REF = 4.096V$ ,  $f_{SAMP} = 105ksps$  (first five harmonics), and  $A_{IN} = -1dBFS$  as a function of LDR irradiation and anneal. The error bars represent the minimum and maximum measured values. The datasheet limit is 90 dB minimum.

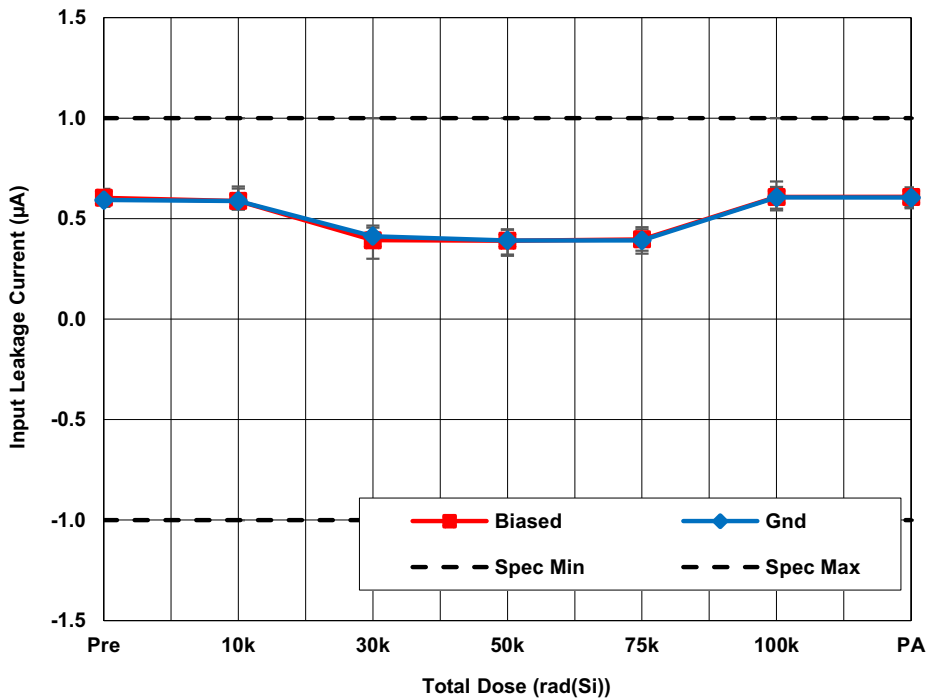


Figure 13. ISL73141SEHMF7 average input leakage current ( $I_{IN}$ ) with  $AV_{CC} = 5V$ ,  $DV_{CC} = 2.5V$ ,  $REF = 4.096V$  as a function of LDR irradiation and anneal. The error bars represent the minimum and maximum measured values. The datasheet limits are  $-1\mu A$  minimum and  $1\mu A$  maximum.

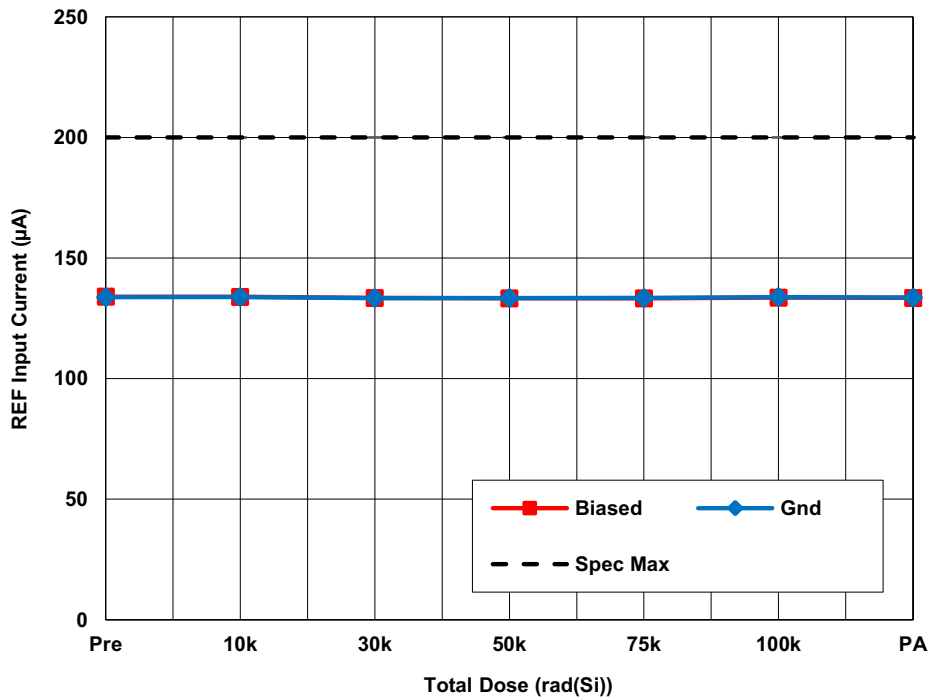


Figure 14. ISL73141SEHMF7 average REF input current ( $I_{REF}$ ) with  $AV_{CC} = 5V$ ,  $DV_{CC} = 2.5V$ ,  $REF = 4.096V$  as a function of LDR irradiation and anneal. The error bars represent the minimum and maximum measured values. The datasheet limit is  $200\mu A$  maximum.

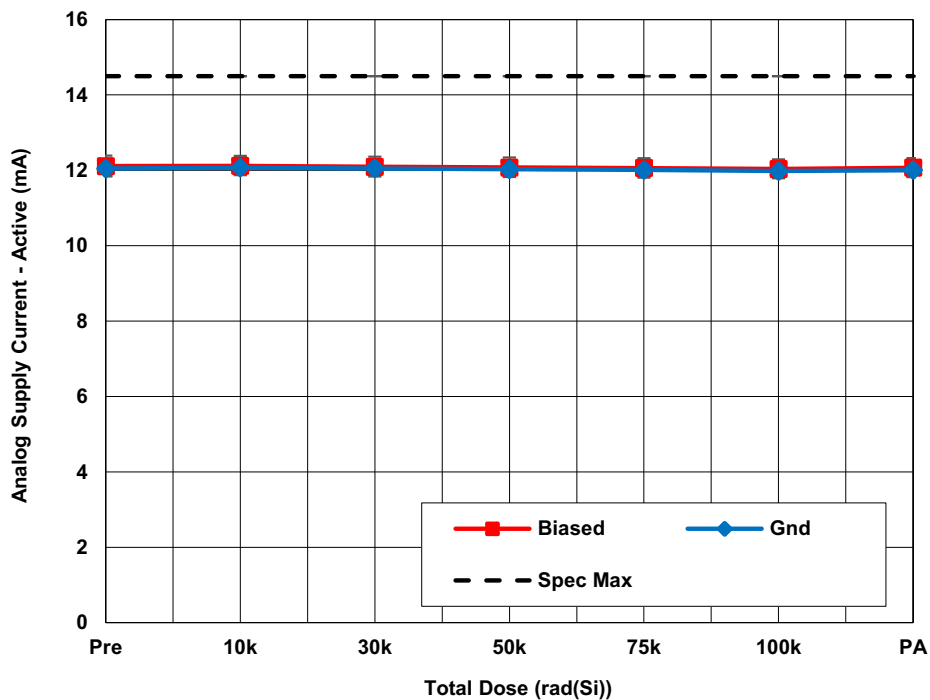


Figure 15. ISL73141SEHMF7 average analog supply current - active ( $I_{AVCC}$ ) with  $AV_{CC} = 5V$ ,  $DV_{CC} = 2.5V$ ,  $REF = 4.096V$ ,  $f_{SAMP} = 1Msps$ , and  $A_{IN} = -1dBFS$  as a function of LDR irradiation and anneal. The error bars represent the minimum and maximum measured values. The datasheet limit is  $14.5mA$  maximum.

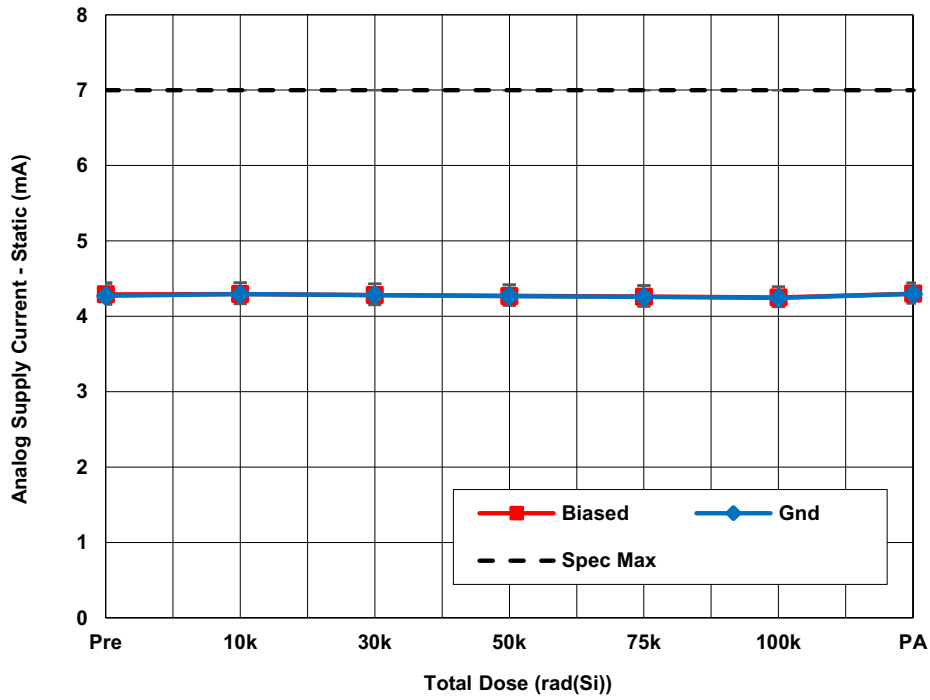


Figure 16. ISL73141SEHMF7 average analog supply current - static ( $I_{STATIC}$ ) with  $AV_{CC} = 5V$ ,  $DV_{CC} = 2.5V$ ,  $REF = 4.096V$ , and  $CS = DV_{CC}$  as a function of LDR irradiation and anneal. The error bars represent the minimum and maximum measured values. The datasheet limit is 7mA maximum.

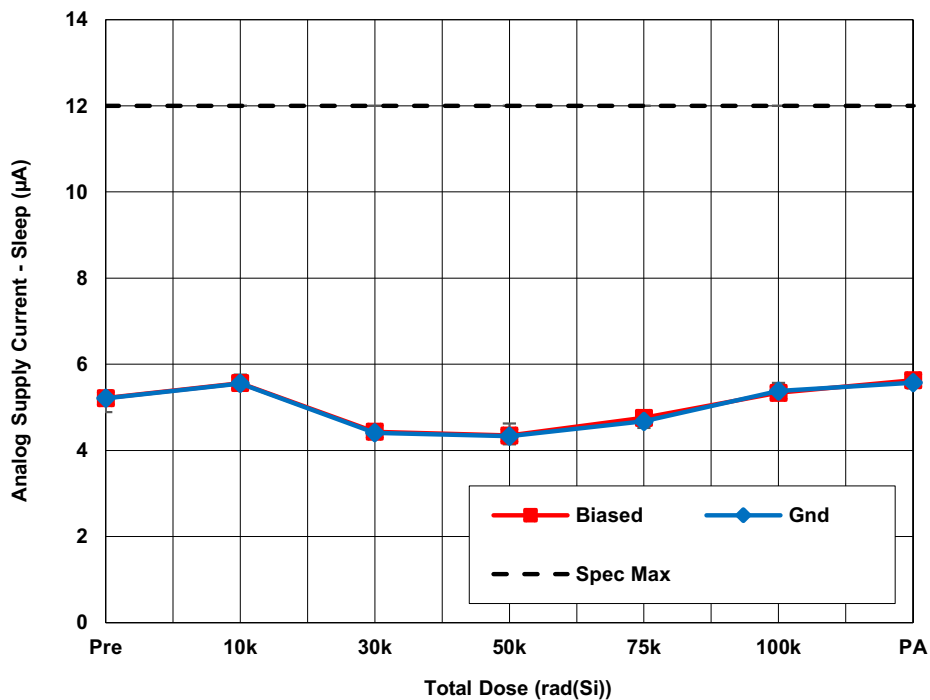


Figure 17. ISL73141SEHMF7 average analog supply current - sleep ( $I_{SLAVCC}$ ) with  $AV_{CC} = 5V$ ,  $DV_{CC} = 2.5V$ ,  $REF = 4.096V$ , and  $PD = GND$  as a function of LDR irradiation and anneal. The error bars represent the minimum and maximum measured values. The datasheet limit is 12µA maximum.

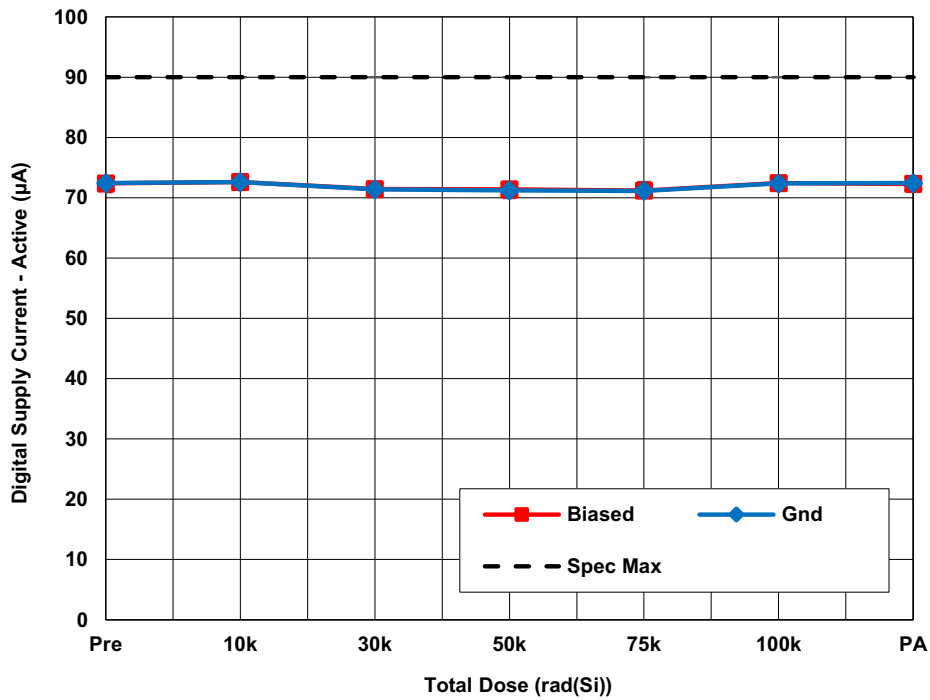


Figure 18. ISL73141SEHMF7 average digital supply current - active ( $I_{DVCC}$ ) with  $AV_{CC} = 5V$ ,  $DV_{CC} = 2.5V$ ,  $REF = 4.096V$ ,  $f_{SCK} = 50MHz$ , and  $C_L = 10pF$  as a function of LDR irradiation and anneal. The error bars represent the minimum and maximum measured values. The datasheet limit is  $90\mu A$  maximum.

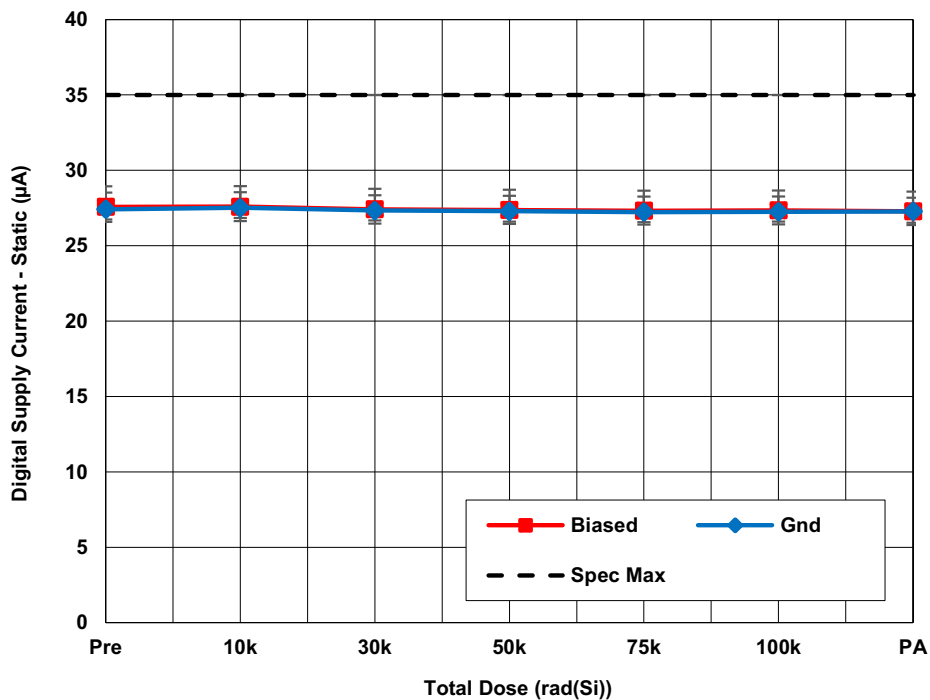


Figure 19. ISL73141SEHMF7 average digital supply current - static ( $I_{STDVCC}$ ) with  $AV_{CC} = 5V$ ,  $DV_{CC} = 2.5V$ ,  $REF = 4.096V$ , and  $CS = DV_{CC}$  as a function of LDR irradiation and anneal. The error bars represent the minimum and maximum measured values. The datasheet limit is  $35\mu A$  maximum.

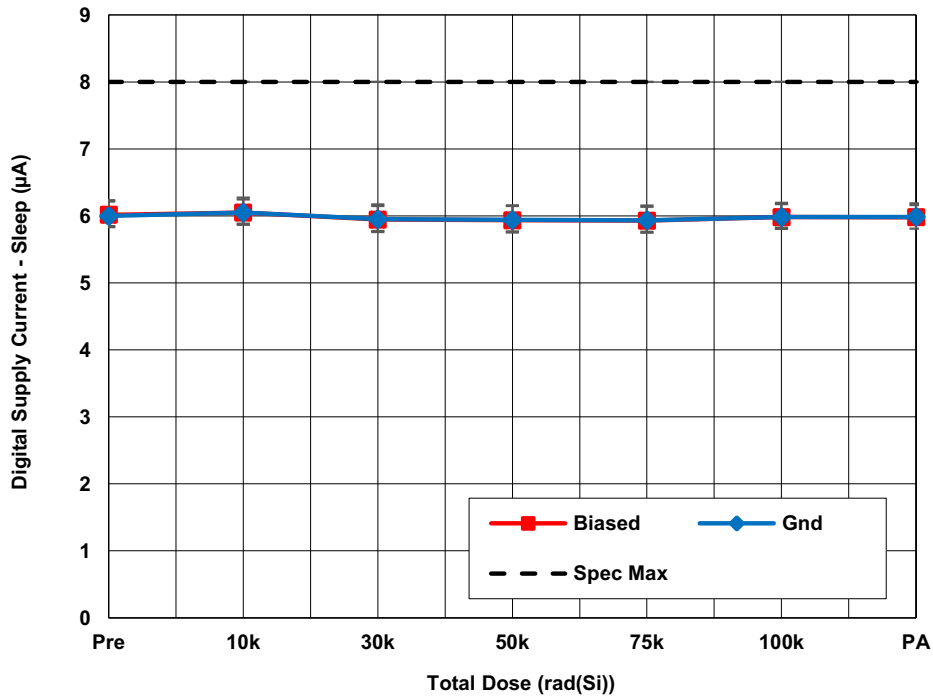


Figure 20. ISL73141SEHMF7 average digital supply current - sleep ( $I_{SLDVCC}$ ) with  $AV_{CC} = 5V$ ,  $DV_{CC} = 2.5V$ ,  $REF = 4.096V$ ,  $PD = GND$  as a function of LDR irradiation and anneal. The error bars represent the minimum and maximum measured values. The datasheet limit is  $8\mu A$  maximum.

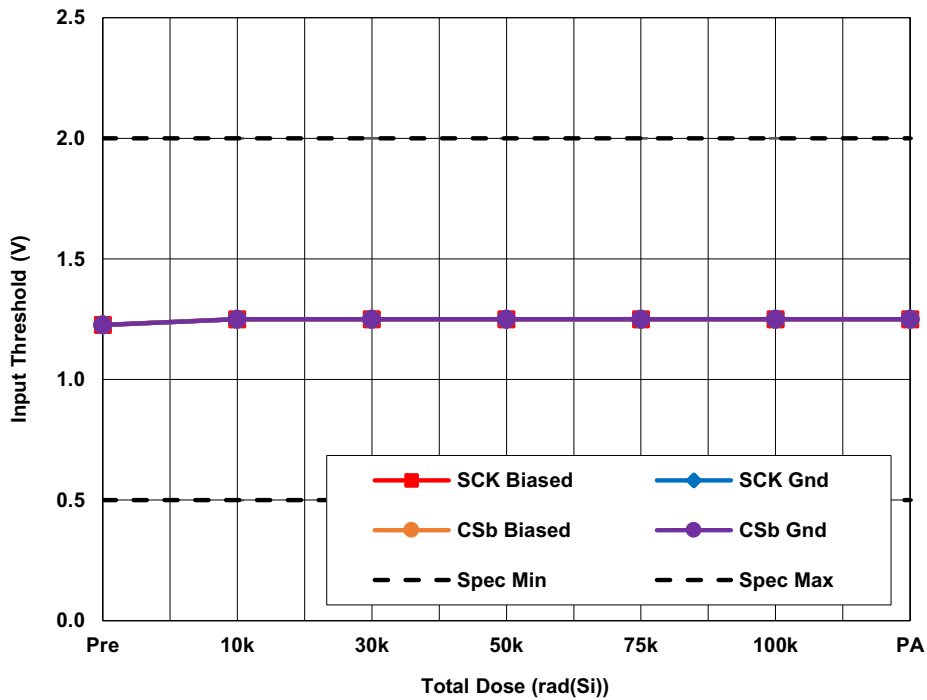


Figure 21. ISL73141SEHMF7 average high-level input ( $V_{IH}$ ) and low level input ( $V_{IL}$ ) with  $AV_{CC} = 5V$ ,  $DV_{CC} = 2.5V$ ,  $REF = 4.096V$  as a function of LDR irradiation and anneal. The error bars (if visible) represent the minimum and maximum measured values. The datasheet limit for  $V_{IH}$  is  $2.0V$  minimum and the datasheet limit for  $V_{IL}$  is  $0.5V$  maximum.

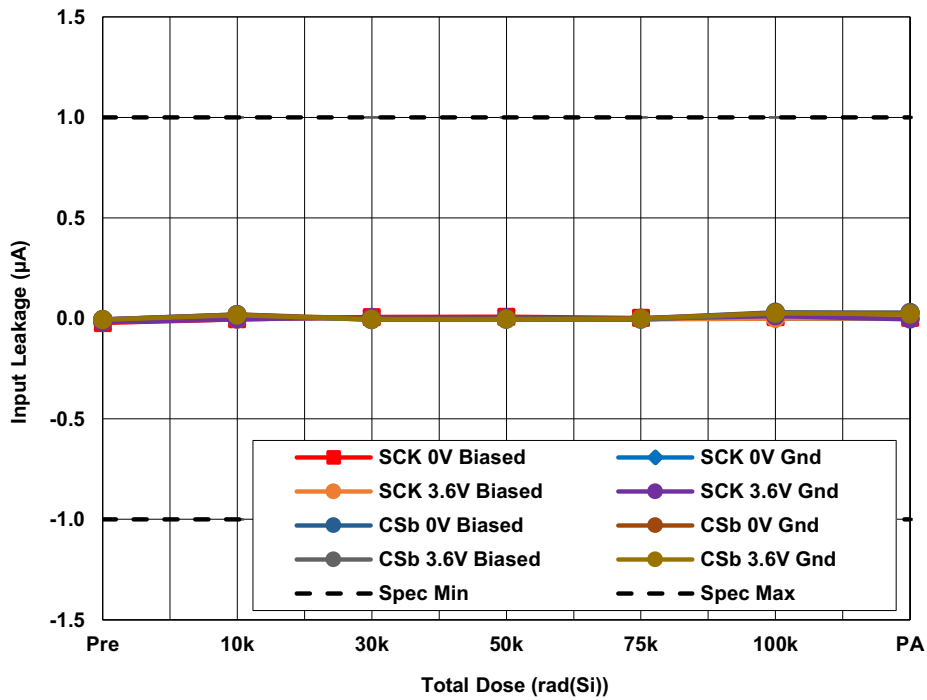


Figure 22. ISL73141SEHMF7 average input leakage current ( $I_{IN}$ ) on SCK and  $\overline{CS}$  with  $AV_{CC} = 5V$ ,  $DV_{CC} = 2.5V$ ,  $REF = 4.096V$  and  $V_{IN} = 0V$  and  $5V$  as a function of LDR irradiation and anneal. The error bars (if visible) represent the minimum and maximum measured values. The datasheet limits are  $-1\mu A$  minimum and  $1\mu A$  maximum.

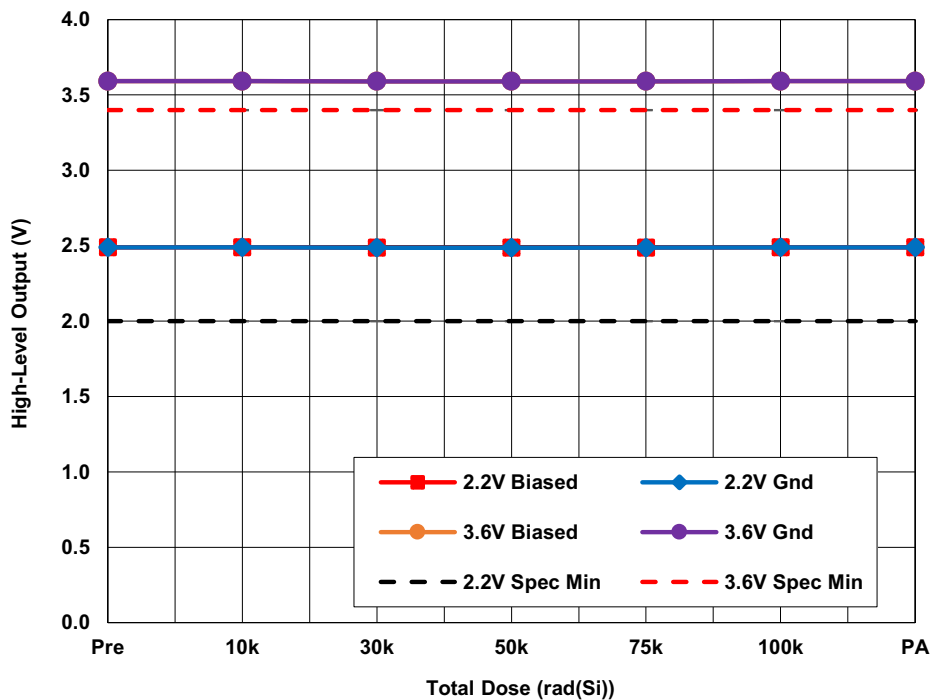


Figure 23. ISL73141SEHMF7 average high-level output ( $V_{OH}$ ) with  $AV_{CC} = 5V$ ,  $DV_{CC} = 2.2V$  and  $3.6V$ ,  $REF = 4.096V$  and  $I_O = -500\mu A$  as a function of LDR irradiation and anneal. The error bars (if visible) represent the minimum and maximum measured values. The datasheet limits are  $2.0V$  minimum for  $DV_{CC} = 2.2V$  and  $3.4V$  minimum for  $DV_{CC} = 3.6V$ .

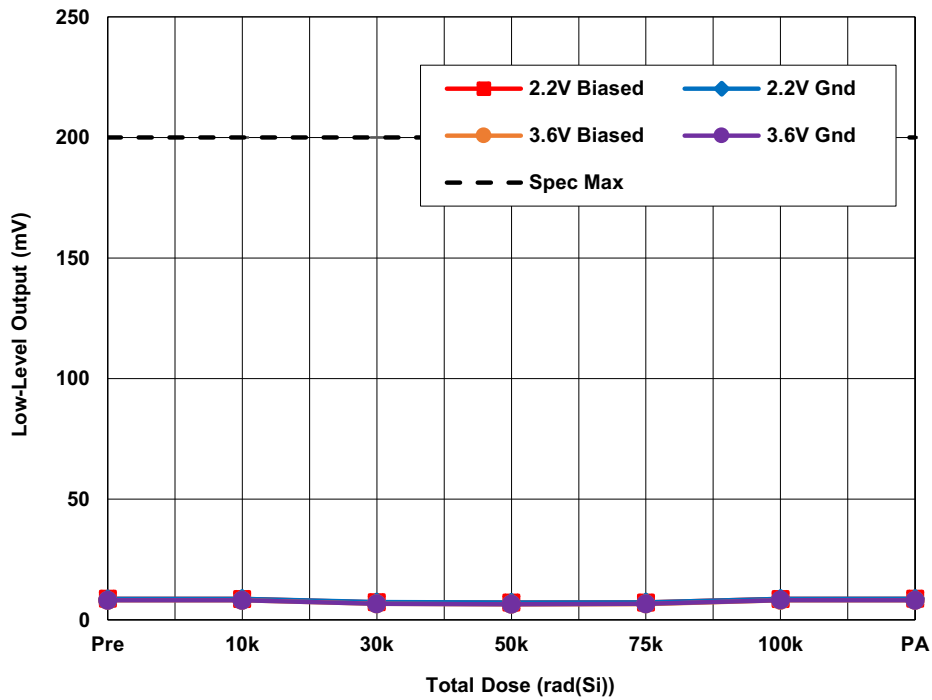


Figure 24. ISL73141SEHMF7 average low-level output ( $V_{OL}$ ) with  $AV_{CC} = 5V$ ,  $DV_{CC} = 2.5V$  and  $3.6V$ ,  $REF = 4.096V$ , and  $I_O = 500\mu A$  as a function of LDR irradiation and anneal. The error bars (if visible) represent the minimum and maximum measured values. The datasheet limit is 200mV maximum.

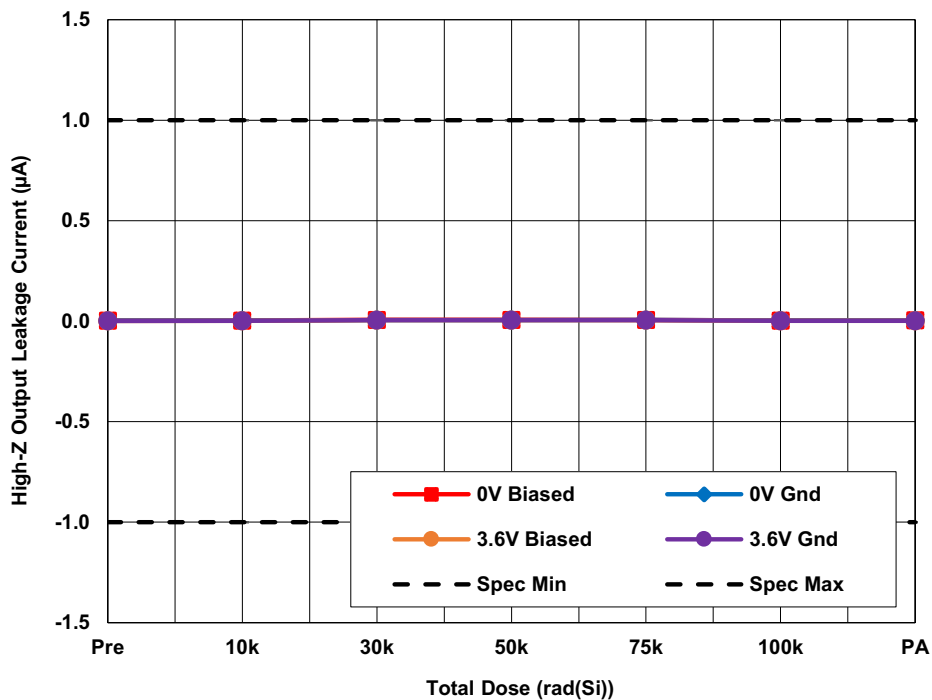


Figure 25. ISL73141SEHMF7 average output leakage current ( $I_{OZ}$ ) with  $AV_{CC} = 5V$ ,  $DV_{CC} = 3.6V$ ,  $REF = 4.096V$ , as a function of LDR irradiation and anneal. The error bars (if visible) represent the minimum and maximum measured values. The datasheet limits are  $-1\mu A$  minimum and  $1\mu A$  maximum.

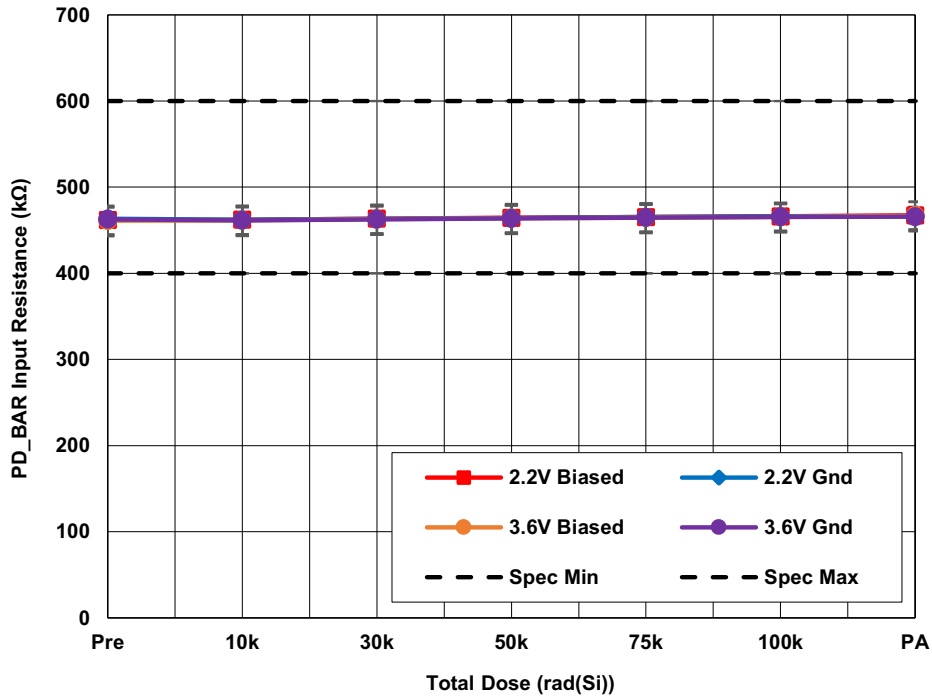


Figure 26. ISL73141SEHMF7 average  $\overline{R_{INPDL}}$  with  $AV_{CC} = 5V$ ,  $DV_{CC} = 2.2V$  and  $3.6V$  and  $REF = 4.096V$  as a function of LDR irradiation and anneal. The error bars represent the minimum and maximum measured values. The datasheet limits are  $400k\Omega$  minimum and  $600k\Omega$  maximum.

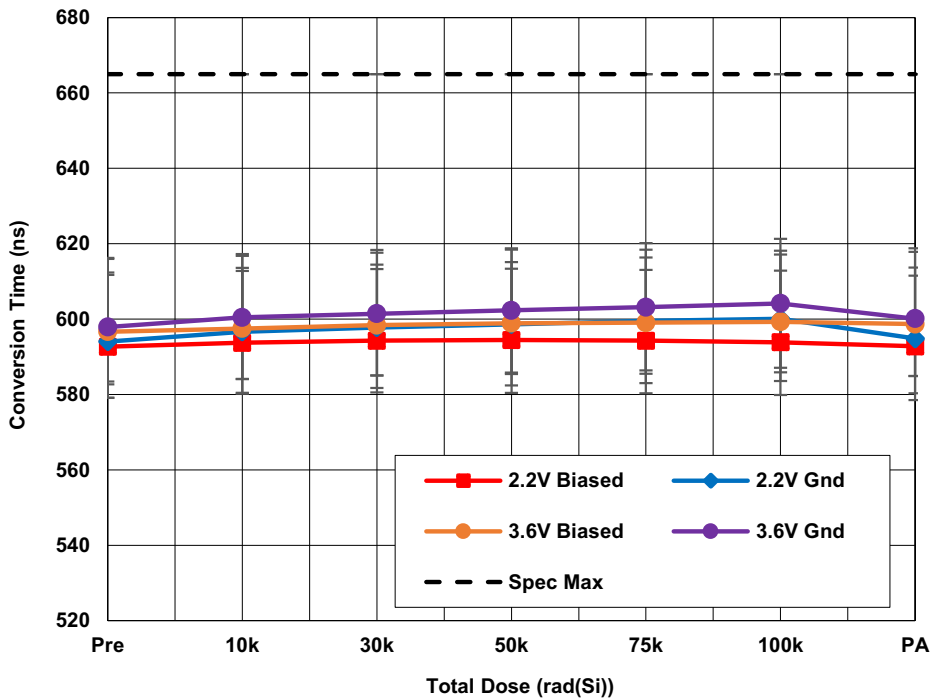


Figure 27. ISL73141SEHMF7 average conversion time ( $t_{CONV}$ ) with  $AV_{CC} = 4.5V$ ,  $DV_{CC} = 2.2V$  and  $AV_{CC} = 5.5V$ ,  $DV_{CC} = 3.6V$ ,  $REF = 4.096V$ ,  $f_{SAMP} = 1Mps$ , and  $A_{IN} = -1dbFS$  as a function of LDR irradiation and anneal. The error bars represent the minimum and maximum measured values. The datasheet limit is  $665ns$  maximum.



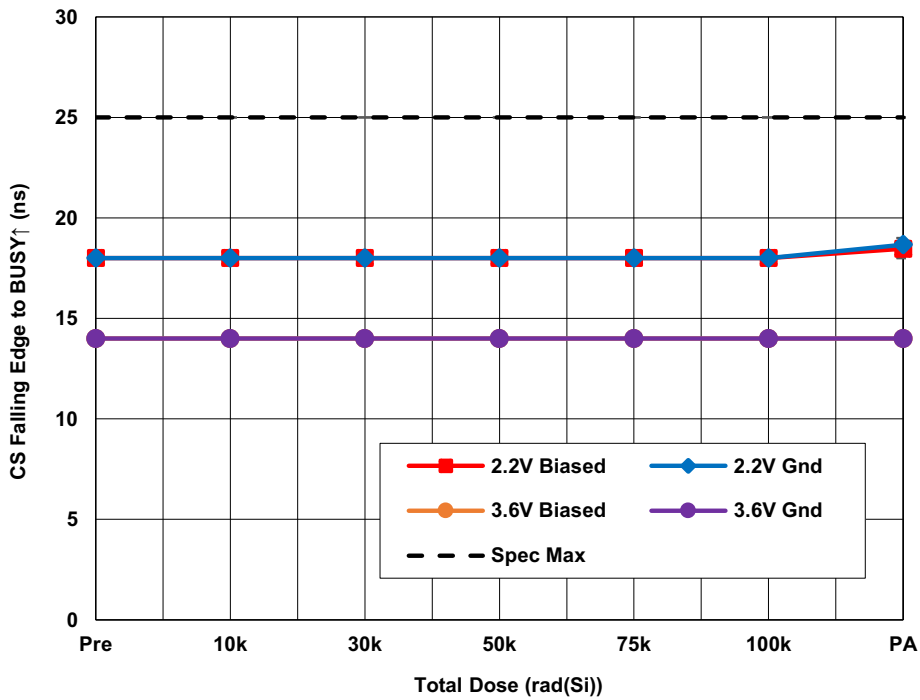


Figure 28. ISL73141SEHMF7 average  $\overline{CS}$  falling edge to BUSY rising edge ( $t_{BUSY_{LH}}$ ) with  $AV_{CC} = 4.5V$ ,  $DV_{CC} = 2.2V$  and  $AV_{CC} = 5.5V$ ,  $DV_{CC} = 3.6V$ ,  $REF = 4.096V$ ,  $f_{SAMP} = 1Msps$ ,  $A_{IN} = -1dbFS$  and  $C_L = 10pF$  as a function of LDR irradiation and anneal. The error bars represent the minimum and maximum measured values. The datasheet limit is 25ns maximum.

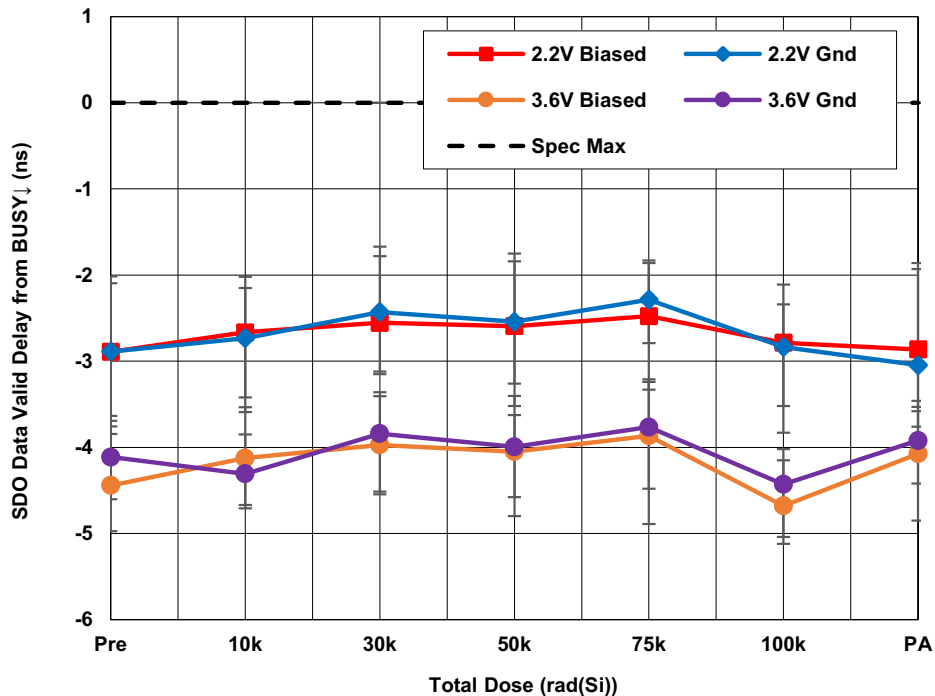


Figure 29. ISL73141SEHMF7 average SDO data valid delay from BUSY falling edge ( $t_{DBUSY_{LSDOV}}$ ) with  $AV_{CC} = 4.5V$ ,  $DV_{CC} = 2.2V$  and  $AV_{CC} = 5.5V$ ,  $DV_{CC} = 3.6V$ ,  $REF = 4.096V$ ,  $f_{SAMP} = 1Msps$ ,  $A_{IN} = -1dbFS$  and  $C_L = 10pF$  as a function of LDR irradiation and anneal. The error bars represent the minimum and maximum measured values. The datasheet limit is 0ns maximum.

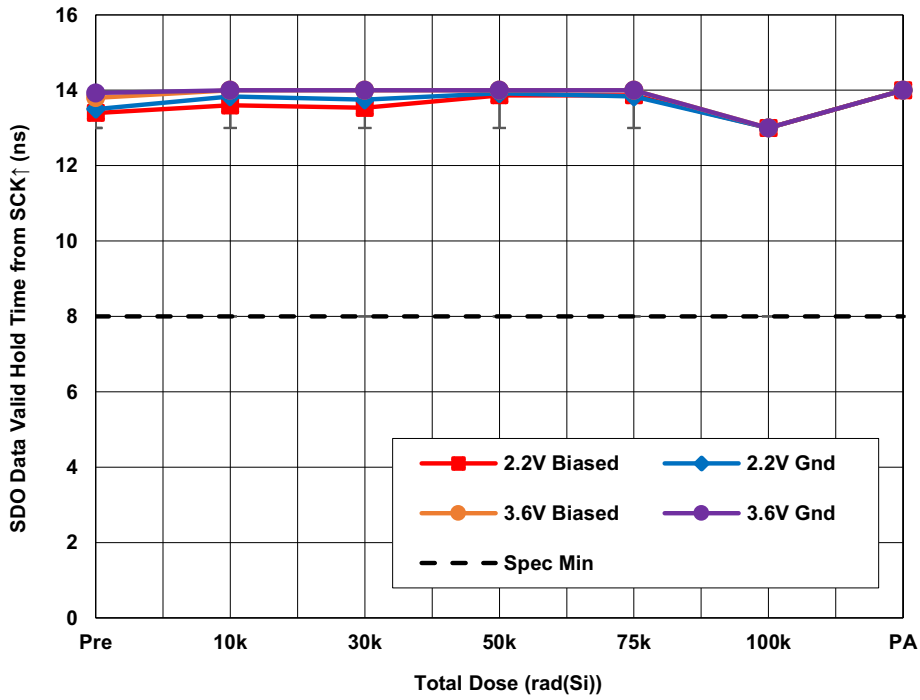


Figure 30. ISL73141SEHMF7 average SDO data valid hold time from SCK rising edge ( $t_{HSDOV}$ ) with  $AV_{CC} = 4.5V$ ,  $DV_{CC} = 2.2V$  and  $AV_{CC} = 5.5V$ ,  $DV_{CC} = 3.6V$ ,  $REF = 4.096V$ ,  $f_{SAMP} = 1Msps$ ,  $A_{IN} = -1dbFS$ , and  $C_L = 10pF$  as a function of LDR irradiation and anneal. The error bars represent the minimum and maximum measured values. The datasheet limit is 8ns minimum.

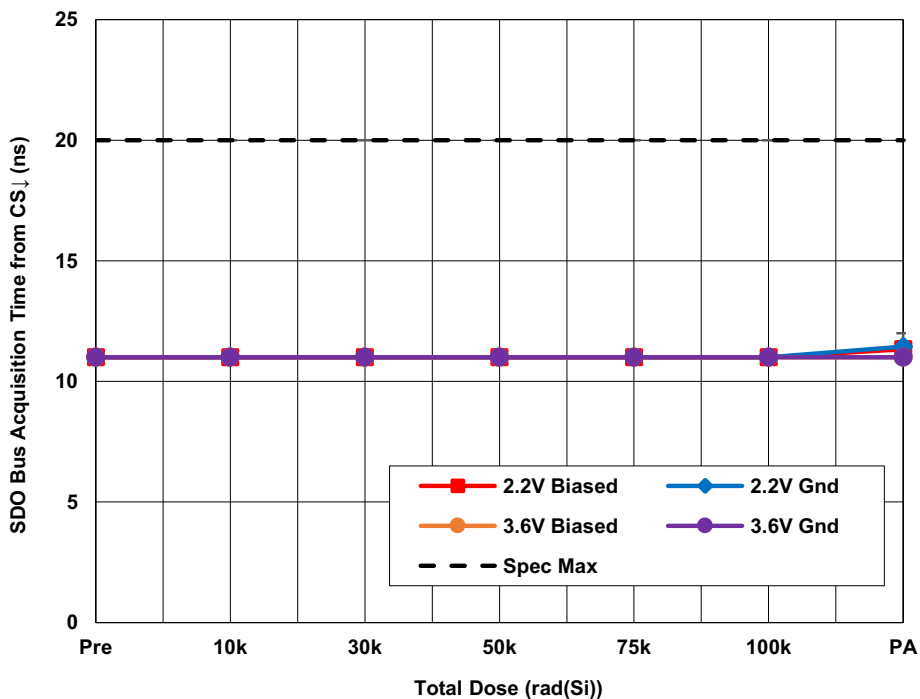


Figure 31. ISL73141SEHMF7 average SDO bus acquisition time from  $\overline{CS}$  falling edge ( $t_{DCSLSDOL}$ ) with  $AV_{CC} = 4.5V$ ,  $DV_{CC} = 2.2V$  and  $AV_{CC} = 5.5V$ ,  $DV_{CC} = 3.6V$ ,  $REF = 4.096V$ ,  $f_{SAMP} = 1Msps$ ,  $A_{IN} = -1dbFS$  and  $C_L = 10pF$  as a function of LDR irradiation and anneal. The error bars represent the minimum and maximum measured values. The datasheet limit is 20ns maximum.

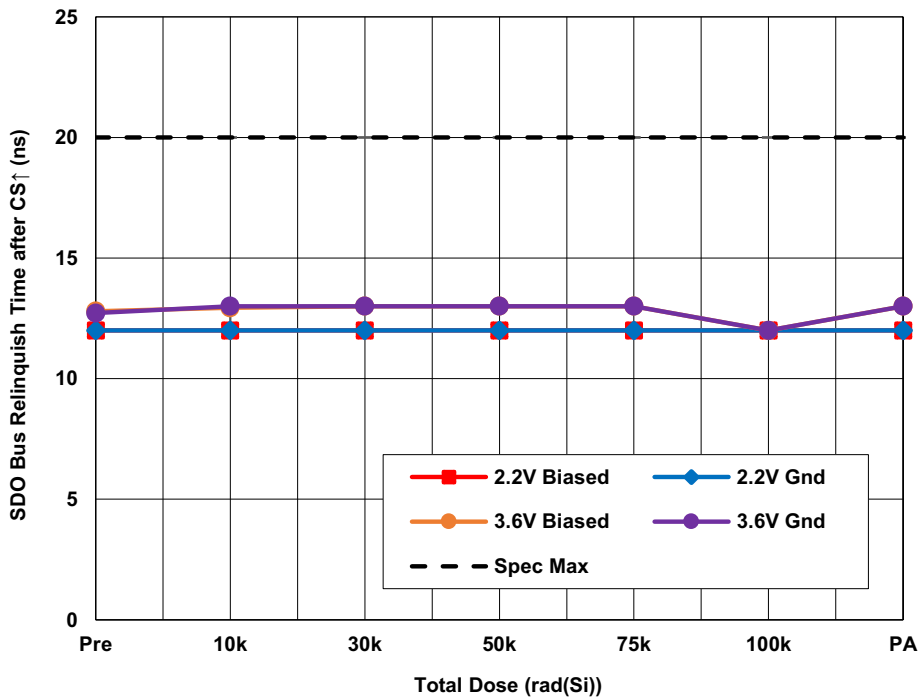


Figure 32. ISL73141SEHMF7 average SDO bus relinquish time after  $\overline{CS}$  rising edge ( $t_{DCSHSDOZ}$ ) with  $AV_{CC} = 4.5V$ ,  $DV_{CC} = 2.2V$  and  $AV_{CC} = 5.5V$ ,  $DV_{CC} = 3.6V$ ,  $REF = 4.096V$ ,  $f_{SAMP} = 1Msps$ ,  $A_{IN} = -1dbFS$ , and  $C_L = 10pF$  as a function of LDR irradiation and anneal. The error bars represent the minimum and maximum measured values. The datasheet limit is 20ns maximum.

### 3. Discussion and Conclusion

We report the results of a LDR total dose test of the ISL73141SEHMF7 5V 14-bit SAR ADC. The irradiation of biased and grounded samples to 100krad(Si) was followed by a 168-hour anneal at 100°C under bias. All datasheet parameters passed at all downpoints. No evidence of bias dependence was observed.

## 4. Appendices

### 4.1 Reported Parameters

Table 3 lists the key parameters that are considered indicative of part performance. These parameters are plotted in Figure 4 through Figure 32. All limits are taken from the ISL73141SEH datasheet.

**Table 3. ISL73141SEHMF7 Key Total Dose Parameters ( $T_A = 25^\circ\text{C}$ )**

Figure	Parameter	Symbol	Conditions	Low Limit	High Limit	Unit
4	Integral Non-Linearity	INL	Measured with full-scale input signal	-1.0	1.0	LSB
5	Differential Non-Linearity	DNL	Measured with full-scale input signal	-0.5	0.5	LSB
6	Zero Scale Error	VOFF	Measured with input grounded	-5	5	LSB
7	Full Scale Error	FSE	Measured with input connected to VREF	-7	7	LSB
8	Signal-to-Noise Ratio	SNR	$F_{IN} = 105\text{kHz}$	80		dB
9	Signal-to-Noise + Distortion Ratio	SINAD	$F_{IN} = 105\text{kHz}$	79		dB
10	Effective Number of Bits	ENOB	$F_{IN} = 105\text{kHz}$	12.5		bits
11	Total Harmonic Distortion	THD	$F_{IN} = 105\text{kHz}$ , first five harmonics	85		dB
12	Spurious-Free Dynamic Range	SFDR	$F_{IN} = 105\text{kHz}$ , first five harmonics	90		dB
13	Input Leakage Current	$I_{AIN}$		-1	1	$\mu\text{A}$
14	REF Input Current	$I_{REF}$			200	$\mu\text{A}$
15	Analog Supply Current - Active	$I_{AVCC}$	Active, $f_{SAMP} = 1\text{Msps}$		14.5	mA
16	Analog Supply Current - Static	$I_{STATIC}$	$\overline{CS}$ held high		7	mA
17	Analog Supply Current - Sleep	$I_{SLAVCC}$	$\overline{PD}$ held low		12	$\mu\text{A}$
18	Digital Supply Current - Active	$I_{DVCC}$	$f_{SCK} = 50\text{MHz}$ , 10pF load		90	$\mu\text{A}$
19	Digital Supply Current - Static	$I_{STDVCC}$	$\overline{CS}$ held high		35	$\mu\text{A}$
20	Digital Supply Current - Sleep	$I_{SLDVCC}$	$\overline{PD}$ held low		8	$\mu\text{A}$
21	High Input Level	$V_{IH}$		$0.8 \cdot DV_{CC}$		V
	Low Input Level	$V_{IL}$			0.5	V
22	Input Current ( $\overline{CS}$ , SCK)	$I_{IN}$	$V_{IN} = 0\text{V to } DV_{CC}$	-1	1	$\mu\text{A}$
23	High-Level Output	$V_{OH}$	$DV_{CC}$ - Output, $I_O = -500\mu\text{A}$	$DV_{CC} - 0.2\text{V}$		V
24	Low-Level Output	$V_{OL}$	$I_O = 500\mu\text{A}$		200	mV
25	Hi-Z Output Leakage Current	$I_{OZ}$	$V_{OUT} = 0\text{V to } DV_{CC}$	-1	1	$\mu\text{A}$
26	$\overline{PD}$ Input Resistance	$R_{INPDL}$	Internal pull-up resistance to $DV_{CC}$	400	600	k $\Omega$
27	Conversion Time	$t_{CONV}$	BUSY Output High Time		665	ns
28	$\overline{CS}$ Falling Edge to BUSY $\uparrow$	$t_{BUSYLH}$	$C_L = 10\text{pF}$		25	ns
29	SDO Data Valid Delay from BUSY $\downarrow$	$t_{DBUSYLSDOV}$	$C_L = 10\text{pF}$		0	ns
30	SDO Data Valid Hold Time from SCK $\uparrow$	$t_{HSDOV}$	$C_L = 10\text{pF}$	8		ns
31	SDO Bus Acquisition Time from $\overline{CS}\downarrow$	$t_{DCSLSDOL}$	$C_L = 10\text{pF}$		20	ns
32	SDO Bus Relinquish Time after $\overline{CS}\uparrow$	$t_{DCSHSDOZ}$	$C_L = 10\text{pF}$		20	ns

## 5. Revision History

Rev.	Date	Description
1.00	Jan.5.21	Initial release

## IMPORTANT NOTICE AND DISCLAIMER

RENESAS ELECTRONICS CORPORATION AND ITS SUBSIDIARIES (“RENESAS”) PROVIDES TECHNICAL SPECIFICATIONS AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES “AS IS” AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for developers skilled in the art designing with Renesas products. You are solely responsible for (1) selecting the appropriate products for your application, (2) designing, validating, and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements. These resources are subject to change without notice. Renesas grants you permission to use these resources only for development of an application that uses Renesas products. Other reproduction or use of these resources is strictly prohibited. No license is granted to any other Renesas intellectual property or to any third party intellectual property. Renesas disclaims responsibility for, and you will fully indemnify Renesas and its representatives against, any claims, damages, costs, losses, or liabilities arising out of your use of these resources. Renesas' products are provided only subject to Renesas' Terms and Conditions of Sale or other applicable terms agreed to in writing. No use of any Renesas resources expands or otherwise alters any applicable warranties or warranty disclaimers for these products.

(Rev.1.0 Mar 2020)

### Corporate Headquarters

TOYOSU FORESIA, 3-2-24 Toyosu,  
Koto-ku, Tokyo 135-0061, Japan  
[www.renesas.com](http://www.renesas.com)

### Contact Information

For further information on a product, technology, the most up-to-date version of a document, or your nearest sales office, please visit:  
[www.renesas.com/contact/](http://www.renesas.com/contact/)

### Trademarks

Renesas and the Renesas logo are trademarks of Renesas Electronics Corporation. All trademarks and registered trademarks are the property of their respective owners.